

HALLIBURTON

SPECTRAL DENSITY  
DUAL SPACED NEUTRON  
MICROLOG


|                          |  |  |  |                           |  |  |  |
|--------------------------|--|--|--|---------------------------|--|--|--|
| COMPANY                  |  |  |  | BEREXCO LLC               |  |  |  |
| WELL                     |  |  |  | HARTNETT-HAZEN 2-21       |  |  |  |
| FIELD/BLOCK              |  |  |  | AMAZON DITCH EAST         |  |  |  |
| COUNTY                   |  |  |  | FINNEY                    |  |  |  |
| STATE                    |  |  |  | KANSAS                    |  |  |  |
| Permanent Datum          |  |  |  | GL                        |  |  |  |
| Log measured from        |  |  |  | KB                        |  |  |  |
| Drilling measured from   |  |  |  | KB                        |  |  |  |
| Date                     |  |  |  | 03-Dec-18                 |  |  |  |
| Run No.                  |  |  |  | 1                         |  |  |  |
| Depth - Driller          |  |  |  | 4900.0 ft                 |  |  |  |
| Depth - Logger           |  |  |  | 4901.0 ft                 |  |  |  |
| Bottom - Logged Interval |  |  |  | 4891                      |  |  |  |
| Top - Logged Interval    |  |  |  | 3300                      |  |  |  |
| Casing - Driller         |  |  |  | 8.625 in @ 1782.0 ft      |  |  |  |
| Casing - Logger          |  |  |  | 1770.0 ft                 |  |  |  |
| Bit Size                 |  |  |  | 7.875 in @                |  |  |  |
| Type Fluid in Hole       |  |  |  | Water Based Mud           |  |  |  |
| Density                  |  |  |  | 9.1 ppg @ 62.00 s/qt      |  |  |  |
| PH                       |  |  |  | 11.00 pH @ 8.4 cp/m       |  |  |  |
| Source of Sample         |  |  |  | FLOWLINE                  |  |  |  |
| Rm @ Meas. Temperature   |  |  |  | 0.66 ohmm @ 76.00 degF @  |  |  |  |
| Rmf @ Meas. Temperature  |  |  |  | 0.53 ohmm @ 72.00 degF @  |  |  |  |
| Rmc @ Meas. Temperature  |  |  |  | 0.79 ohmm @ 72.00 degF @  |  |  |  |
| Source Rmf               |  |  |  | MEAS                      |  |  |  |
| Rm @ BHT                 |  |  |  | 0.41 ohmm @ 125.0 degF @  |  |  |  |
| Time Since Circulation   |  |  |  | 11:00 hr                  |  |  |  |
| Time on Bottom           |  |  |  | 03-Dec-18 15:50           |  |  |  |
| Max. Rec. Temperature    |  |  |  | 125.00 degF @ 4901.0 ft @ |  |  |  |
| Equipment                |  |  |  | 12156883 EL RENO, OK      |  |  |  |
| Recorded By              |  |  |  | WHITLOCK                  |  |  |  |
| Witnessed By             |  |  |  | PETER VOLLMER             |  |  |  |


|                 |  |                                           |  |
|-----------------|--|-------------------------------------------|--|
| COMPANY         |  | BEREXCO LLC                               |  |
| WELL            |  | HARTNETT-HAZEN 2-21                       |  |
| FIELD/BLOCK     |  | AMAZON DITCH EAST                         |  |
| COUNTY          |  | FINNEY                                    |  |
| STATE           |  | KANSAS                                    |  |
| API No.         |  | 15-055-22508-00-00                        |  |
| Location        |  | (SHL) E2 SW NE NW<br>990' FNL & 1855' FWL |  |
| Sect.           |  | 21                                        |  |
| Twp.            |  | 22S                                       |  |
| Rge.            |  | 34W                                       |  |
| Other Services: |  | ACRT<br>SDL-DSN<br>MICLOG                 |  |
| Elev. 2953.0 ft |  | Elev.: K.B.                               |  |
| D.F.            |  | 2963.0 ft                                 |  |
| G.L.            |  | 2953.0 ft                                 |  |



Fold here



|                                         |  |            |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
|-----------------------------------------|--|------------|--|-----------------------------|--|----------|--|-----------------------------------------|--|----------|--|---------------|--|-----------------|--|
| Service Ticket No.: 905282992           |  |            |  | API No.: 15-055-22508-00-00 |  |          |  | PGM Version: WL INSITE R5.8.9 (Build 6) |  |          |  |               |  |                 |  |
| CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE |  |            |  |                             |  |          |  | RESISTIVITY SCALE CHANGES               |  |          |  |               |  |                 |  |
| Date                                    |  | Sample No. |  |                             |  |          |  | Type Log                                |  | Depth    |  | Scale Up Hole |  | Scale Down Hole |  |
| Depth-Driller                           |  |            |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| Type Fluid in Hole                      |  |            |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| Density                                 |  | Viscosity  |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| Ph                                      |  | Fluid Loss |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| Source of Sample                        |  |            |  |                             |  |          |  | RESISTIVITY EQUIPMENT DATA              |  |          |  |               |  |                 |  |
| Rm @ Meas. Temp                         |  | @          |  | @                           |  | Run No.  |  | Tool Type & No.                         |  | Pad Type |  | Tool Pos.     |  | Other           |  |
| Rmf @ Meas. Temp.                       |  | @          |  | @                           |  |          |  |                                         |  |          |  |               |  |                 |  |
| Rmc @ Meas. Temp.                       |  | @          |  | @                           |  |          |  |                                         |  |          |  |               |  |                 |  |
| Source Rmf                              |  | Rmc        |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| Rm @ BHT                                |  | @          |  | @                           |  |          |  |                                         |  |          |  |               |  |                 |  |
| Rmf @ BHT                               |  | @          |  | @                           |  |          |  |                                         |  |          |  |               |  |                 |  |
| Rmc @ BHT                               |  | @          |  | @                           |  |          |  |                                         |  |          |  |               |  |                 |  |
| EQUIPMENT DATA                          |  |            |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| GAMMA                                   |  |            |  | ACOUSTIC                    |  |          |  | DENSITY                                 |  |          |  | NEUTRON       |  |                 |  |
| Run No.                                 |  |            |  | Run No.                     |  |          |  | Run No.                                 |  |          |  | Run No.       |  |                 |  |
| Serial No.                              |  |            |  | Serial No.                  |  |          |  | Serial No.                              |  |          |  | Serial No.    |  |                 |  |
| Model No.                               |  |            |  | Model No.                   |  |          |  | Model No.                               |  |          |  | Model No.     |  |                 |  |
| Diameter                                |  |            |  | No. of Cent.                |  |          |  | Diameter                                |  |          |  | Diameter      |  |                 |  |
| Detector Model No.                      |  |            |  | Spacing                     |  |          |  | Log Type                                |  |          |  | Log Type      |  |                 |  |
| Type                                    |  |            |  | Source Type                 |  |          |  | Source Type                             |  |          |  | Source Type   |  |                 |  |
| Length                                  |  |            |  | LSA [Y/N]                   |  |          |  | Serial No.                              |  |          |  | Serial No.    |  |                 |  |
| Distance to Source                      |  |            |  | FWDA [Y/N ]                 |  |          |  | Strength                                |  |          |  | Strength      |  |                 |  |
| LOGGING DATA                            |  |            |  |                             |  |          |  |                                         |  |          |  |               |  |                 |  |
| GENERAL                                 |  |            |  | GAMMA                       |  | ACOUSTIC |  | DENSITY                                 |  |          |  | NEUTRON       |  |                 |  |
| Run                                     |  | Depth      |  | Speed                       |  | Scale    |  | Scale                                   |  | Matrix   |  | Scale         |  | Matrix          |  |
| No.                                     |  | From To    |  | ft/min                      |  | L R      |  | L R                                     |  | L R      |  | L R           |  | L R             |  |




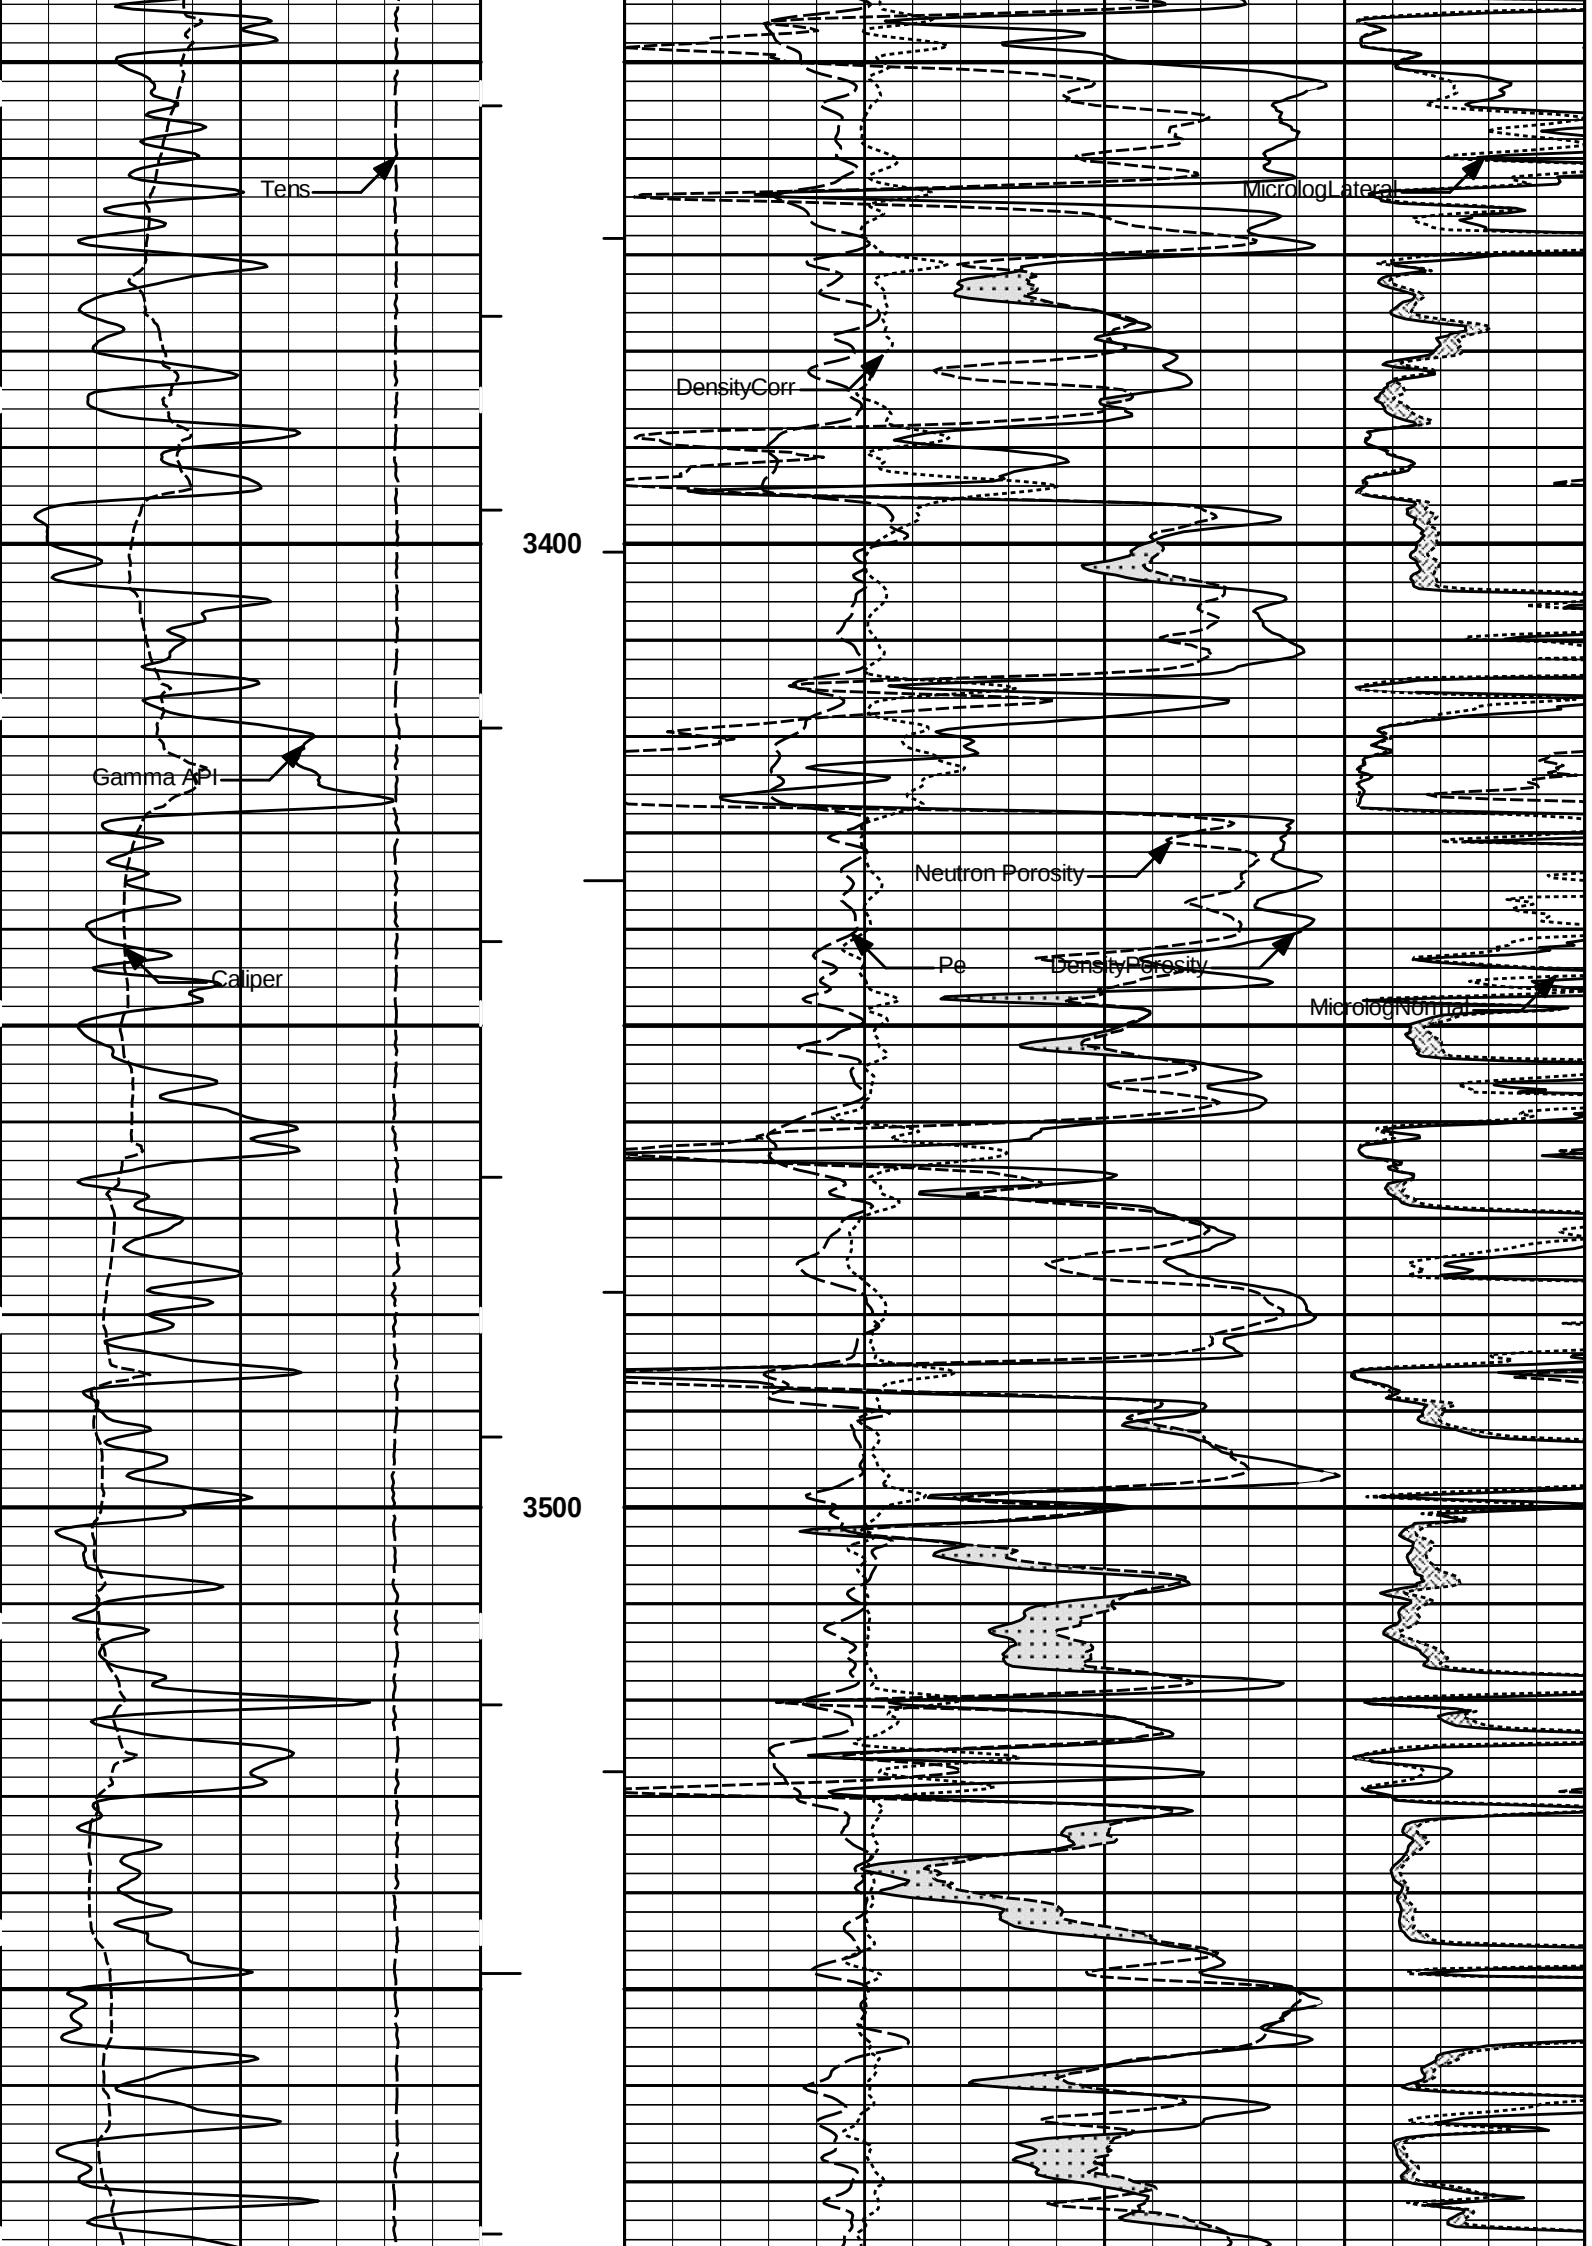


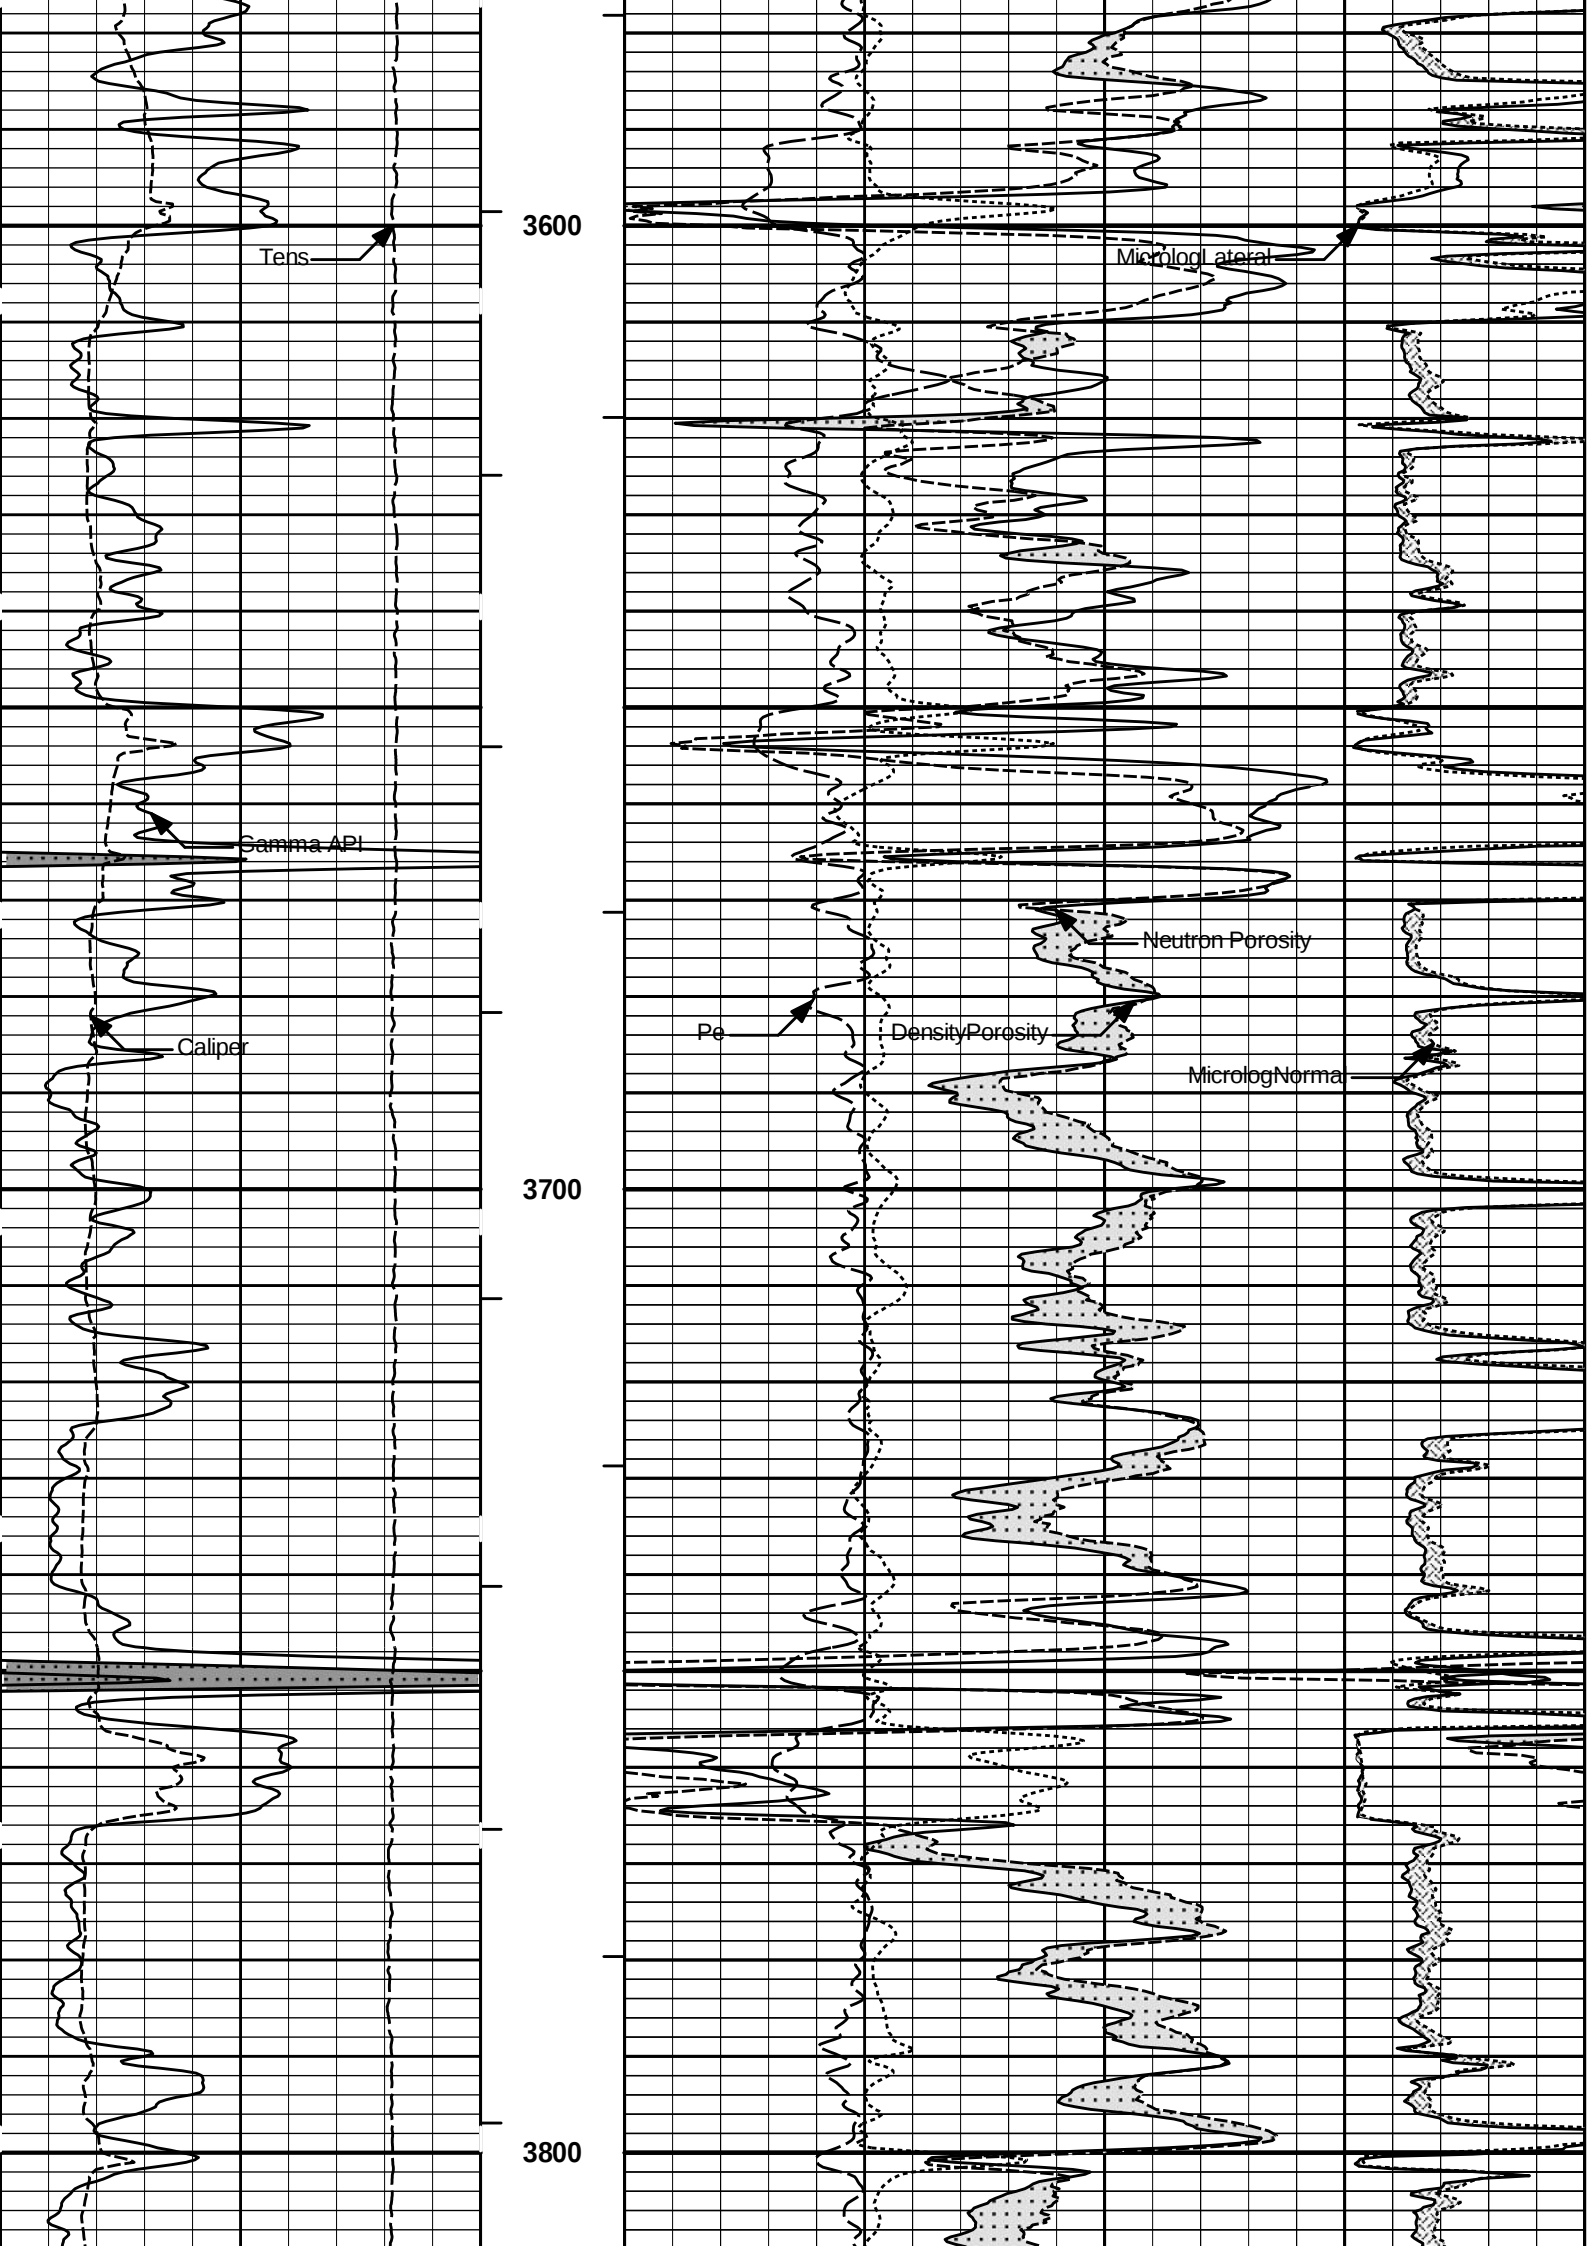

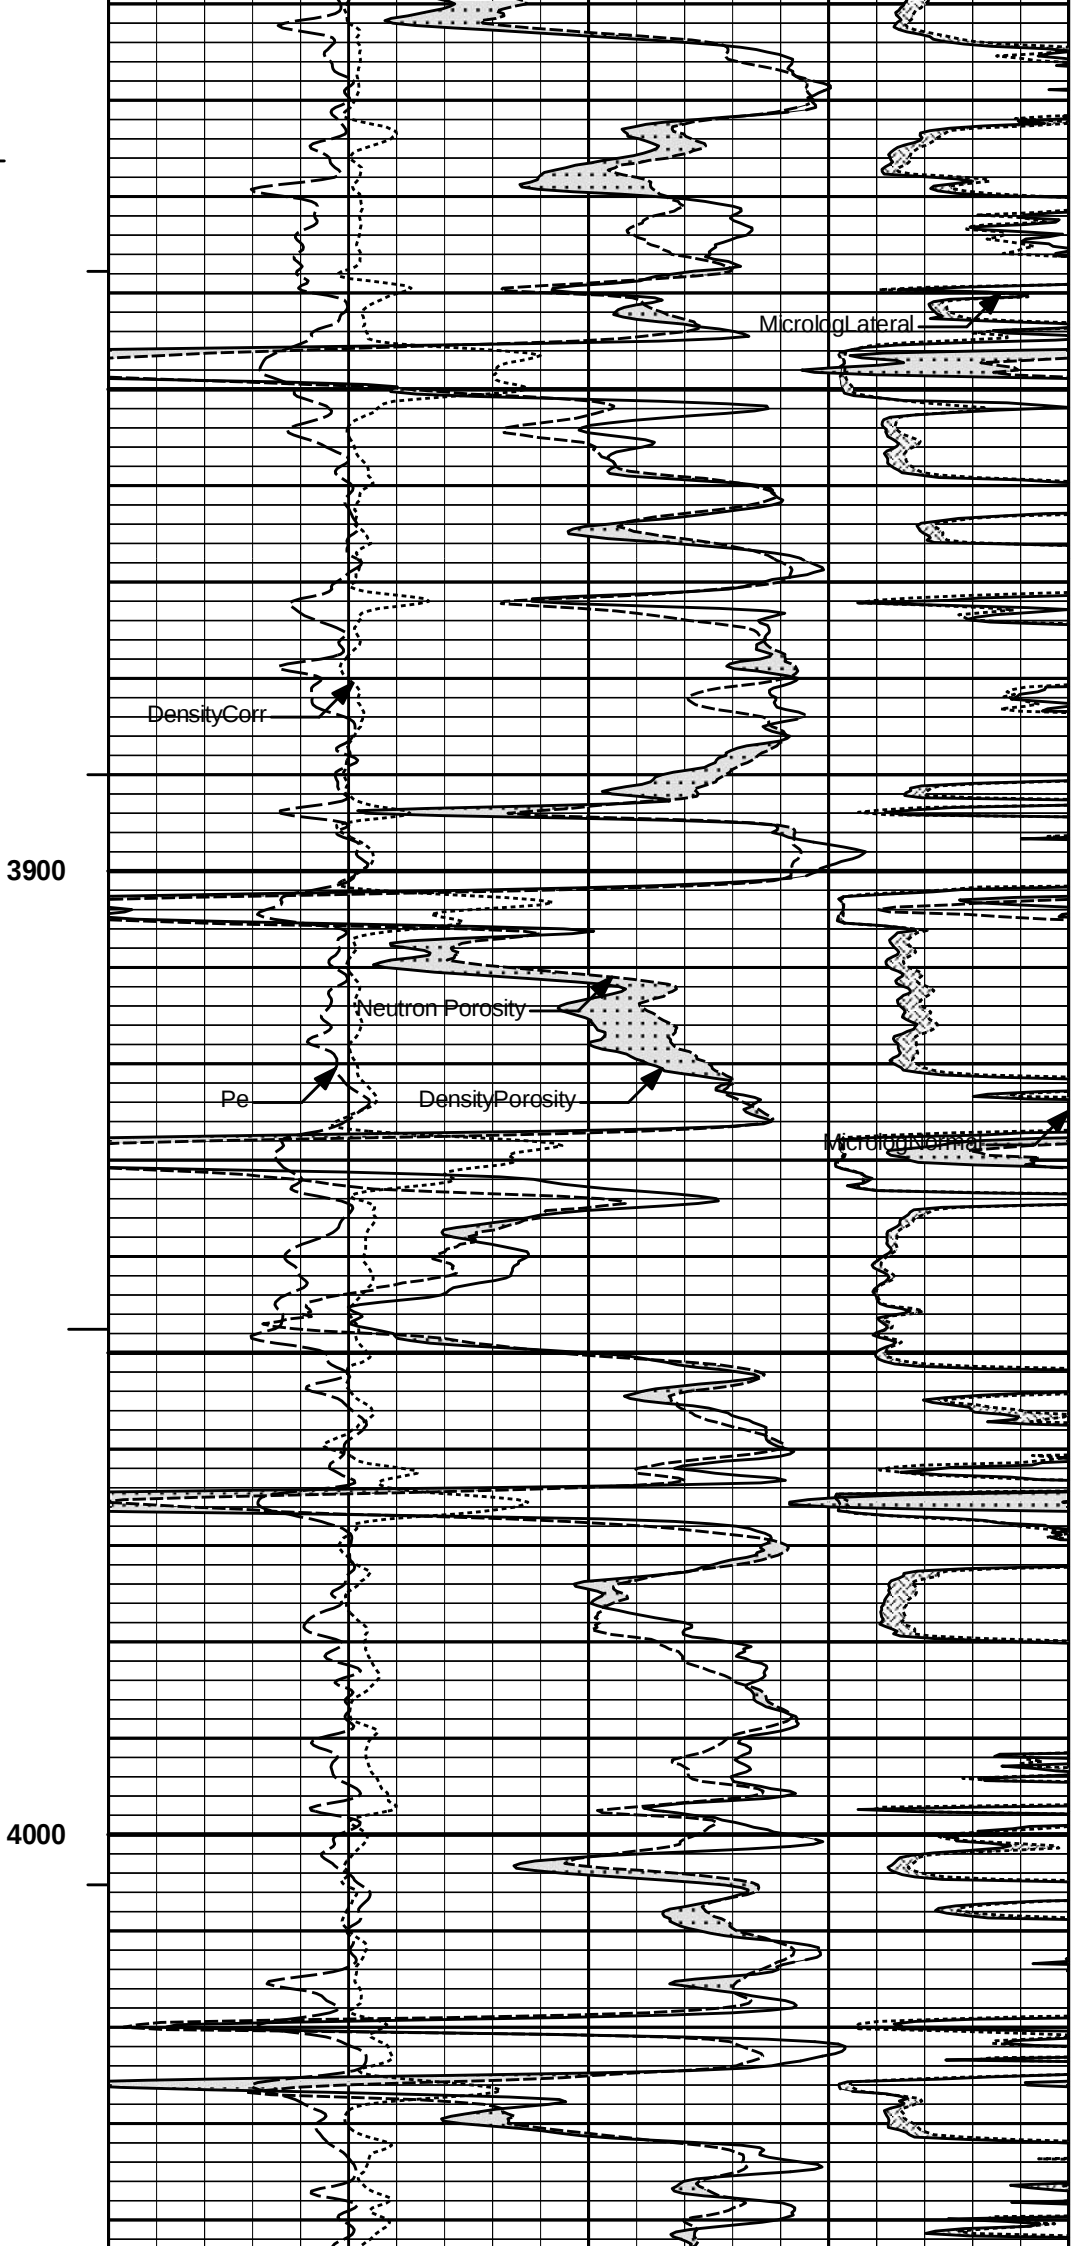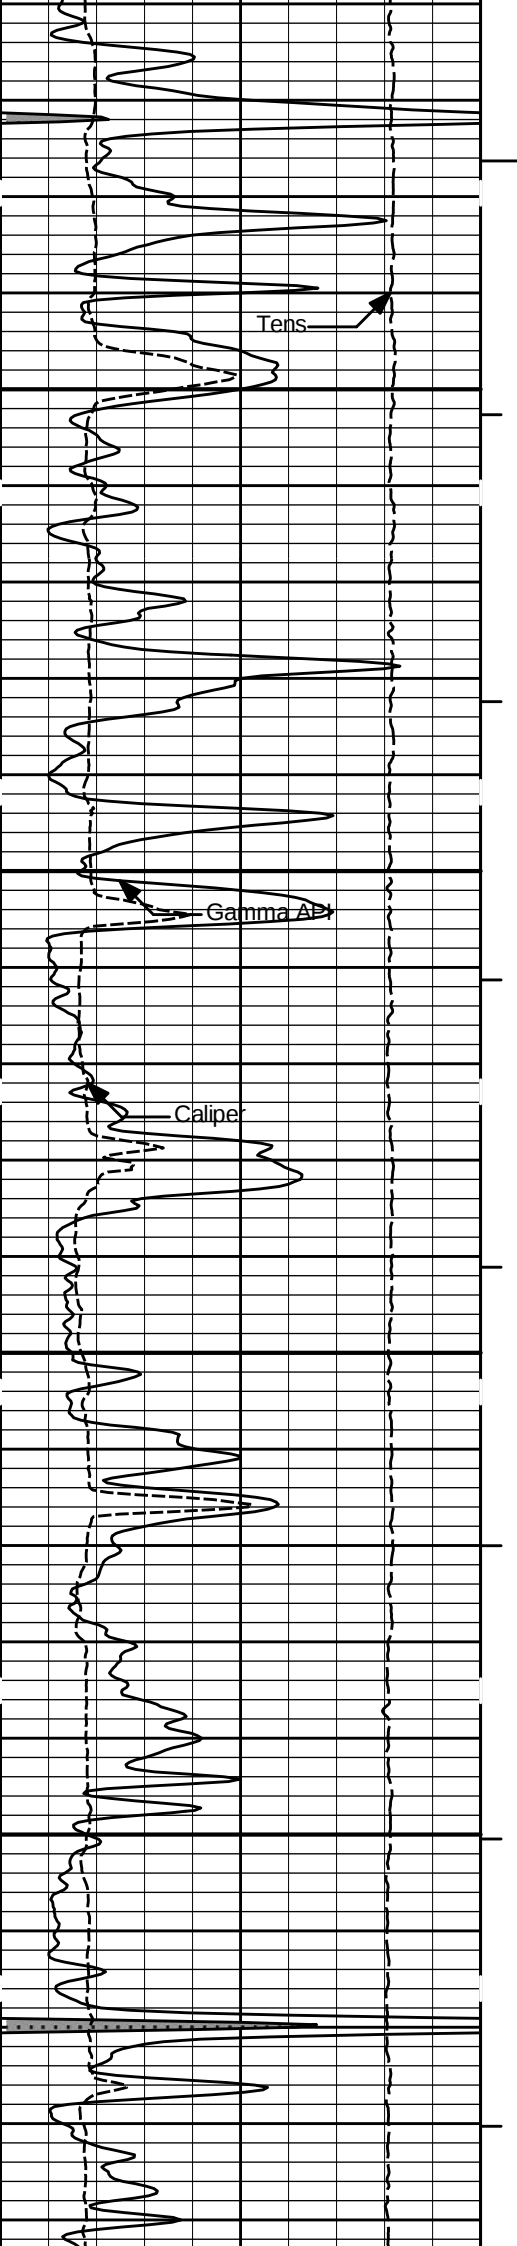

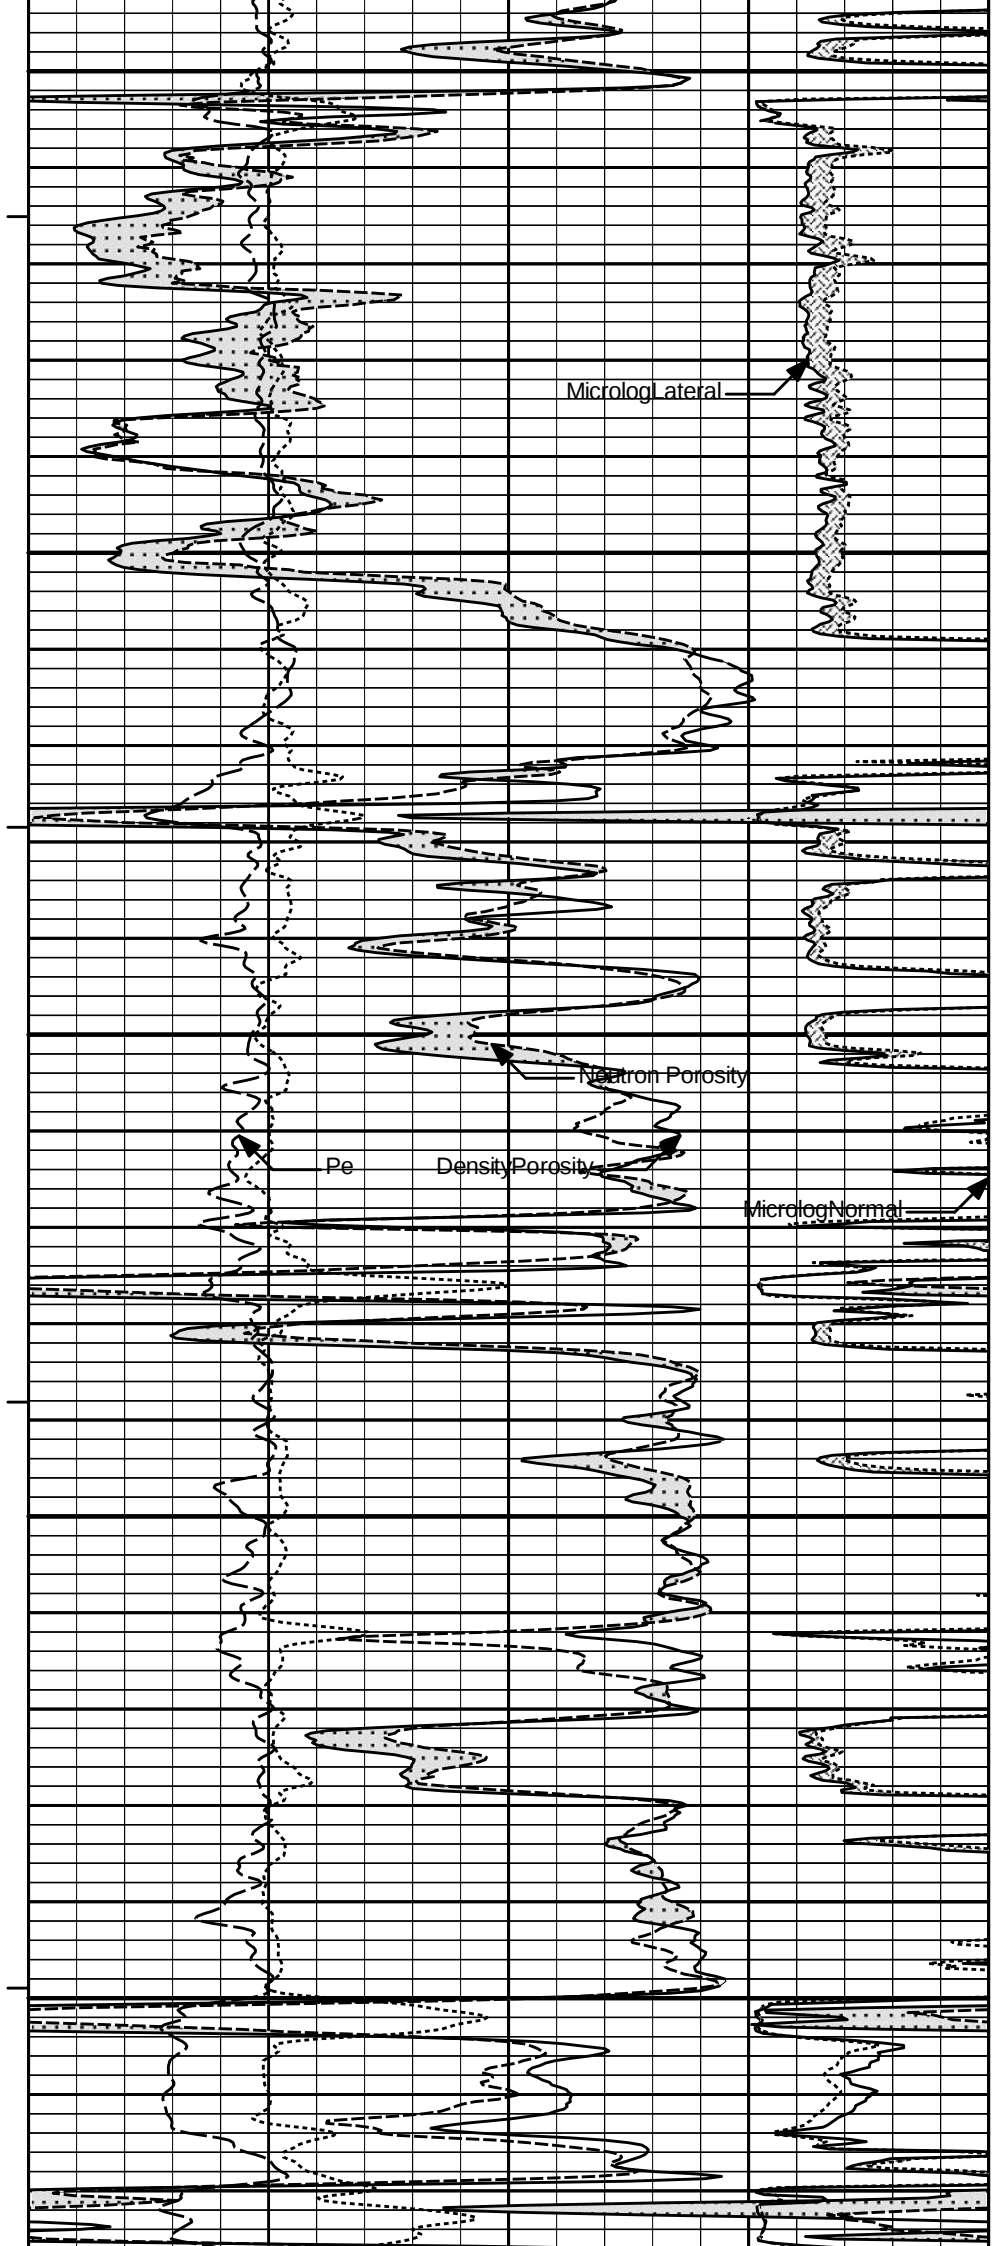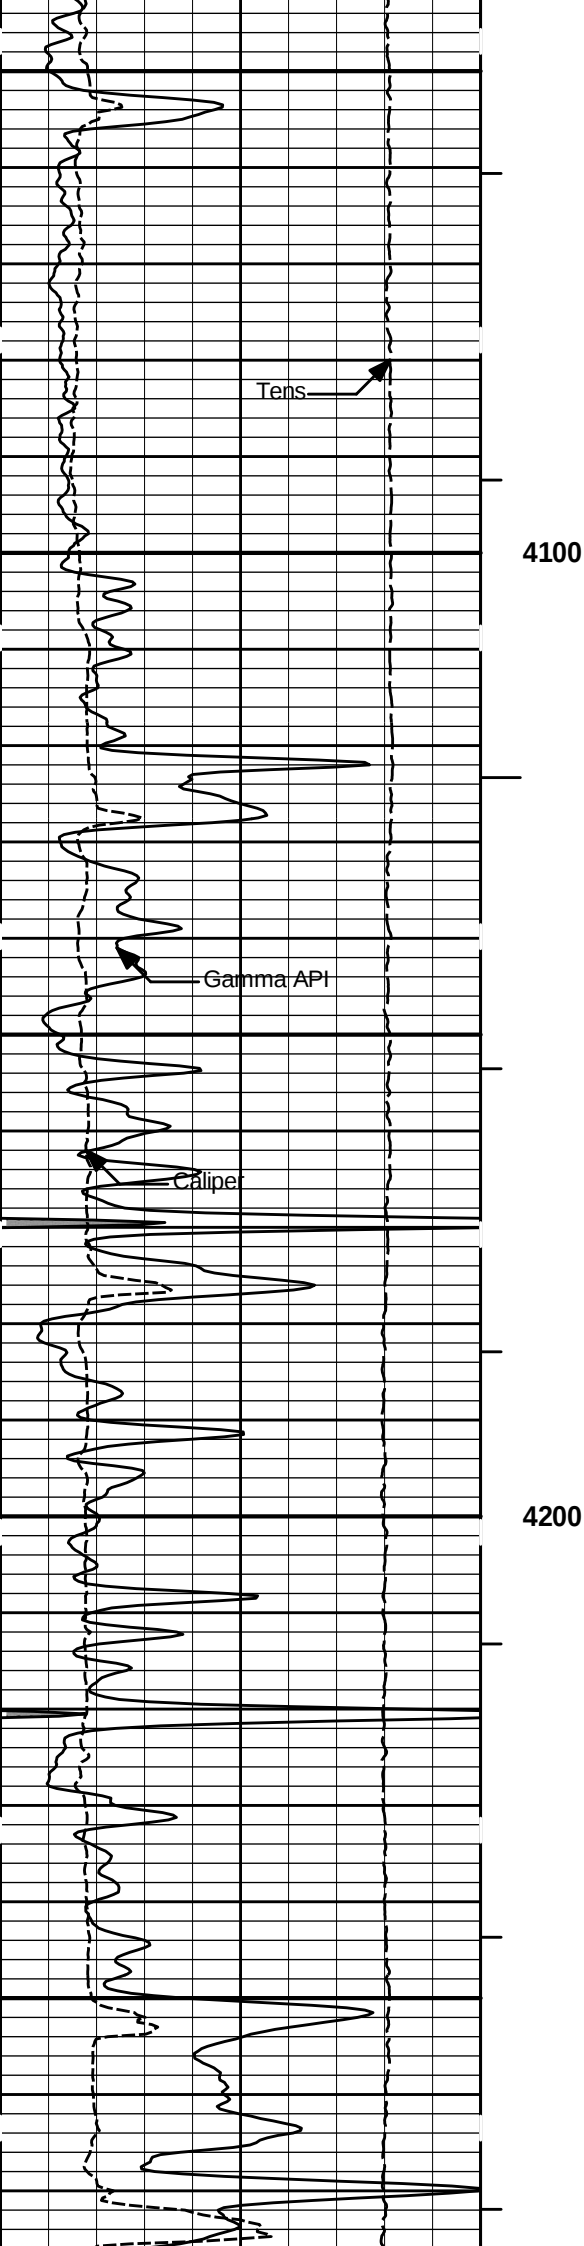


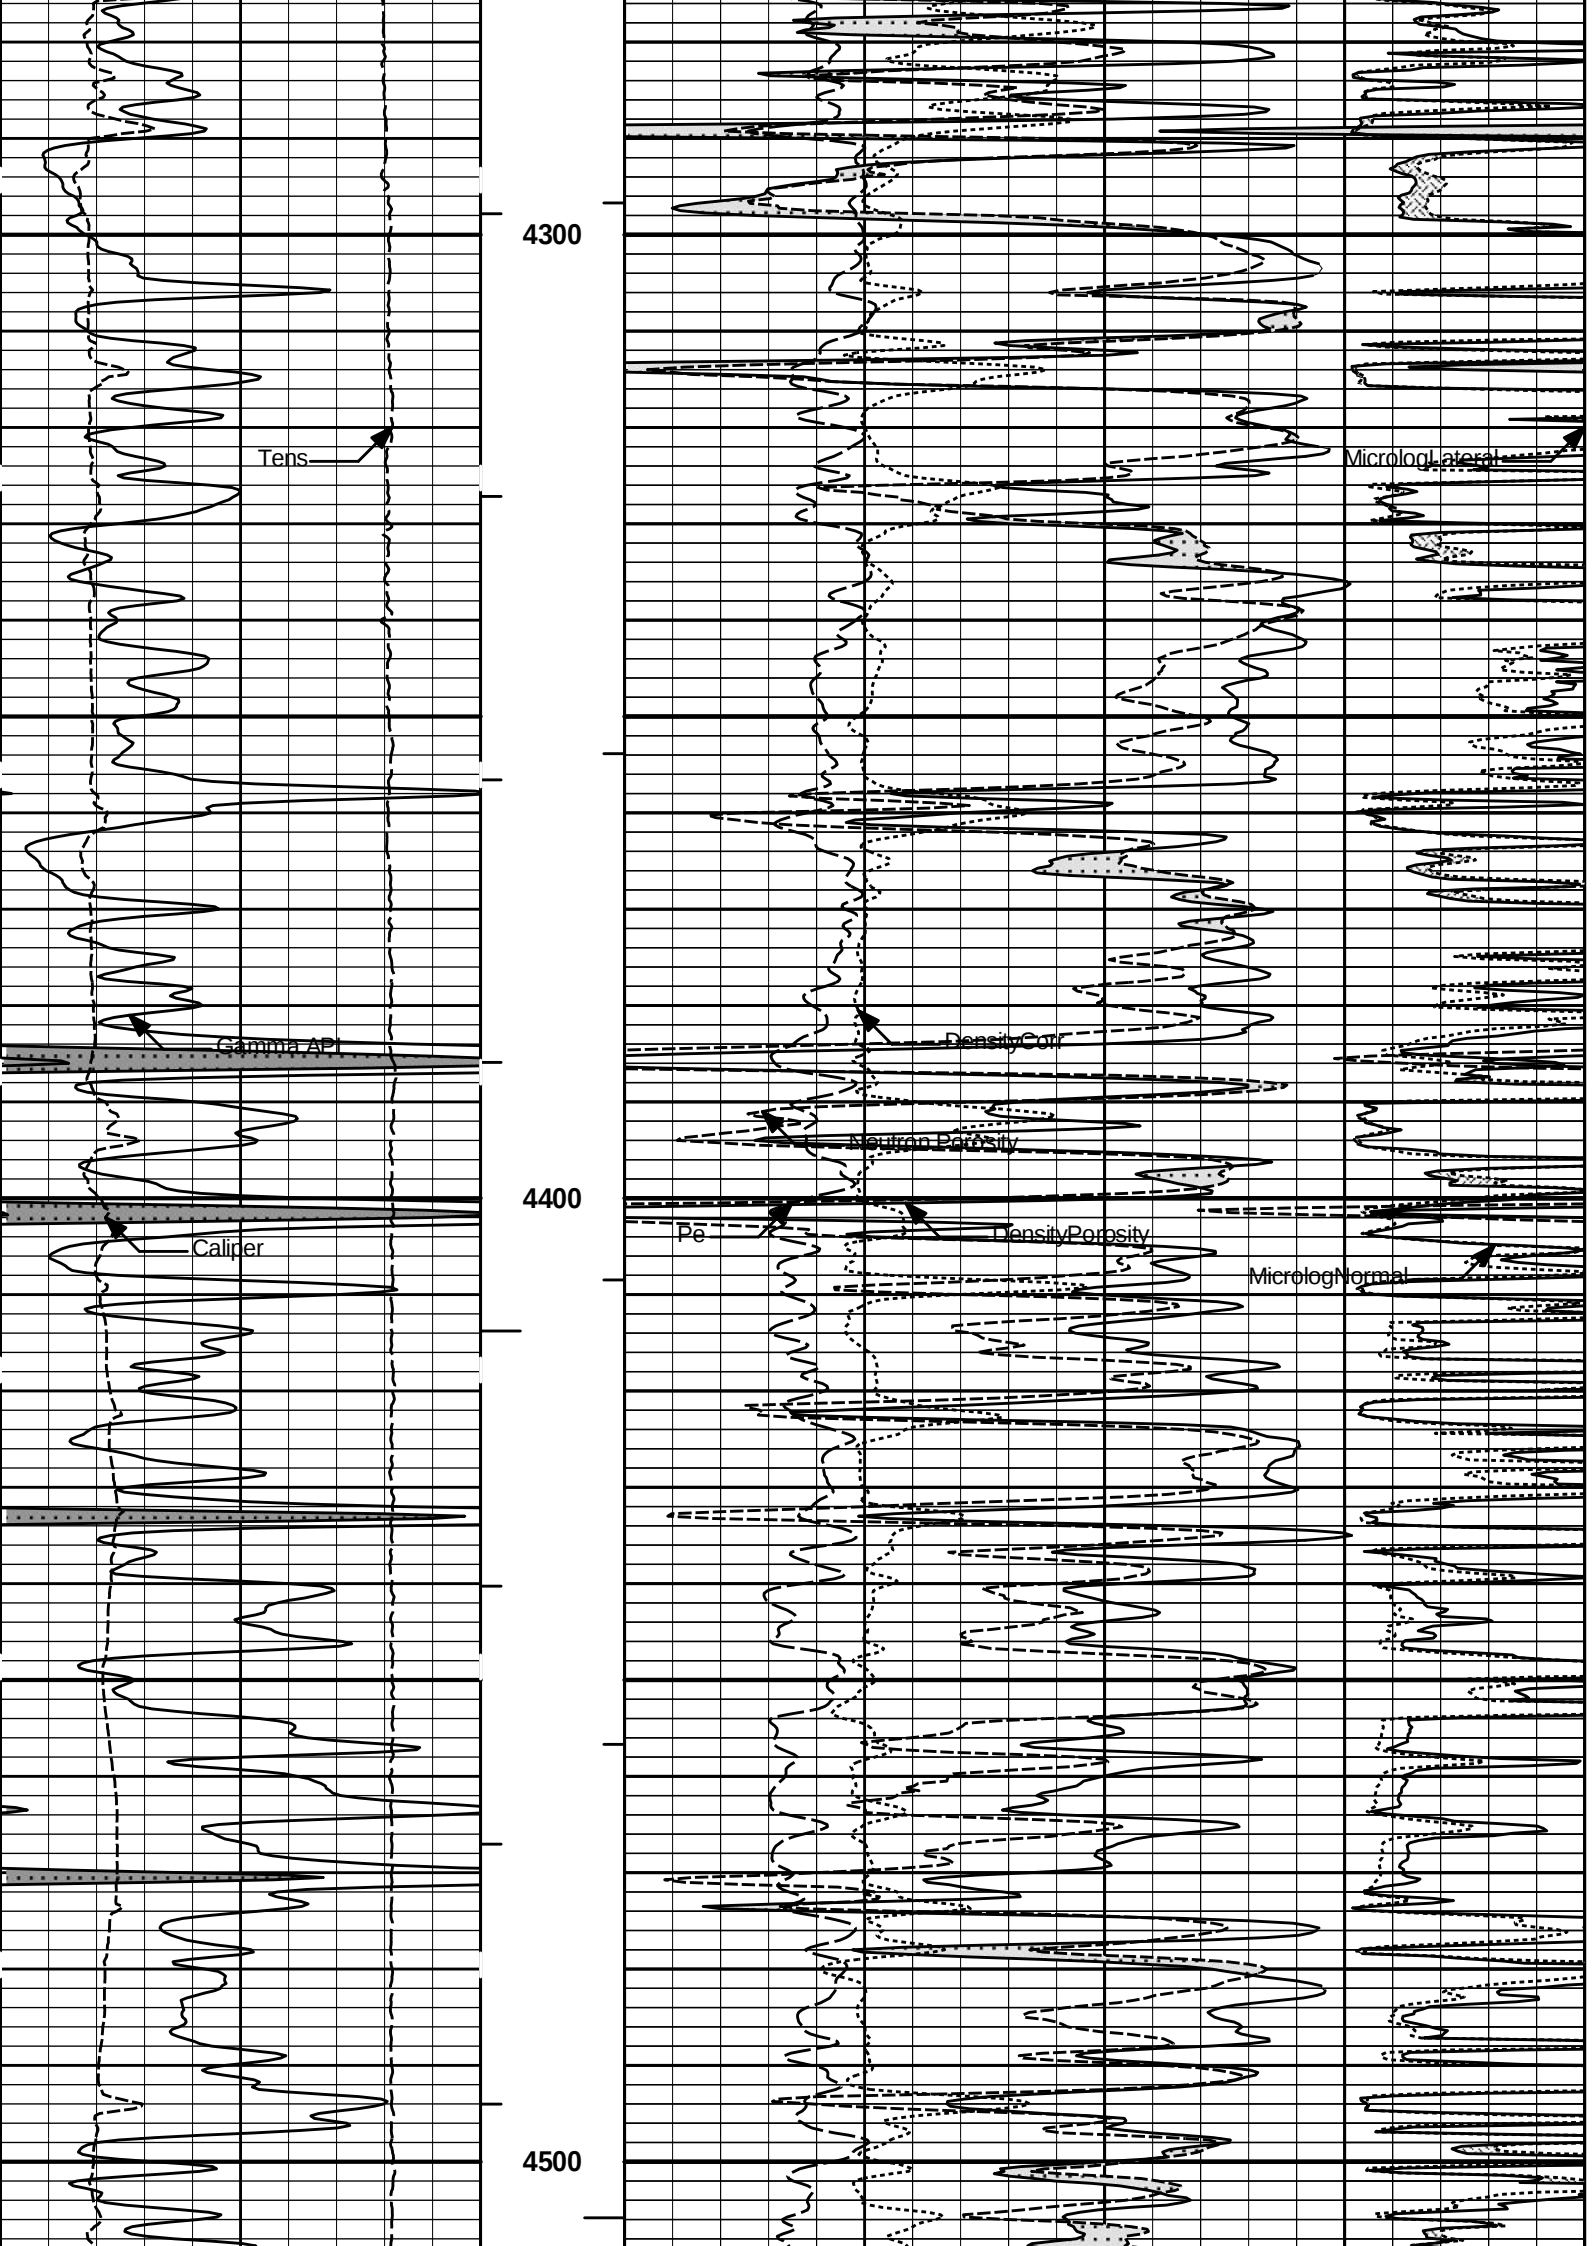


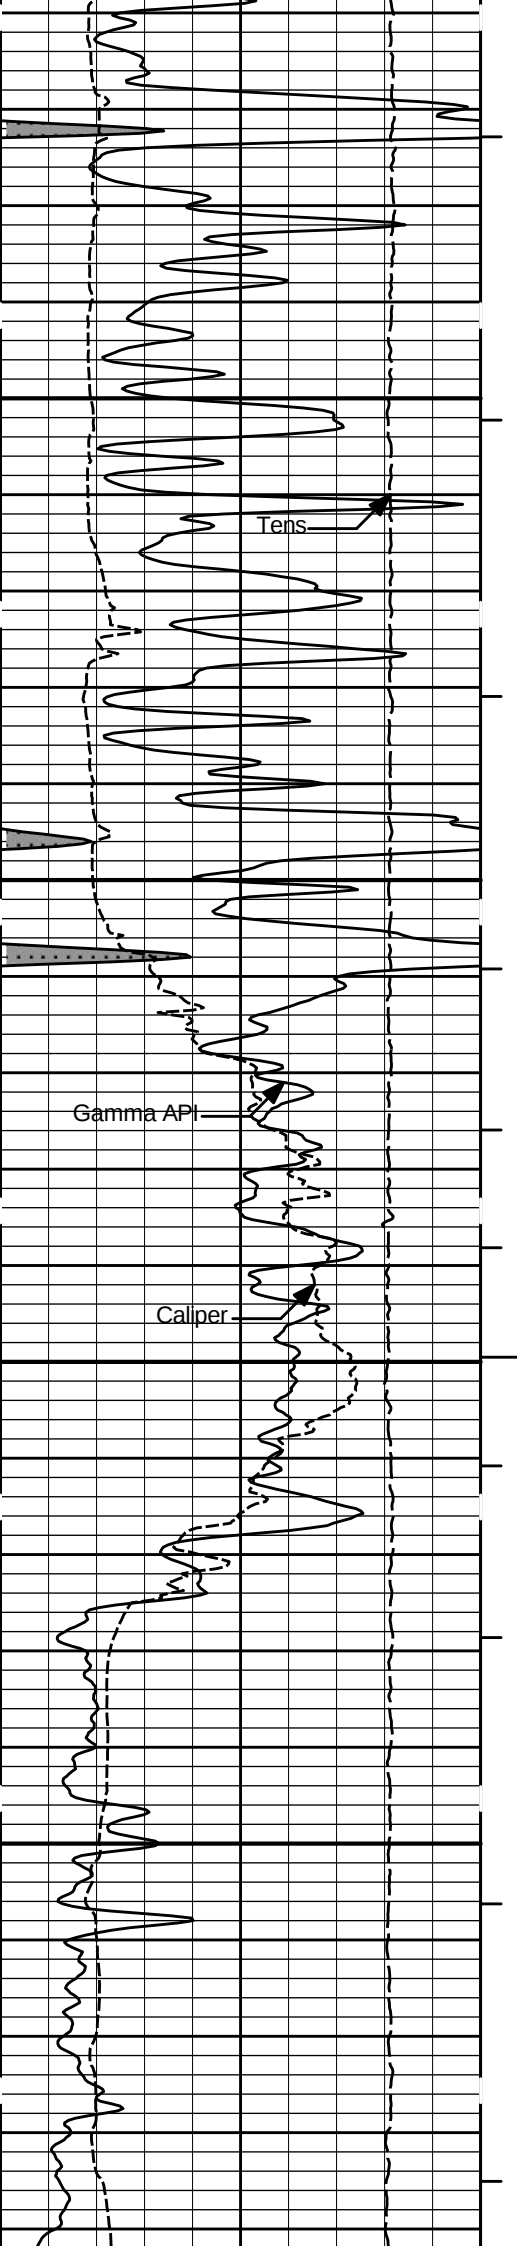

4600

4700

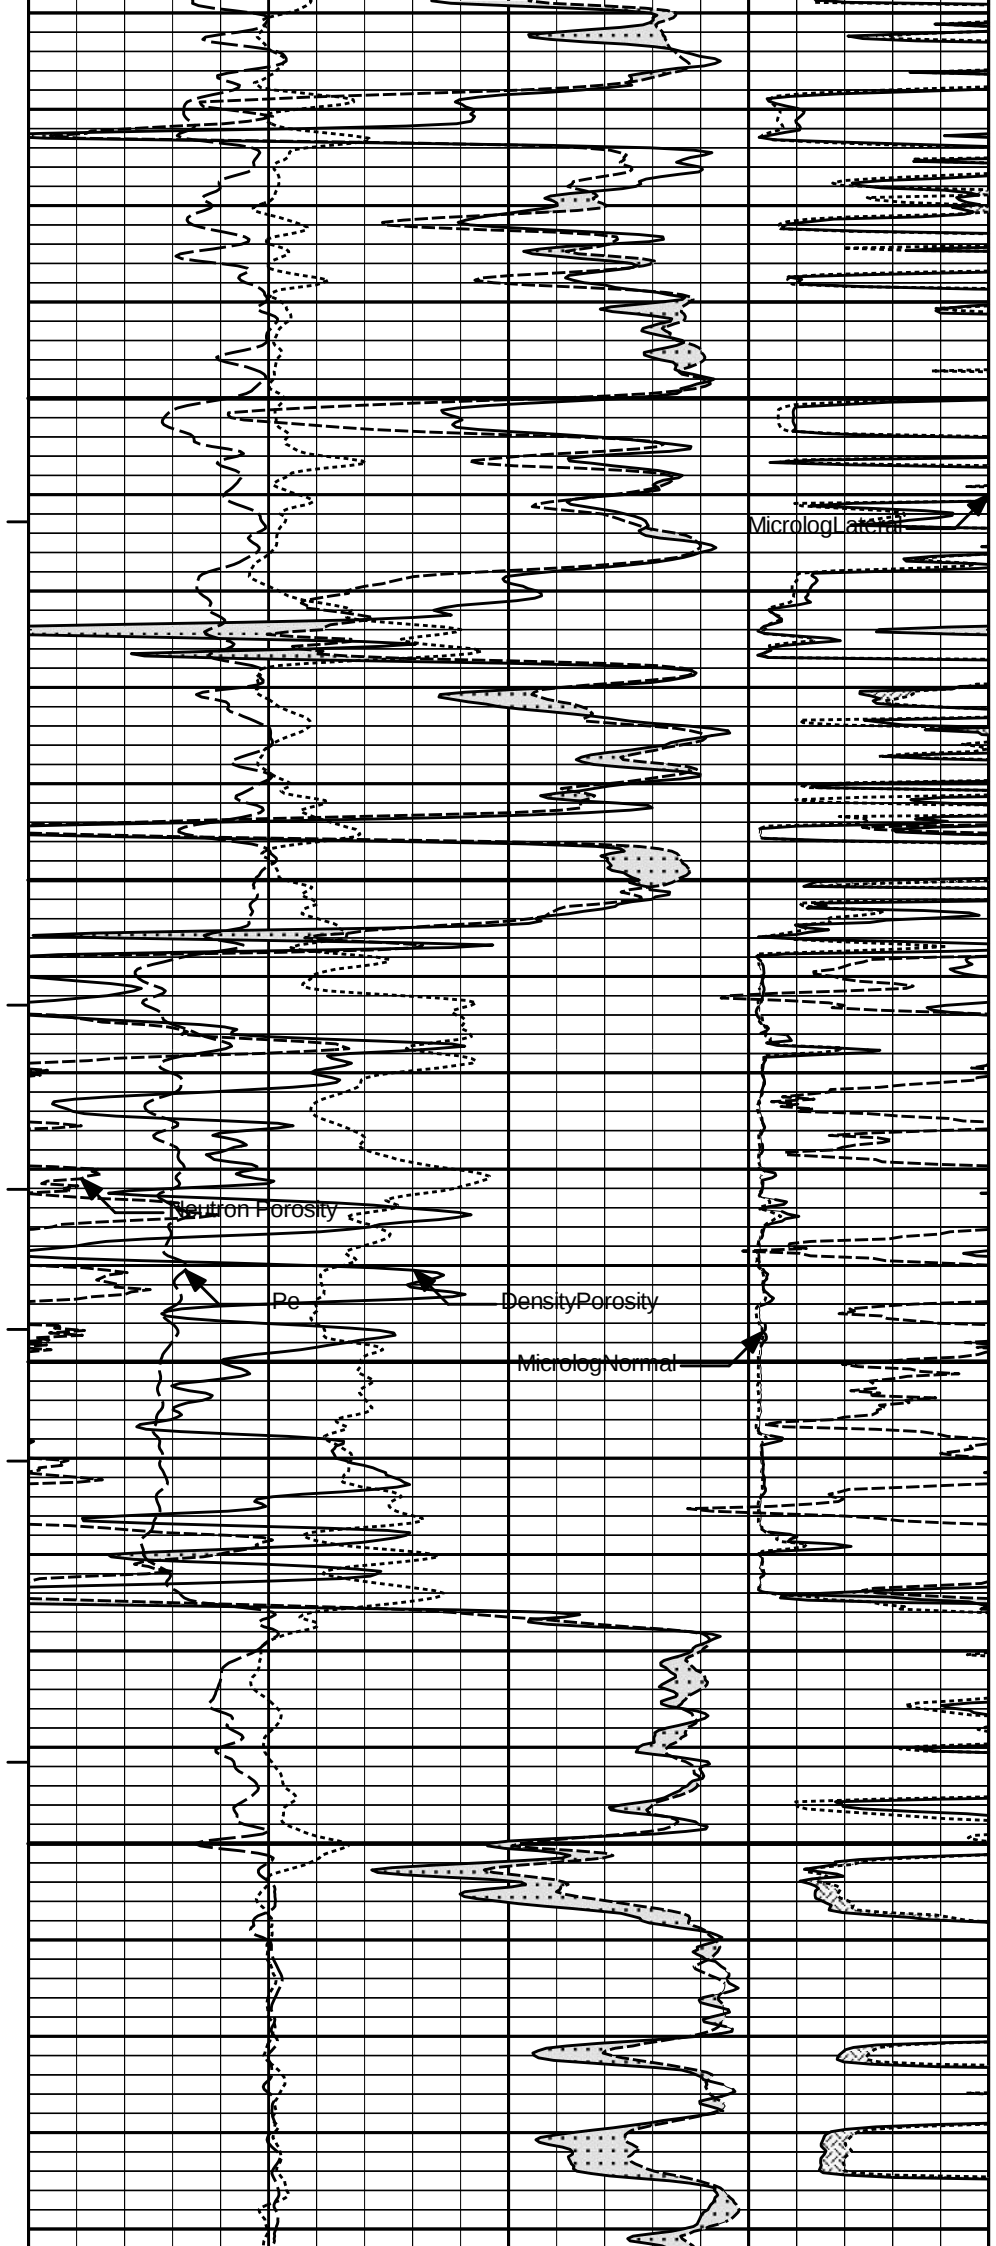

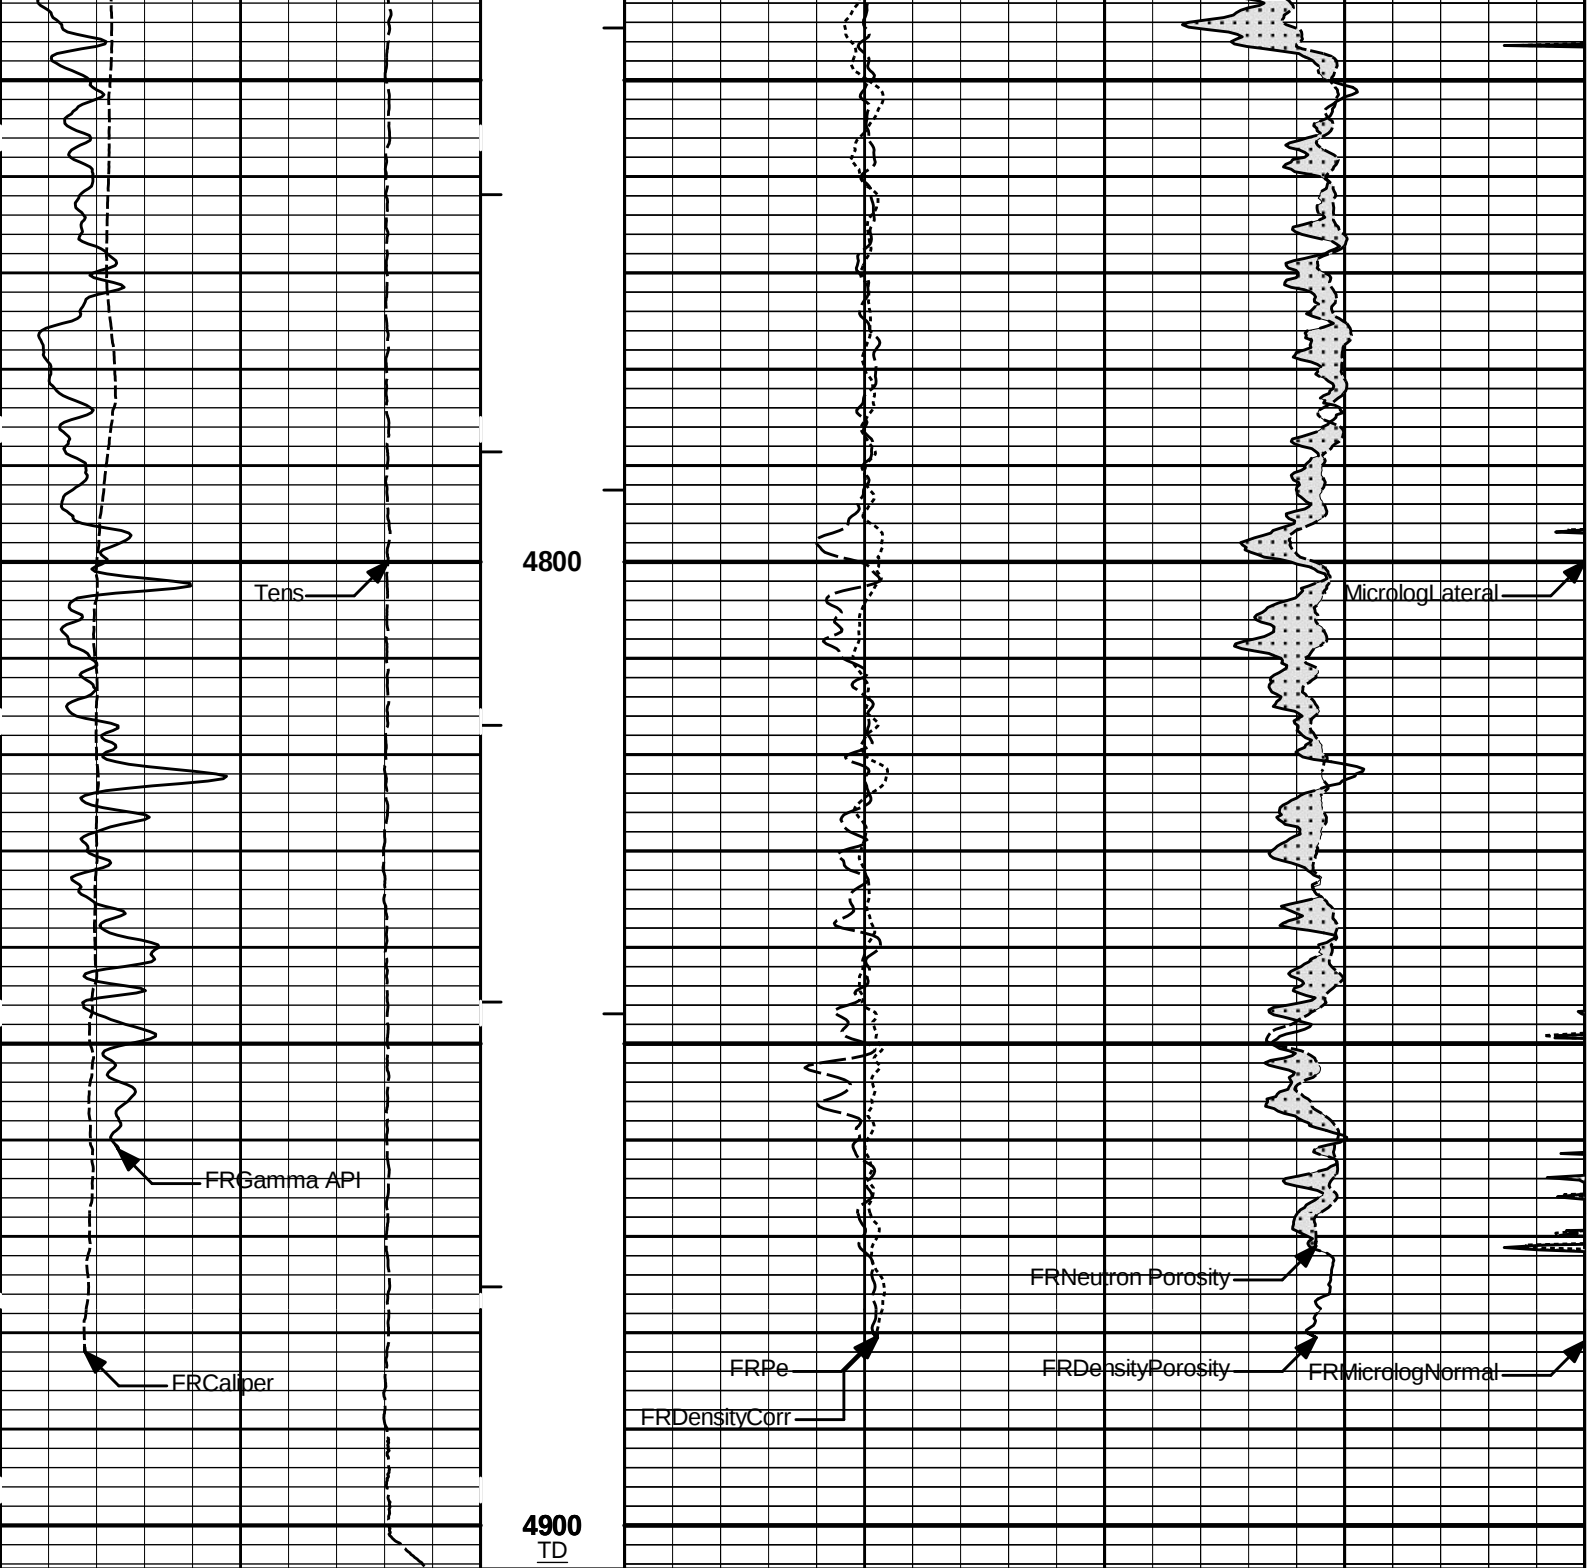

|     |           |     |         |       |                  |      |   |                 |    |
|-----|-----------|-----|---------|-------|------------------|------|---|-----------------|----|
| 15K | Tens      | 0   | 1 : 240 | 0     | Pe               | 10   | 0 | MicrologNormal  | 20 |
|     | pounds    |     | ft      |       |                  |      |   | ohm-metre       |    |
| 6   | Caliper   | 16  | AHVT    | -0.25 | DensityCorr      | 0.25 | 0 | MicrologLateral | 20 |
|     | inches    |     |         |       | g/cc             |      |   | ohm-metre       |    |
| 0   | Gamma API | 150 | BHVT    | 30    | DensityPorosity  | -10  |   |                 |    |
|     | api       |     |         |       | %                |      |   |                 |    |
|     |           |     |         | 30    | Neutron Porosity | -10  |   |                 |    |
|     |           |     |         |       | %                |      |   |                 |    |

**HALLIBURTON**

Plot Time: 03-Dec-18 17:50:59  
Plot Range: 3300 ft to 4904.5 ft  
Data: BEREX\_HARTNETT\Well Based\DAQ-0001-002\  
Plot File: \\SDL-DSN-ML\PoromL\_5\_main\_IQ


**5 INCH MAIN LOG**


HALLIBURTON

Plot Time: 03-Dec-18 17:50:59  
Plot Range: 4590 ft to 4905.92 ft  
Data: BEREX\_HARTNETT\Well Based\REPEAT\  
Plot File: \\SDL-DSN-ML\PoromL\_5\_main\_IQ


REPEAT SECTION


REPEAT SECTION

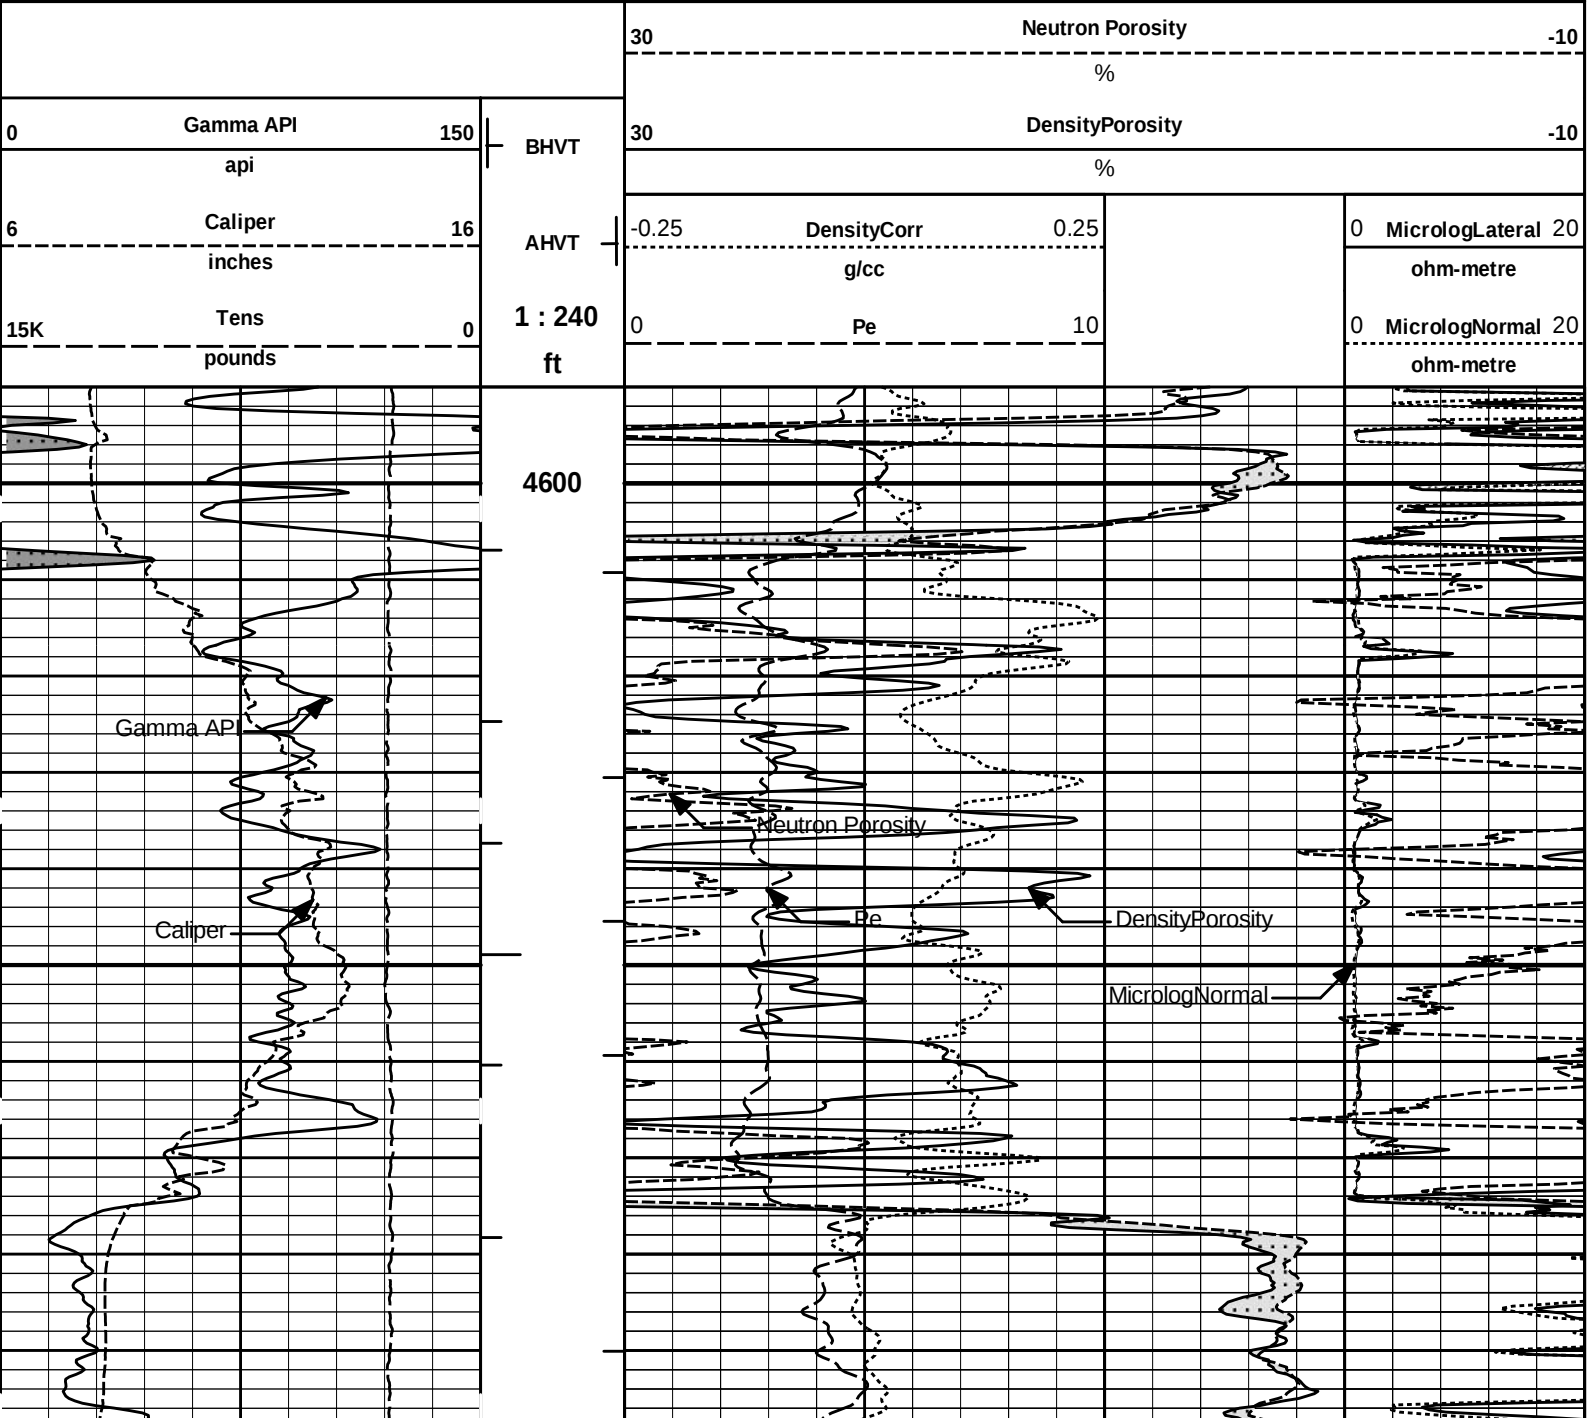


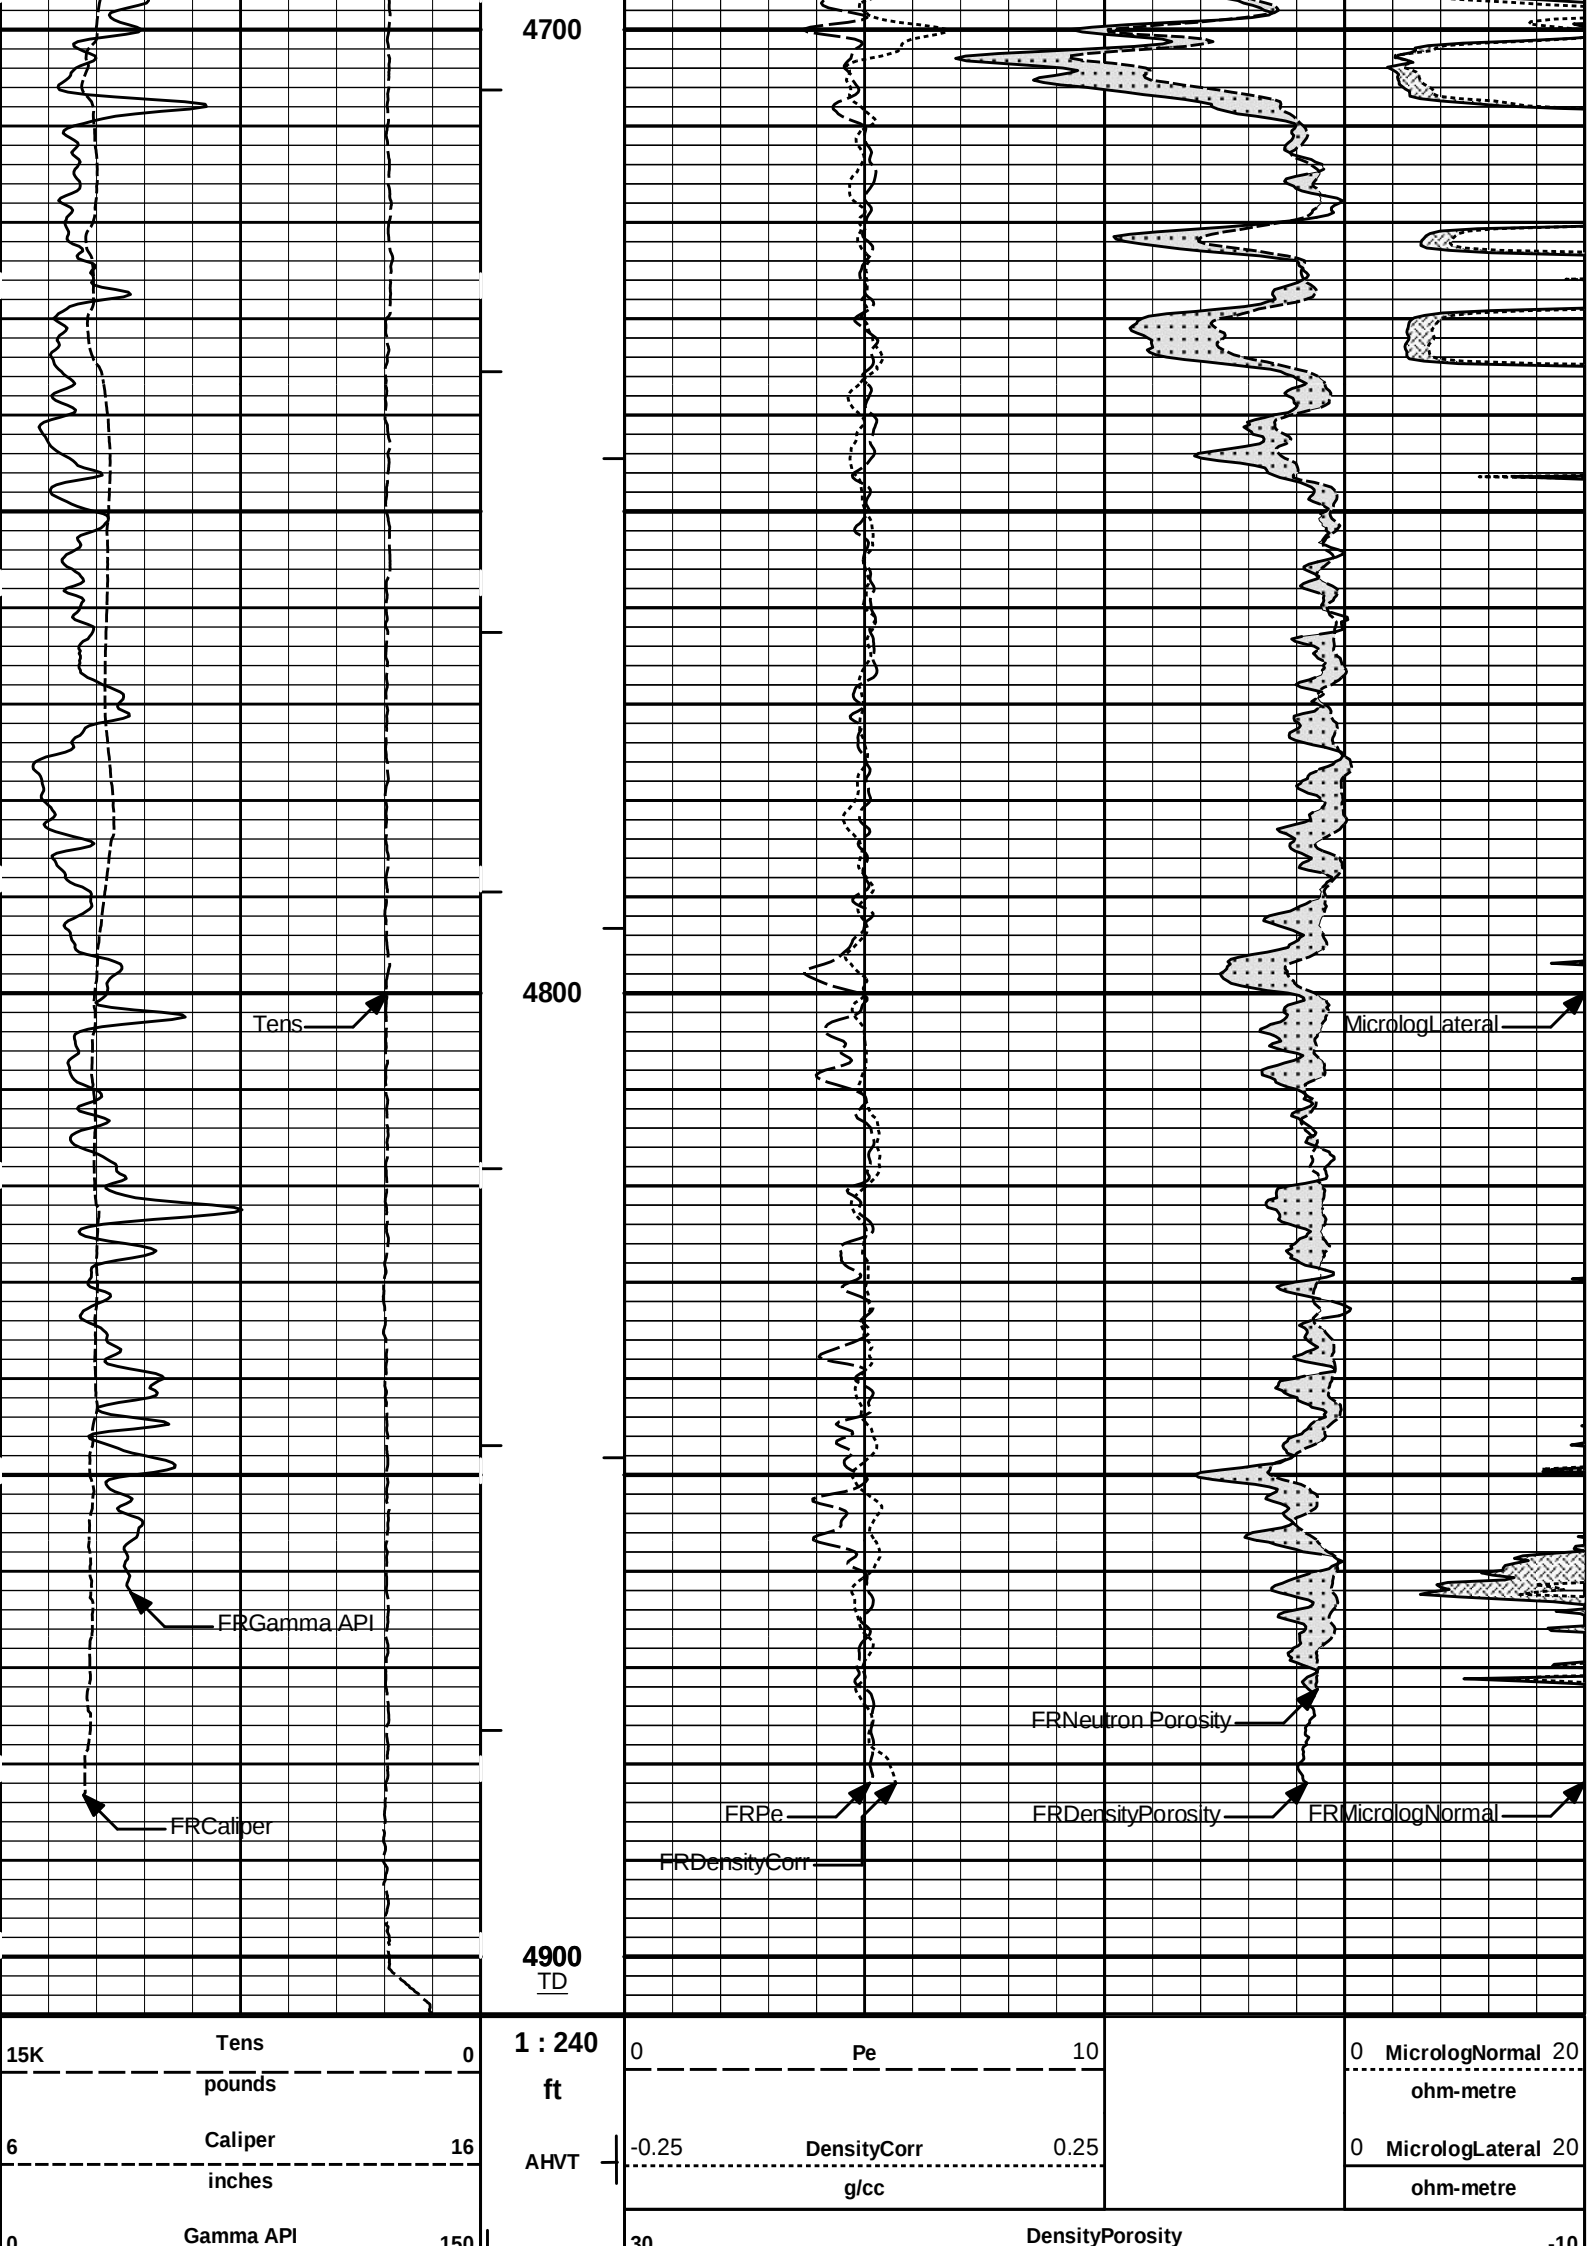





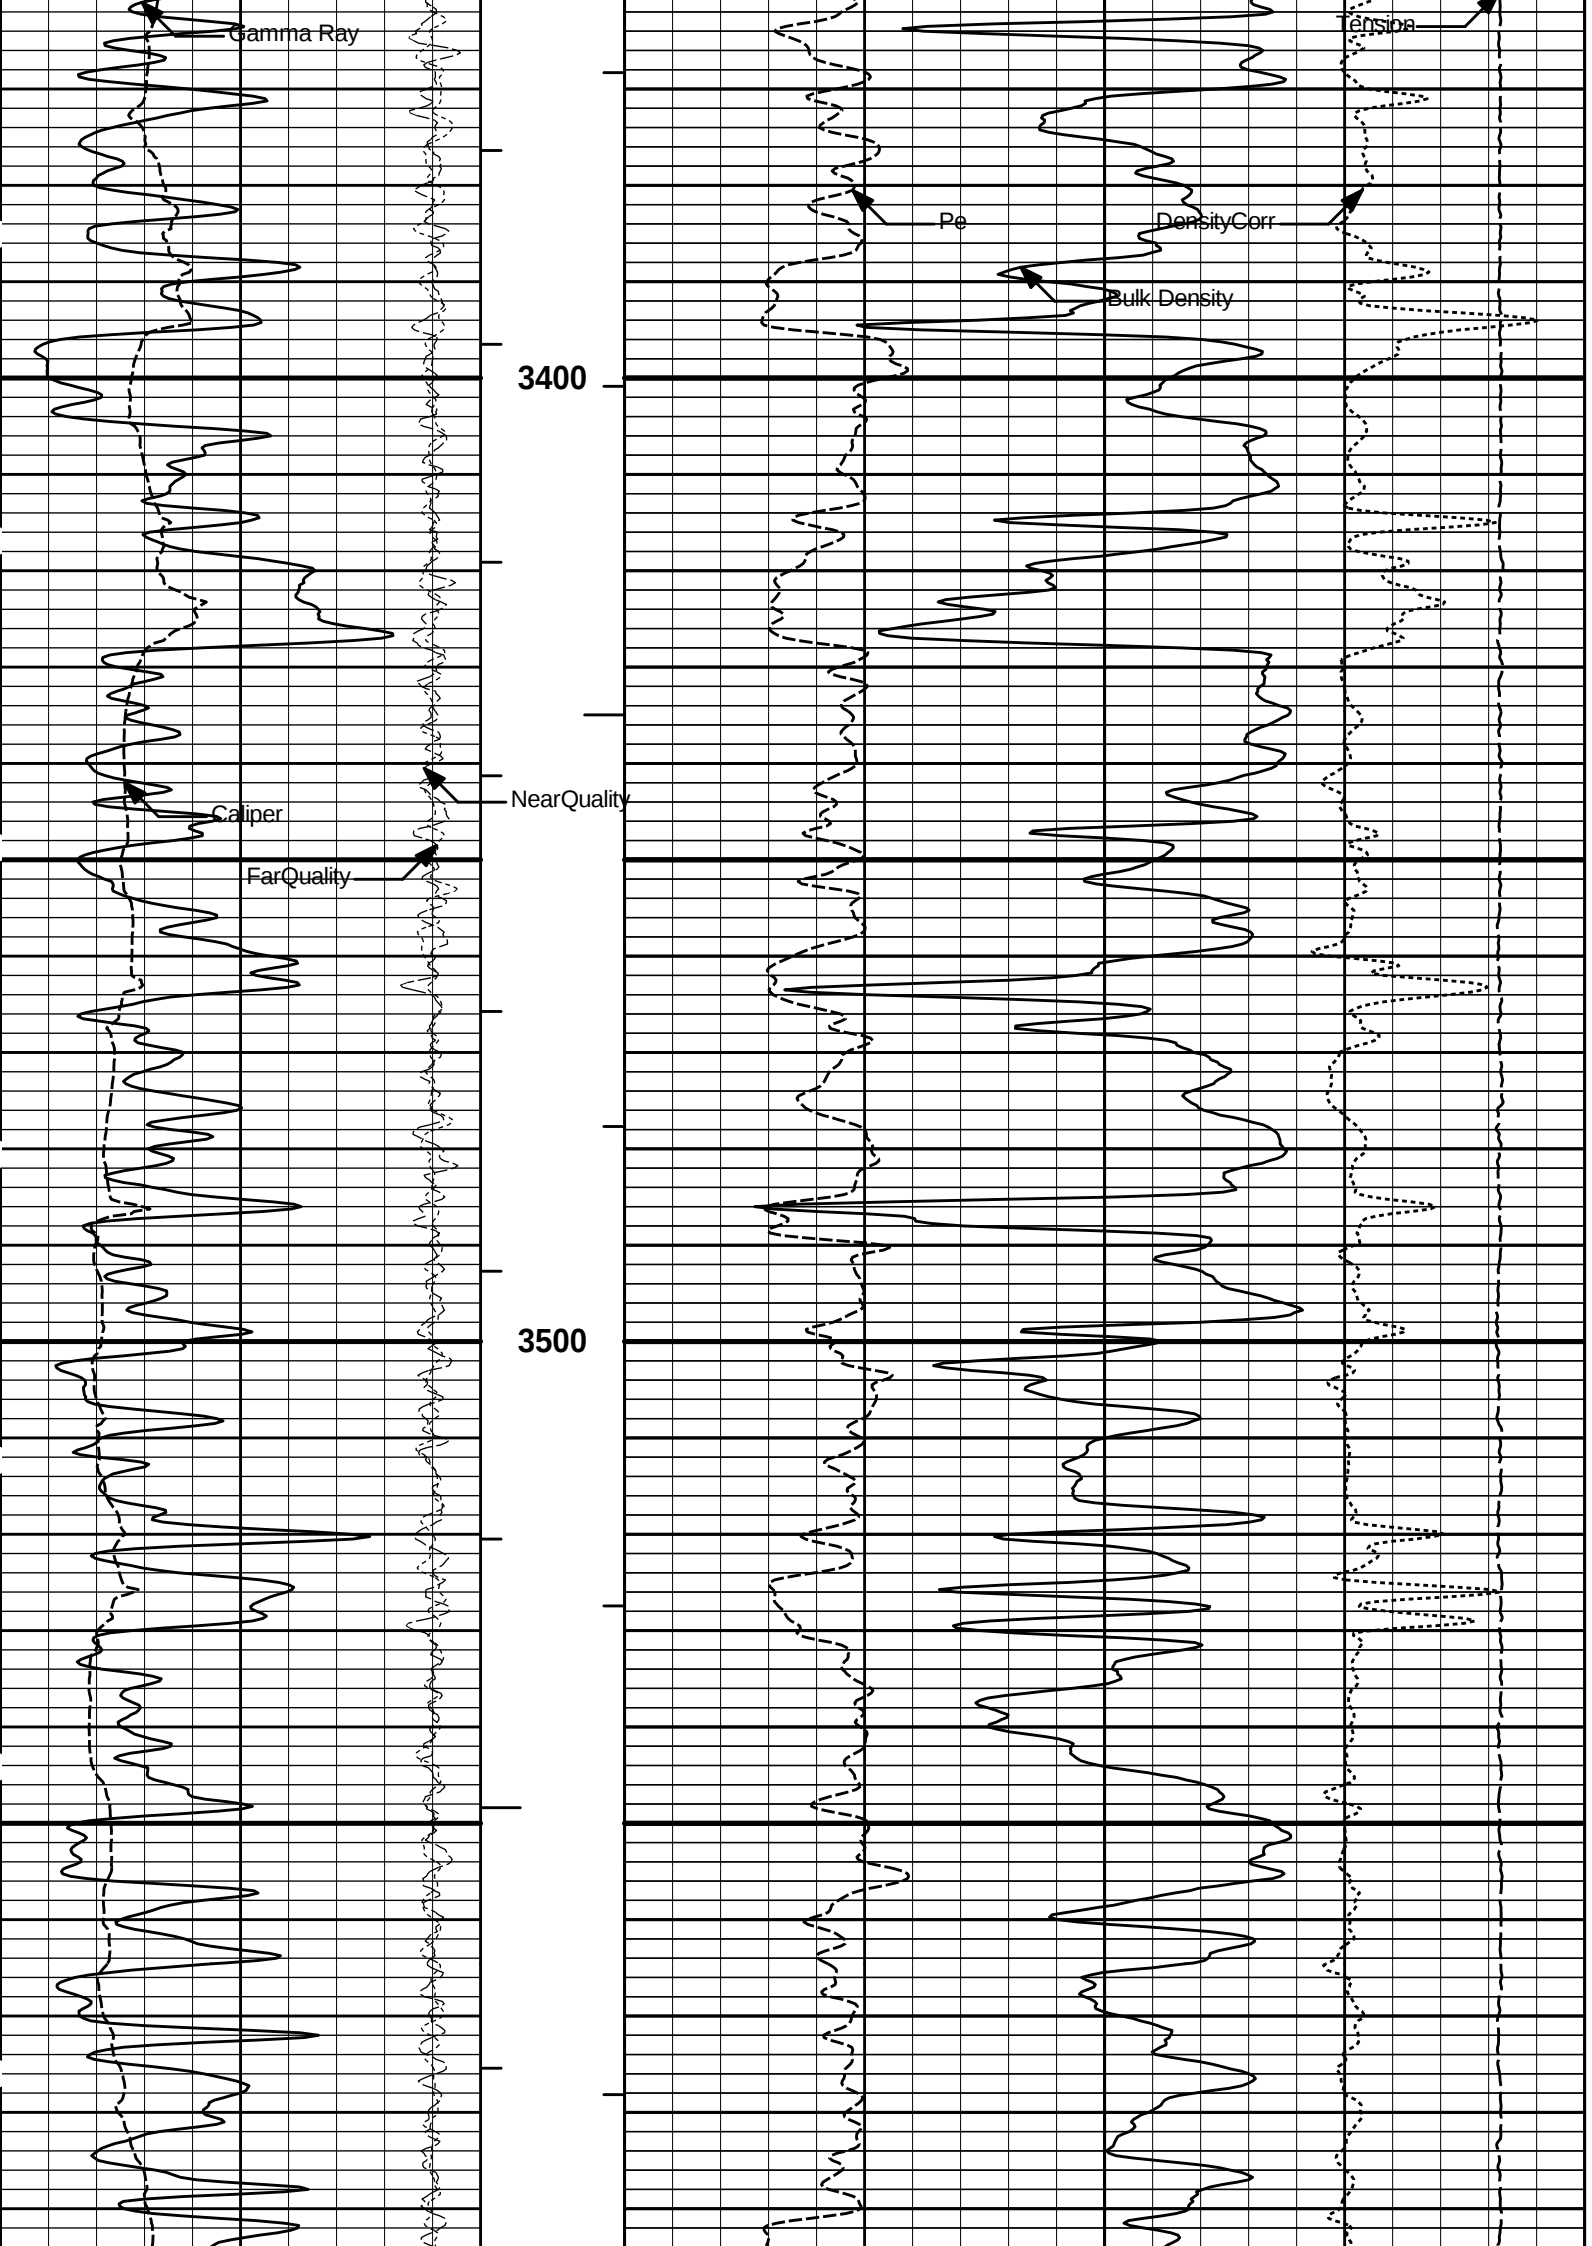


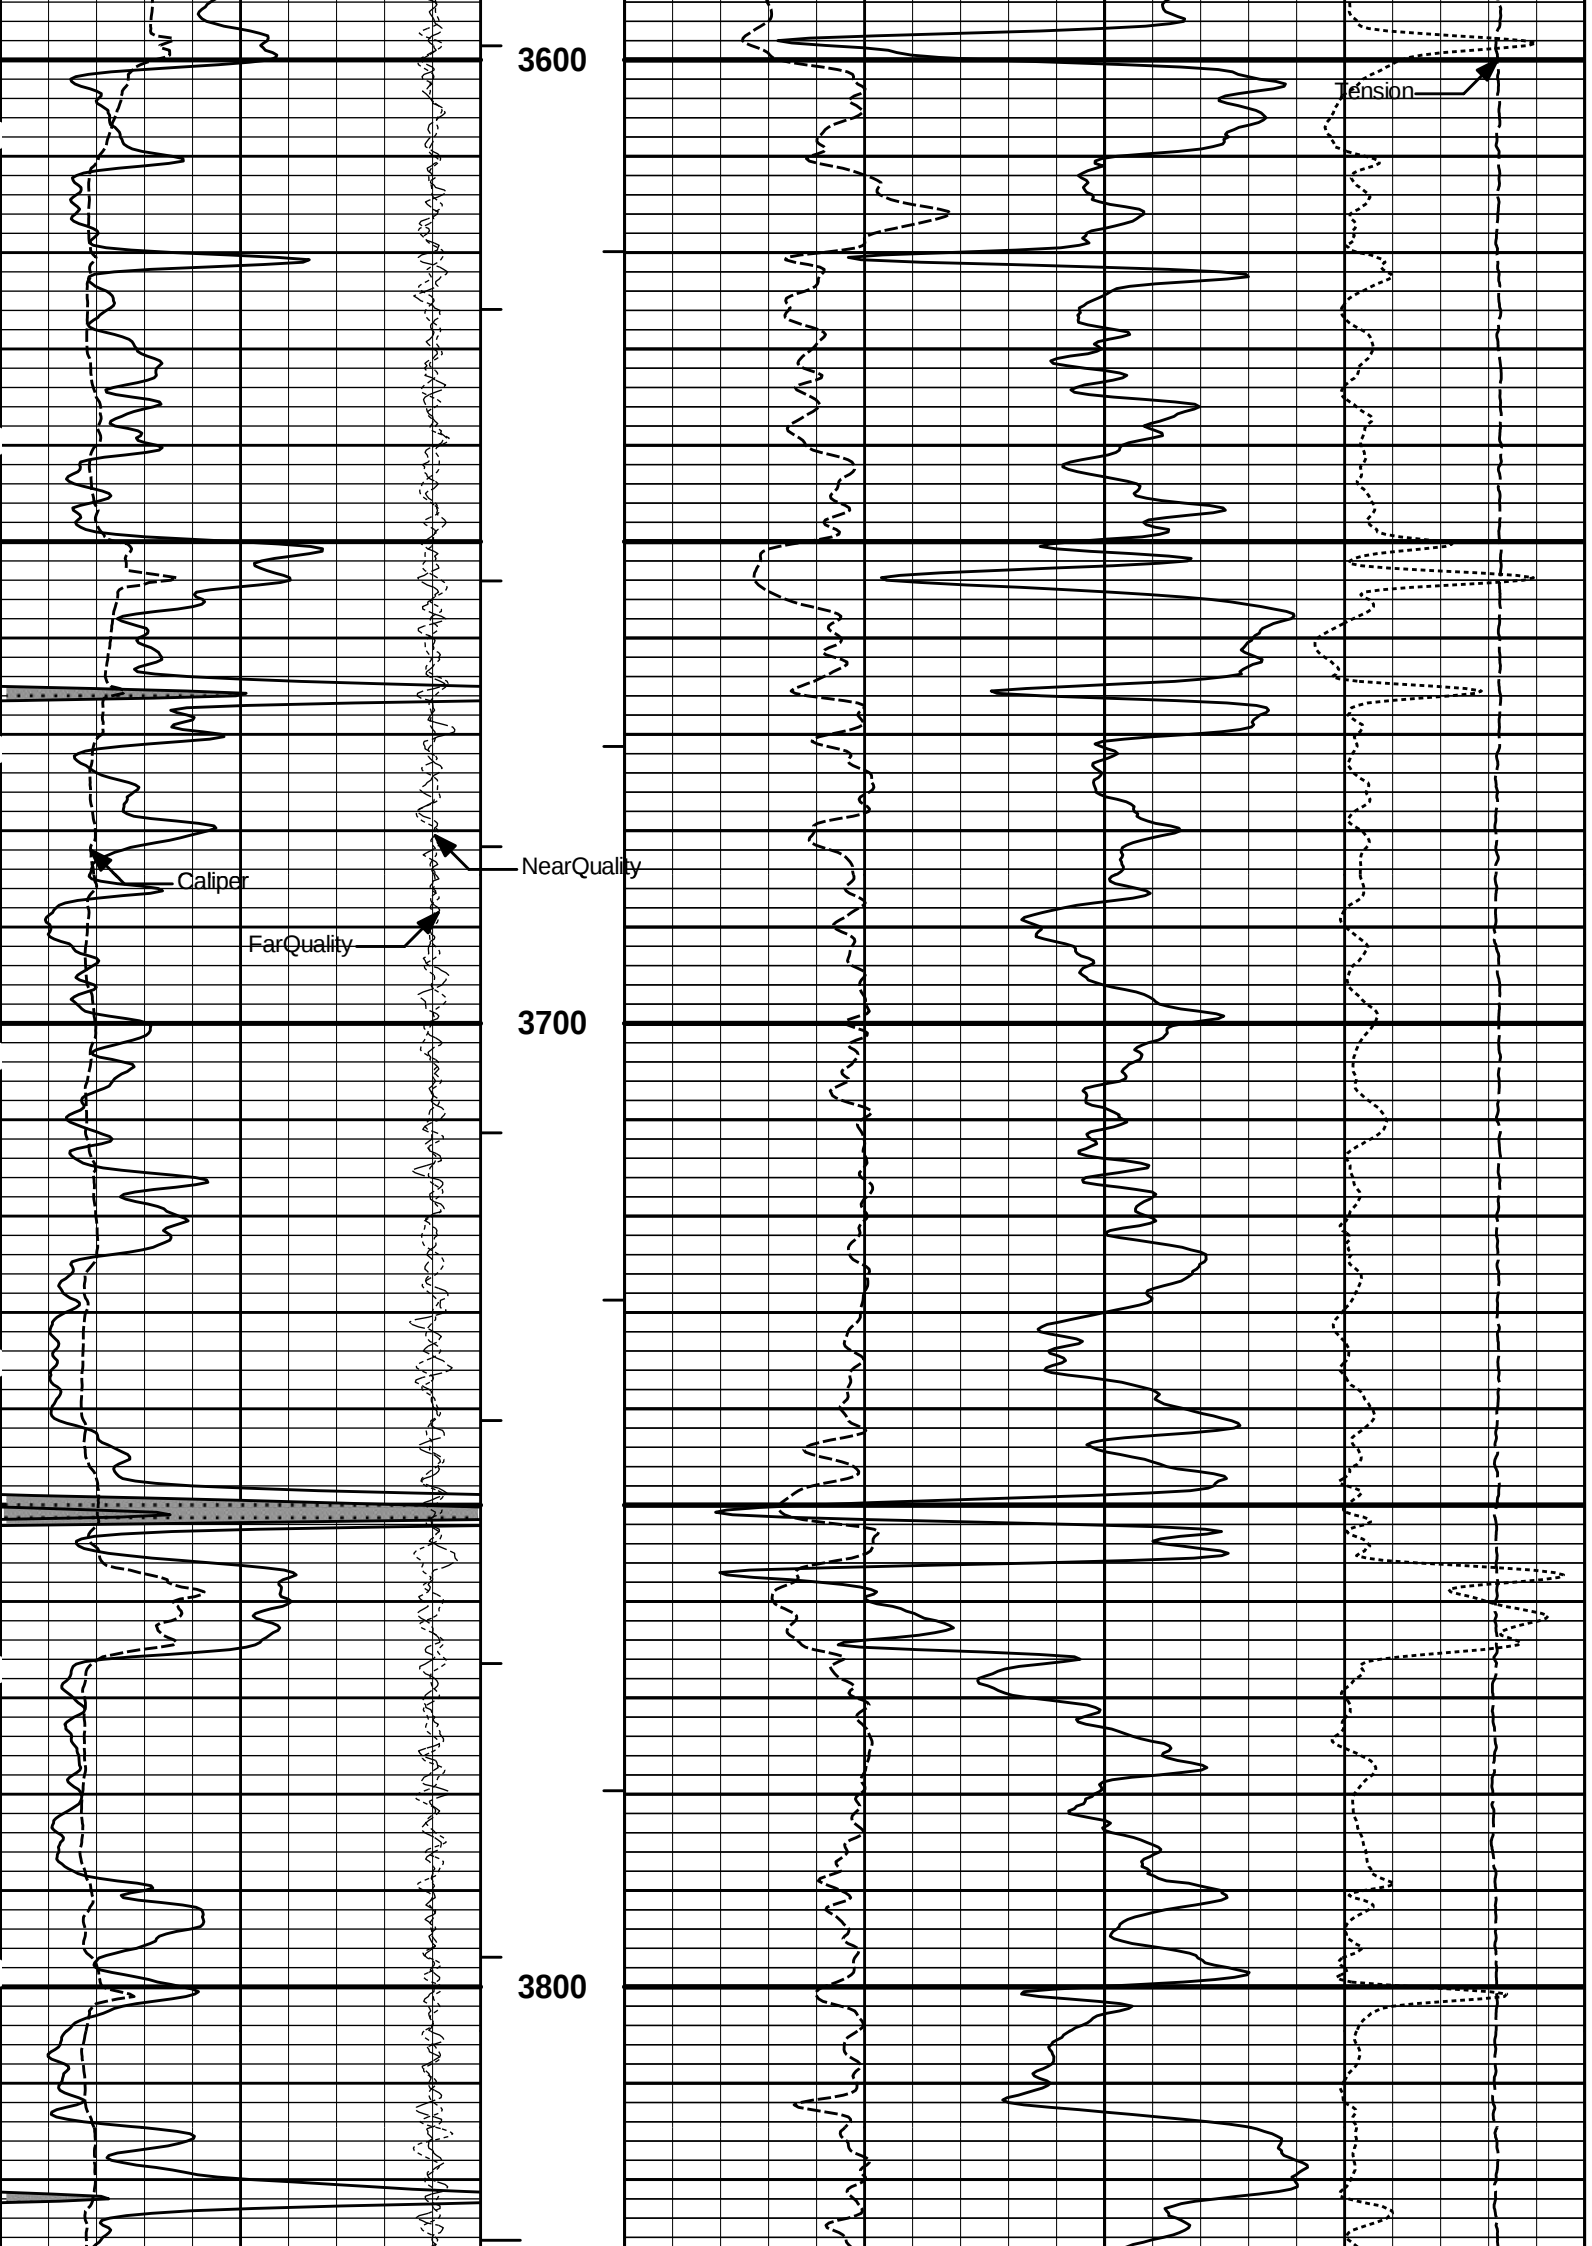

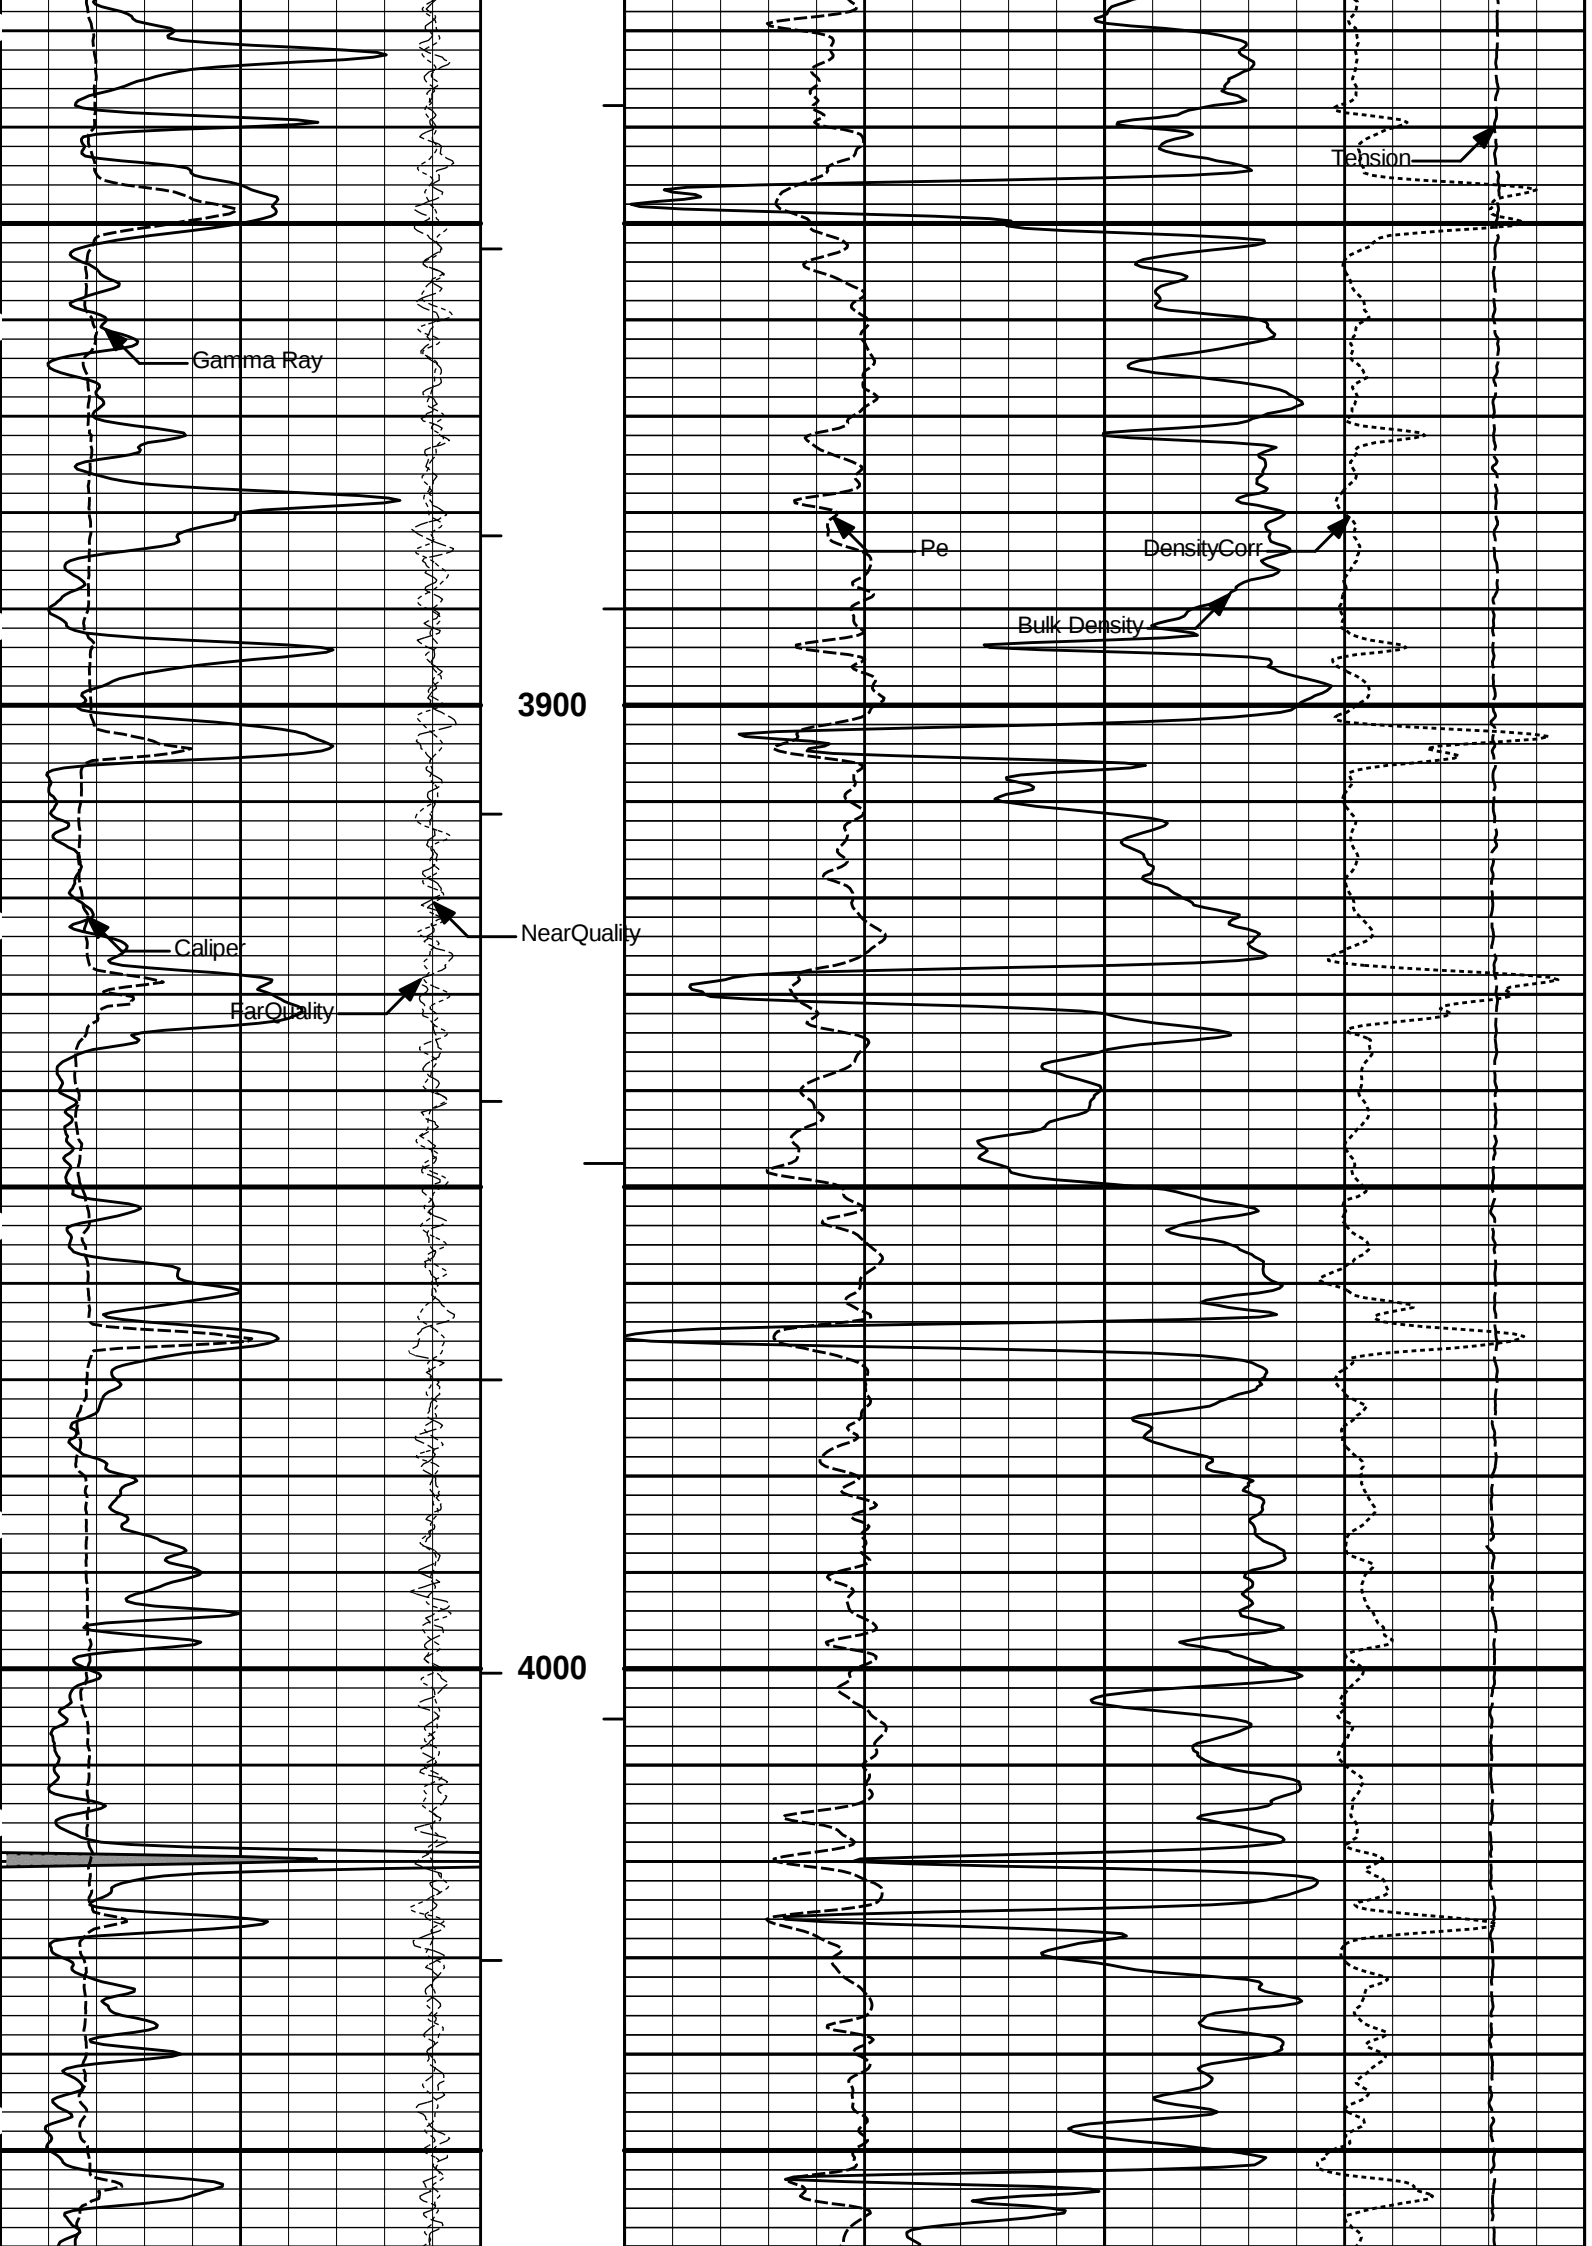

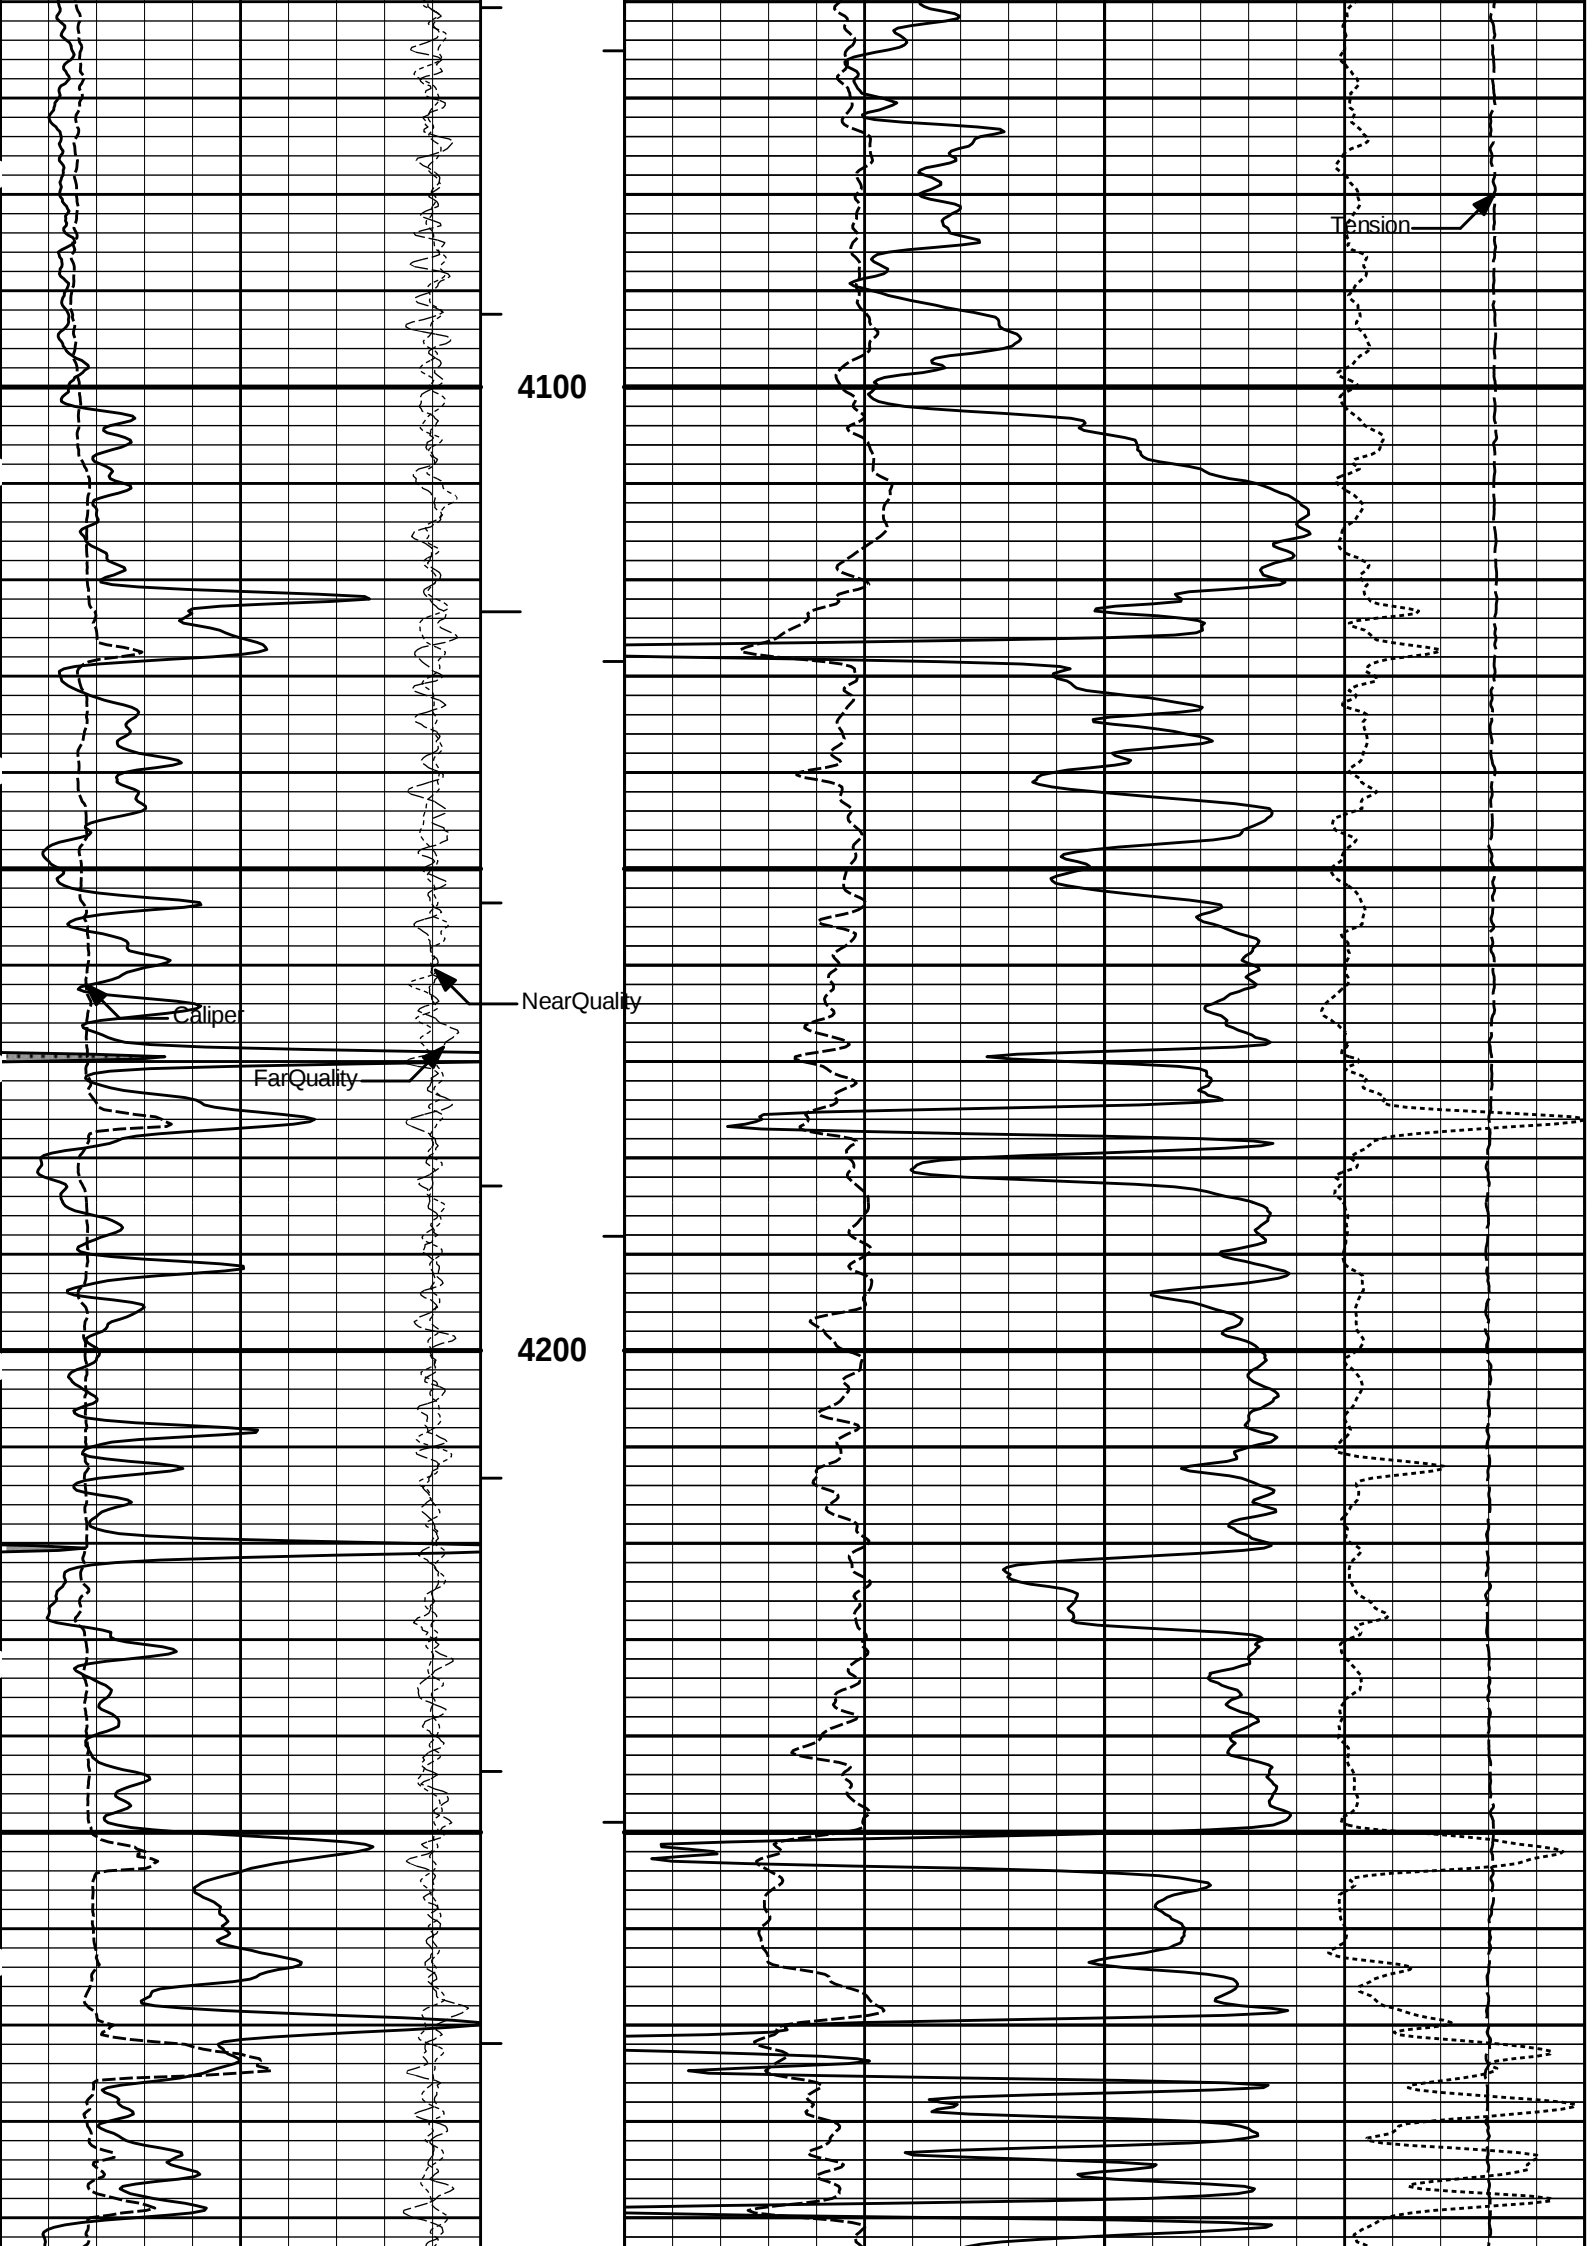

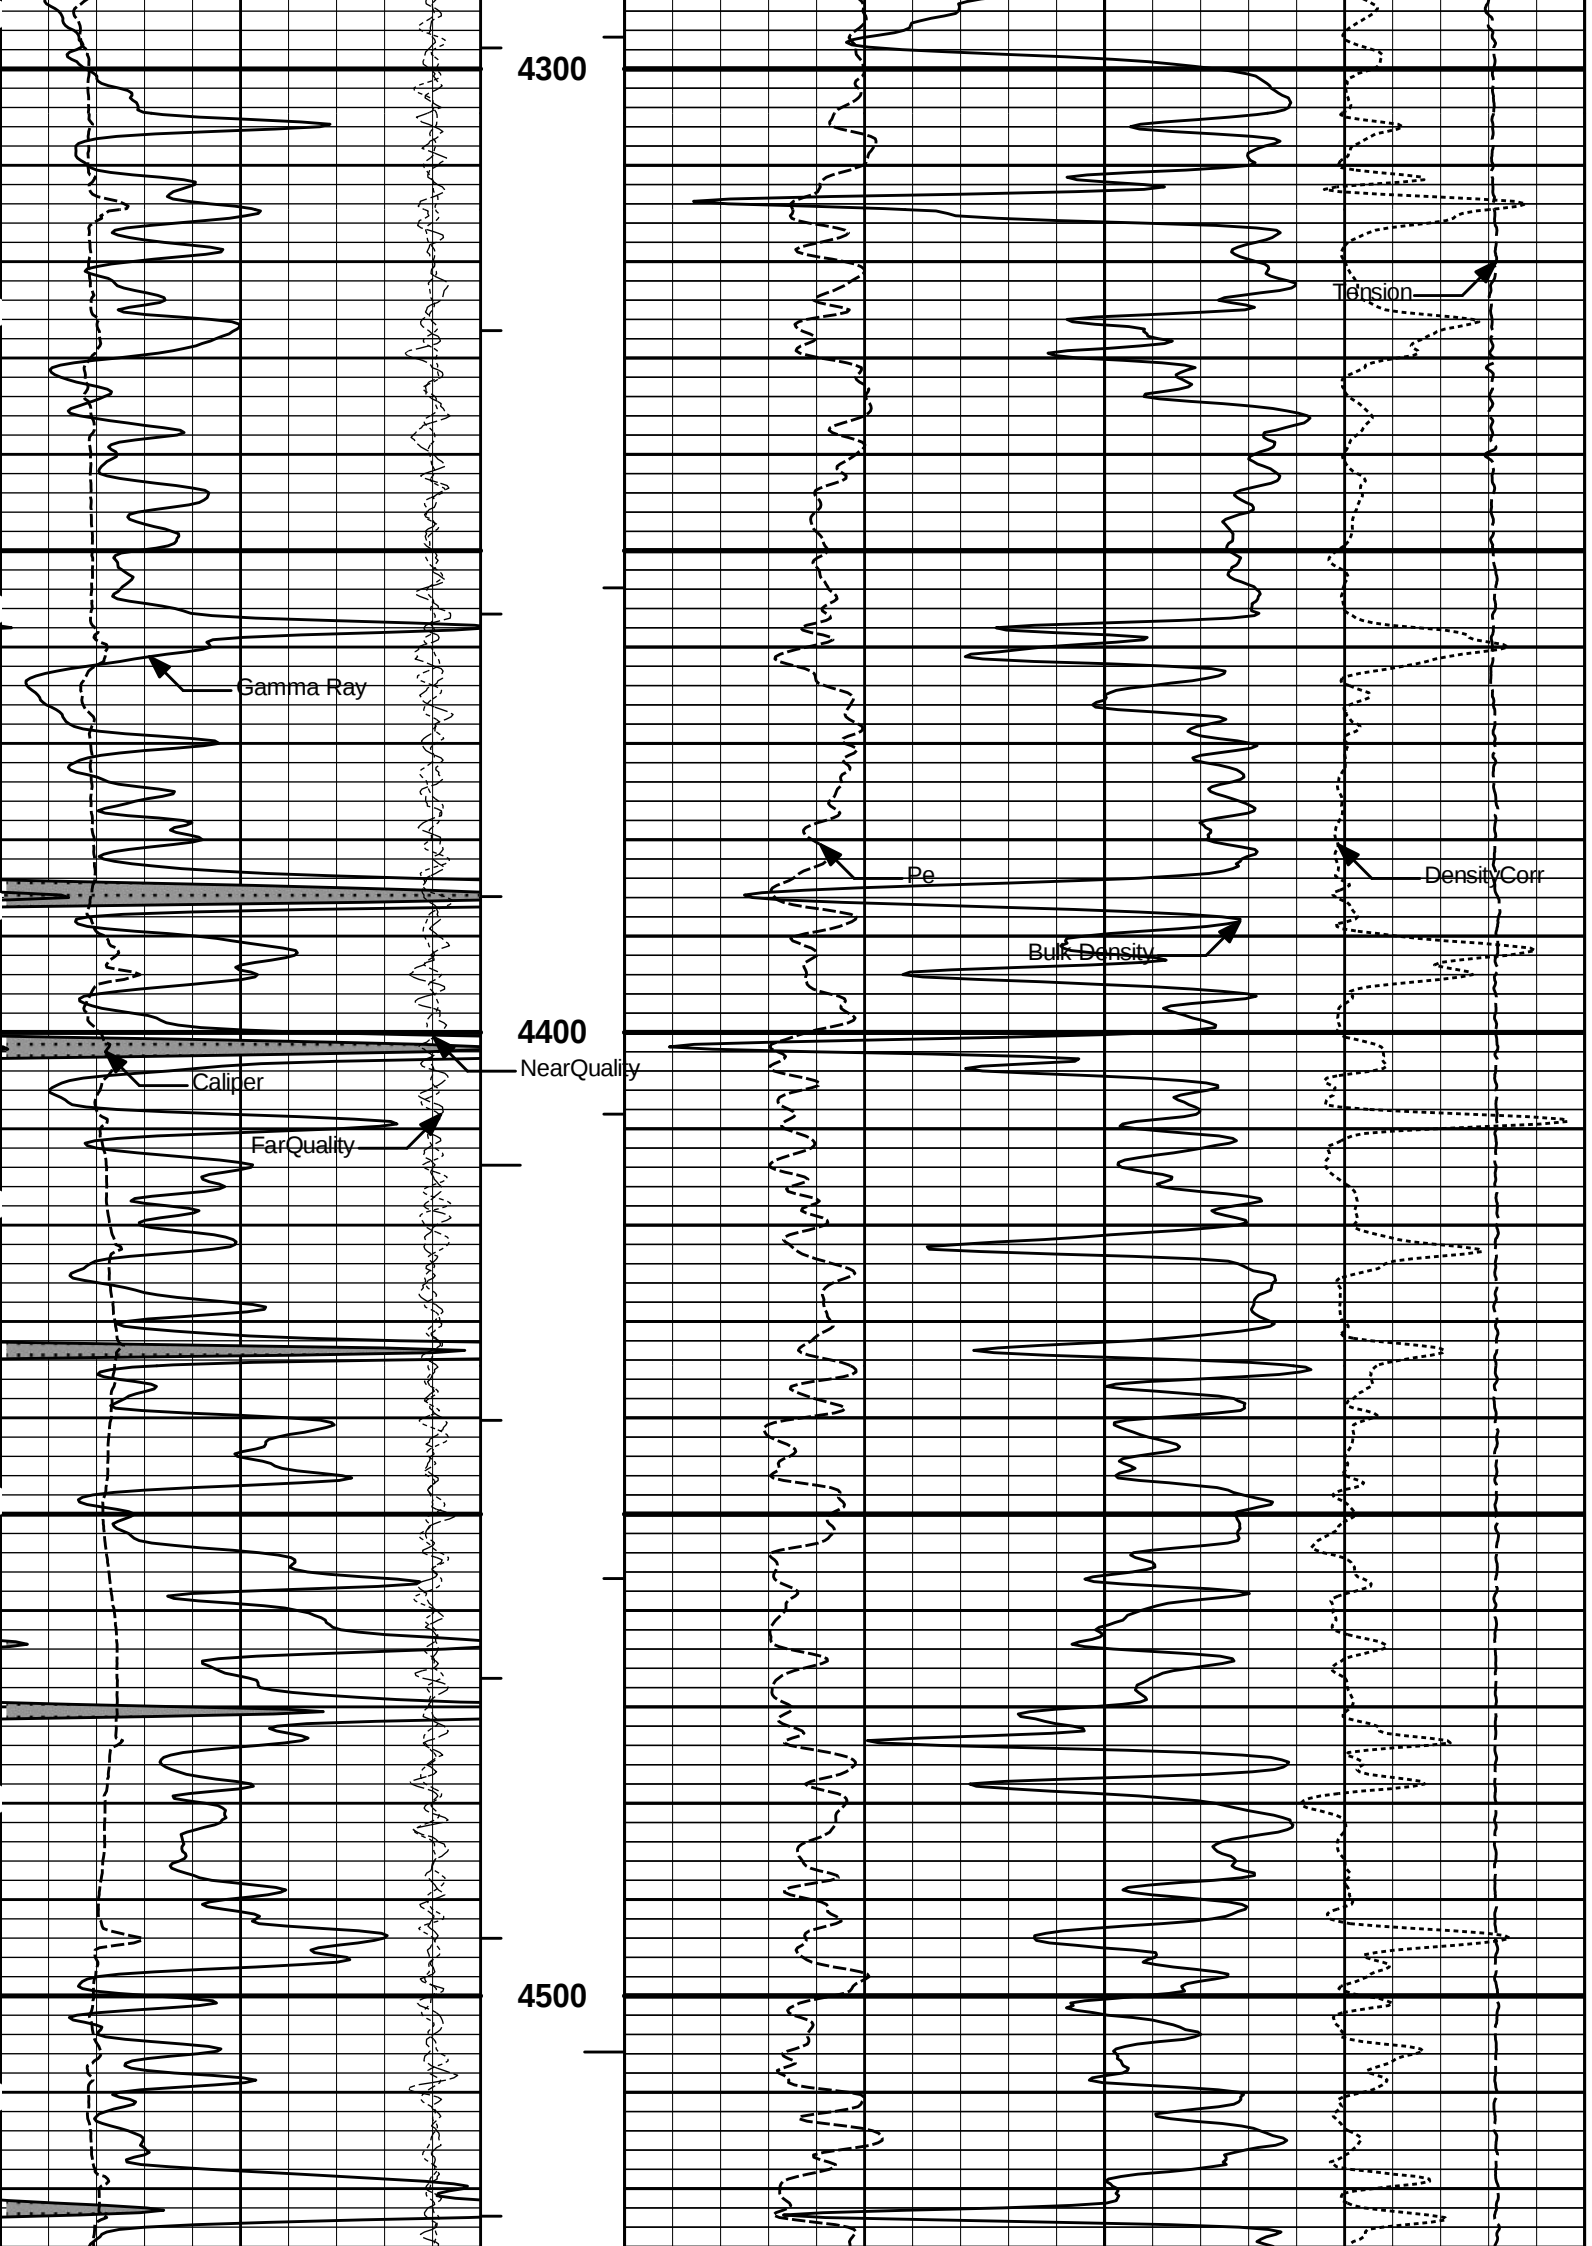

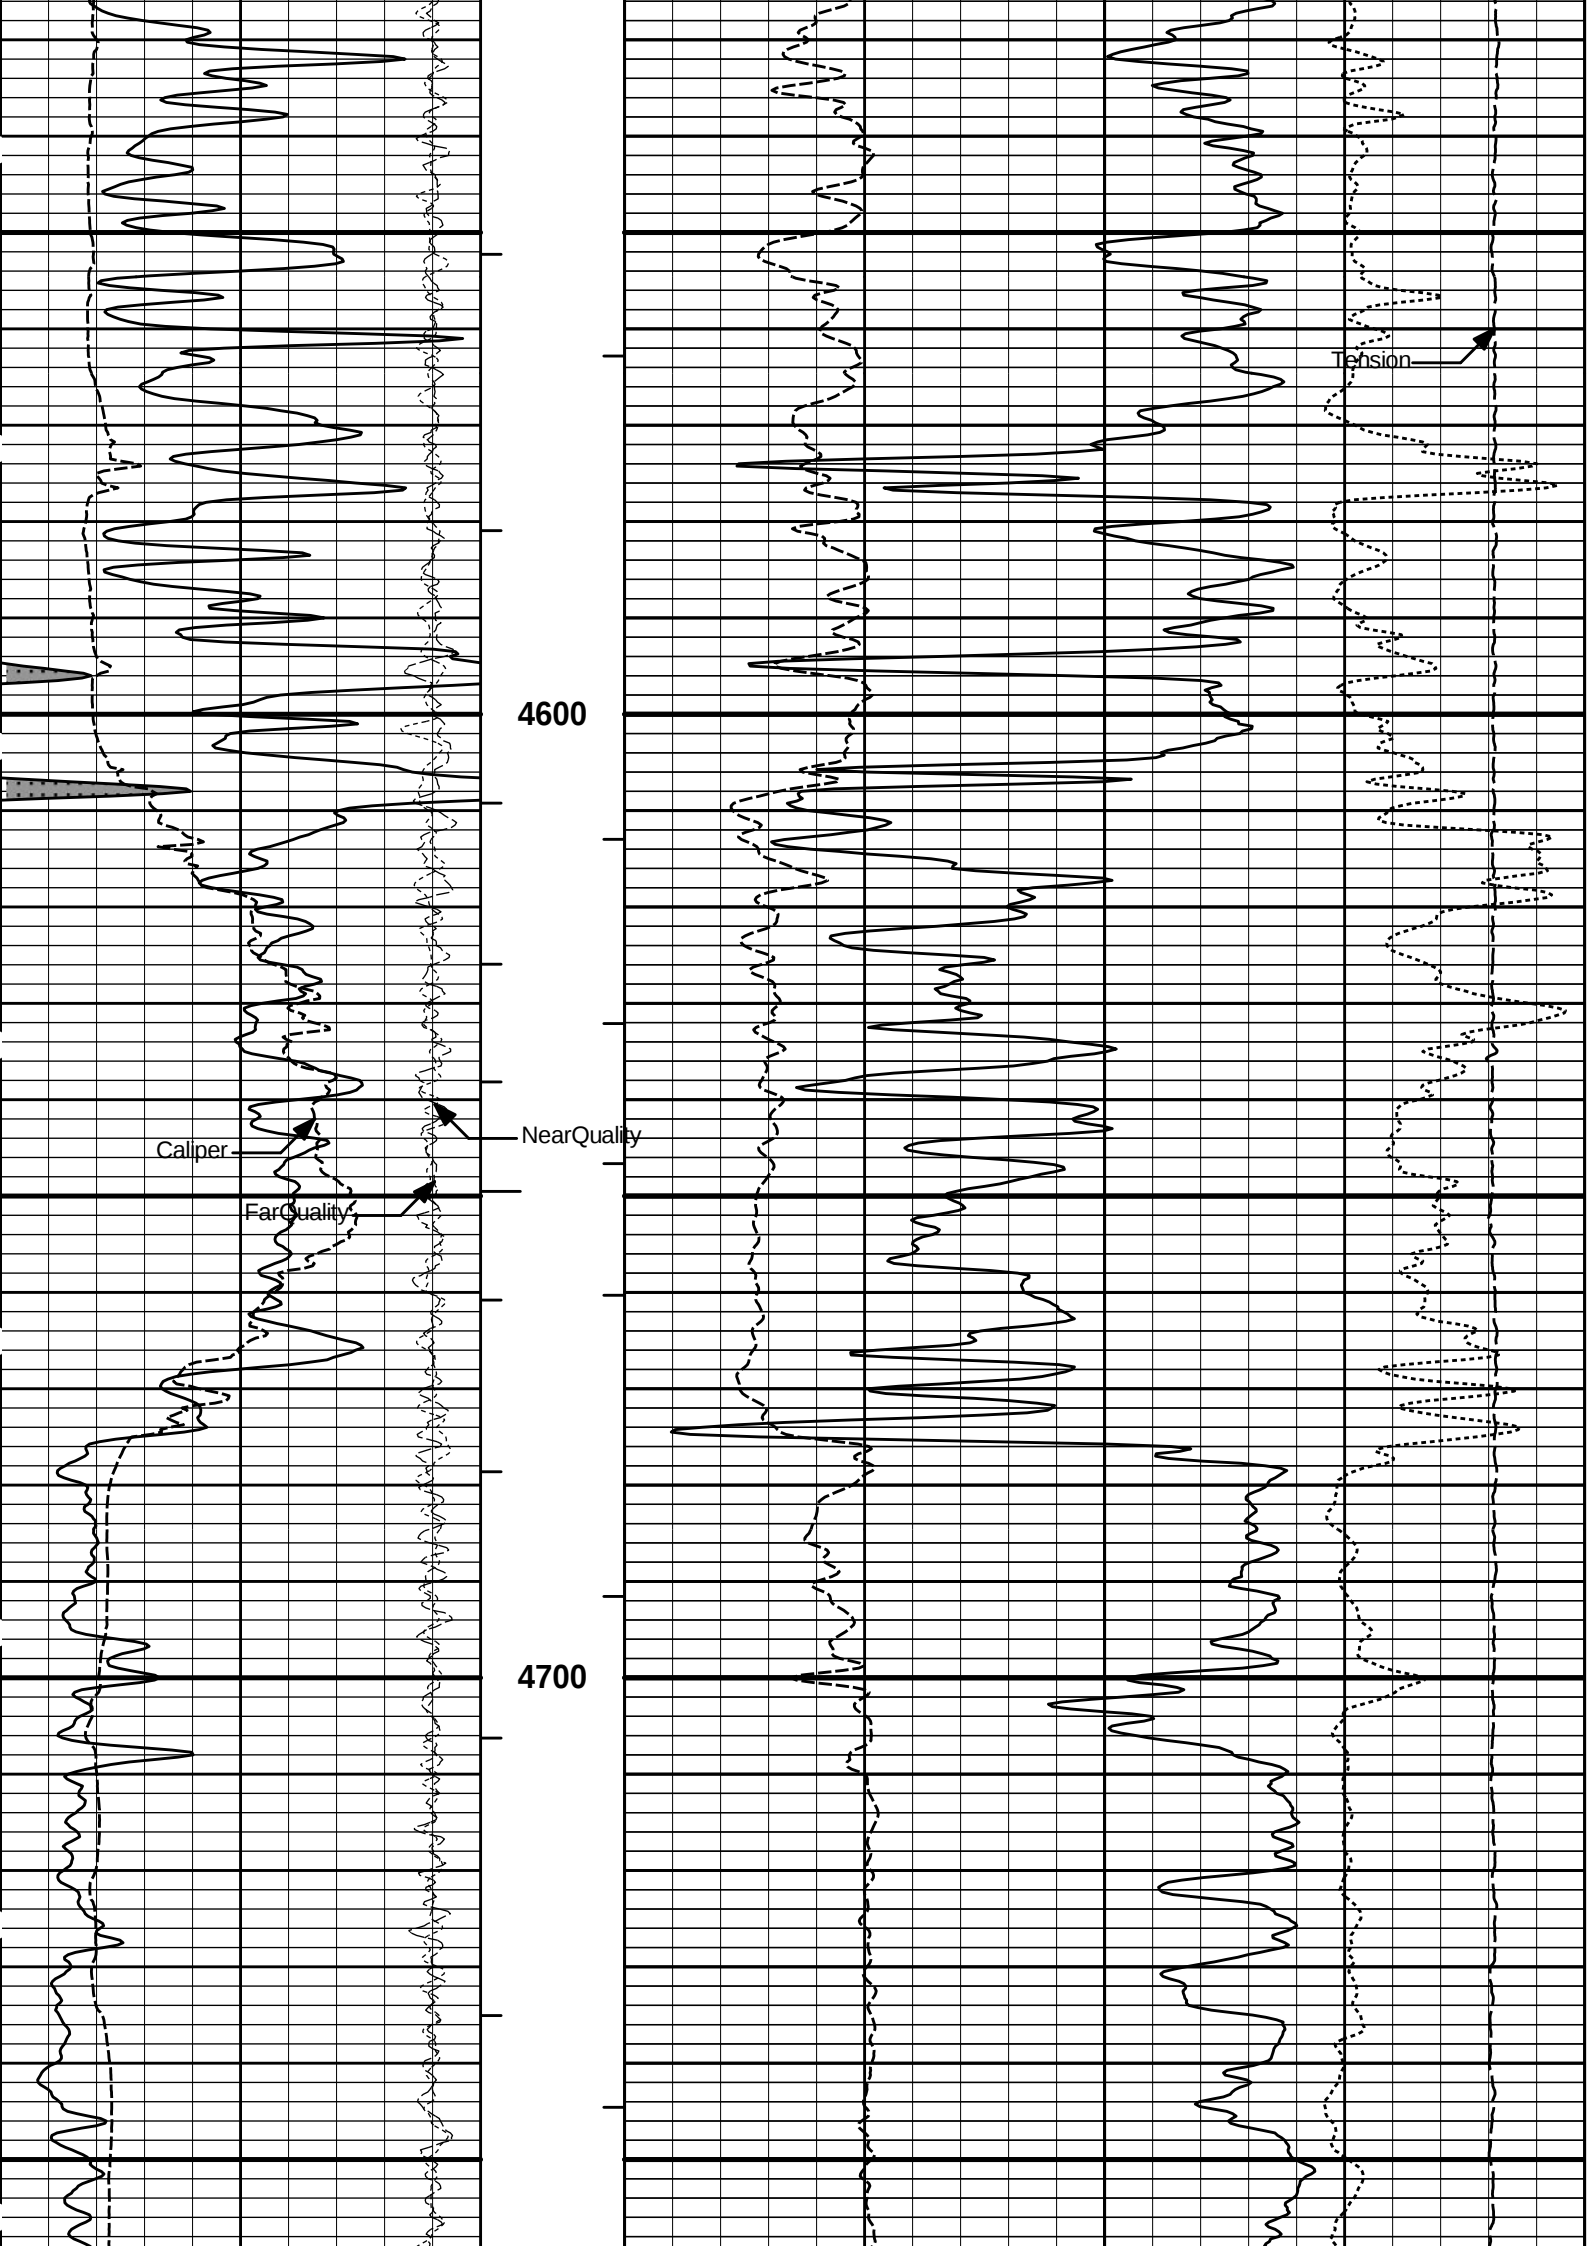



|     |             |     |         |   |              |    |       |             |      |
|-----|-------------|-----|---------|---|--------------|----|-------|-------------|------|
| 6   | Caliper     | 16  | 1 : 240 | 0 | Pe           | 10 | -0.25 | DensityCorr | 0.25 |
|     | inches      |     | ft      |   |              |    |       | g/cc        |      |
| -18 | NearQuality | 2   | BHV     |   |              |    | 15K   | Tension     | 0    |
|     |             |     | ft3     |   |              |    |       | pounds      |      |
| 18  | FarQuality  | -2  | AHV     | 2 | Bulk Density |    |       |             |      |
|     |             |     | ft3     |   | g/cc         |    |       |             |      |
| 0   | Gamma Ray   | 150 |         |   |              |    |       |             |      |
|     | api         |     |         |   |              |    |       |             |      |

**HALLIBURTON**


Plot Time: 03-Dec-18 17:51:05  
Plot Range: 3300 ft to 4904.5 ft  
Data: BEREX\_HARTNETT\Well Based\DAQ-0001-002\  
Plot File: \\-LOCAL-\\BEREX\_HARTNETT\0001 RWCH-GTET-DSN-SDL-ACRT\SDL-DSN-ML\BULKD\_5\_MAIN\_IQ


**5 INCH MAIN LOG**

**MAIN SECTION 5" PER 100'**

REPEAT SECTION

REPEAT SECTION

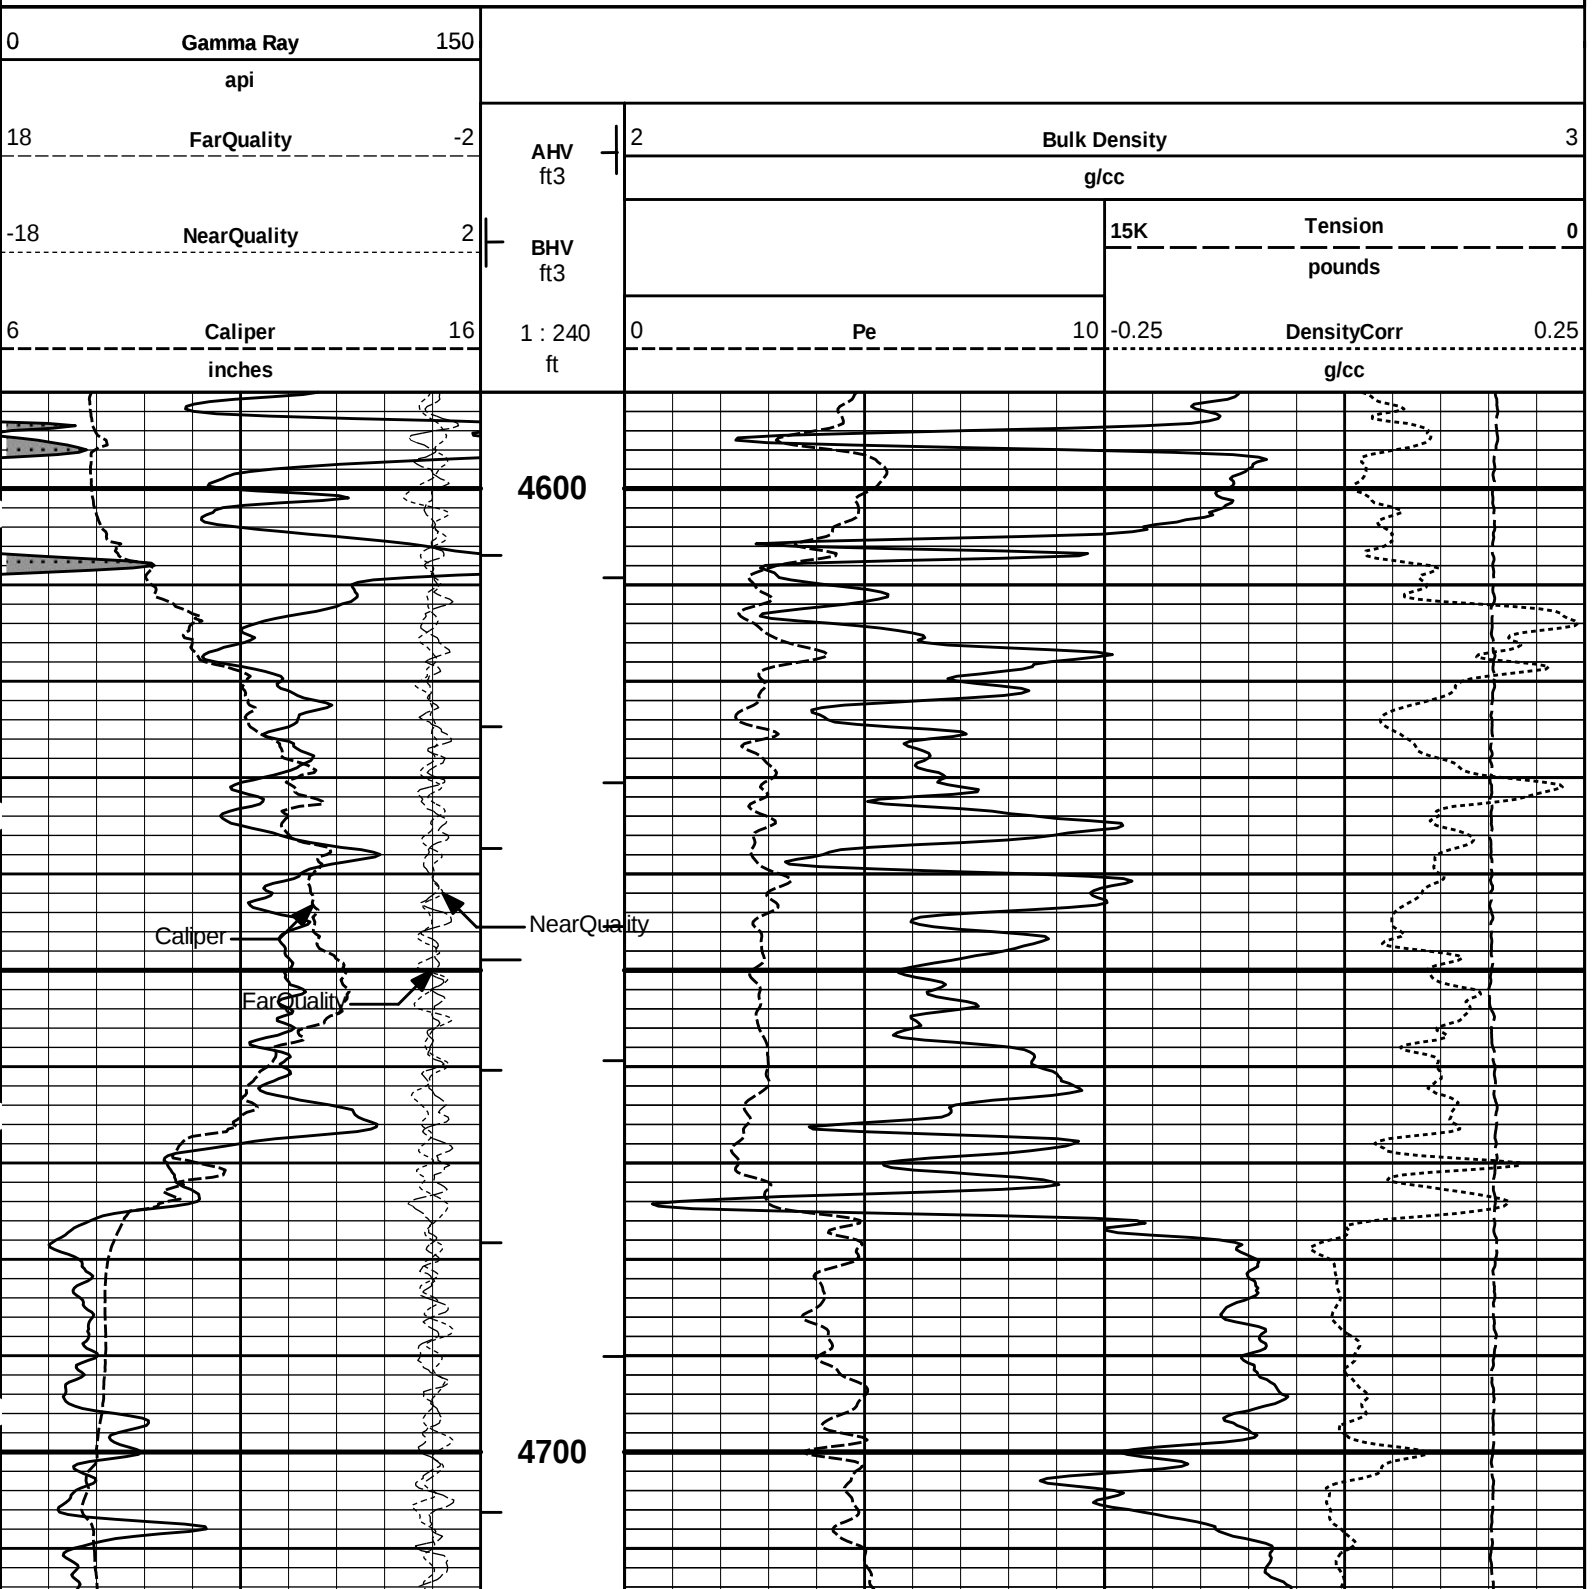

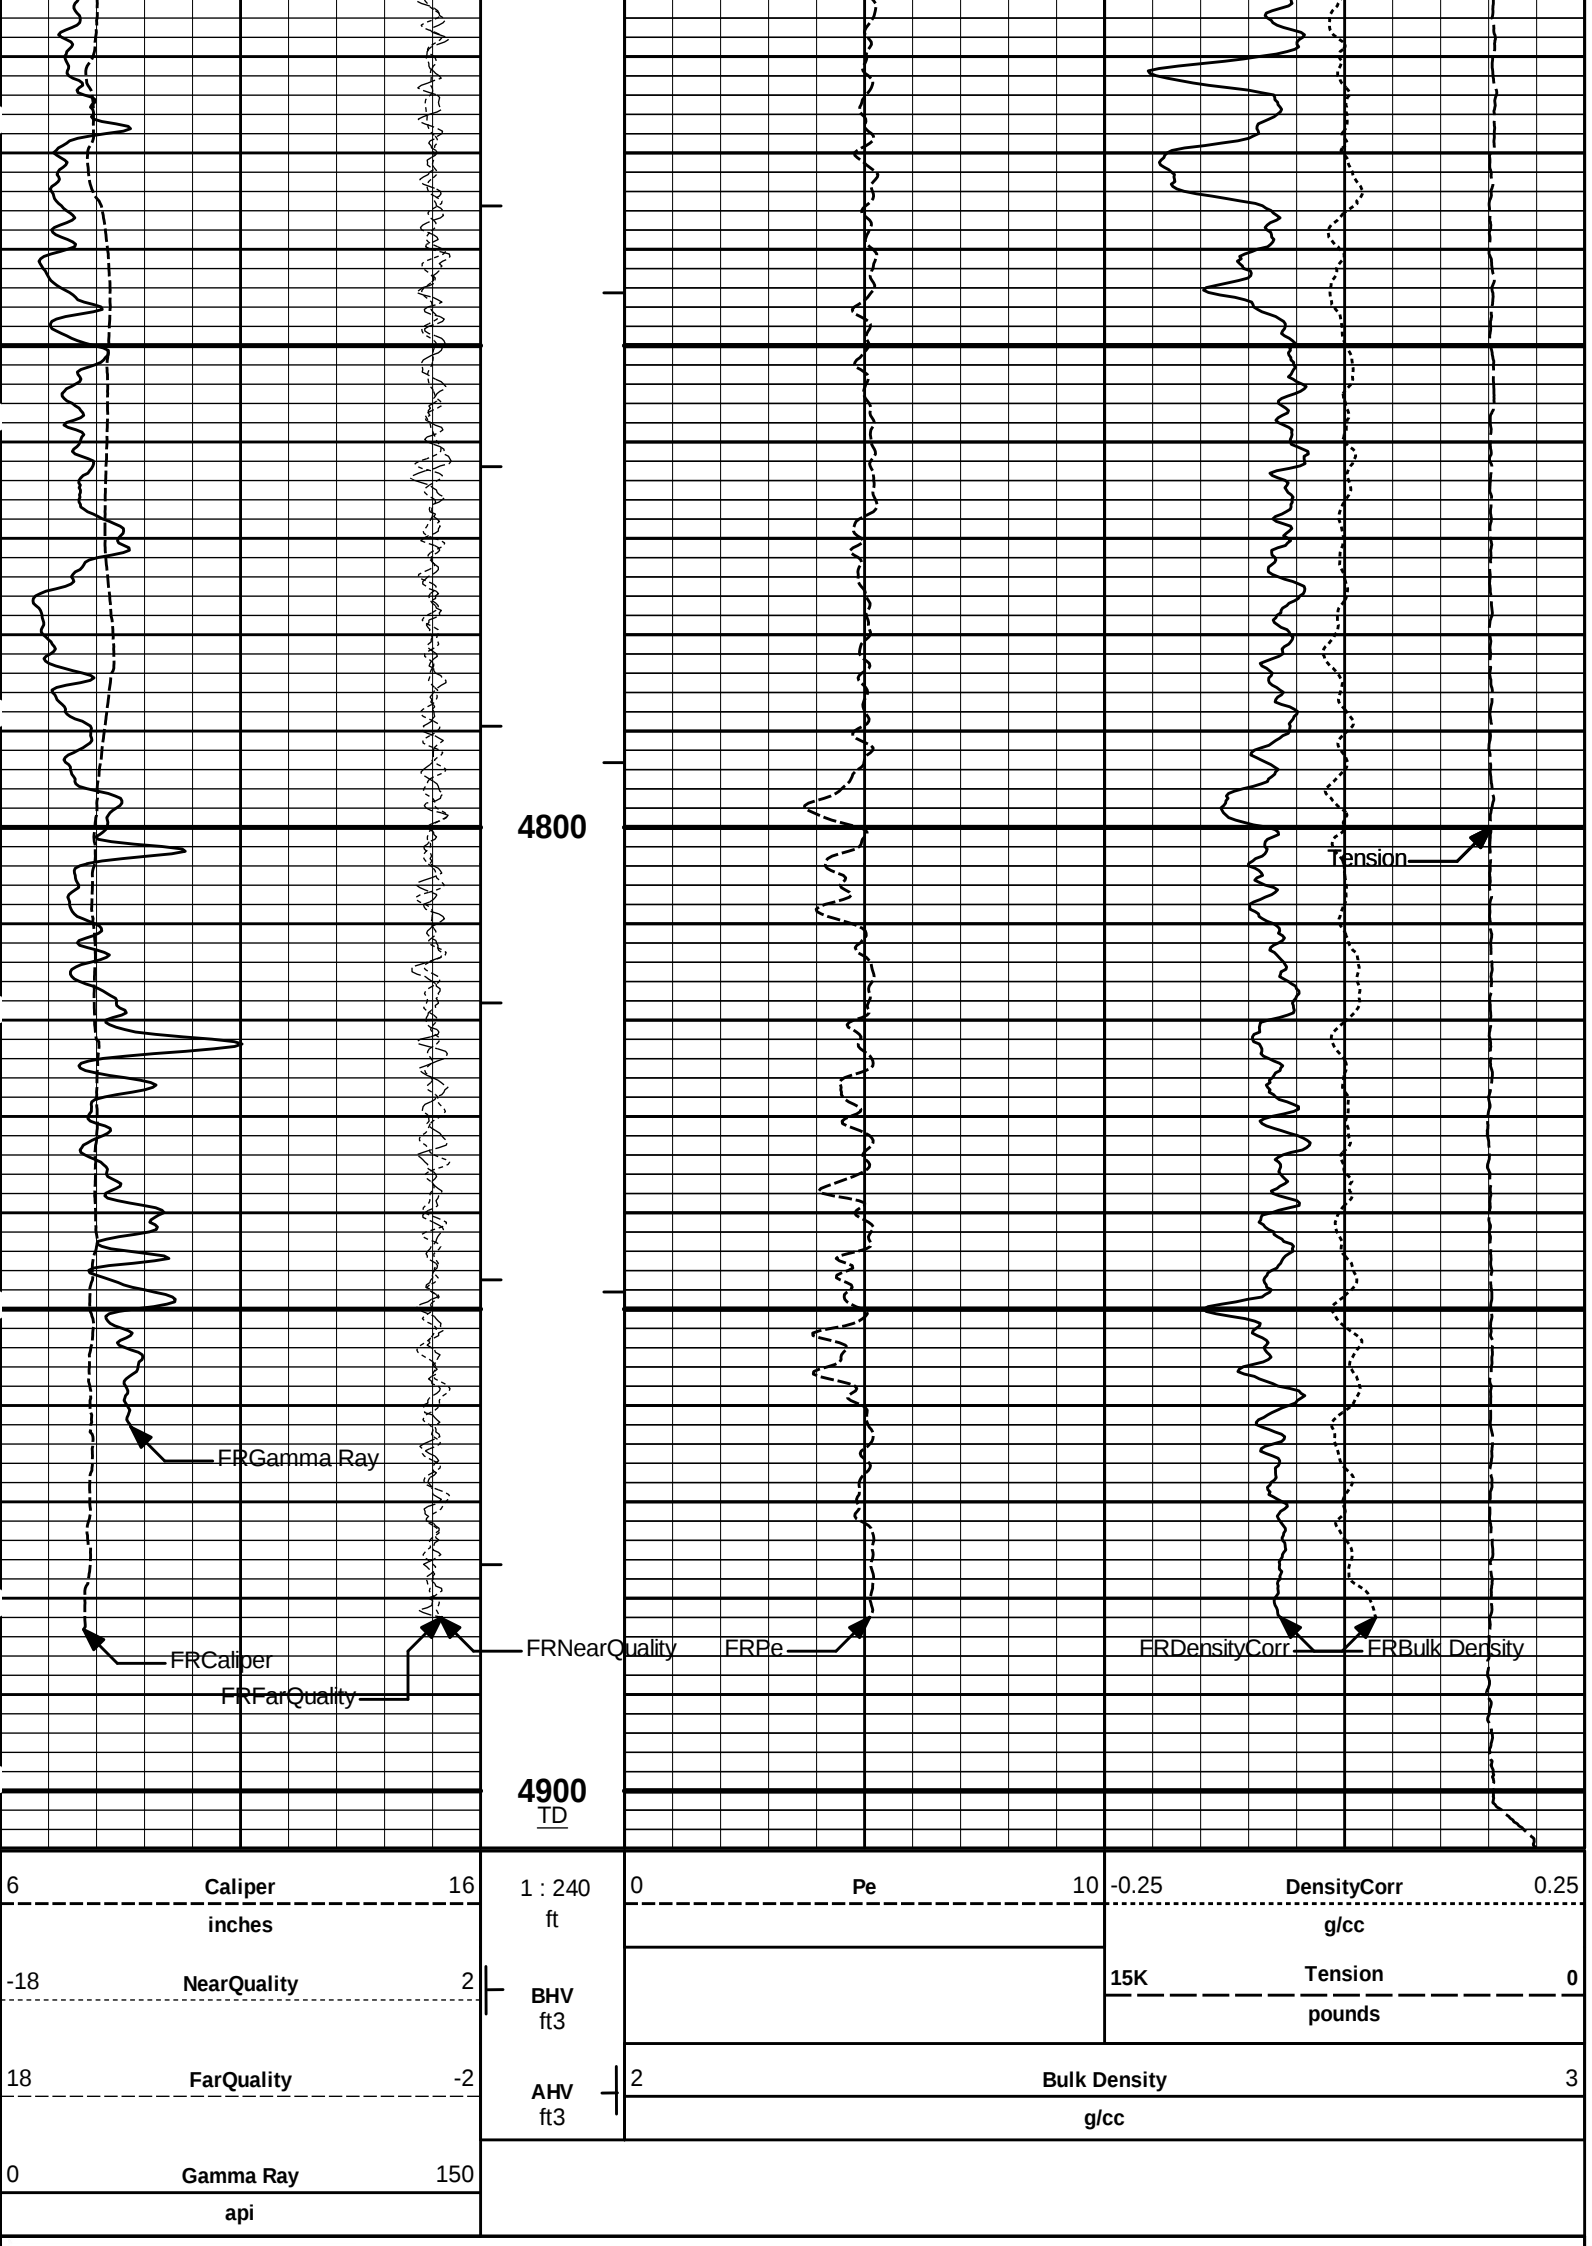

REPEAT SECTION

REPEAT SECTION

CALIBRATION REPORT

SURFACE TENSION SHOP CALIBRATION

|                   |                            |                             |                    |
|-------------------|----------------------------|-----------------------------|--------------------|
| Tool Name:        | Depth Panel - 12345678     | Reference Calibration Date: | 09-Nov-18 12:52:33 |
| Engineer:         | SEAN WOLTEMATH             | Calibration Date:           | 23-Nov-18 01:18:37 |
| Software Version: | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |

SURFACE TENSION LOAD CELL

| Measurement | Load Cell Value | Measurement | Calibrated | Units |
|-------------|-----------------|-------------|------------|-------|
| Low         | 10151.94        | -24.65      | 0.00       | lbs   |
| High        | 17443.55        | 7803.00     | 7830.00    | lbs   |

DOWNHOLE TENSION SHOP CALIBRATION

|                   |                            |                             |                    |
|-------------------|----------------------------|-----------------------------|--------------------|
| Tool Name:        | RWCH - 12345678            | Reference Calibration Date: | 28-Nov-18 08:13:29 |
| Engineer:         | WHITLOCK                   | Calibration Date:           | 01-Dec-18 15:06:12 |
| Software Version: | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |

DOWNHOLE LOAD CELL

| Measurement | Tool Value | Measurement | Calibrated | Units |
|-------------|------------|-------------|------------|-------|
| Low         | -366.44    | 21.47       | 0.00       | lbs   |
| High        | 14578.33   | 4078.90     | 1450.00    | lbs   |

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

|                   |                            |                             |                    |
|-------------------|----------------------------|-----------------------------|--------------------|
| Tool Name:        | GTET - 11013113            | Reference Calibration Date: | 22-Oct-18 11:33:38 |
| Engineer:         | WHITLOCK                   | Calibration Date:           | 27-Nov-18 10:49:38 |
| Software Version: | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |

Calibrator Source S/N: TB-79  
Calibrator API Reference:222.00 api  
Equivalent Calibrator API Reference:225.9 api

| Measurement             | Measured | Calibrated | Units |
|-------------------------|----------|------------|-------|
| Background              | 26.6     | 26.6       | api   |
| Background + Calibrator | 252.9    | 252.4      | api   |
| Calibrator              | 226.3    | 225.9      | api   |

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

|                   |                            |                             |                    |
|-------------------|----------------------------|-----------------------------|--------------------|
| Tool Name:        | GTET - 11013113            | Reference Calibration Date: | 27-Nov-18 10:49:38 |
| Engineer:         | WHITLOCK                   | Calibration Date:           | 30-Nov-18 09:52:27 |
| Software Version: | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |

Calibrator Source S/N: TB-79  
Calibrator API Reference:222.00 api

| Field Verification      | Shop  | Field      | Units     |
|-------------------------|-------|------------|-----------|
| Background              | 26.6  | 26.0       | api       |
| Background + Calibrator | 252.4 | 251.0      | api       |
| Calibrator              | 225.9 | 224.9      | api       |
| Shop                    | Field | Difference | Tolerance |
| 225.9                   | 224.9 | 1.0        | +/- 9.00  |

**DUAL SPACED NEUTRON SHOP CALIBRATION****Tool Name:** DSNT - 11019641**Reference Calibration Date:** 04-Aug-18 12:26:27**Engineer:** SEAN WOLTEMATH**Calibration Date:** 07-Nov-18 10:07:09**Software Version:** WL INSITE R5.8.9 (Build 6)**Calibration Version:** 1

Logging Source S/N: DSN-436

Tank Serial Number: EL RENO HWT

Reference value assigned to Tank: 56.100

Snow Block S/N: 12156883

Calibration Tank Water Temperature: 66 degF

Min. Tool Housing Outside Diameter: 3.625 in

**CALIBRATION CONSTANTS**

| Measurement | Prev. Value | New Value | Control Limit On New Value |
|-------------|-------------|-----------|----------------------------|
| Gain:       | 0.97742     | 0.98053   | 0.900 - 1.100              |

**WATER TANK SUMMARY (Horizontal Water Tank)**

| Measurement       | Current Reading<br>(Previous Coef.) | Calibrated<br>(New Coef.) | Change | Control Limit<br>On Change |
|-------------------|-------------------------------------|---------------------------|--------|----------------------------|
| Porosity (decp):  | 0.2348                              | 0.2358                    | 0.0010 | +/- 0.0020                 |
| Calibrated Ratio: | 10.5259                             | 10.5595                   | 0.034  | +/- 0.050                  |

**VERIFIER**

| Measurement                 | Value  | Control Limit     |
|-----------------------------|--------|-------------------|
| Snow-Block Porosity (decp): | 0.0724 | 0.02000 - 0.09000 |

**PASS/FAIL SUMMARY**

|                   |        |
|-------------------|--------|
| Background Check: | Passed |
| Gain-Range Check: | Passed |
| Snow-Block Check: | Passed |

**DUAL SPACED NEUTRON FIELD CALIBRATION****Tool Name:** DSNT - 11019641**Reference Calibration Date:** 07-Nov-18 10:07:09**Engineer:** WHITLOCK**Calibration Date:** 30-Nov-18 09:37:26**Software Version:** WL INSITE R5.8.9 (Build 6)**Calibration Version:** 1

Logging Source S/N: DSN-436

Snow Block S/N: 12156883

**NEUTRON FIELD-CHECK SUMMARY**

|                             | Shop   | Field  | Difference | Control Limit<br>On Change |
|-----------------------------|--------|--------|------------|----------------------------|
| Snow-Block Porosity (decp): | 0.0724 | 0.0725 | 0.0001     | +/- 0.0150                 |

**PASS/FAIL SUMMARY**

|                        |        |
|------------------------|--------|
| Block Change Check:    | Passed |
| Snow Block Stat Check: | Passed |
| Temperature Check:     | Passed |

**DENSITY CALIBER SHOP CALIBRATION**

| Density Caliper Shop Calibration                                                             |  |                                   |  |                         |  |                             |  |                            |  |
|----------------------------------------------------------------------------------------------|--|-----------------------------------|--|-------------------------|--|-----------------------------|--|----------------------------|--|
| Tool Name:                                                                                   |  | SDLT - 10960494                   |  |                         |  | Reference Calibration Date: |  | 01-Jan-70 00:00:00         |  |
| Engineer:                                                                                    |  | SEAN WOLTEMATH                    |  |                         |  | Calibration Date:           |  | 10-Oct-18 14:49:27         |  |
| Software Version:                                                                            |  | WL INSITE R5.6.3 (Build 4)        |  |                         |  | Calibration Version:        |  | 1                          |  |
| Host Tool Name:                                                                              |  | DSNT - 11019641                   |  |                         |  |                             |  |                            |  |
| Calibration Coefficients                                                                     |  |                                   |  |                         |  |                             |  |                            |  |
| Measurement                                                                                  |  | Previous Value                    |  | New Value               |  | Control Limit On New Value  |  |                            |  |
| Pad Offset                                                                                   |  | -3977.11                          |  | -3977.11                |  | -7000.00 - -1000.00         |  |                            |  |
| Pad Gain                                                                                     |  | 0.0003897                         |  | 0.0003897               |  | 0.0002000 - 0.0006000       |  |                            |  |
| Arm Offset                                                                                   |  | -3073.13                          |  | -3073.13                |  | -5000.00 - 3000.00          |  |                            |  |
| Arm Gain                                                                                     |  | 0.0005210                         |  | 0.0005210               |  | 0.000300 - 0.000700         |  |                            |  |
| Arm Power                                                                                    |  | -0.000005094                      |  | -0.000005094            |  | -0.000010000 - 0.000010000  |  |                            |  |
| The ring diameter is computed from: DIAMETER = PAD EXTENSION + ARM EXTENSION + TOOL DIAMETER |  |                                   |  |                         |  |                             |  |                            |  |
| Tool Diameter: 4.50 in                                                                       |  |                                   |  |                         |  |                             |  |                            |  |
| Calibration Rings                                                                            |  |                                   |  |                         |  |                             |  |                            |  |
| Measurement                                                                                  |  | Current Reading (Previous Coeff.) |  | Calibrated (New Coeff.) |  | Change                      |  | Control Limit On New Value |  |
| PAD EXTENSION:                                                                               |  |                                   |  |                         |  |                             |  |                            |  |
| Small Ring (in)                                                                              |  | 2.00                              |  | 2.00                    |  | 0.00                        |  | +/- 0.20                   |  |
| Medium Ring (in)                                                                             |  | 3.75                              |  | 3.75                    |  | 0.00                        |  | +/- 0.20                   |  |
| RING DIAMETER:                                                                               |  |                                   |  |                         |  |                             |  |                            |  |
| Small Ring (in)                                                                              |  | 6.50                              |  | 6.50                    |  | 0.00                        |  | +/- 0.20                   |  |
| Medium Ring (in)                                                                             |  | 8.25                              |  | 8.25                    |  | 0.00                        |  | +/- 0.20                   |  |
| Large Ring (in)                                                                              |  | 15.00                             |  | 15.00                   |  | 0.00                        |  | +/- 0.20                   |  |
| PASS/FAIL SUMMARY                                                                            |  |                                   |  |                         |  |                             |  |                            |  |
| Calibration-Coefficients Range Check:                                                        |  |                                   |  |                         |  | Passed                      |  |                            |  |
| Ring-Measurement Check:                                                                      |  |                                   |  |                         |  | Passed                      |  |                            |  |
| PASS/FAIL SUMMARY                                                                            |  |                                   |  |                         |  |                             |  |                            |  |
| Calibration-Coefficients Range Check:                                                        |  |                                   |  |                         |  | Passed                      |  |                            |  |

| SDLT Caliper Field Calibration |  |                            |  |       |  |                             |  |                            |  |
|--------------------------------|--|----------------------------|--|-------|--|-----------------------------|--|----------------------------|--|
| Tool Name:                     |  | SDLT - 10960494            |  |       |  | Reference Calibration Date: |  | 10-Oct-18 14:49:27         |  |
| Engineer:                      |  | WHITLOCK                   |  |       |  | Calibration Date:           |  | 30-Nov-18 09:39:30         |  |
| Software Version:              |  | WL INSITE R5.6.3 (Build 4) |  |       |  | Calibration Version:        |  | 1                          |  |
| Measured Caliper Values        |  |                            |  |       |  |                             |  |                            |  |
| Measurement                    |  | Shop                       |  | Field |  | Change                      |  | Control Limit On New Value |  |
| Pad Extension                  |  | 3.75                       |  | 3.79  |  | 0.04                        |  | +/- 0.10                   |  |
| Ring Diameter                  |  | 8.25                       |  | 8.25  |  | -0.00                       |  | +/- 0.15                   |  |
| PASS/FAIL SUMMARY              |  |                            |  |       |  |                             |  |                            |  |
| Pad Extension Check:           |  |                            |  |       |  | Passed                      |  |                            |  |
| Diameter Check:                |  |                            |  |       |  | Passed                      |  |                            |  |

| Array Compensated True Resistivity Shop Calibration |        |                            |       |        |          |                             |        |                    |       |
|-----------------------------------------------------|--------|----------------------------|-------|--------|----------|-----------------------------|--------|--------------------|-------|
| Tool Name:                                          |        | ACRt Sonde - 11830728      |       |        |          | Reference Calibration Date: |        | 06-Jul-18 13:24:46 |       |
| Engineer:                                           |        | WHITLOCK                   |       |        |          | Calibration Date:           |        | 31-Oct-18 14:22:50 |       |
| Software Version:                                   |        | WL INSITE R5.8.9 (Build 6) |       |        |          | Calibration Version:        |        | 1                  |       |
| Host Tool Name:                                     |        | ACRt Instrument - 11830684 |       |        |          |                             |        |                    |       |
| Typical Gain Range                                  |        |                            |       |        |          |                             |        |                    |       |
| Subarray                                            | R12KHz |                            |       | R36KHz |          |                             | R72KHz |                    |       |
|                                                     | Lower  | (mmho/m)                   | Upper | Lower  | (mmho/m) | Upper                       | Lower  | (mmho/m)           | Upper |
| A1 (80")                                            | 0.95   | 1.0279                     | 1.05  | 0.95   | 1.0076   | 1.05                        | 0.95   | 0.9997             | 1.05  |

|                          |          |        |       |                    |               |                  |               |        |      |
|--------------------------|----------|--------|-------|--------------------|---------------|------------------|---------------|--------|------|
| A1 (80")                 | 0.95     | 1.0279 | 1.05  | 0.95               | 1.0070        | 1.05             | 0.95          | 0.9997 | 1.05 |
| A2 (50")                 | 0.95     | 1.0334 | 1.05  | 0.95               | 1.0139        | 1.05             | 0.95          | 1.0097 | 1.05 |
| A3 (29")                 | 0.95     | 1.0346 | 1.05  | 0.95               | 1.0146        | 1.05             | 0.95          | 1.0081 | 1.05 |
| A4 (17")                 | 0.95     | 1.0279 | 1.05  | 0.95               | 1.0063        | 1.05             | 0.95          | 1.0018 | 1.05 |
| A5 (10")                 | N/A      | N/A    | N/A   | 0.95               | 1.0001        | 1.05             | 0.95          | 0.9950 | 1.05 |
| A6 (6")                  | N/A      | N/A    | N/A   | 0.95               | 0.9869        | 1.05             | 0.95          | 0.9818 | 1.05 |
| SONDE OFFSET             |          |        |       |                    |               |                  |               |        |      |
| Subarray                 | R12KHz   |        |       | R36KHz             |               |                  | R72KHz        |        |      |
|                          | (mmho/m) |        |       | (mmho/m)           |               |                  | (mmho/m)      |        |      |
| A1 (80")                 | 0.315    |        |       | -4.964             |               |                  | -5.711        |        |      |
| A2 (50")                 | 0.409    |        |       | -3.450             |               |                  | -5.485        |        |      |
| A3 (29")                 | -11.648  |        |       | -3.720             |               |                  | -3.783        |        |      |
| A4 (17")                 | -90.980  |        |       | -28.724            |               |                  | -23.707       |        |      |
| A5 (10")                 | N/A      |        |       | -76.200            |               |                  | -37.537       |        |      |
| A6 (6")                  | N/A      |        |       | 280.488            |               |                  | 149.005       |        |      |
| TRANSMITTER CURRENT GAIN |          |        |       |                    |               |                  |               |        |      |
| Signal                   | Lower    | R      | Upper | R-MUD VERIFICATION |               |                  |               |        |      |
|                          |          |        |       | Signal             | Lower (ohm-m) | Measured (ohm-m) | Upper (ohm-m) |        |      |
| 12K                      | 0.6      | 0.82   | 1.3   | Mud Cell           | 0.95          | 0.99             | 1.05          |        |      |
| 36K                      | 1.0      | 1.80   | 2.0   |                    |               |                  |               |        |      |
| 72K                      | 1.0      | 1.05   | 2.0   |                    |               |                  |               |        |      |
| PASS/FAIL SUMMARY        |          |        |       |                    |               |                  |               |        |      |
| GAIN RANGE CHK           |          |        |       | PASS               |               |                  |               |        |      |
| SONDE OFFSET CHK         |          |        |       | PASS               |               |                  |               |        |      |
| TOOL OK TO LOG           |          |        |       |                    |               |                  |               |        |      |

| QUALITY CHECK SHOP CALIBRATION |                            |                             |                    |
|--------------------------------|----------------------------|-----------------------------|--------------------|
| Tool Name:                     | ACRt Sonde - 11830728      | Reference Calibration Date: | 06-Jun-18 14:01:20 |
| Engineer:                      | WHITLOCK                   | Calibration Date:           | 31-Oct-18 14:33:20 |
| Software Version:              | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |
| Host Tool Name:                | ACRt Instrument - 11830684 |                             |                    |

|                     |                   |                   |           |                   |                   |           |                   |                   |           |
|---------------------|-------------------|-------------------|-----------|-------------------|-------------------|-----------|-------------------|-------------------|-----------|
| STANDARD DEVIATIONS |                   |                   |           |                   |                   |           |                   |                   |           |
|                     | R12KHz            |                   |           | R36KHz            |                   |           | R72KHz            |                   |           |
|                     | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail |
| A1 (80")            | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      |
| A2 (50")            | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      |
| A3 (29")            | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      |
| A4 (17")            | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      |
| A5 (10")            | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      |
| A6 (6")             | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      | 0.000             | < 0.750           | Pass      |
| AVERAGES            |                   |                   |           |                   |                   |           |                   |                   |           |
|                     | R12KHz            |                   |           | R36KHz            |                   |           | R72KHz            |                   |           |
|                     | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail |
| A1 (80")            | 0.000             | < 0.500           | Pass      | -0.001            | > -0.500          | Pass      | -0.006            | > -0.500          | Pass      |
| A2 (50")            | 0.000             | < 0.500           | Pass      | -0.001            | > -0.500          | Pass      | -0.005            | > -0.500          | Pass      |
| A3 (29")            | -0.000            | < 0.500           | Pass      | -0.001            | > -0.500          | Pass      | -0.003            | > -0.500          | Pass      |
| A4 (17")            | -0.002            | > -0.500          | Pass      | -0.006            | > -0.500          | Pass      | -0.022            | > -0.500          | Pass      |
| A5 (10")            | -0.010            | > -0.500          | Pass      | -0.017            | > -0.500          | Pass      | -0.036            | > -0.500          | Pass      |
| A6 (6")             | 0.014             | < 0.500           | Pass      | 0.063             | < 0.500           | Pass      | 0.138             | < 0.500           | Pass      |

| GAIN TOLERANCE    |                             |                        |                        |                       |           |
|-------------------|-----------------------------|------------------------|------------------------|-----------------------|-----------|
| R12KHz            |                             |                        |                        |                       |           |
|                   | Measured<br>(mmho/m)        | Last Month<br>(mmho/m) | Difference<br>(mmho/m) | Tolerance<br>(mmho/m) | Pass/Fail |
| A1 (80")          | -213173456.000              | -213653808.000         | 480352.000             | 10682690.400          | Pass      |
| A2 (50")          | -205651744.000              | -206143280.000         | 491536.000             | 10307164.000          | Pass      |
| A3 (29")          | -200817664.000              | -201197776.000         | 380112.000             | 10059888.800          | Pass      |
| A4 (17")          | -200193568.000              | -200629872.000         | 436304.000             | 10031493.600          | Pass      |
| A5 (10")          | -200252336.000              | -200678960.000         | 426624.000             | 10033948.000          | Pass      |
| A6 (6")           | -199820688.000              | -200219344.000         | 398656.000             | 10010967.200          | Pass      |
| R36KHz            |                             |                        |                        |                       |           |
|                   | Measured<br>(mmho/m)        | Last Month<br>(mmho/m) | Difference<br>(mmho/m) | Tolerance<br>(mmho/m) | Pass/Fail |
| A1 (80")          | 48114080.000                | 48477272.000           | 363192.000             | 2423863.600           | Pass      |
| A2 (50")          | 33966292.000                | 34324412.000           | 358120.000             | 1716220.600           | Pass      |
| A3 (29")          | 28032378.000                | 28346680.000           | 314302.000             | 1417334.000           | Pass      |
| A4 (17")          | 27853682.000                | 28207516.000           | 353834.000             | 1410375.800           | Pass      |
| A5 (10")          | 27373208.000                | 27716930.000           | 343722.000             | 1385846.500           | Pass      |
| A6 (6")           | 26035236.000                | 26360300.000           | 325064.000             | 1318015.000           | Pass      |
| R72KHz            |                             |                        |                        |                       |           |
|                   | Measured<br>(mmho/m)        | Last Month<br>(mmho/m) | Difference<br>(mmho/m) | Tolerance<br>(mmho/m) | Pass/Fail |
| A1 (80")          | -92927656.000               | -93022904.000          | 95248.000              | 4651145.200           | Pass      |
| A2 (50")          | -90501024.000               | -90617752.000          | 116728.000             | 4530887.600           | Pass      |
| A3 (29")          | -88192472.000               | -88292832.000          | 100360.000             | 4414641.600           | Pass      |
| A4 (17")          | -88397088.000               | -88515880.000          | 118792.000             | 4425794.000           | Pass      |
| A5 (10")          | -86957704.000               | -87076952.000          | 119248.000             | 4353847.600           | Pass      |
| A6 (6")           | -87976216.000               | -88080696.000          | 104480.000             | 4404034.800           | Pass      |
| PASS/FAIL SUMMARY |                             |                        |                        |                       |           |
|                   | Std Deviation Verification  |                        |                        | Pass                  |           |
|                   | Average Verification        |                        |                        | Pass                  |           |
|                   | Gain Tolerance Verification |                        |                        | Pass                  |           |

| MICRO LOG SHOP CALIBRATION |                            |                             |                    |
|----------------------------|----------------------------|-----------------------------|--------------------|
| Tool Name:                 | Microlog Pad - 10960494    | Reference Calibration Date: | 08-Jun-18 16:08:54 |
| Engineer:                  | WHITLOCK                   | Calibration Date:           | 30-Sep-18 13:47:51 |
| Software Version:          | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |
| Host Tool Name:            | DSNT - 11019641            |                             |                    |

| CALIBRATION COEFFICIENT SUMMARY |                                |            |                                 |            |       |
|---------------------------------|--------------------------------|------------|---------------------------------|------------|-------|
| Measurement                     | Micro Log Normal               |            | Micro Log Lateral               |            | Units |
|                                 | Measured                       | Calibrated | Measured                        | Calibrated |       |
| Tool Zero                       | -0.07                          | -0.14      | -0.00                           | -0.01      | ohmm  |
| Calibration Point #1            | 0.07                           | 0.00       | 0.00                            | 0.00       | ohmm  |
| Calibration Point #2            | 20.01                          | 20.00      | 19.95                           | 20.00      | ohmm  |
| Internal Reference              | 19.84                          | 19.83      | 19.92                           | 19.97      | ohmm  |
| Measurement                     | Micro Log Normal<br>Tool Value |            | Micro Log Lateral<br>Tool Value |            | Units |
|                                 |                                |            |                                 |            |       |
| Tool Zero                       | -0.08                          |            | 0.35                            |            | V     |
| Calibration Point #1            | 37.72                          |            | 2.09                            |            | V     |
| Calibration Point #2            | 5356.95                        |            | 6956.77                         |            | V     |
| Internal Reference              | 5312.51                        |            | 6945.81                         |            | V     |

| MICRO LOG FIELD CHECK |  |  |  |
|-----------------------|--|--|--|
|-----------------------|--|--|--|

| MICRO LOG FIELD CHECK        |                                    |                          |                   |                             |                    |      |
|------------------------------|------------------------------------|--------------------------|-------------------|-----------------------------|--------------------|------|
| Tool Name:                   | Microlog Pad - 10960494            |                          |                   | Reference Calibration Date: | 30-Sep-18 13:47:51 |      |
| Engineer:                    | WHITLOCK                           |                          |                   | Calibration Date:           | 30-Nov-18 09:48:53 |      |
| Software Version:            | WL INSITE R5.8.9 (Build 6)         |                          |                   | Calibration Version:        | 1                  |      |
| Measurement                  | Micro Log Normal                   |                          | Micro Log Lateral |                             |                    |      |
|                              | Shop                               | Field                    | Shop              | Field                       | Units              |      |
|                              | Tool Zero                          | -0.14                    | -0.14             | -0.01                       | -0.01              | ohmm |
|                              | Internal Reference                 | 19.83                    | 19.82             | 19.97                       | 19.96              | ohmm |
|                              | Summary                            |                          |                   |                             |                    |      |
|                              | Signal                             | Shop                     | Field             | Difference                  | Tolerance          |      |
|                              | Microlog Normal                    | 19.83                    | 19.82             | 0.01                        | +/- 0.80           |      |
|                              | Microlog Lateral                   | 19.97                    | 19.96             | 0.01                        | +/- 0.80           |      |
|                              |                                    |                          |                   |                             |                    |      |
|                              | SPECTRAL DENSITY SHOP CALIBRATION  |                          |                   |                             |                    |      |
| Tool Name:                   | SDLT Pad - 11213308                |                          |                   | Reference Calibration Date: | 17-Sep-18 12:07:25 |      |
| Engineer:                    | WHITLOCK                           |                          |                   | Calibration Date:           | 17-Sep-18 12:30:06 |      |
| Software Version:            | WL INSITE R5.6.3 (Build 4)         |                          |                   | Calibration Version:        | 1                  |      |
| Logging Source S/N: 5475GW   |                                    |                          |                   |                             |                    |      |
| Aluminum Block S/N: EL RENO  |                                    | Density: 2.581g/cc       |                   | Pe: 3.170                   |                    |      |
| Magnesium Block S/N: EL RENO |                                    | Density: 1.687g/cc       |                   | Pe: 2.594                   |                    |      |
| DENSITY CALIBRATION SUMMARY  |                                    |                          |                   |                             |                    |      |
| Measurement                  | Previous Value                     |                          | New Value         |                             | Control Limit      |      |
| Near Bar Gain                | 1.0089                             |                          | 1.0095            |                             | 0.90 - 1.10        |      |
| Near Dens Gain               | 0.9949                             |                          | 0.9972            |                             | 0.90 - 1.10        |      |
| Near Peak Gain               | 1.0098                             |                          | 1.0259            |                             | 0.90 - 1.10        |      |
| Near Lith Gain               | 1.0052                             |                          | 1.0142            |                             | 0.90 - 1.10        |      |
| Far Bar Gain                 | 1.0078                             |                          | 1.0061            |                             | 0.90 - 1.10        |      |
| Far Dens Gain                | 0.9950                             |                          | 0.9953            |                             | 0.90 - 1.10        |      |
| Far Peak Gain                | 0.9901                             |                          | 0.9911            |                             | 0.90 - 1.10        |      |
| Far Lith Gain                | 0.9745                             |                          | 0.9764            |                             | 0.90 - 1.10        |      |
|                              |                                    |                          |                   |                             |                    |      |
| Near Bar Offset              | 0.0471                             |                          | 0.0438            |                             | NONE               |      |
| Near Dens Offset             | 0.1758                             |                          | 0.1544            |                             | NONE               |      |
| Near Peak Offset             | 0.0270                             |                          | -0.1077           |                             | NONE               |      |
| Near Lith Offset             | 0.0345                             |                          | -0.0412           |                             | NONE               |      |
| Far Bar Offset               | -0.0195                            |                          | -0.0036           |                             | NONE               |      |
| Far Dens Offset              | 0.1103                             |                          | 0.1086            |                             | NONE               |      |
| Far Peak Offset              | 0.1339                             |                          | 0.1248            |                             | NONE               |      |
| Far Lith Offset              | 0.2115                             |                          | 0.1964            |                             | NONE               |      |
|                              |                                    |                          |                   |                             |                    |      |
| Near Bar Background          | 945.62                             |                          | 947.60            |                             | 700 - 1450         |      |
| Near Dens Background         | 315.82                             |                          | 314.50            |                             | 230 - 480          |      |
| Near Peak Background         | 136.57                             |                          | 137.87            |                             | 100 - 210          |      |
| Near Lith Background         | 168.89                             |                          | 168.30            |                             | 125 - 260          |      |
| Far Bar Background           | 482.51                             |                          | 480.15            |                             | 450 - 900          |      |
| Far Dens Background          | 193.40                             |                          | 193.79            |                             | 175 - 345          |      |
| Far Peak Background          | 78.35                              |                          | 78.65             |                             | 70 - 140           |      |
| Far Lith Background          | 80.88                              |                          | 79.56             |                             | 75 - 145           |      |
|                              |                                    |                          |                   |                             |                    |      |
| CALIBRATION BLOCK SUMMARY    |                                    |                          |                   |                             |                    |      |
| Measurement                  | Current Reading<br>(Previous Coef) | Calibrated<br>(New Coef) | Change            | Control Limit<br>On Change  |                    |      |
| MAGNESIUM                    |                                    |                          |                   |                             |                    |      |
| Density (g/cc)               | 1.685                              | 1.687                    | 0.002             | +/- 0.015                   |                    |      |
| Pe                           | 2.557                              | 2.562                    | 0.006             | +/- 0.150                   |                    |      |

|                                |               |                |              |                |
|--------------------------------|---------------|----------------|--------------|----------------|
| Pe                             | 2.557         | 2.563          | 0.006        | +/- 0.150      |
| ALUMINUM                       |               |                |              |                |
| Density (g/cc)                 | 2.580         | 2.580          | -0.000       | +/- 0.01500    |
| Pe                             | 3.115         | 3.136          | 0.021        | +/- 0.150      |
| TOOL SUMMARY                   |               |                |              |                |
| Measurement                    | Near Detector |                | Far Detector |                |
|                                | Value         | Control Limits | Value        | Control Limits |
| QUALITY                        |               |                |              |                |
| Background                     | 0.0003        | +/- 0.0110     | 0.0015       | +/- 0.0140     |
| Magnesium Block                | 0.0001        | +/- 0.0110     | -0.0007      | +/- 0.0140     |
| Aluminum Block                 | -0.0000       | +/- 0.0110     | -0.0006      | +/- 0.0140     |
| Resolution                     | 9.24          | 6.00 - 11.50   | 9.28         | 6.00 - 11.50   |
| Internal Verifier(B+D+P+L)     | 1568          | 1200 - 2700    | 832          | 800 - 1700     |
| PASS/FAIL SUMMARY              |               |                |              |                |
| Background Quality Check:      |               |                | Passed       |                |
| Background Range Check:        |               |                | Passed       |                |
| Background Resolution Check:   |               |                | Passed       |                |
| Background Verification Check: |               |                | Passed       |                |
| Magnesium Quality Check:       |               |                | Passed       |                |
| Aluminum Quality Check:        |               |                | Passed       |                |
| Gains Check:                   |               |                | Passed       |                |
| Changes in Calibration Blocks: |               |                | Passed       |                |

|                              |                            |                             |                    |  |
|------------------------------|----------------------------|-----------------------------|--------------------|--|
| SPECTRAL DENSITY FIELD CHECK |                            |                             |                    |  |
| Tool Name:                   | SDLT Pad - 11213308        | Reference Calibration Date: | 17-Sep-18 12:30:06 |  |
| Engineer:                    | WHITLOCK                   | Calibration Date:           | 30-Nov-18 09:59:11 |  |
| Software Version:            | WL INSITE R5.8.9 (Build 6) | Calibration Version:        | 1                  |  |

|                                   |          |          |        |                   |
|-----------------------------------|----------|----------|--------|-------------------|
| Pad Temperature: 71.7 degF        |          |          |        |                   |
| DENSITY FIELD CALIBRATION SUMMARY |          |          |        |                   |
| Measurement                       | Shop     | Field    | Change | Control Limit +/- |
| Near (B+D+P+L) cps                | 1568.269 | 1567.878 | -0.391 | 15.935            |
| Far (B+D+P+L) cps                 | 832.156  | 828.503  | -3.653 | 15.879            |
| Near Resolution                   | 9.24     | 9.24     | 0.000  | 0.50              |
| Far Resolution                    | 9.28     | 9.27     | -0.010 | 1.00              |
| PASS/FAIL SUMMARY                 |          |          |        |                   |
| Bkg Quality Check:                |          |          | Passed |                   |
| Bkg Resolution Check:             |          |          | Passed |                   |
| Bkg Verification Check:           |          |          | Passed |                   |

|                      |         |        |       |            |            |       |
|----------------------|---------|--------|-------|------------|------------|-------|
| CALIBRATION SUMMARY  |         |        |       |            |            |       |
| Sensor               | Shop    | Field  | Post  | Difference | Tolerance  | Units |
| Depth Panel-12345678 |         |        |       |            |            |       |
| Tension Zero         | 0.00    | -----  | ----- | 0.00       | -----      | lbs   |
| Tension Cal          | 7830.00 | -----  | ----- | 0.00       | -----      | lbs   |
| RWCH-12345678        |         |        |       |            |            |       |
| DH Tension Zero      | 0.00    | -----  | ----- | 0.00       | -----      | lbs   |
| DH Tension Cal       | 1450.00 | -----  | ----- | 0.00       | -----      | lbs   |
| GTET-11013113        |         |        |       |            |            |       |
| Gamma Ray Calibrator | 225.9   | 224.9  | ----- | 1.0        | +/- 9.00   | api   |
| DSNT-11019641        |         |        |       |            |            |       |
| Snow-Block Porosity  | 0.0724  | 0.0725 | ----- | -0.0001    | +/- 0.0150 | decp  |

|                                                       |          |          |       |       |           |       |
|-------------------------------------------------------|----------|----------|-------|-------|-----------|-------|
| SDLT-10960494                                         |          |          |       |       |           |       |
| Pad Extension                                         | 3.75     | 3.79     | ----- | -0.04 | +/-0.10   | in    |
| Ring Diameter                                         | 8.25     | 8.25     | ----- | 0.00  | +/-0.15   | in    |
| ACRt Sonde-11830728                                   |          |          |       |       |           |       |
| Mud Cell                                              | 0.99     | -----    | ----- | 0     | -----     | ohm-m |
| Microlog Pad-10960494                                 |          |          |       |       |           |       |
| MicroLog Normal                                       | 19.83    | 19.82    | ----- | 0.01  | +/-0.80   | ohmm  |
| MicroLog Lateral                                      | 19.97    | 19.96    | ----- | 0.01  | +/-0.80   | ohmm  |
| SDLT Pad-11213308                                     |          |          |       |       |           |       |
| Near(B+D+P+L)                                         | 1568.269 | 1567.878 | ----- | 0.391 | +/-15.935 | cps   |
| Far(B+D+P+L)                                          | 832.156  | 828.503  | ----- | 3.653 | +/-15.879 | cps   |
| Data: BEREX_HARTNETT\0001 RWCH-GTET-DSN-SDL-ACRT\IDLE |          |          |       |       |           |       |
| Date: 03-Dec-18 15:11:59                              |          |          |       |       |           |       |

HALLIBURTON


PARAMETERS REPORT

| Depth<br>(ft) | Tool Name       | Mnemonic | Description                                           | Value      | Units |
|---------------|-----------------|----------|-------------------------------------------------------|------------|-------|
| TOP           |                 |          |                                                       |            |       |
|               | SHARED          | BS       | Bit Size                                              | 7.875      | in    |
|               | SHARED          | UBS      | Use Bit Size instead of Caliper for all applications. | No         |       |
|               | SHARED          | MDBS     | Mud Base                                              | Water      |       |
|               | SHARED          | MDWT     | Borehole Fluid Weight                                 | 9.100      | ppg   |
|               | SHARED          | WAGT     | Weighting Agent                                       | Natural    |       |
|               | SHARED          | BSAL     | Borehole salinity                                     | 0.00       | ppm   |
|               | SHARED          | FSAL     | Formation Salinity NaCl                               | 0.00       | ppm   |
|               | SHARED          | KPCT     | Percent K in Mud by Weight?                           | 0.00       | %     |
|               | SHARED          | RMUD     | Mud Resistivity                                       | 0.750      | ohmm  |
|               | SHARED          | TRM      | Temperature of Mud                                    | 75.0       | degF  |
|               | SHARED          | CSD      | Logging Interval is Cased?                            | No         |       |
|               | SHARED          | ICOD     | AHV Casing OD                                         | 5.500      | in    |
|               | SHARED          | CSTR     | Compressive Strength                                  | 1000.00    | psia  |
|               | SHARED          | ST       | Surface Temperature                                   | 75.0       | degF  |
|               | SHARED          | TD       | Total Well Depth                                      | 4900.00    | ft    |
|               | SHARED          | BHT      | Bottom Hole Temperature                               | 125.0      | degF  |
|               | SHARED          | SVTM     | Navigation and Survey Master Tool                     | NONE       |       |
|               | SHARED          | AZTM     | High Res Z Accelerometer Master Tool                  | GTET       |       |
|               | SHARED          | TEMM     | CBM Temperature Master Tool                           | GTET       |       |
|               | SHARED          | SOCI     | Source of Casing Information                          | Parameters |       |
|               | SHARED          | MSAL     | Water-base mud filtrate salinity                      | 0.00       | ppm   |
|               | Rwa / CrossPlot | XPOK     | Process Crossplot?                                    | Yes        |       |
|               | Rwa / CrossPlot | FCHO     | Select Source of F                                    | Automatic  |       |
|               | Rwa / CrossPlot | AFAC     | Archie A factor                                       | 0.6200     |       |
|               | Rwa / CrossPlot | MFAC     | Archie M factor                                       | 2.1500     |       |
|               | Rwa / CrossPlot | RMFR     | Rmf Reference                                         | 0.10       | ohmm  |
|               | Rwa / CrossPlot | TMFR     | Rmf Ref Temp                                          | 75.00      | degF  |
|               | Rwa / CrossPlot | RWA      | Resistivity of Formation Water                        | 0.05       | ohmm  |
|               | Rwa / CrossPlot | ADP      | Use Air Porosity to calculate CrossplotPhi            | No         |       |
|               | Rwa / CrossPlot | BHSM     | Borehole Size Source Tool                             | SDLT       |       |
|               | Rwa / CrossPlot | ROIN     | Input for RO Calculation                              | Rwa        |       |
|               | GTET            | CPCK     | Process Gamma Ray2                                    | Yes        |       |

|              |      |                                              |                 |      |
|--------------|------|----------------------------------------------|-----------------|------|
| GTET         | GROK | Process Gamma Ray?                           | Yes             |      |
| GTET         | GEOK | Process Gamma Ray EVR?                       | No              |      |
| GTET         | TPOS | Tool Position for Gamma Ray Tools.           | Eccentered      |      |
| GTET         | BHSM | Borehole Size Source Tool                    | SDLT            |      |
| DSNT         | DNOK | Process DSN?                                 | Yes             |      |
| DSNT         | DEOK | Process DSN EVR?                             | No              |      |
| DSNT         | NLIT | Neutron Lithology                            | Limestone       |      |
| DSNT         | DNSO | DSN Standoff - 0.25 in (6.35 mm) Recommended | 0.250           | in   |
| DSNT         | DNTT | Temperature Correction Type                  | None            |      |
| DSNT         | DPRS | DSN Pressure Correction Type                 | None            |      |
| DSNT         | SHCO | View More Correction Options                 | No              |      |
| DSNT         | UTVD | Use TVD for Gradient Corrections?            | No              |      |
| DSNT         | LHWT | Logging Horizontal Water Tank?               | No              |      |
| DSNT         | UCLA | Classic Neutron Parameter utilized?          | No              |      |
| DSNT         | BHSM | Borehole Size Source Tool                    | SDLT            |      |
| SDLT         | CLOK | Process Caliper Outputs?                     | Yes             |      |
| Microlog Pad | MLOK | Process MicroLog Outputs?                    | Yes             |      |
| SDLT Pad     | DNOK | Process Density?                             | Yes             |      |
| SDLT Pad     | DNOK | Process Density EVR?                         | No              |      |
| SDLT Pad     | CB   | Logging Calibration Blocks?                  | No              |      |
| SDLT Pad     | SPVT | SDLT Pad Temperature Valid?                  | Yes             |      |
| SDLT Pad     | DTWN | Disable temperature warning                  | No              |      |
| SDLT Pad     | DMA  | Formation Density Matrix                     | 2.710           | g/cc |
| SDLT Pad     | DFL  | Formation Density Fluid                      | 1.000           | g/cc |
| SDLT Pad     | BHSM | Borehole Size Source Tool                    | SDLT            |      |
| ACRt Sonde   | RTOK | Process ACRt?                                | Yes             |      |
| ACRt Sonde   | MNSO | Minimum Tool Standoff                        | 1.50            | in   |
| ACRt Sonde   | TCS1 | Temperature Correction Source                | FP Lwr & FP Upr |      |
| ACRt Sonde   | TPOS | Tool Position                                | Free Hanging    |      |
| ACRt Sonde   | RMOP | Rmud Source                                  | Mud Cell        |      |
| ACRt Sonde   | RMIN | Minimum Resistivity for MAP                  | 0.20            | ohmm |
| ACRt Sonde   | RMAX | Maximum Resistivity for MAP                  | 200.00          | ohmm |
| ACRt Sonde   | THQY | Threshold Quality                            | 0.50            |      |
| ACRt Sonde   | MRFX | Fixed mud resistivity                        | 2000            | ohmm |
| ACRt Sonde   | BHSM | Borehole Size Source Tool                    | SDLT            |      |
| ACRt Sonde   | MBFL | Apply Corkscrew Effect?                      | No              |      |

**HALLIBURTON**

| Description                  | Overbody Description                          | O.D.          | Diagram                                                                             | Sensors @ Delays                                      | Length   | Accumulated Length |
|------------------------------|-----------------------------------------------|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------------|----------|--------------------|
| RWCH-12345678<br>135.00 lbs  | Weak Point 10000 lbs-<br>00000025<br>0.01 lbs | Ø 2.310 in →  |  | ← Fishing Neck @ 57.71 ft                             |          | 58.59 ft           |
|                              |                                               | Ø 3.625 in →  |                                                                                     | ← Load Cell @ 54.91 ft<br>← BH Temperature @ 54.34 ft | 6.25 ft  |                    |
|                              |                                               | Ø 0.010 in* → |                                                                                     |                                                       |          | 52.34 ft           |
| SP Sub-11812437<br>60.00 lbs |                                               | Ø 3.625 in →  |                                                                                     | ← SP @ 50.56 ft                                       | 3.74 ft  |                    |
|                              |                                               |               |                                                                                     | ← Z-Accelerometer @ 48.15 ft                          | 48.60 ft |                    |

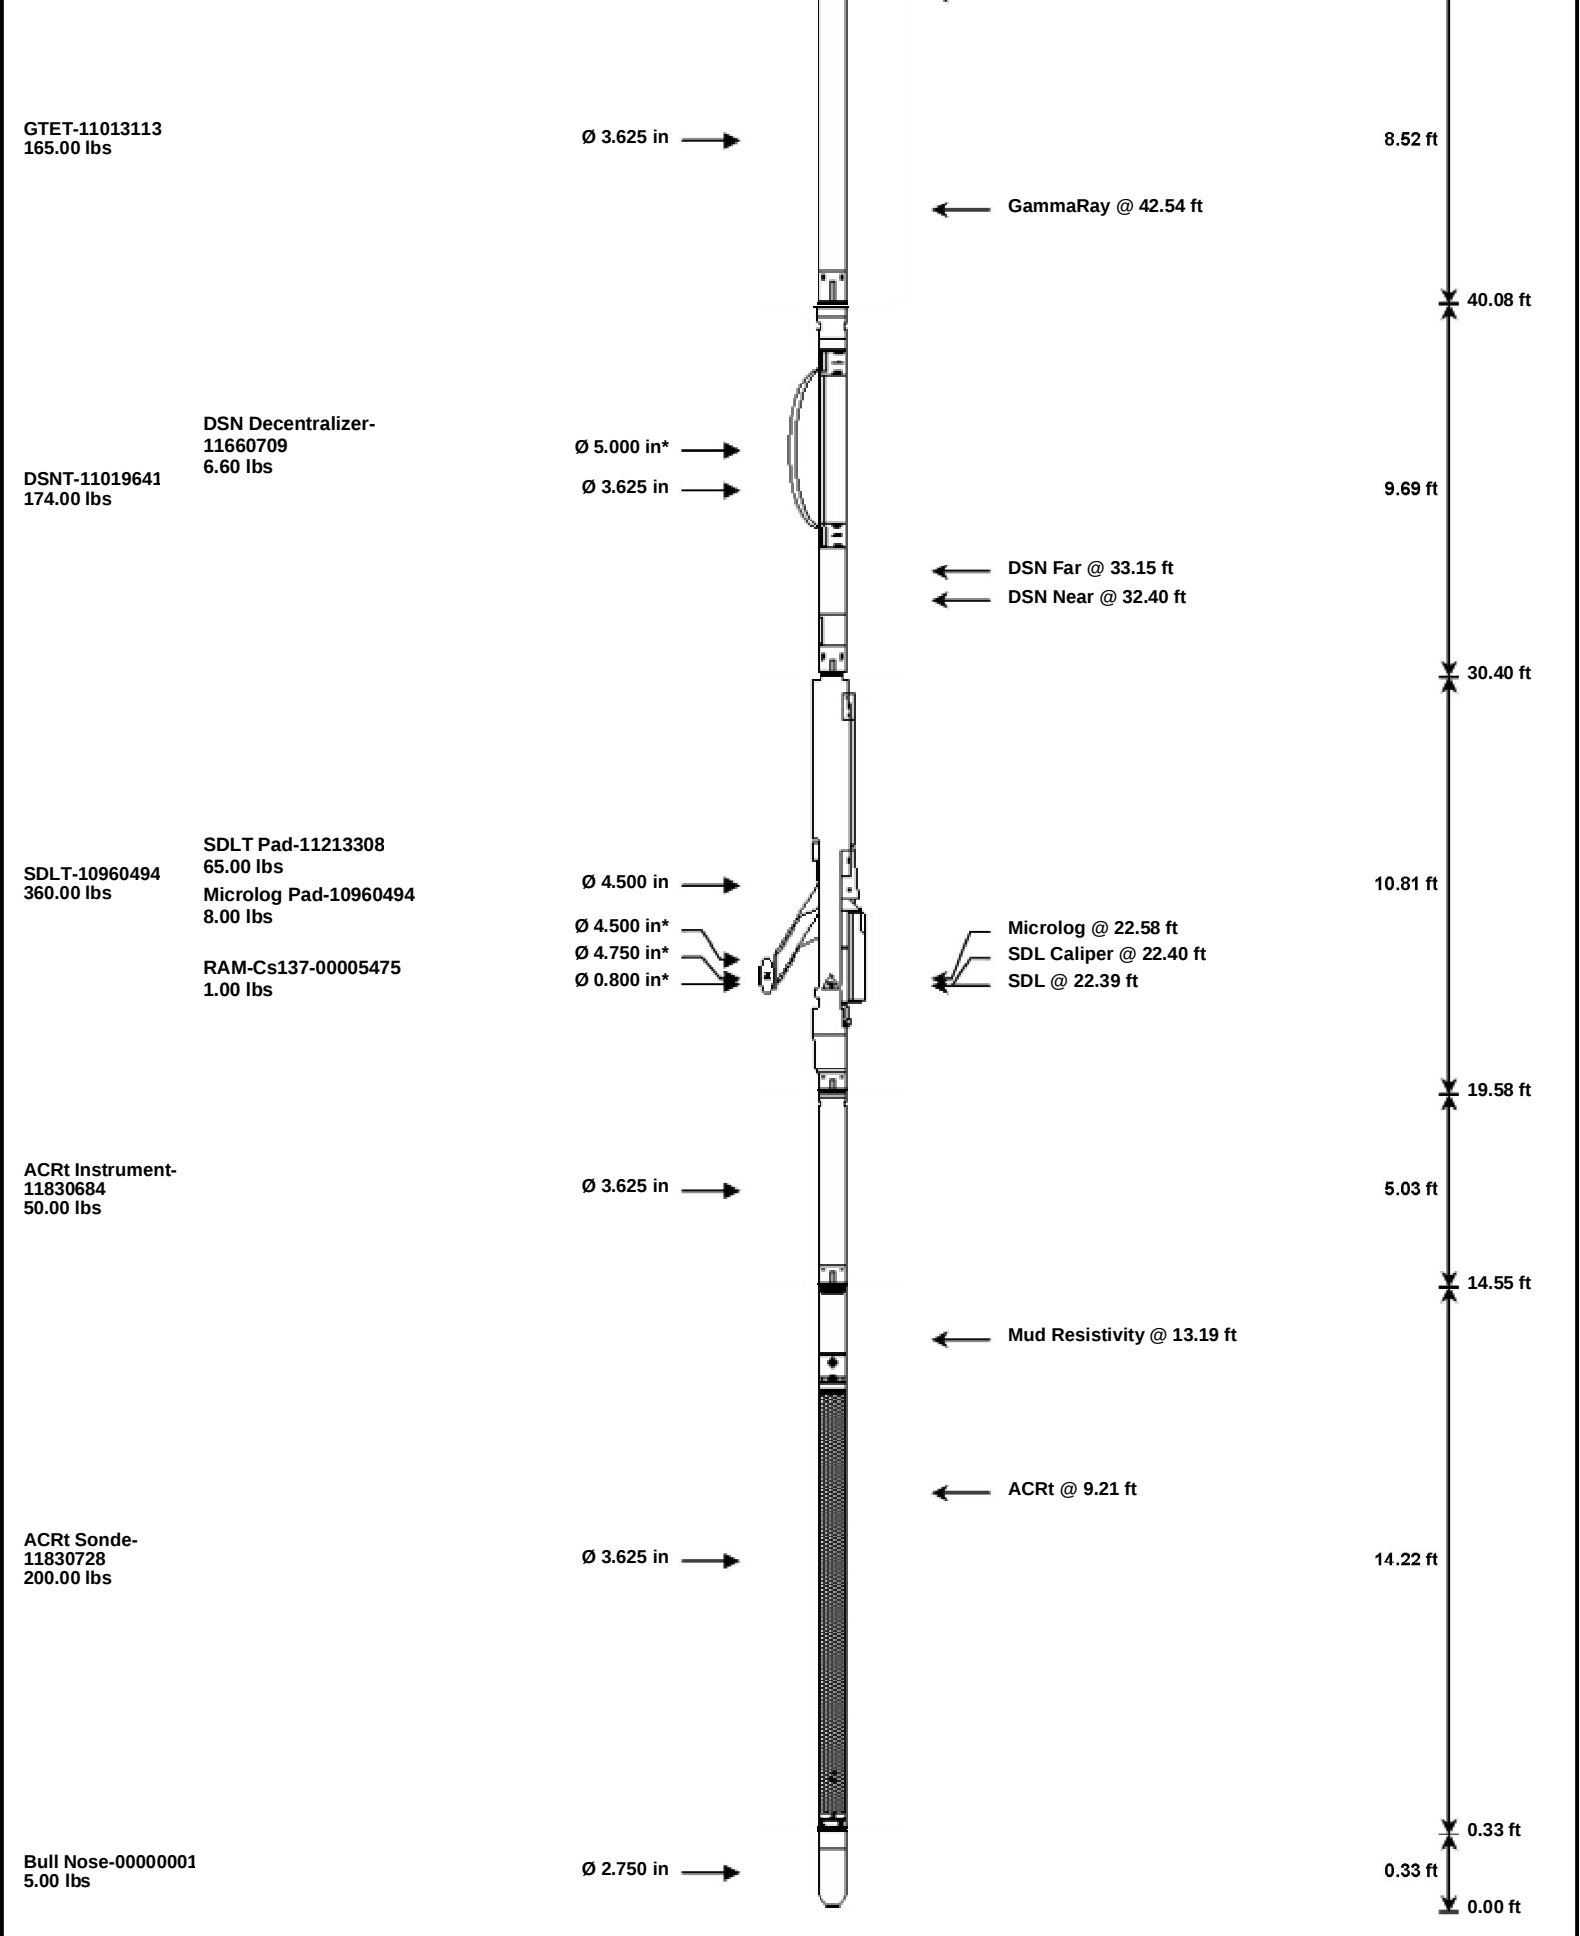

| Mnemonic | Tool Name                      | Serial Number | Weight (lbs) | Length (ft) | Accumulated Length (ft) | Max.Log. Speed (fpm) |
|----------|--------------------------------|---------------|--------------|-------------|-------------------------|----------------------|
| RWCH     | Releasable Wireline Cable Head | 12345678      | 135.00       | 6.25        | 52.34                   | 300.00               |
| WP10K    | Weak Point 10000 lbs           | 00000025      | 0.01         | 0.01        | * 53.14                 | 300.00               |
| SP       | SP Sub                         | 11812437      | 60.00        | 3.74        | 48.60                   | 300.00               |
| GTET     | Gamma Telemetry Tool           | 11013113      | 165.00       | 8.52        | 40.08                   | 60.00                |
| DSNT     | Dual Spaced Neutron            | 11019641      | 174.00       | 9.69        | 30.40                   | 60.00                |
| DCNT     | DSN Decentralizer              | 11660709      | 6.60         | 5.13        | * 33.73                 | 300.00               |
| SDLT     | Spectral Density Tool          | 10960494      | 360.00       | 10.81       | 19.58                   | 60.00                |
| SDLF     | SDL Fluid Density Tool         | 11812437      | 60.00        | 3.74        | 21.58                   | 300.00               |

|                                                         |                                                       |          |          |       |   |       |        |
|---------------------------------------------------------|-------------------------------------------------------|----------|----------|-------|---|-------|--------|
| SDLP                                                    | Density Insite Pad                                    | 11213308 | 65.00    | 2.55  | * | 21.79 | 60.00  |
| Cs137                                                   | Logging Source, SDLT-I, 1.78 Ci - Cs137               | 00005475 | 1.00     | 0.80  | * | 22.02 | 300.00 |
| MICP                                                    | Microlog Pad                                          | 10960494 | 8.00     | 1.00  | * | 22.08 | 60.00  |
| ACRt                                                    | Array Compensated True Resistivity Instrument Section | 11830684 | 50.00    | 5.03  |   | 14.55 | 120.00 |
| ACRt                                                    | Array Compensated True Resistivity Sonde Section      | 11830728 | 200.00   | 14.22 |   | 0.33  | 120.00 |
| BLNS                                                    | Bull Nose                                             | 00000001 | 5.00     | 0.33  |   | 0.00  | 300.00 |
| Total                                                   |                                                       |          | 1,229.61 | 58.59 |   |       |        |
| * Not included in Total Length and Length Accumulation. |                                                       |          |          |       |   |       |        |
| Data: BEREX_HARTNETT\0001 RWCH-GTET-DSN-SDL-ACRT\IDLE   |                                                       |          |          |       |   |       |        |
| Date: 03-Dec-18 15:13:52                                |                                                       |          |          |       |   |       |        |