

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-165-20396-00-00  
Spot: N2NWNE Sec/Twnshp/Rge: 9-19S-20W  
660 feet from N Section Line, 1980 feet from E Section Line  
Lease Name: BELLPORT Well #: 1  
County: RUSH Total Vertical Depth: 4227 feet

Operator License No.: 31627  
Op Name: WHITETAIL CRUDE, INC  
Address: N HWY 283 PO BOX 544  
NESS CITY, KS 67560

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4225	0	WITH 75 SX CMT
SURF	8.625	405		WITH 185 SX CMT \$ 137.38

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/13/2006 2:30 PM  
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC  
Proposal Rcvd. from: MIKE FRITZLER Company: WHITETAIL CRUDE, INC Phone: (785) 798-3641

Proposed Plugging Method: PUMP 20 SX CMT & 2 SX HULLS AT 4200'. PLUG AT 1400' WITH 25 SX CMT. PERFORATE AT 700'. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 07/13/2006 3:50 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

RAN TUBING TO 4200' PUMP 20 SX CMT & 2 SX HULLS. PULLED TUBING TO 1400' & PUMP 25 SX CMT. PRESSURE TESTED CASING TO 300 PSIG. PERFORATED CASING AT 700'. PUMPED 235 SX CMT DOWN 5 1/2" CIRCULATING CMT TO SURFACE UP 8 5/8" X 5 1/2" ANNULUS.

Perfs:


Top	Bot	Thru	Comments
4225	4227	OH	

**INVOICED**  
DATE 7-27-06  
BY 2007060282

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

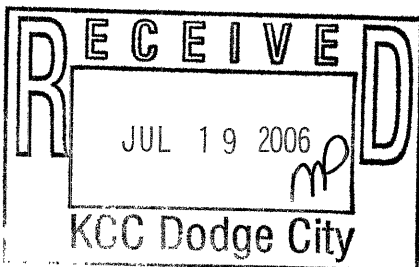

Signed Richard W. Lacey  
(TECHNICIAN)

RECEIVED  
JUL 26 2006  
KCC WICHITA

Form C-2

*[Handwritten signature]*