



DUAL INDUCTION LOG

Company	CHIEFTAIN OIL COMPANY, INC.		
Well	STOCKWELL #1		
Field	WILDCAT		
County	BARBER	State	KANSAS
Location:	API # : 15-007-24345-0000		Other Services CDL/CNL/PE
Well	770' FNL & 1050' FVL NE - SE - NW - NW		
Field	SEC 36 TWP 31S RGE 12W		
County	BARBER	State	KANSAS
Permanent Datum	GROUND LEVEL	Elevation	1557
Log Measured From	KELLY BUSHING 13' A.G.L.	K.B. 1570 D.F. 1568 G.L. 1557	
Drilling Measured From	KELLY BUSHING		
Date	3/11/19		
Run Number	ONE		
Depth Driller	4770		
Depth Logger	4774		
Bottom Logged Interval	4772		
Top Log Interval	00		
Casing Driller	8 5/8"@311'		
Casing Logger	311		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 5,000 PPM	
Density / Viscosity	9.4/54		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.20@50F		
Rmf @ Meas. Temp	.900@50F		
Rmc @ Meas. Temp	1.44@50F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.488@123F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	8:15 A.M.		
Maximum Recorded Temperature	123F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	DAVE BARKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
MEDICINE LODGE, KS., 1N. ON HWY 281, E. INTO



MAIN SECTION

Database File: 3601pe.db
Dataset Pathname: pass3.5
Presentation Format: dil2
Dataset Creation: Mon Mar 11 10:07:26 2019
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
---	--------------	----

0	RILD (Ohm-m)	50
---	--------------	----



1000	CILD (mmho/m)	0
------	---------------	---

50	RILD X10 (Ohm-m)	500
----	------------------	-----

50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

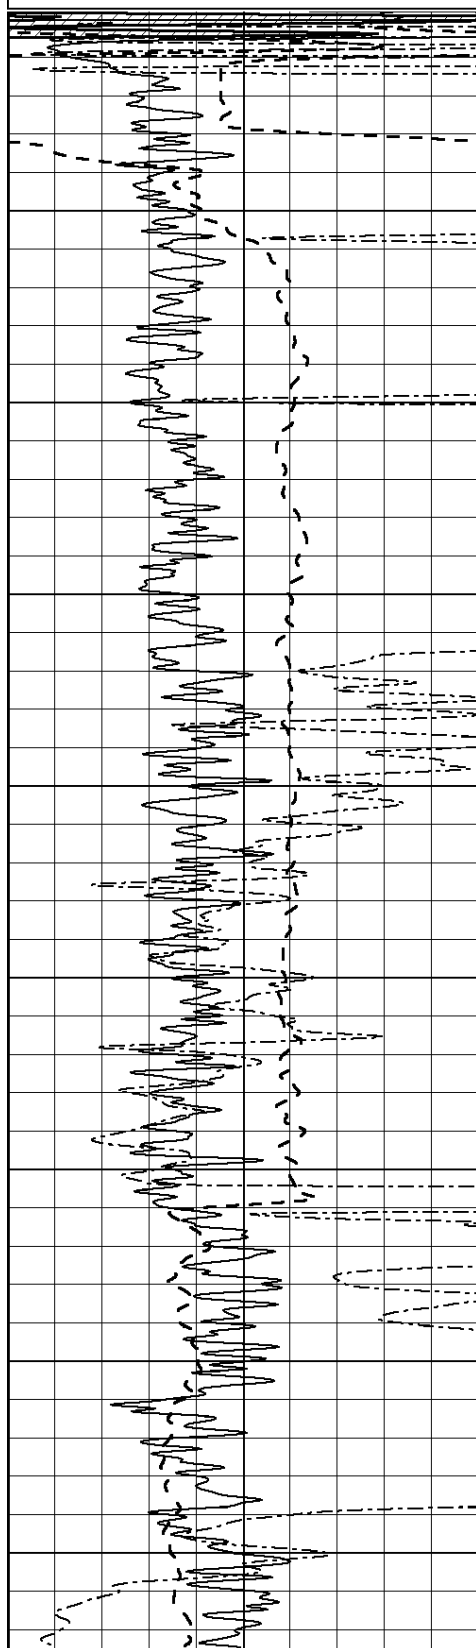

0
50
100
150
200
250
300
350
400

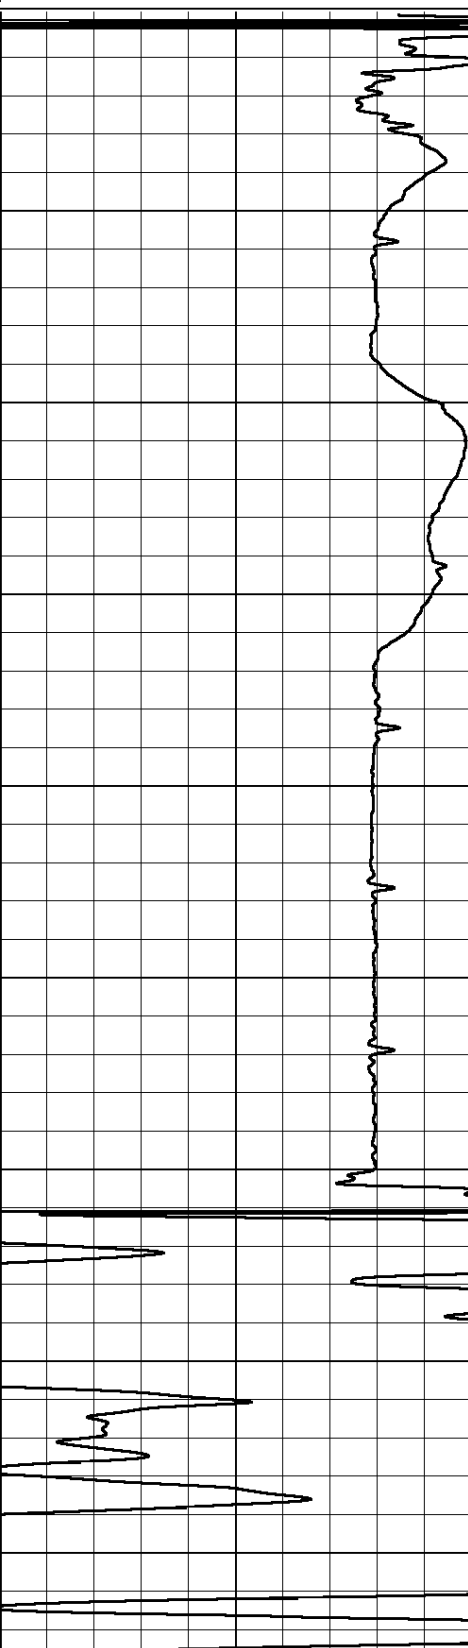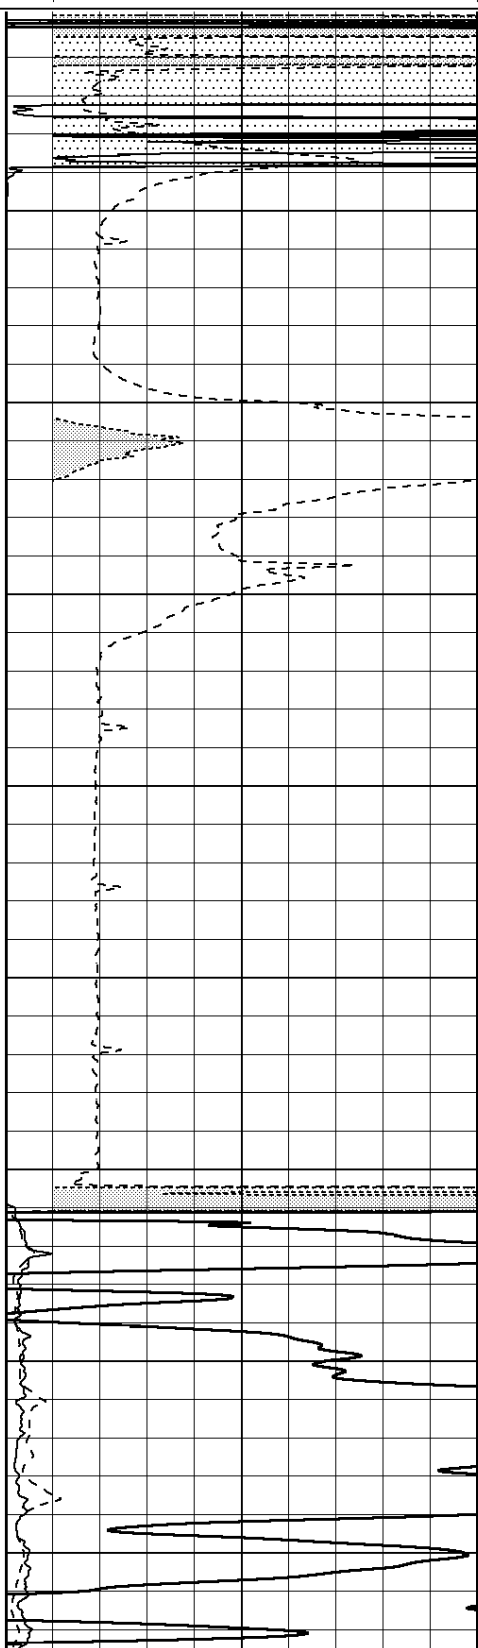

450

500

550

600

650

700



750


800

850

900

950

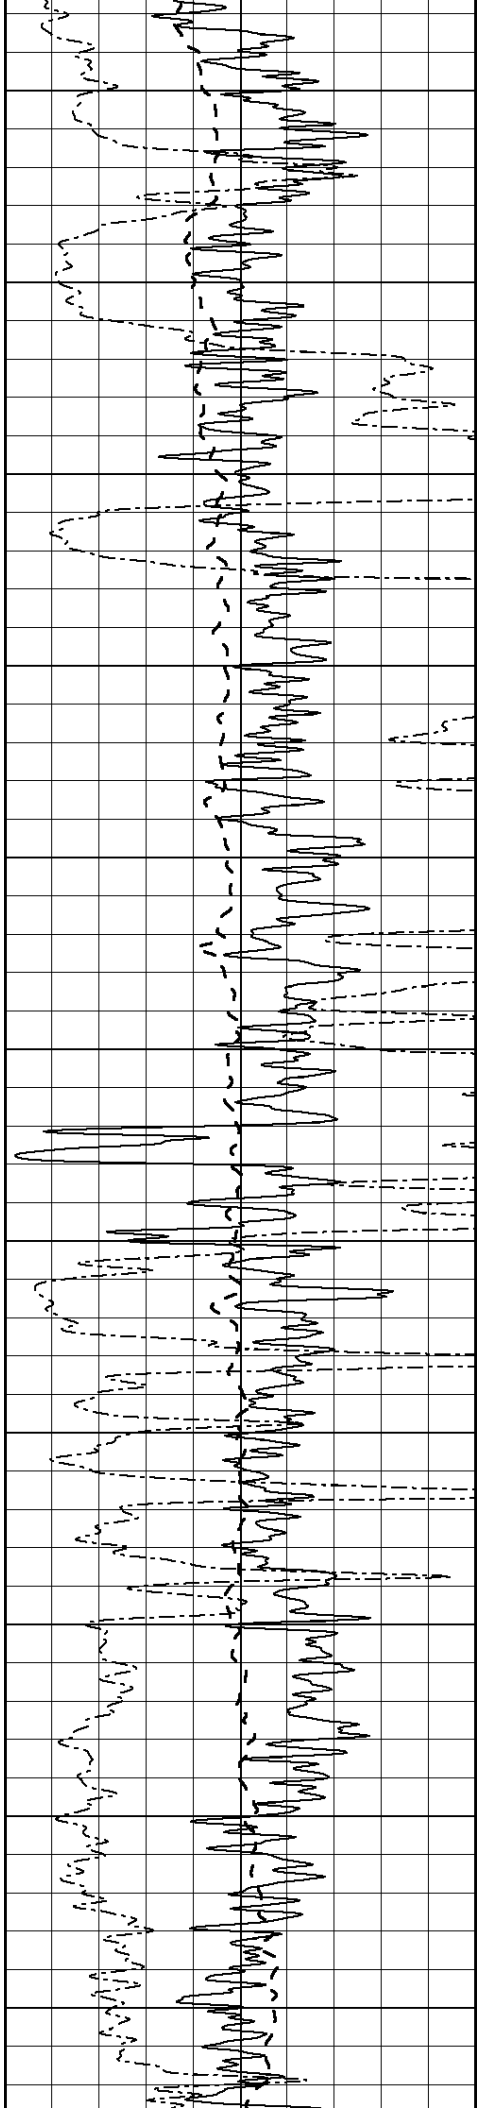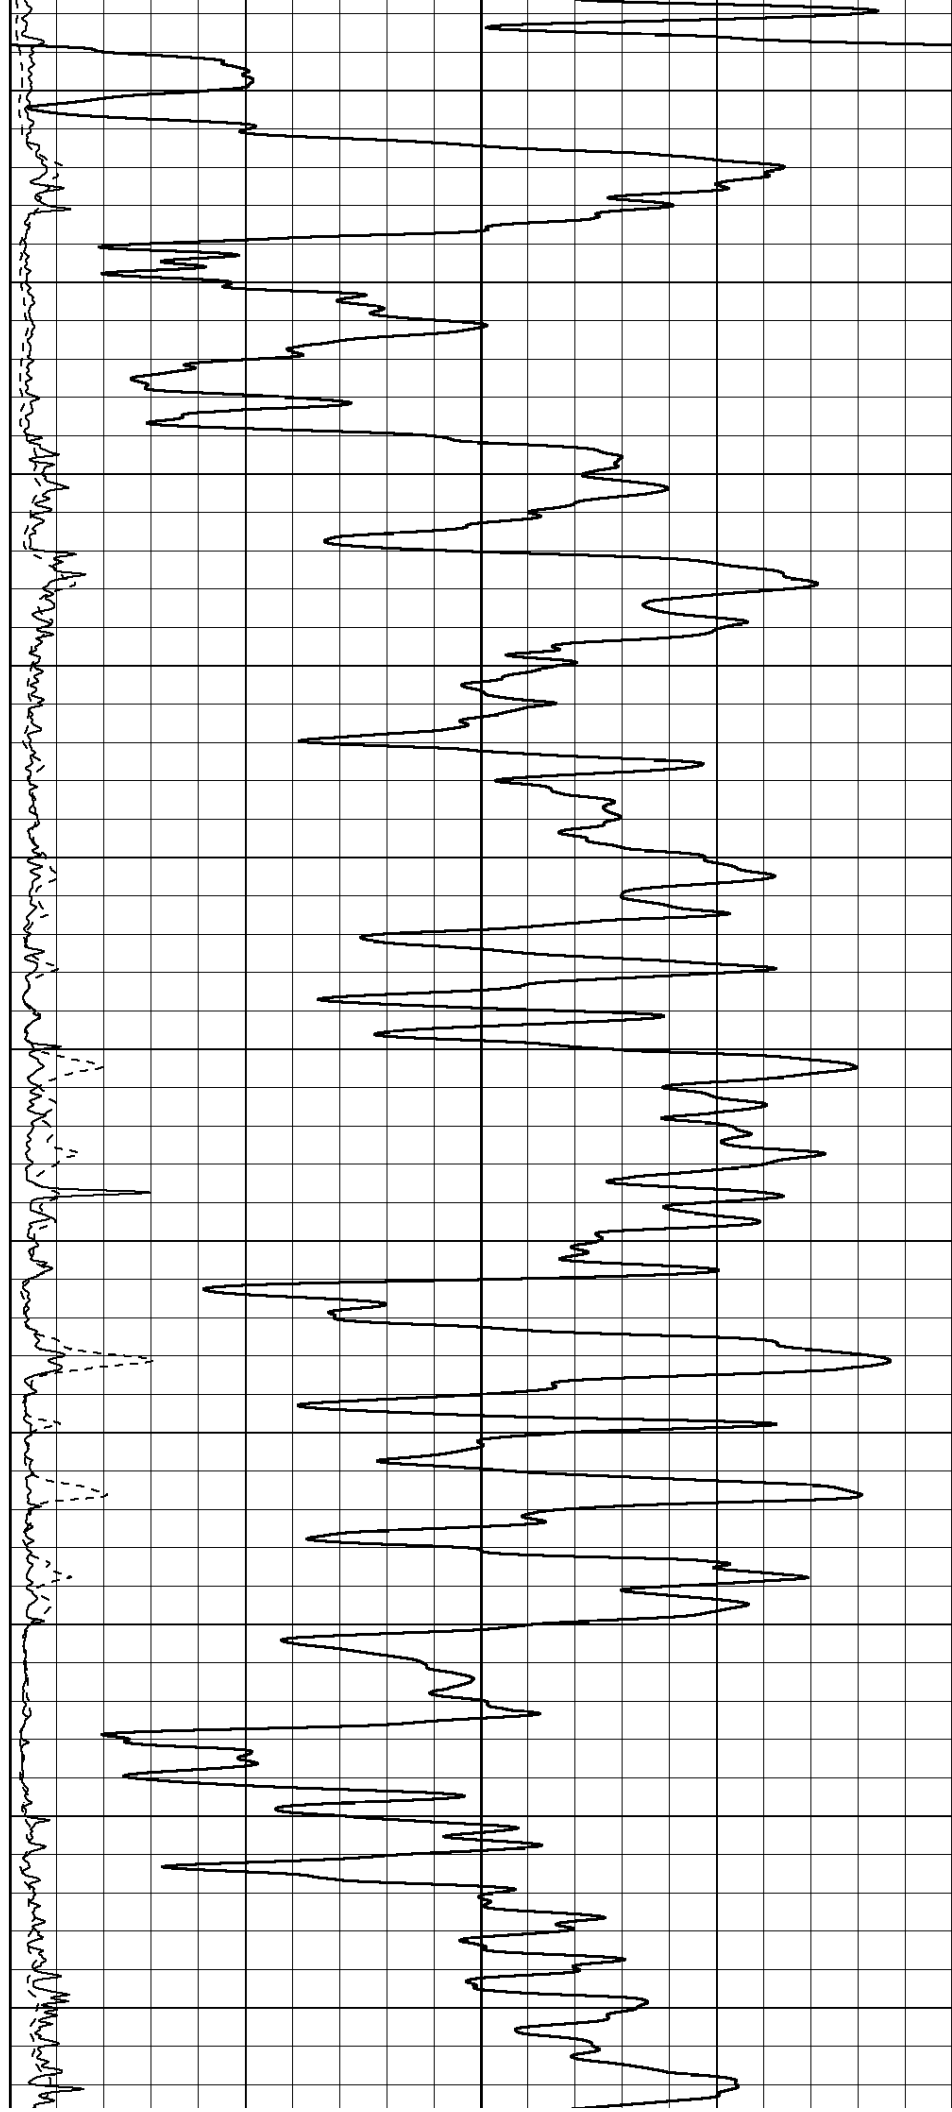

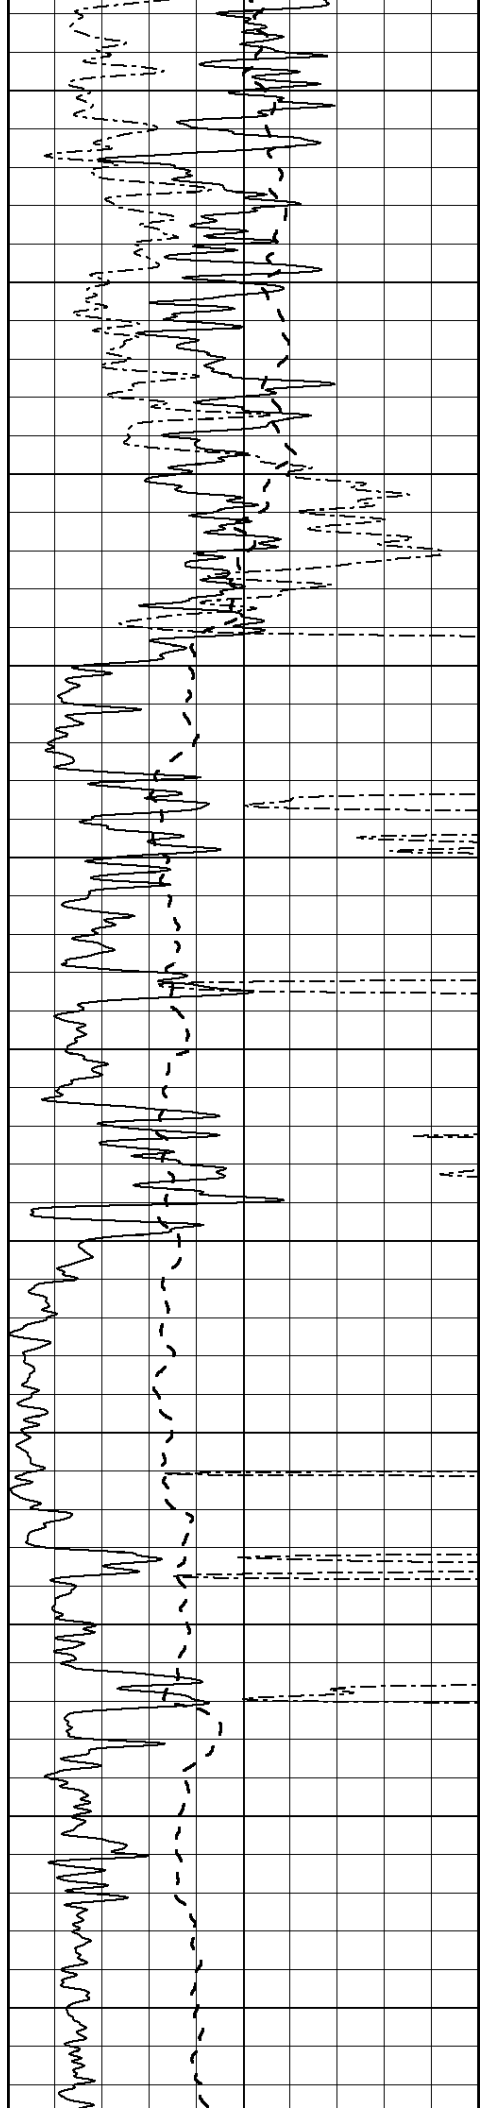

1000

1050

1100

1150

1200

1250


1300


1350

1400

1450

1500

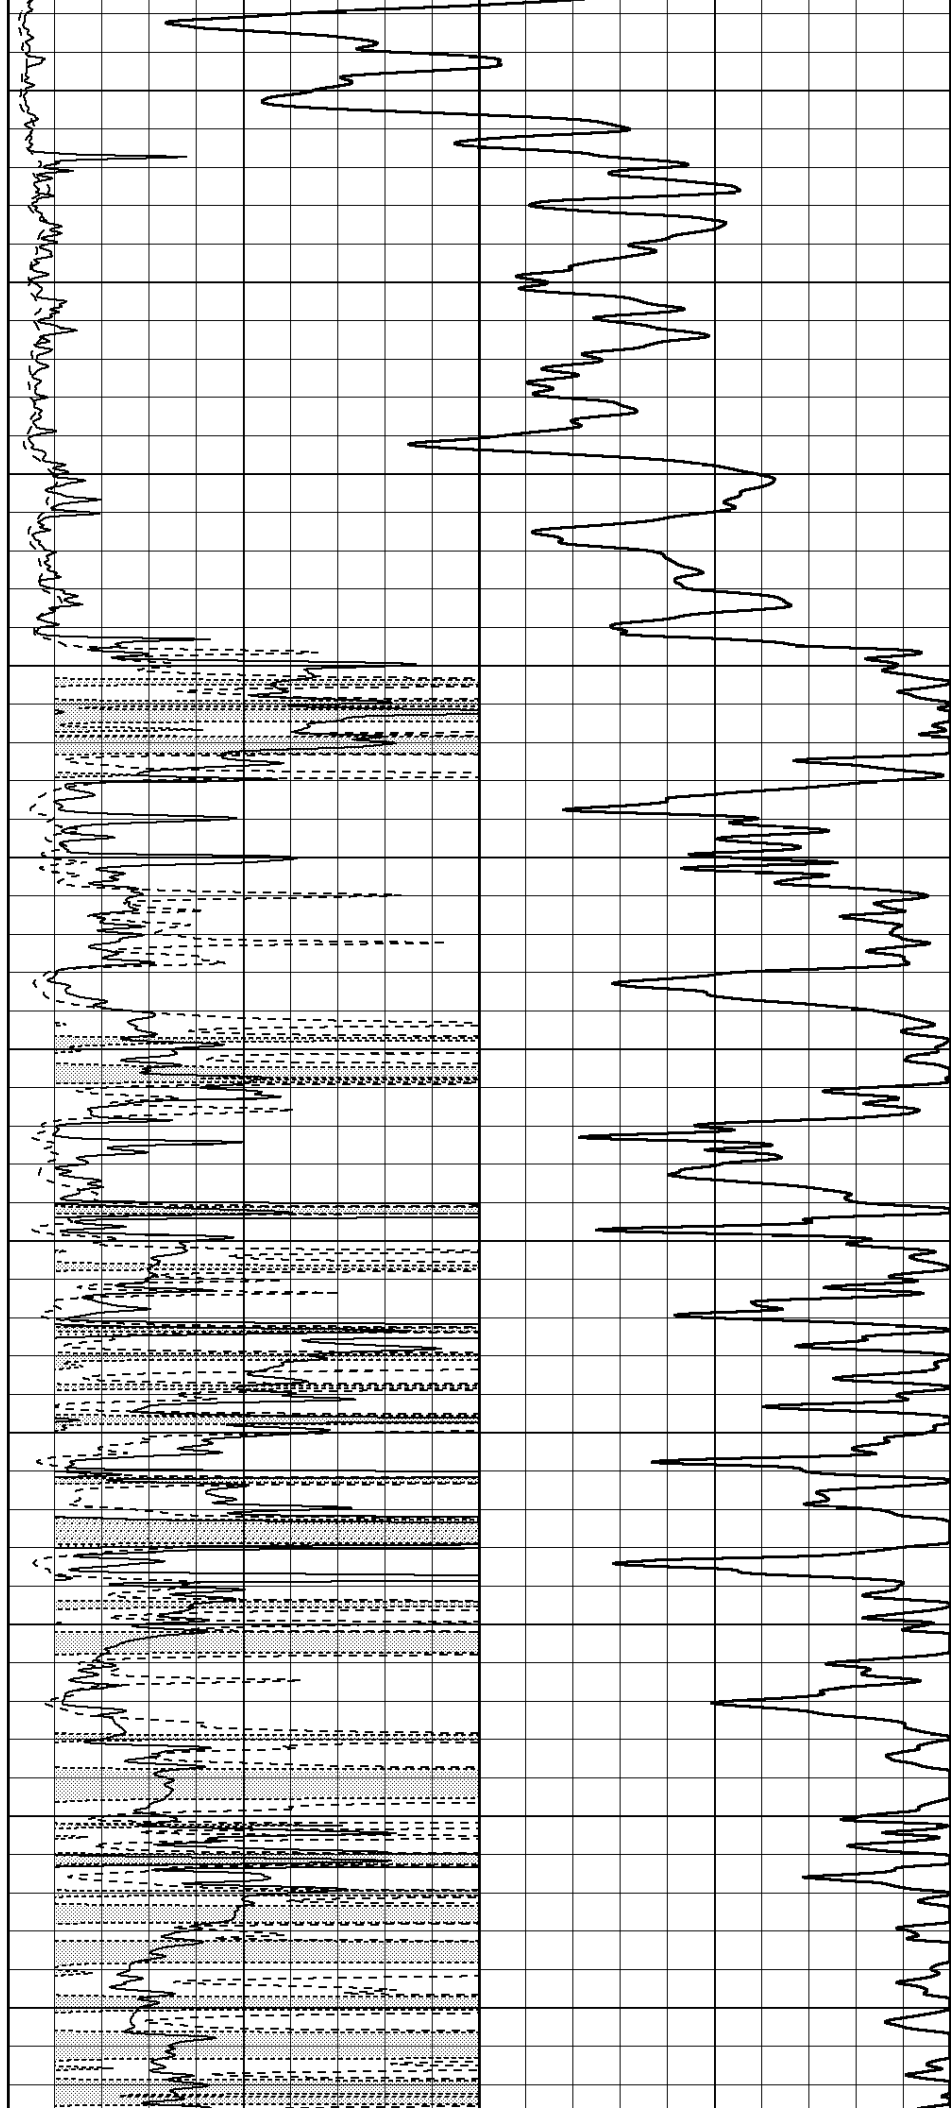

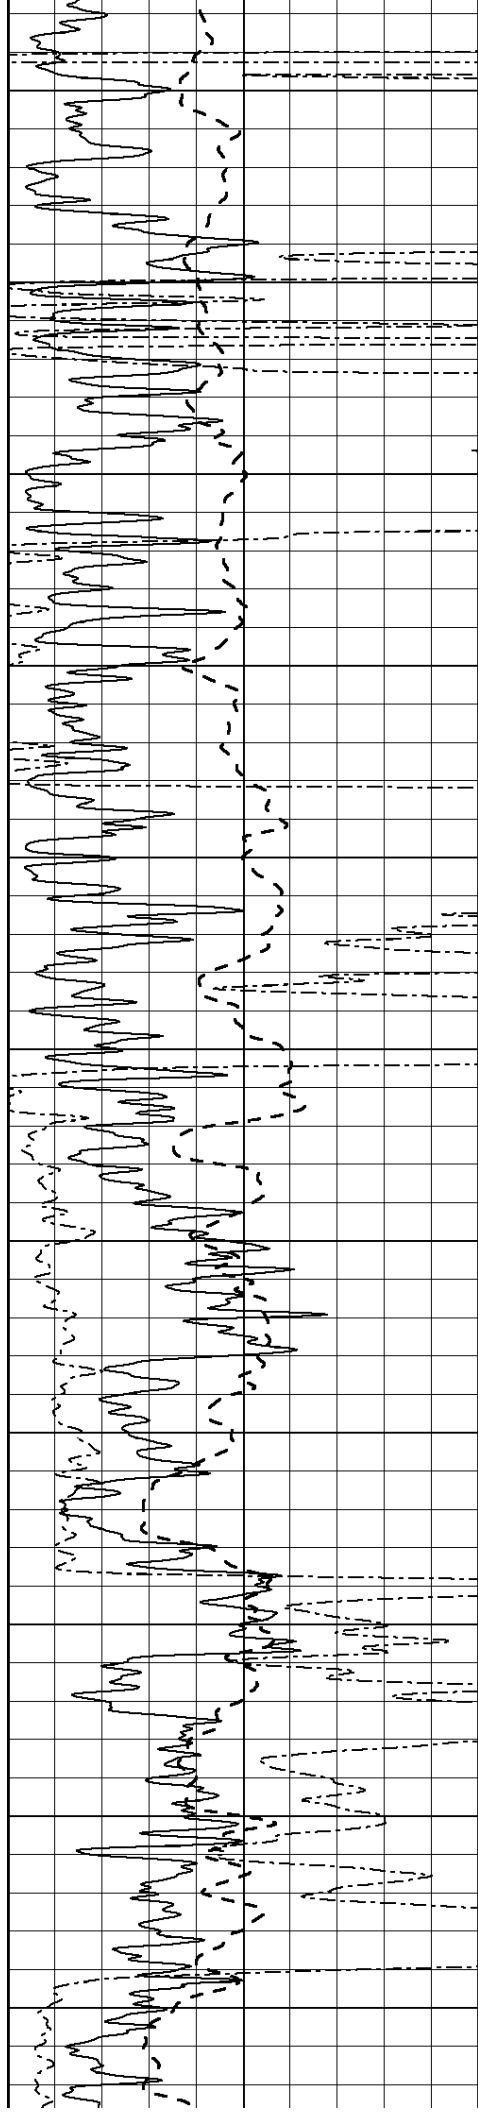

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

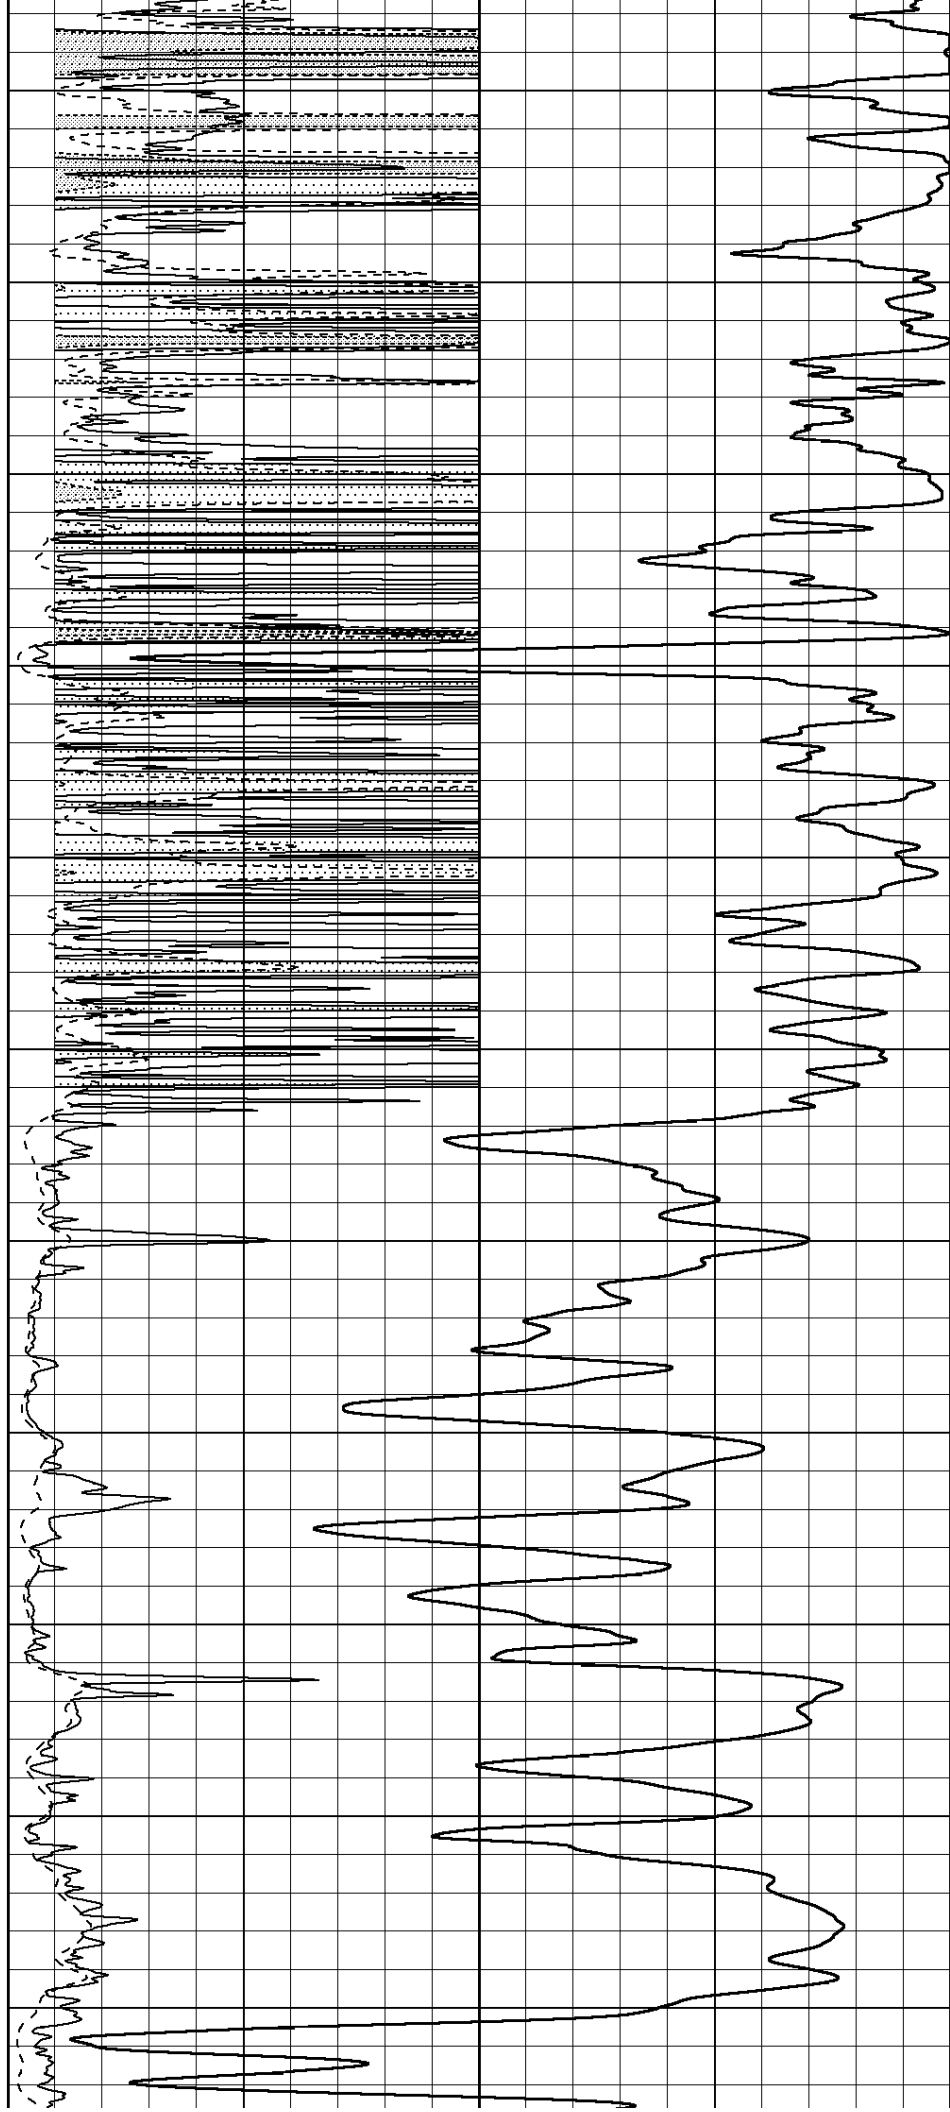

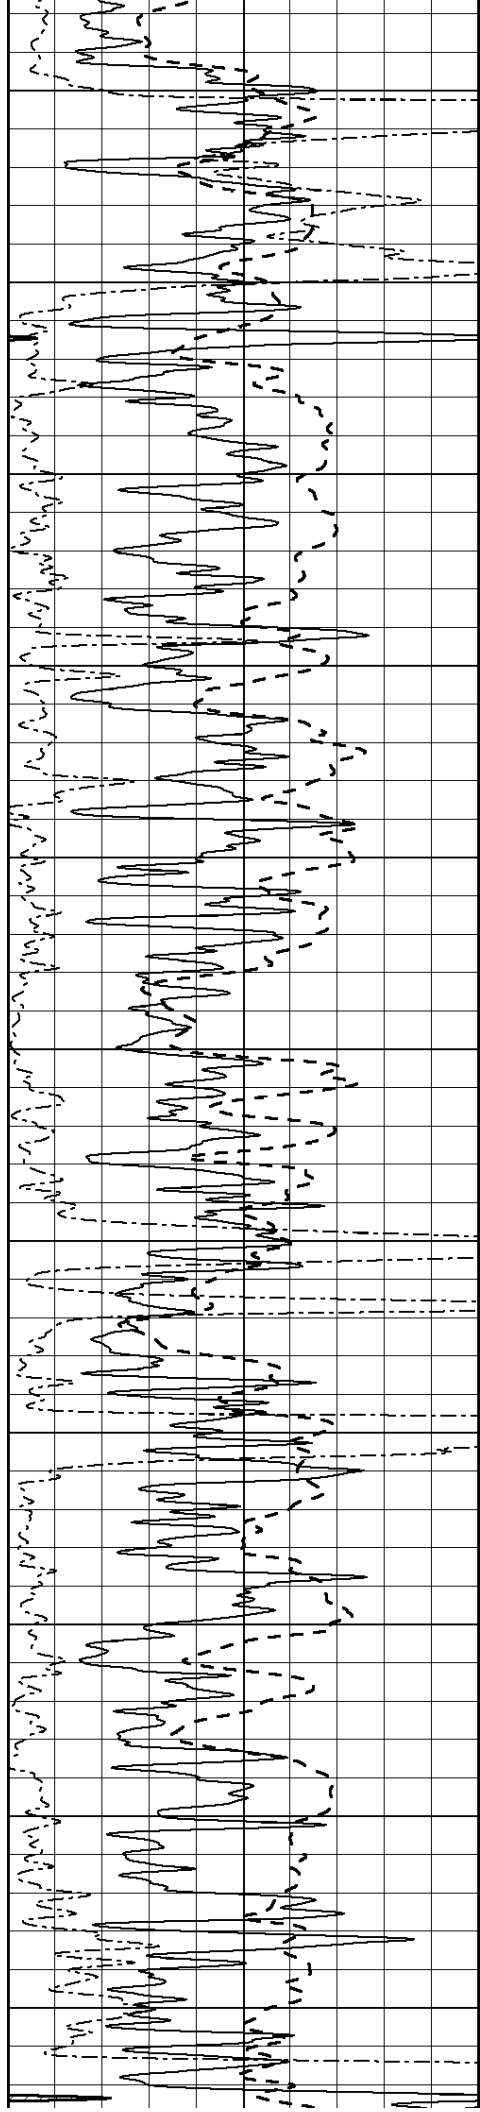

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

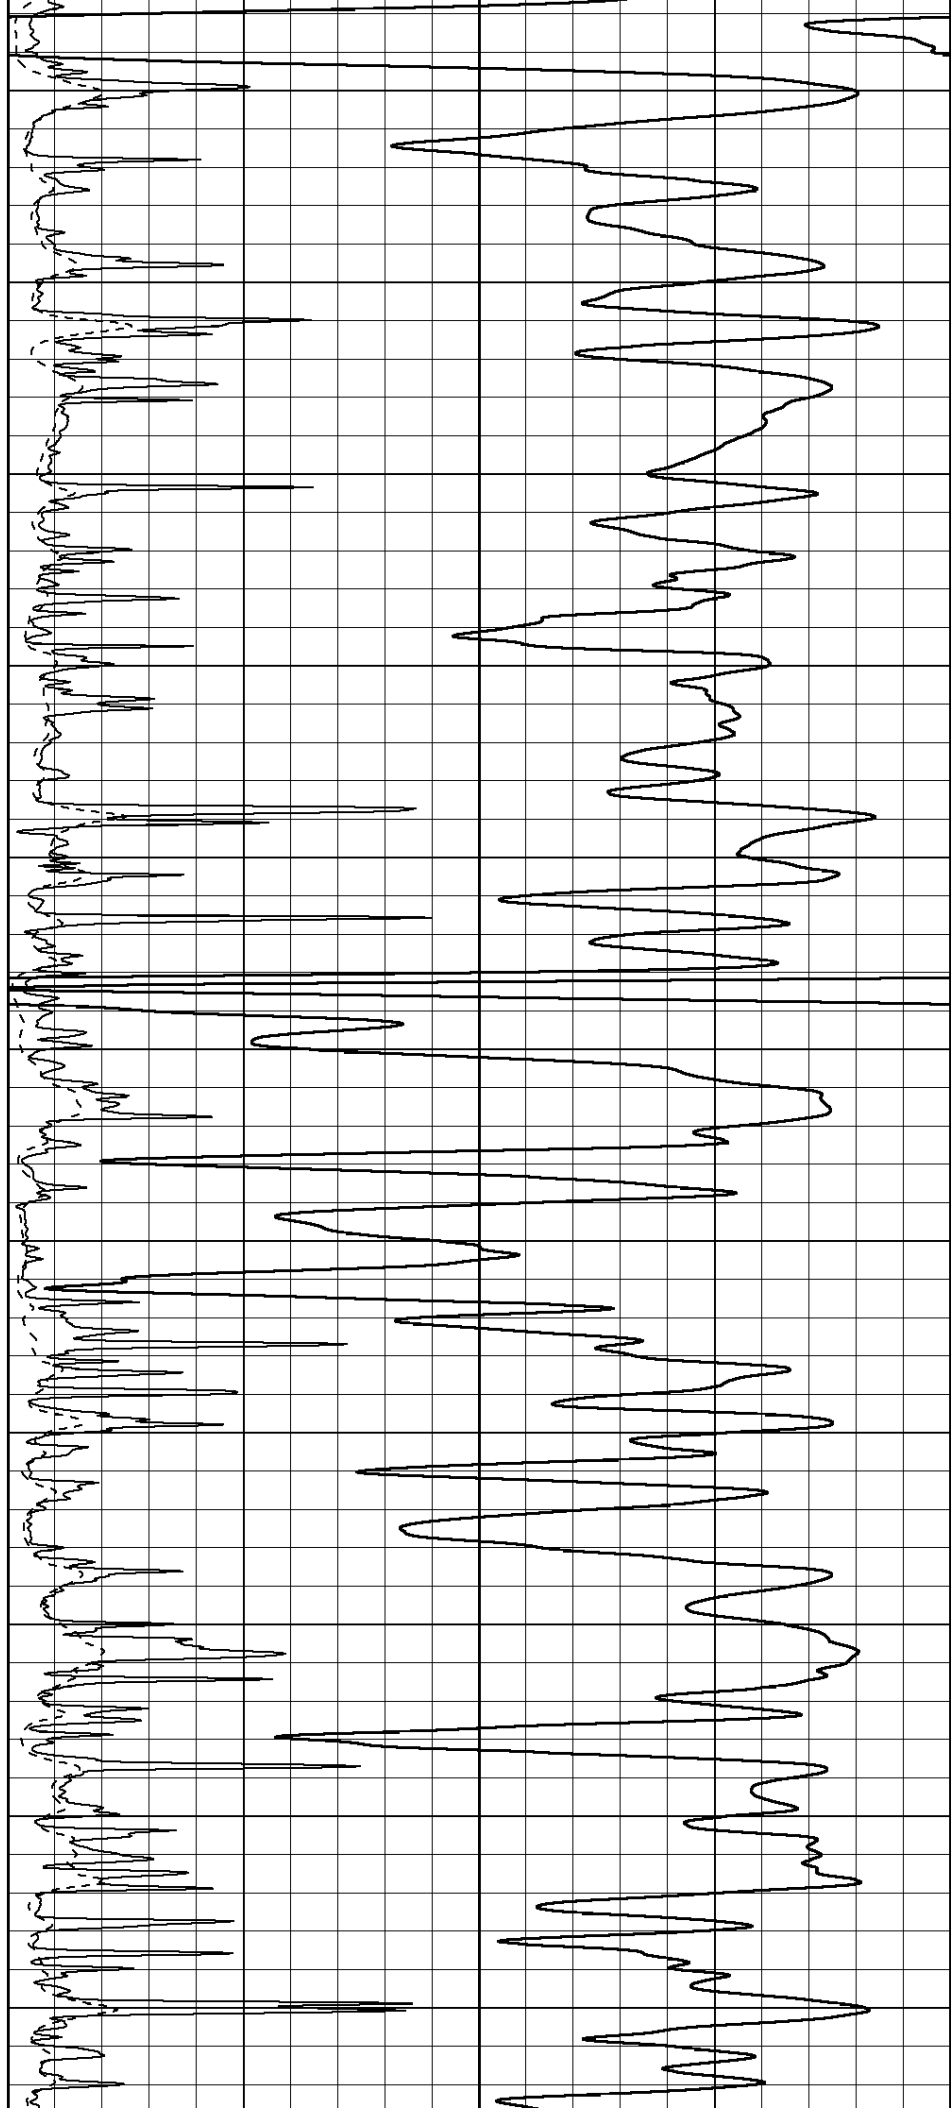

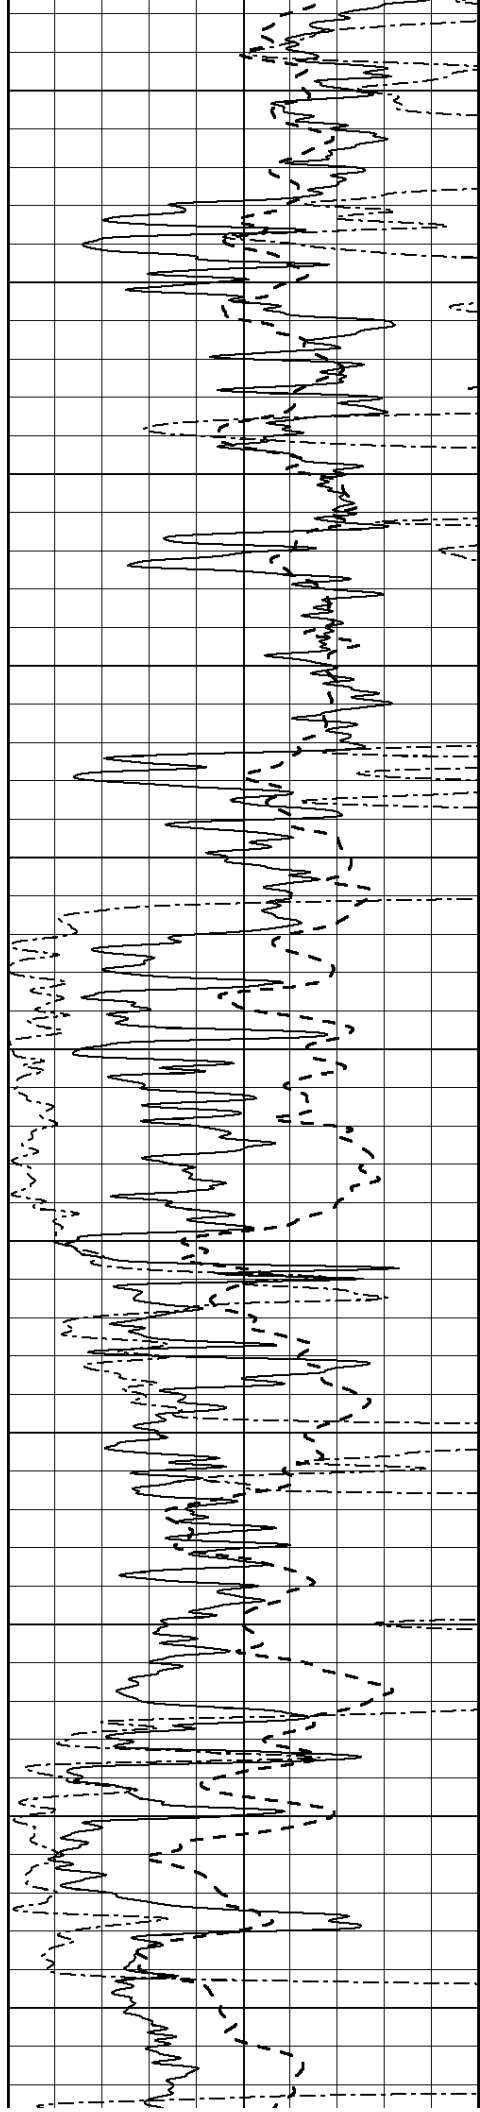

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

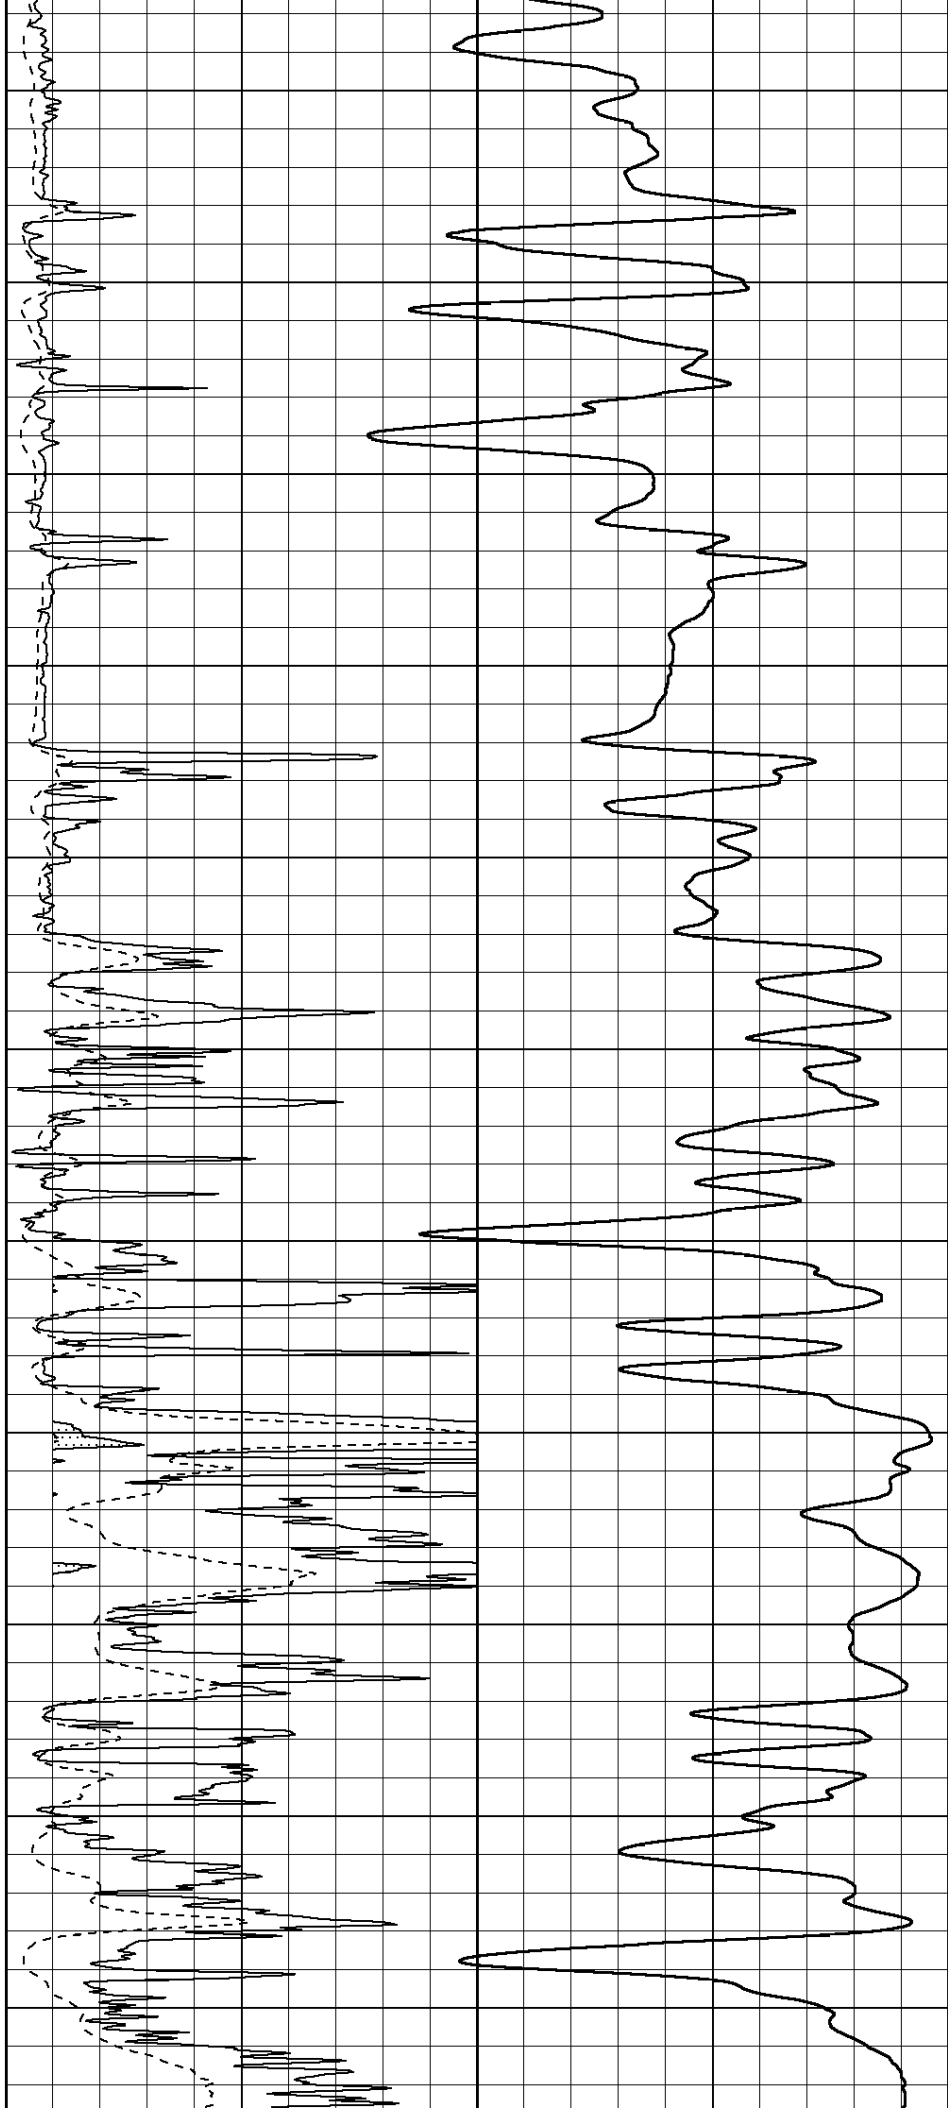

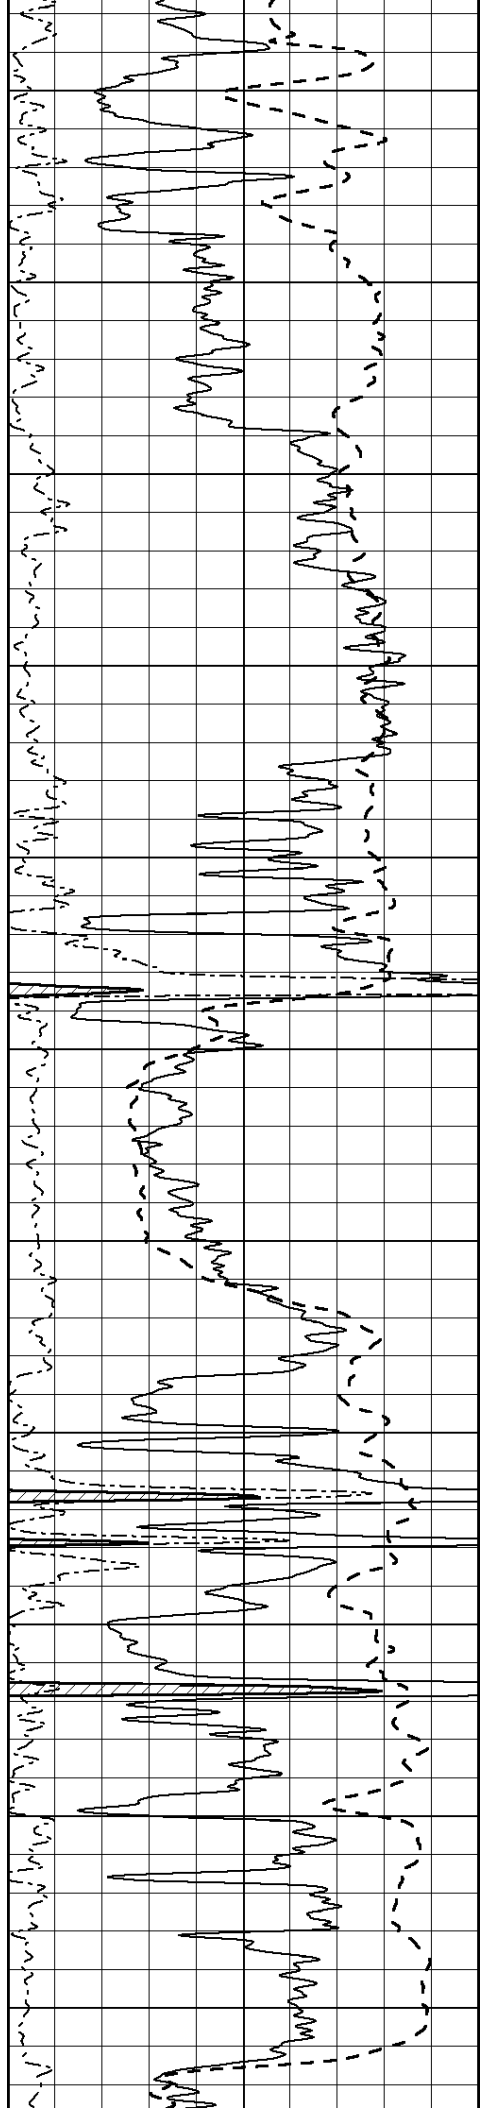

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

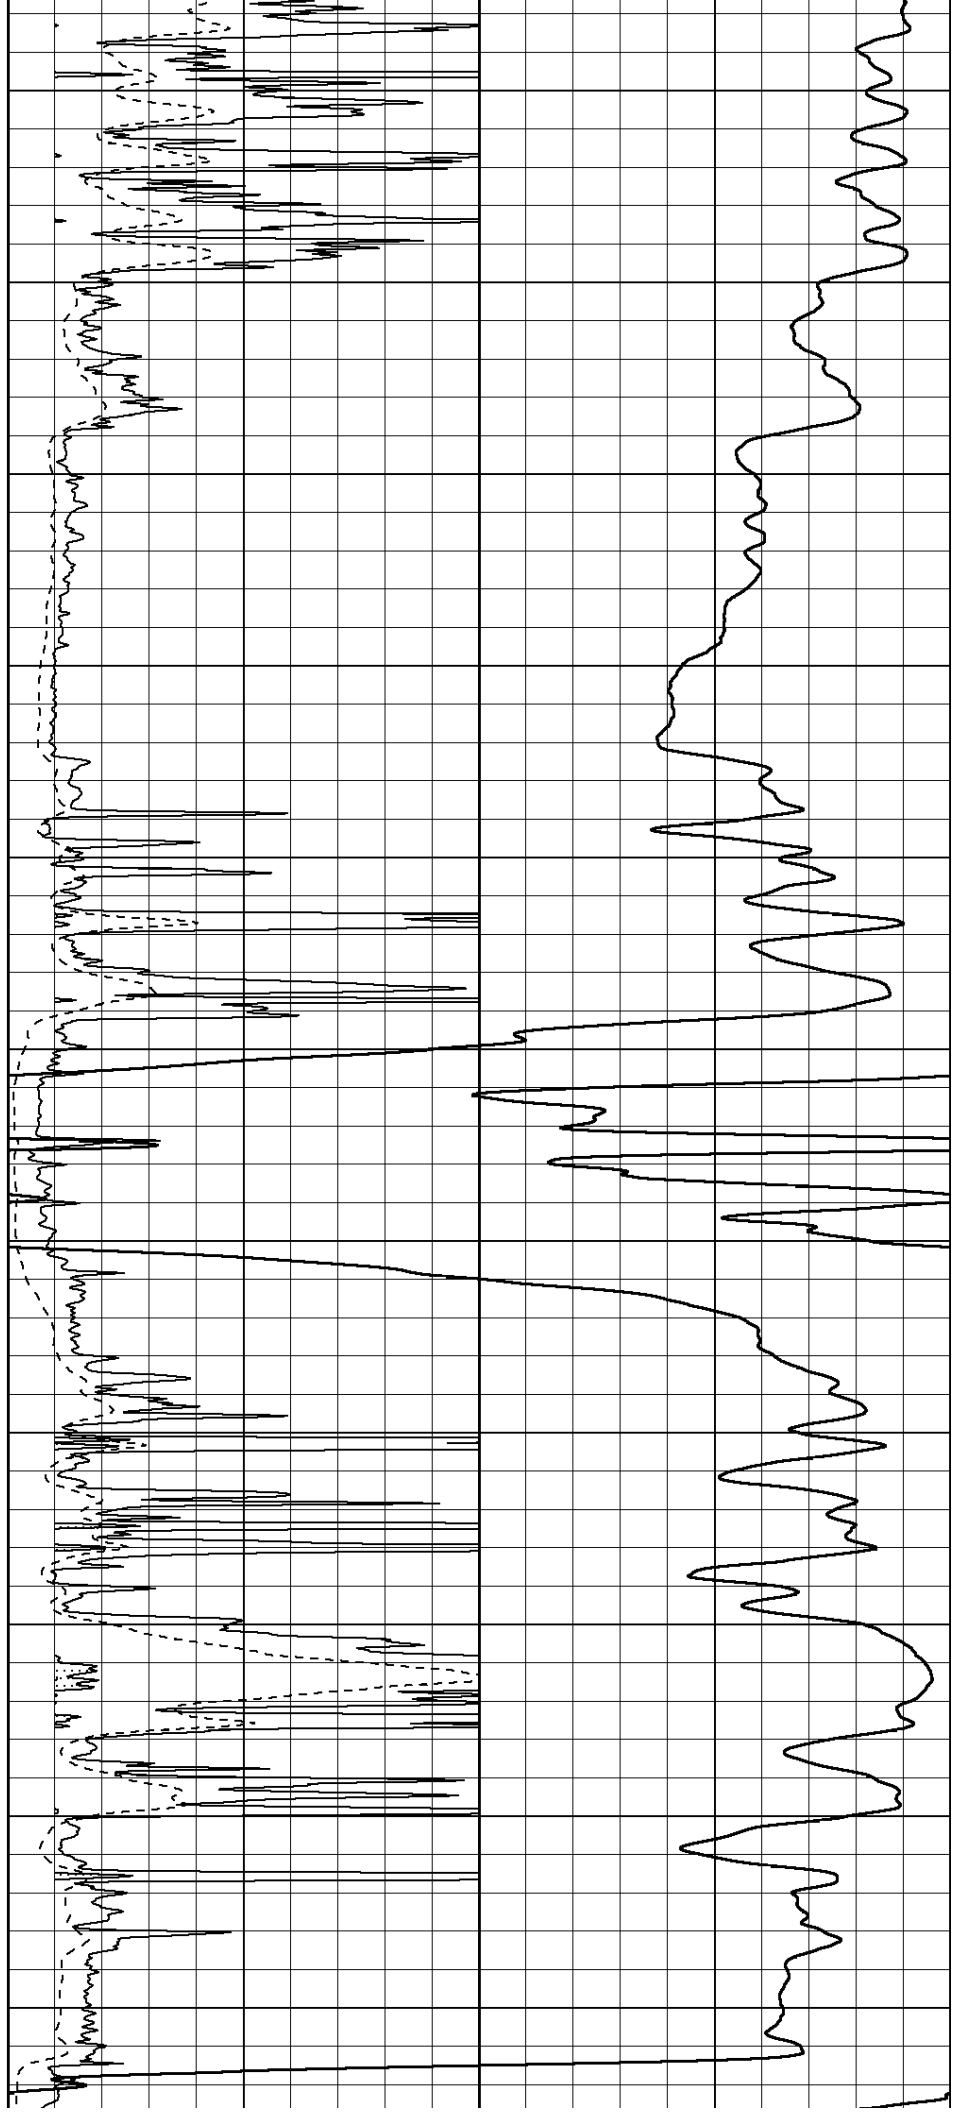

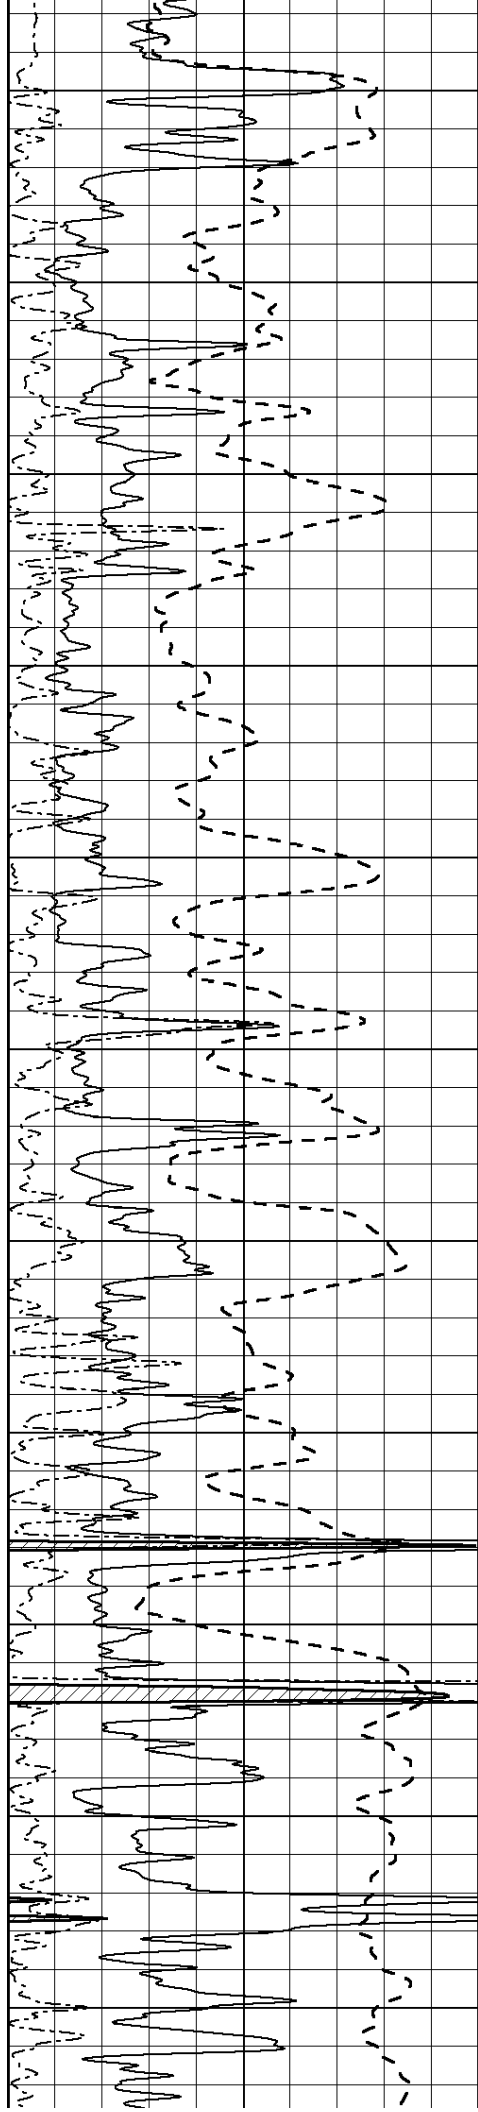

3750

3800

3850

3900

3950

4000



4050


4100

4150


4200

4250

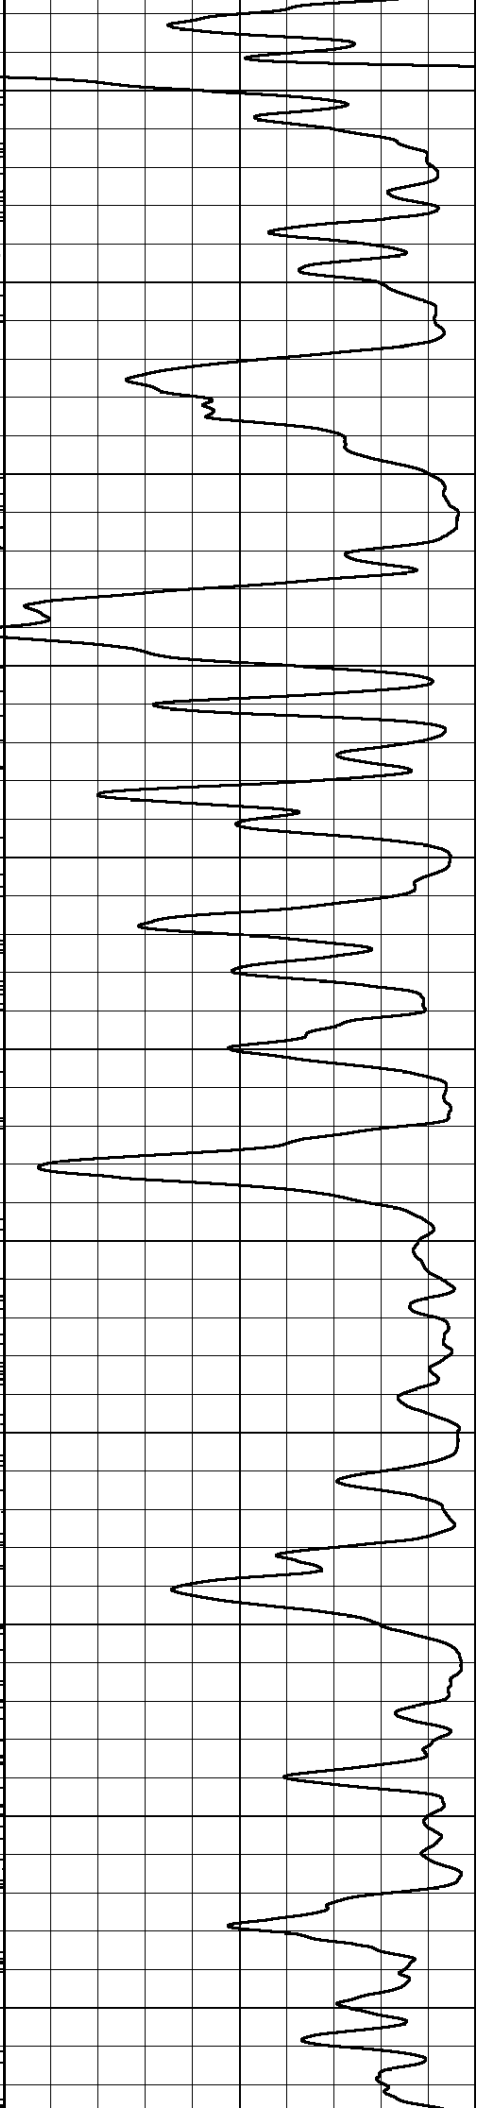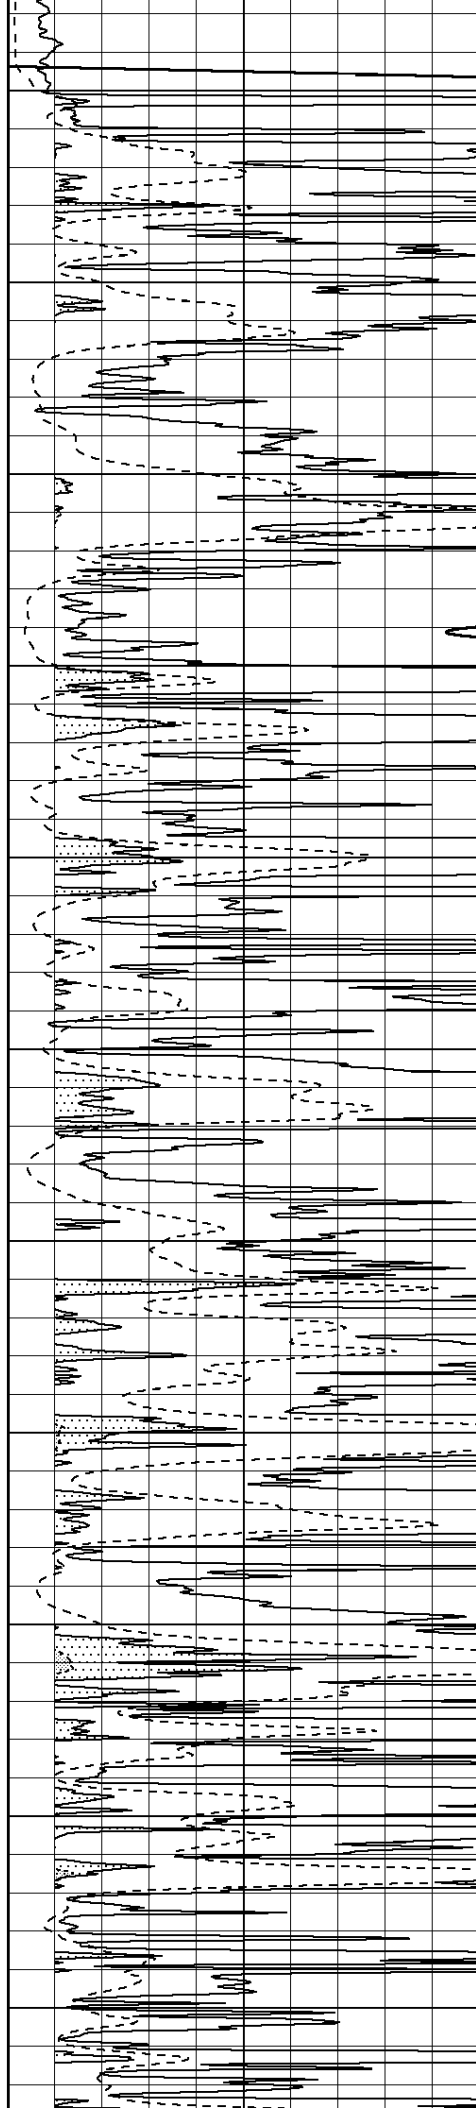


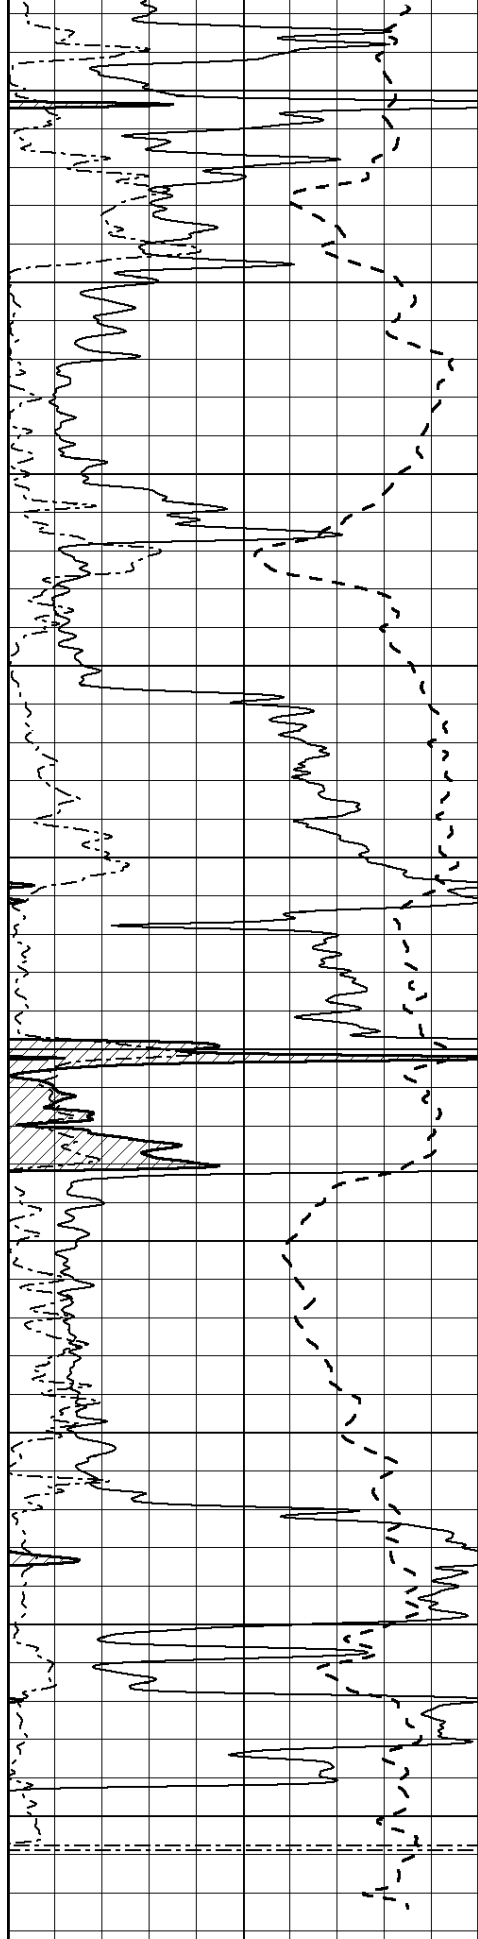

0 Gamma Ray (GAPI) 150
-100 SP (mV) 100
0 RWA (Ohm-m) 1

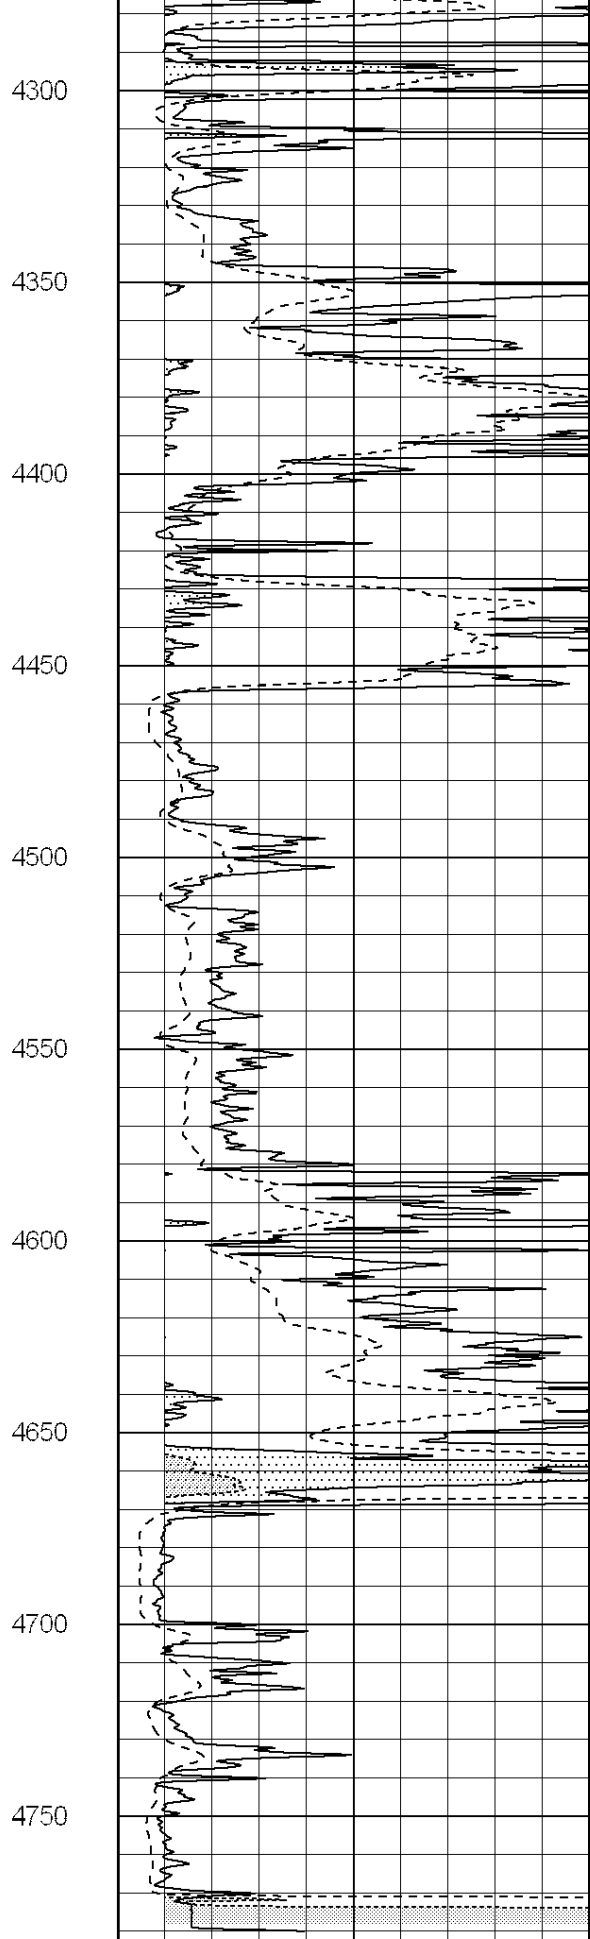

0 RLL3 (Ohm-m) 50
0 RILD (Ohm-m) 50
1000 CILD (mmho/m) 0
50 RILD X10 (Ohm-m) 500

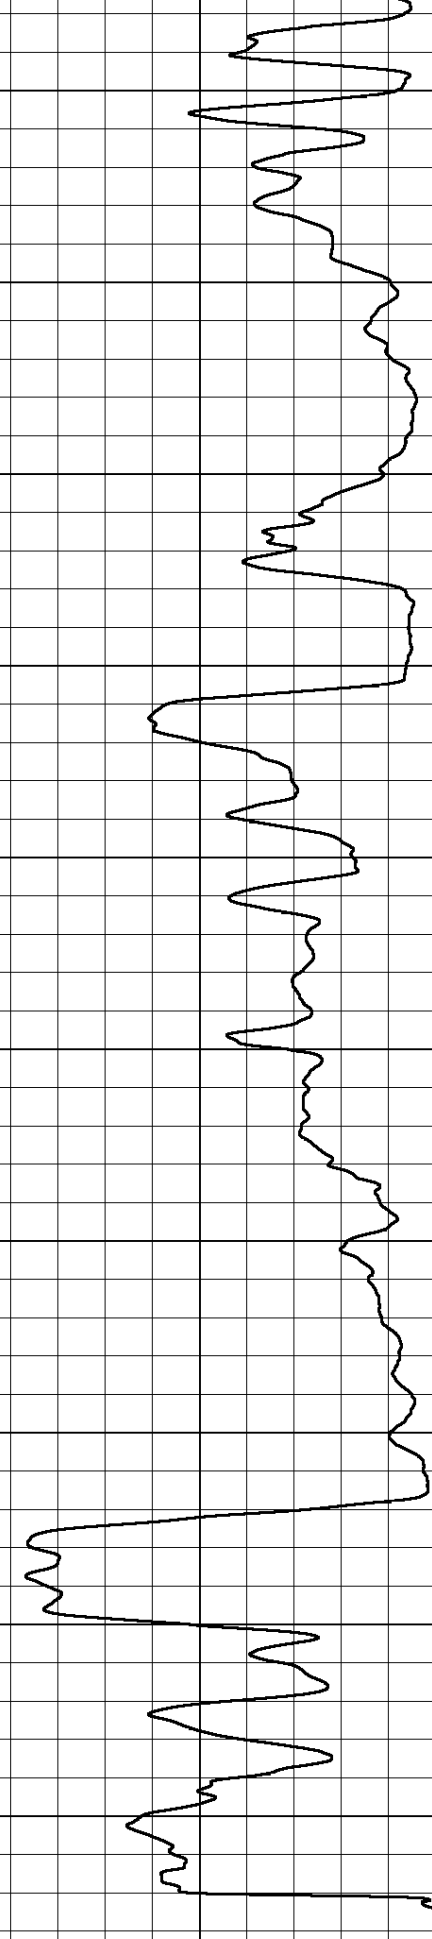

0






MAIN SECTION

Database File: 3601pe.db
Dataset Pathname: pass3.5
Presentation Format: _dil
Dataset Creation: Mon Mar 11 10:07:26 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

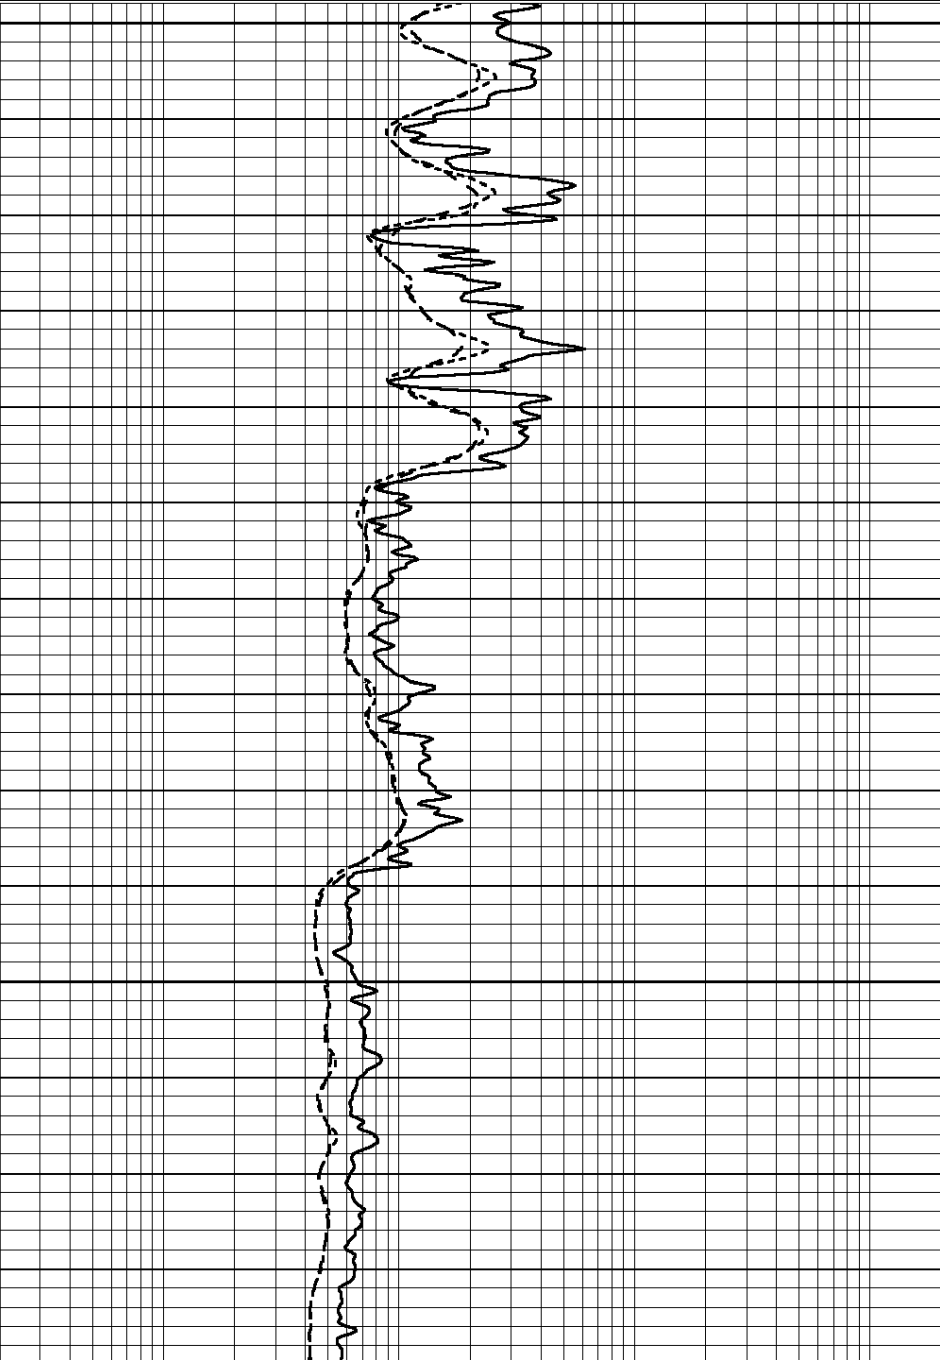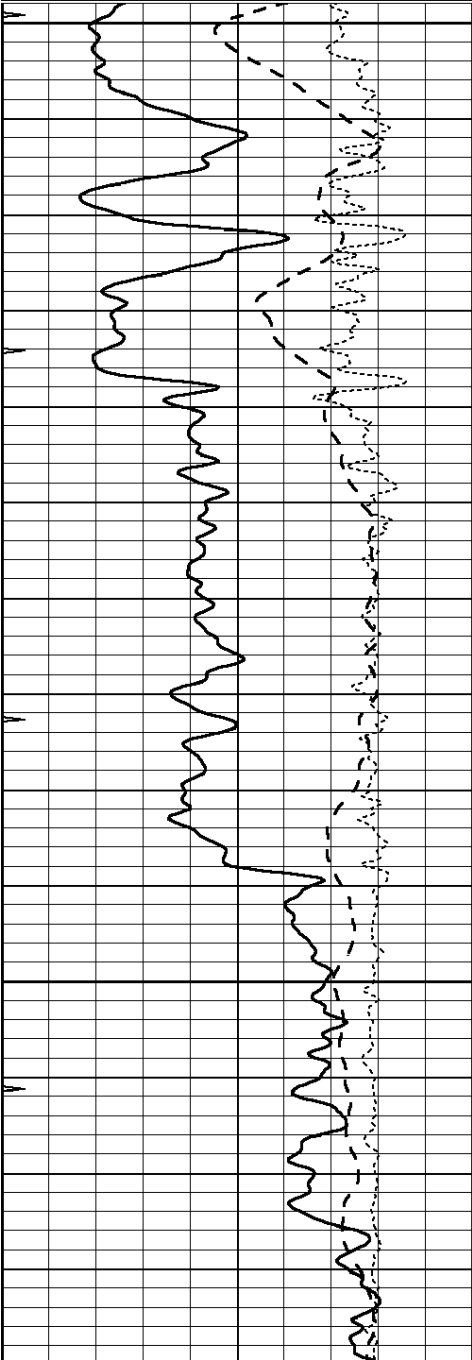

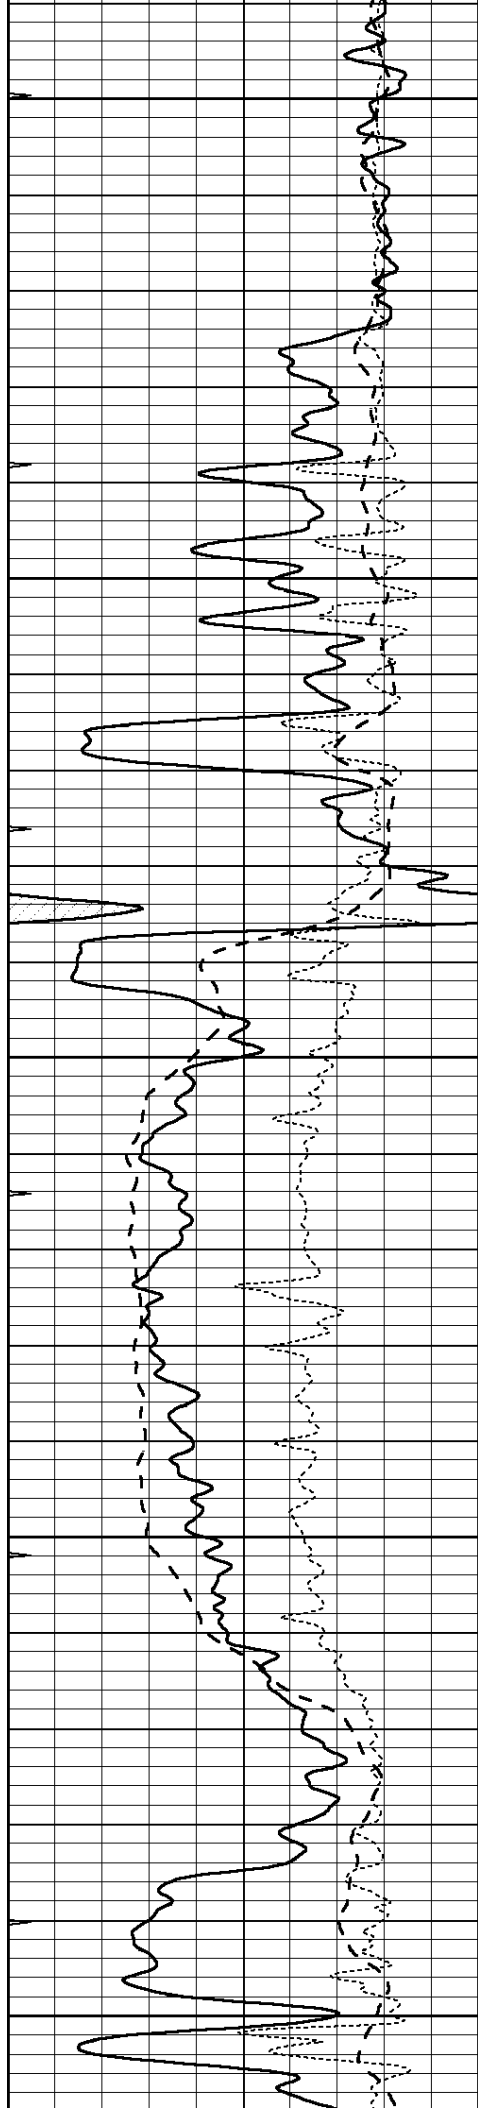


3350


3400

3450

3500

3550

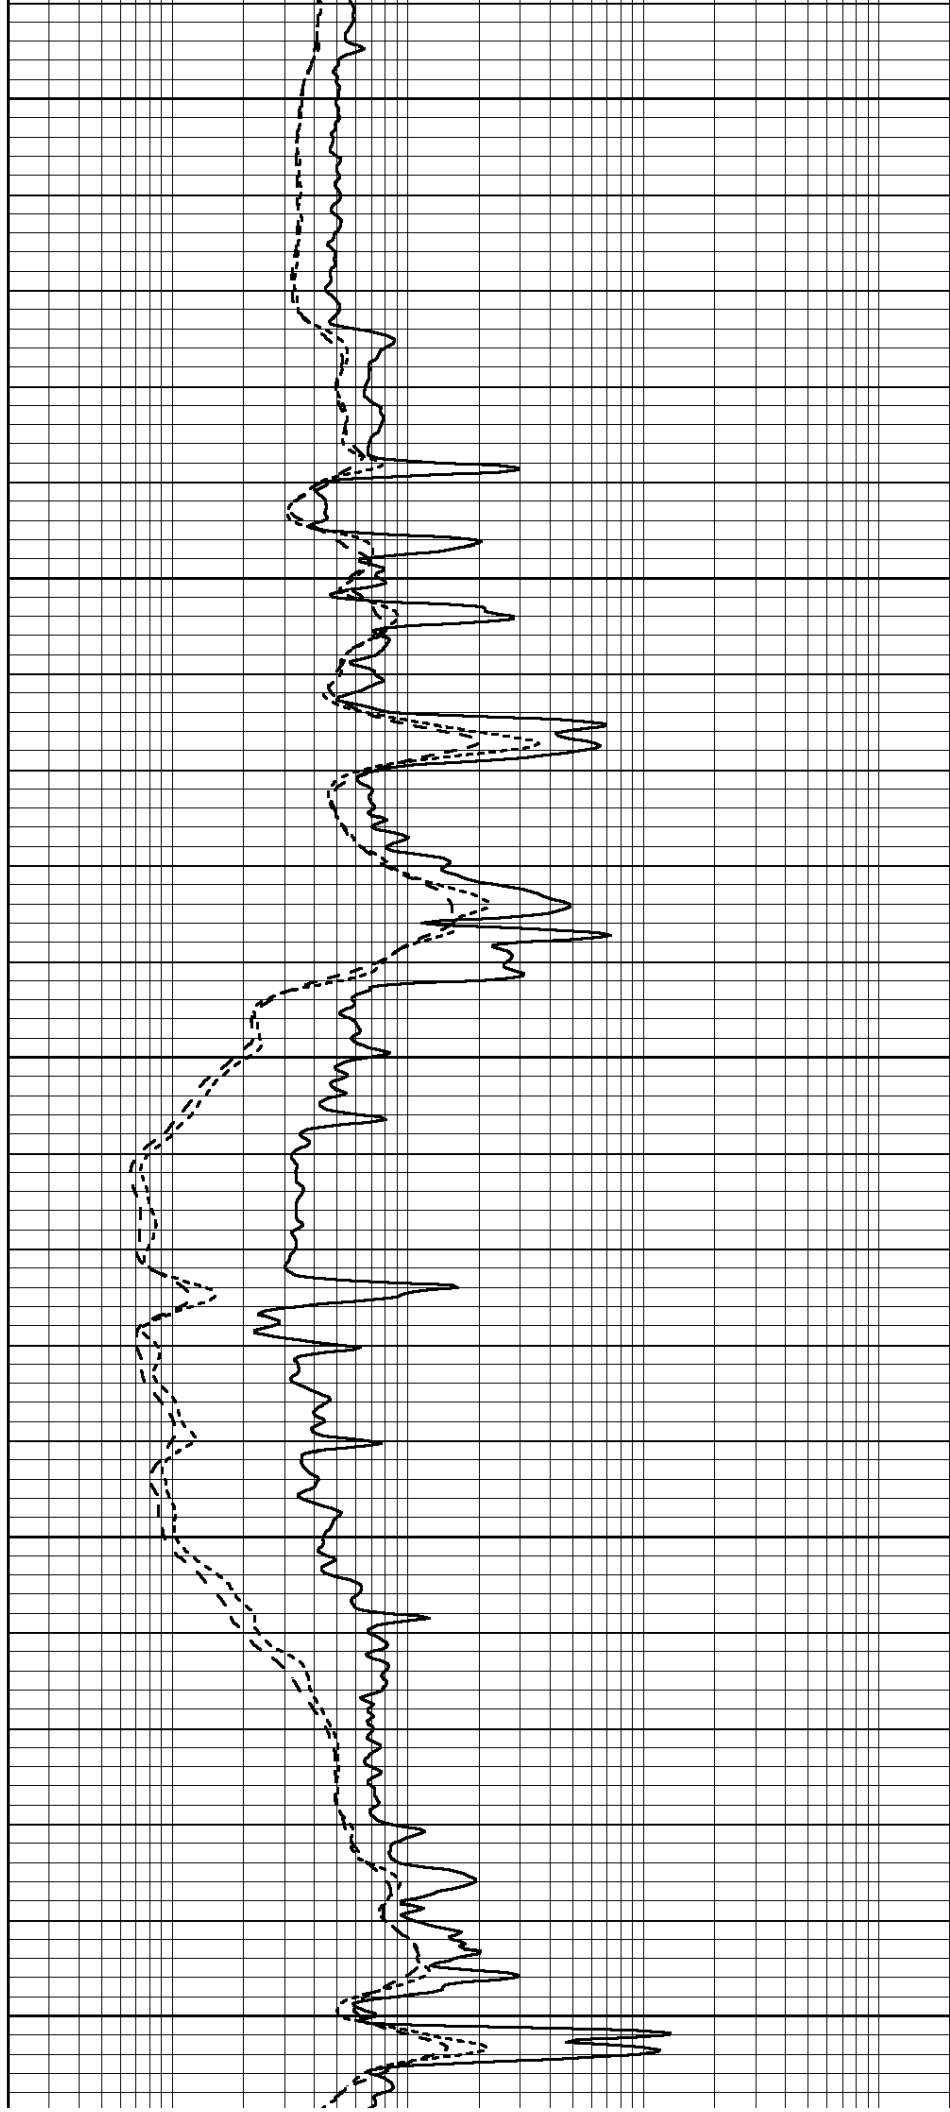

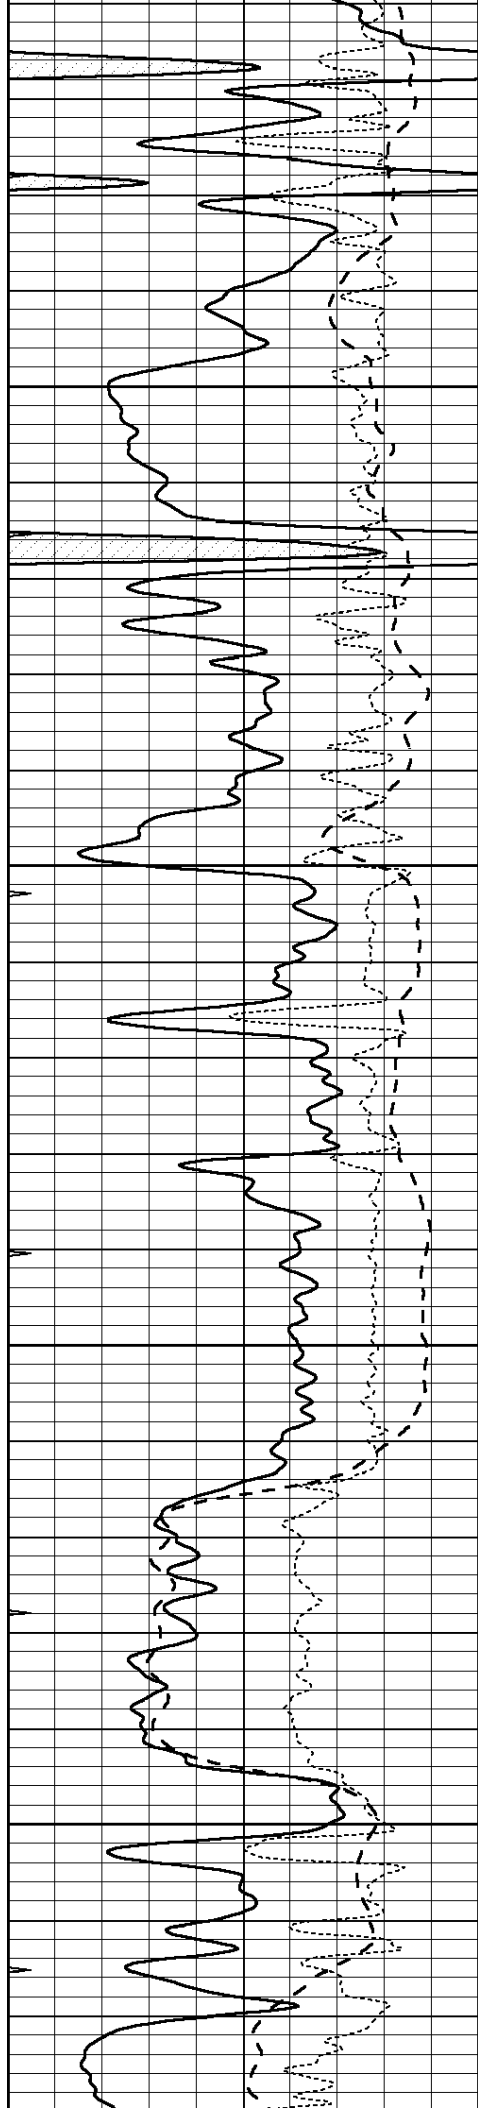



3600

3650

3700

3750

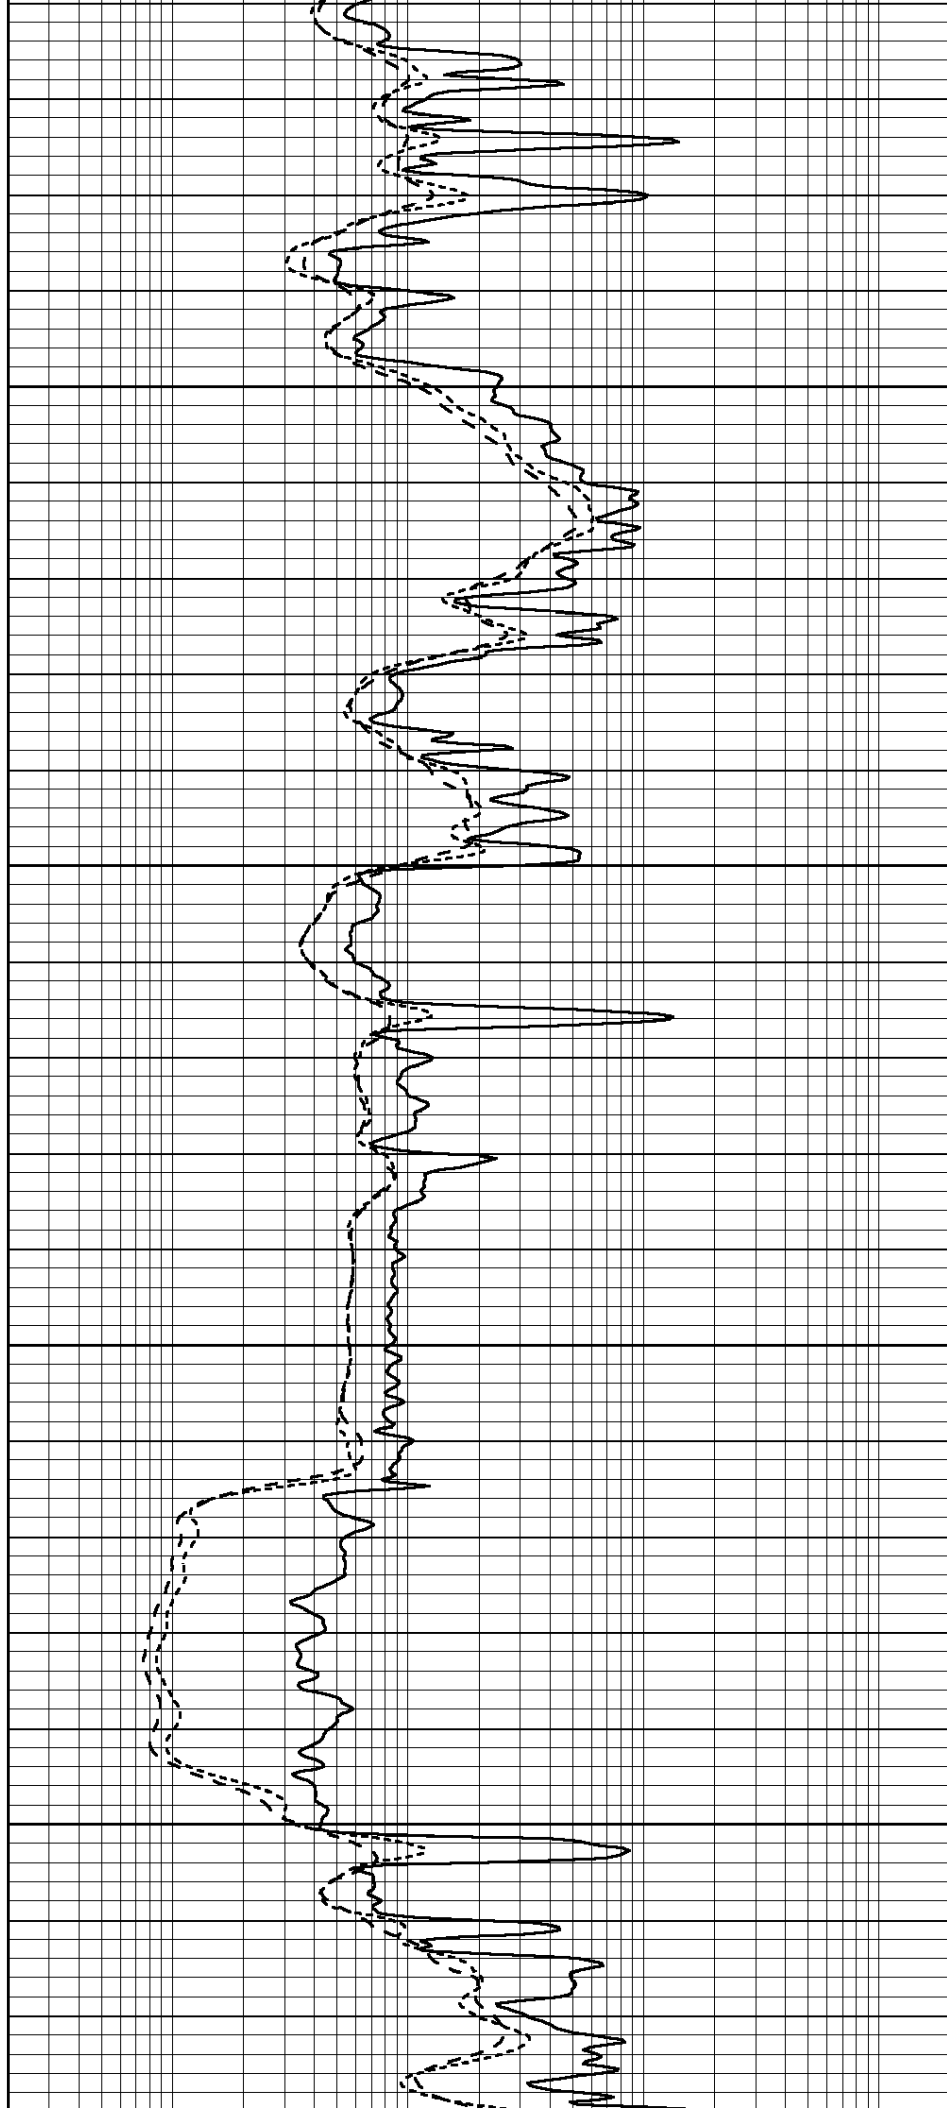

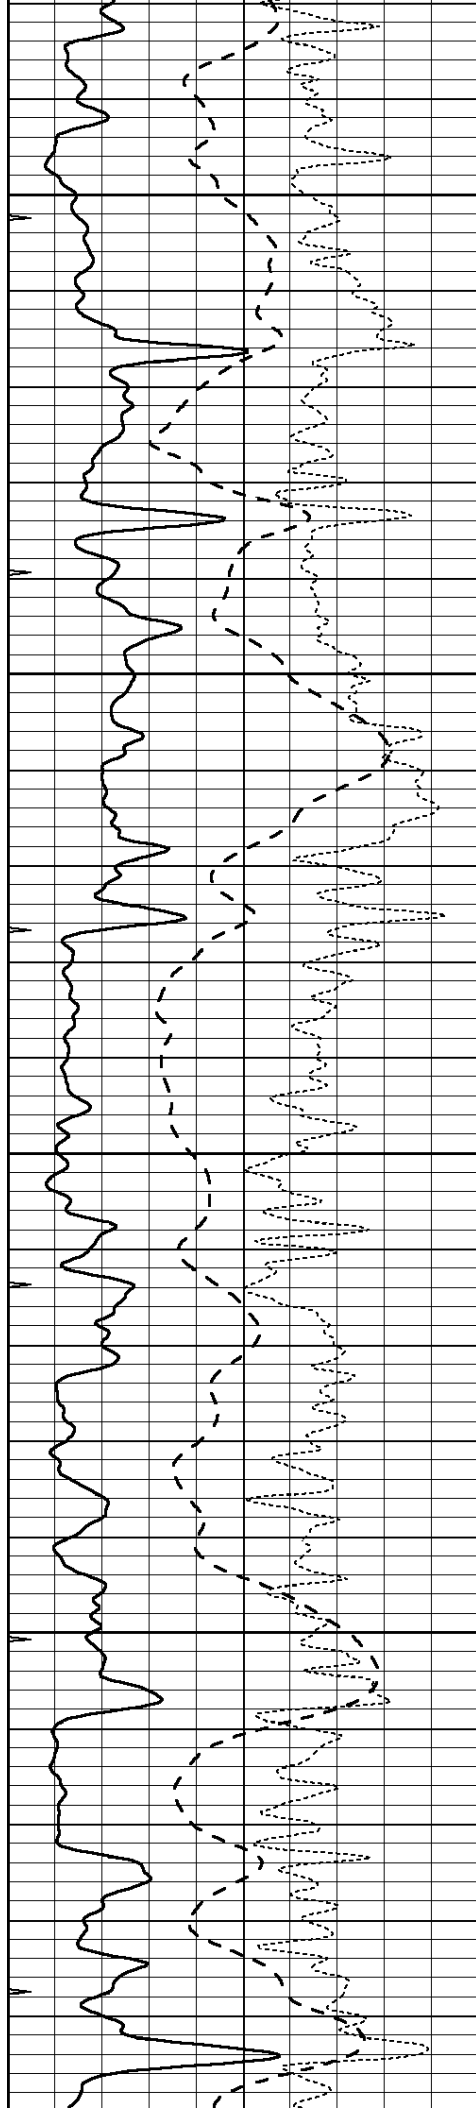


3800


3850

3900

3950

4000

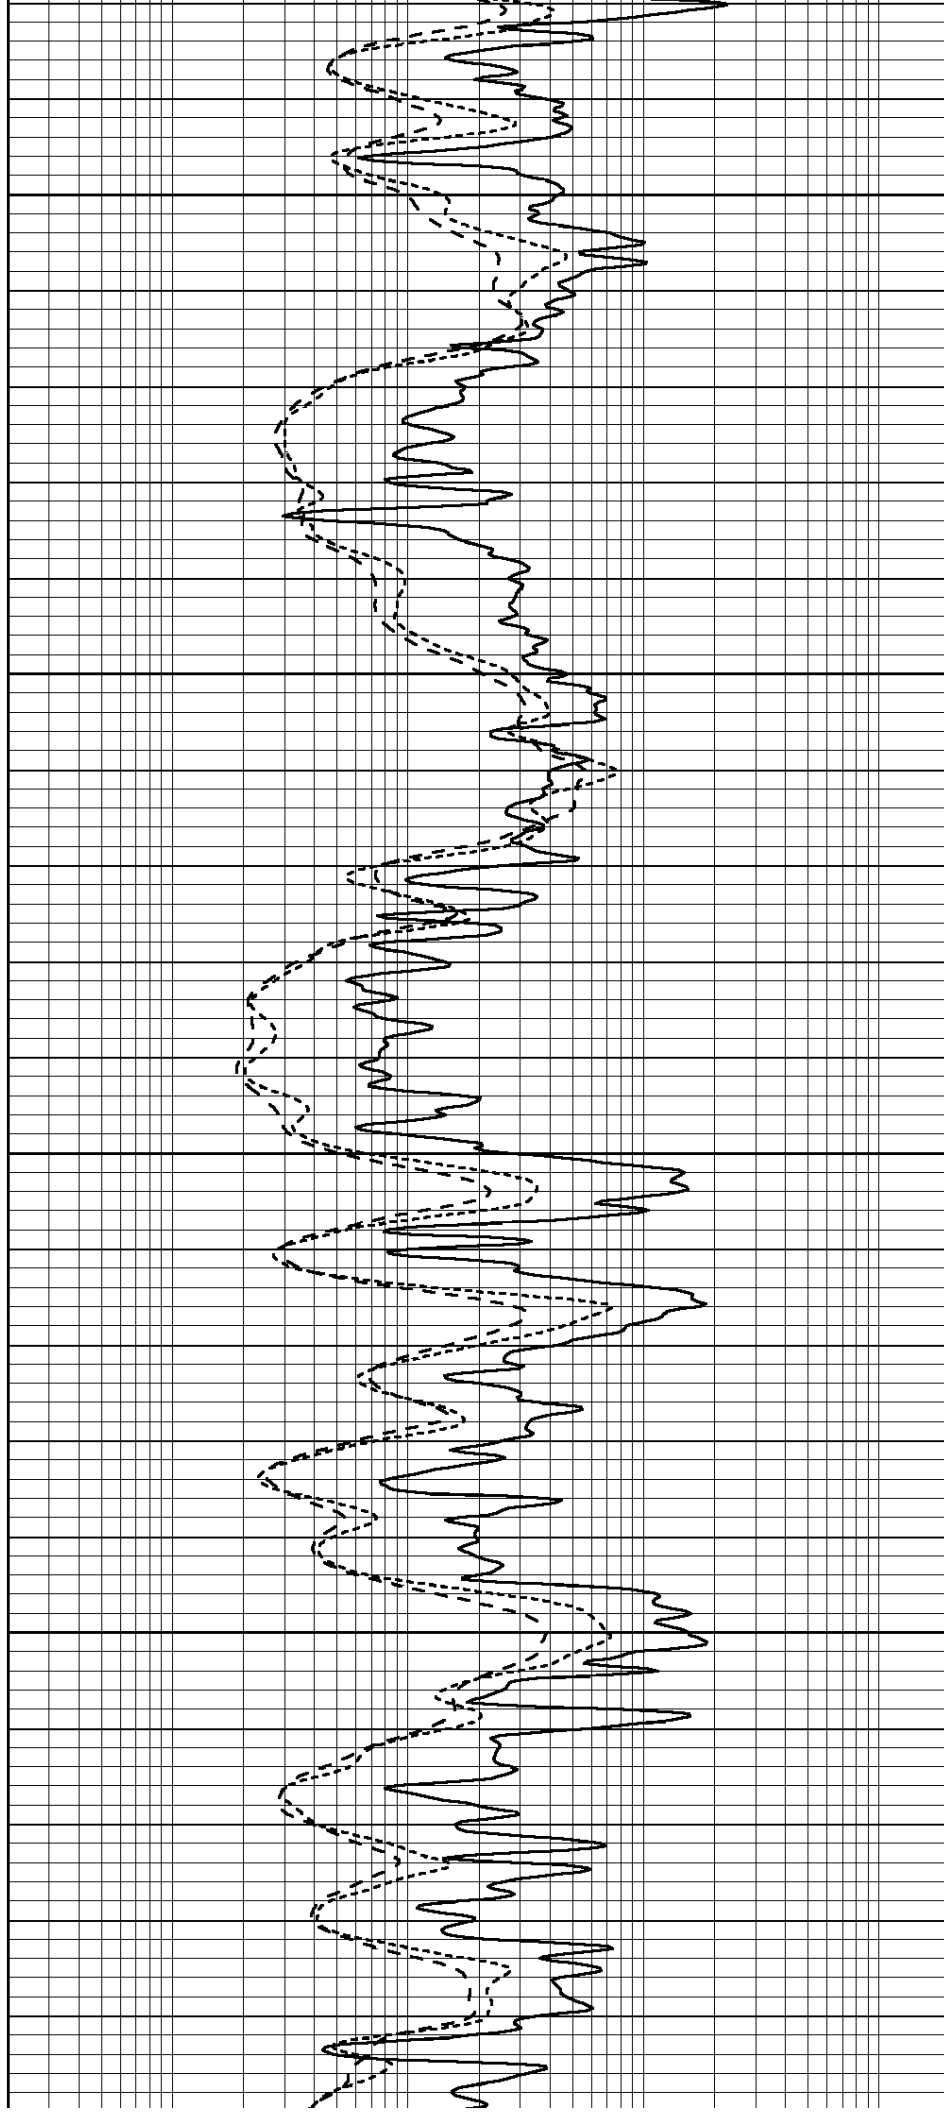

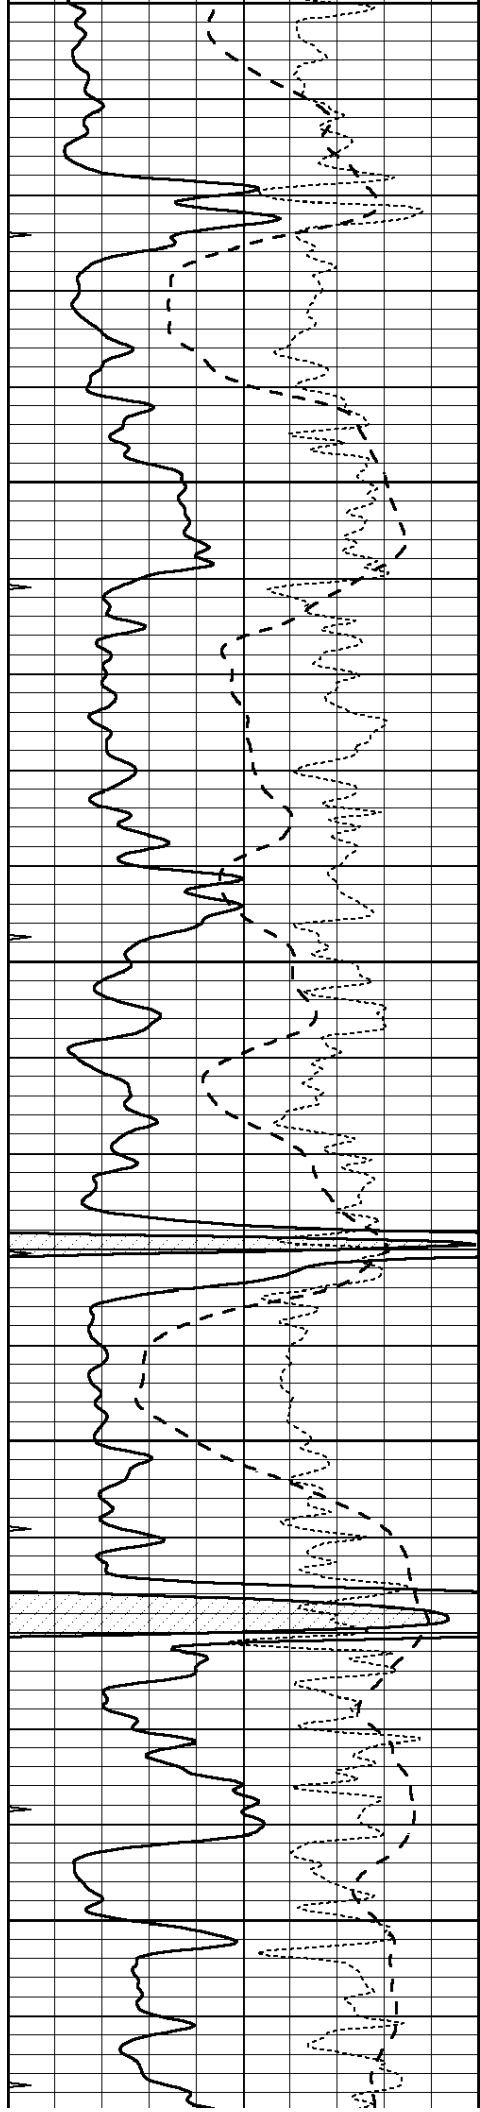


4000


4050

4100

4150

4200

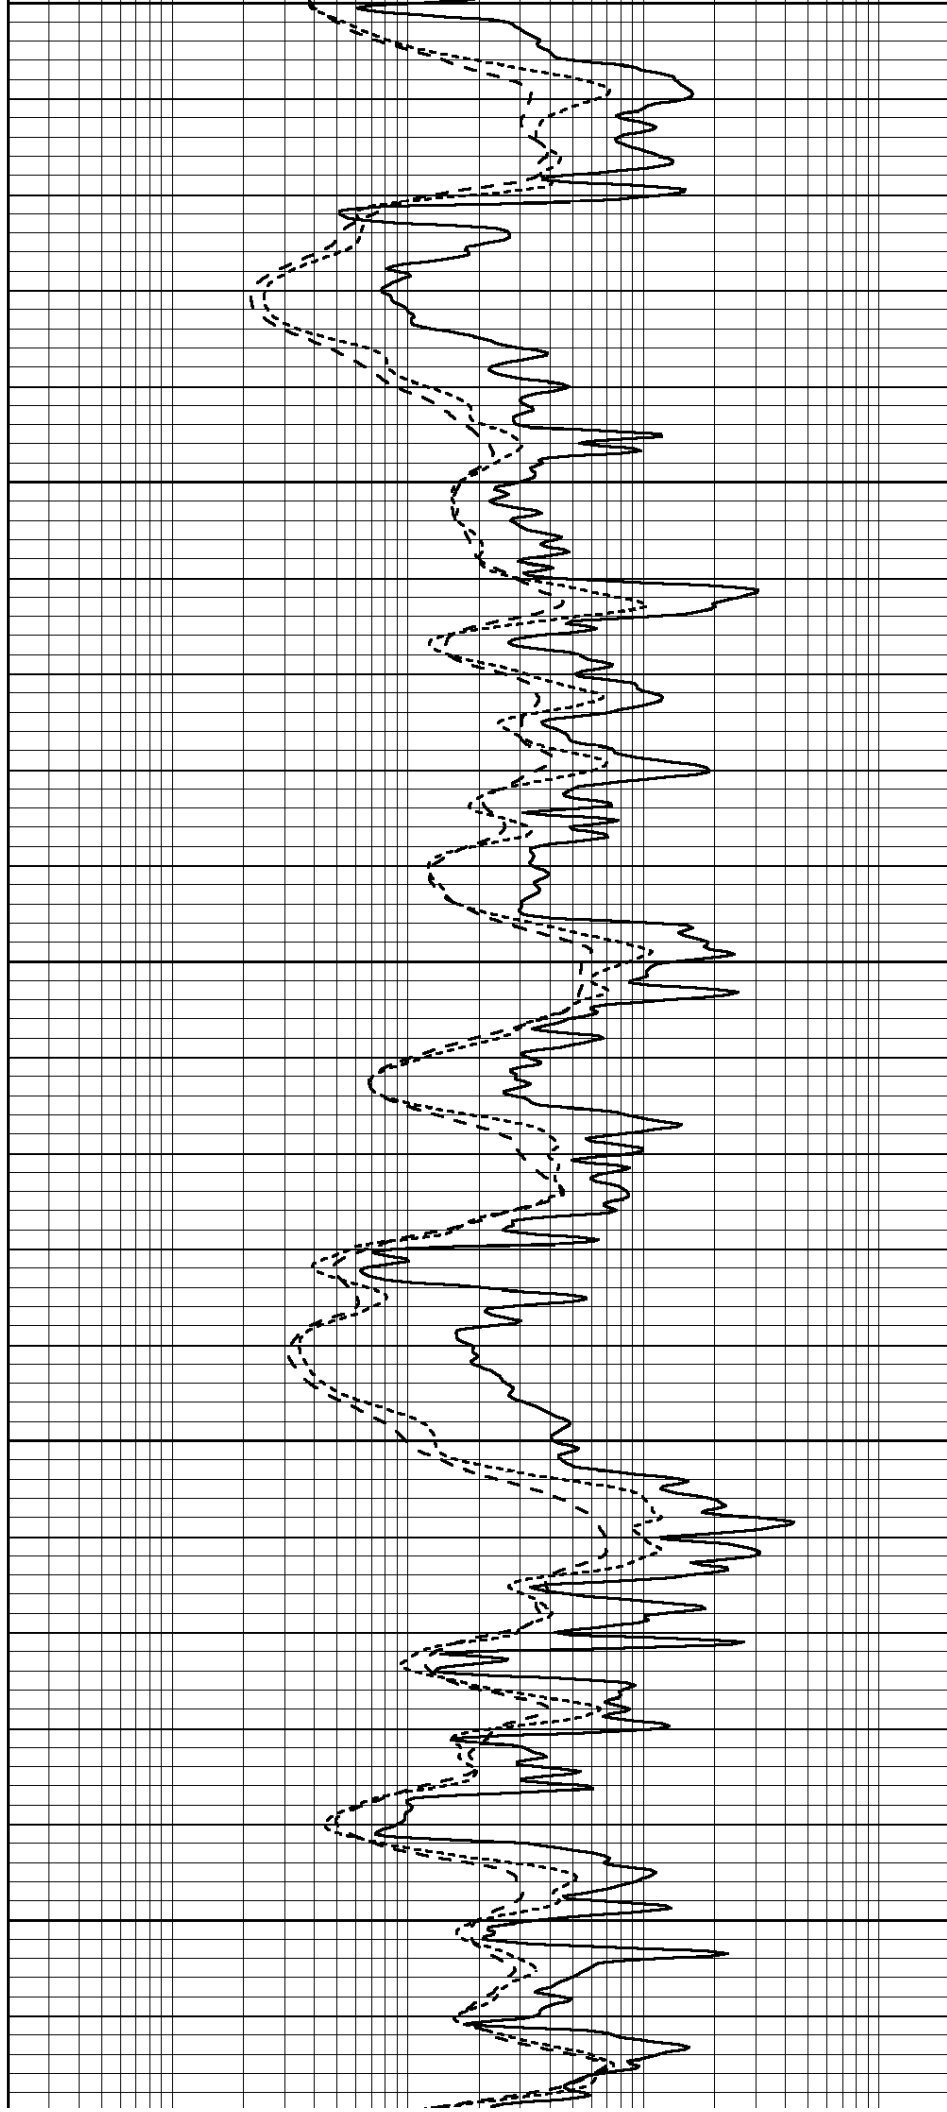

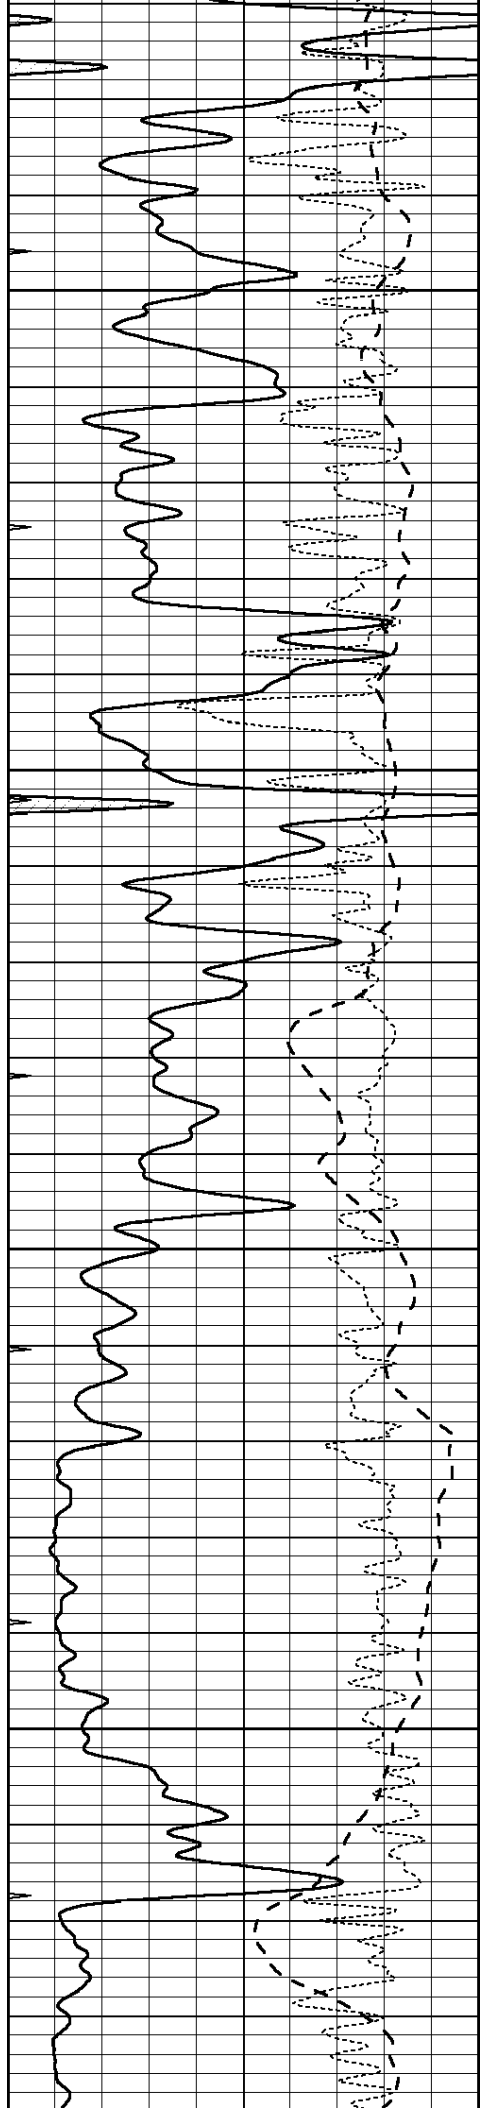



4250

4300

4350

4400

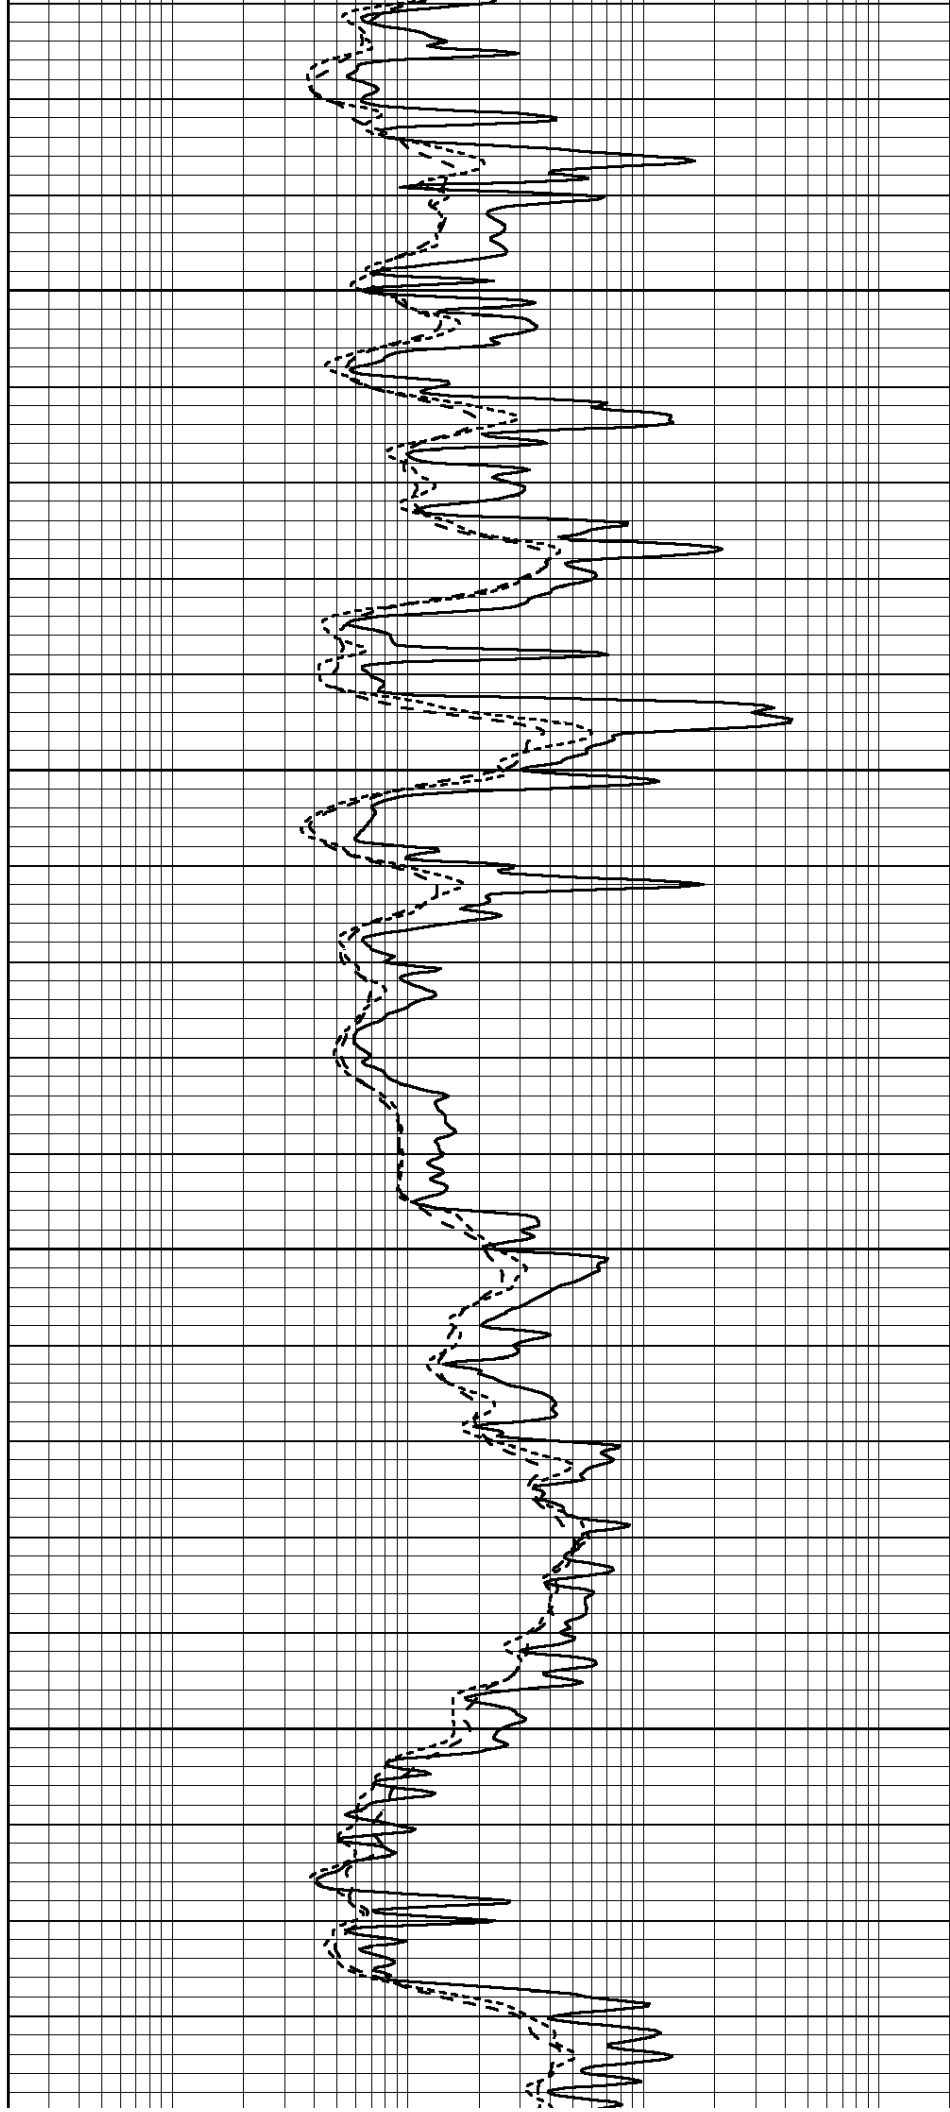

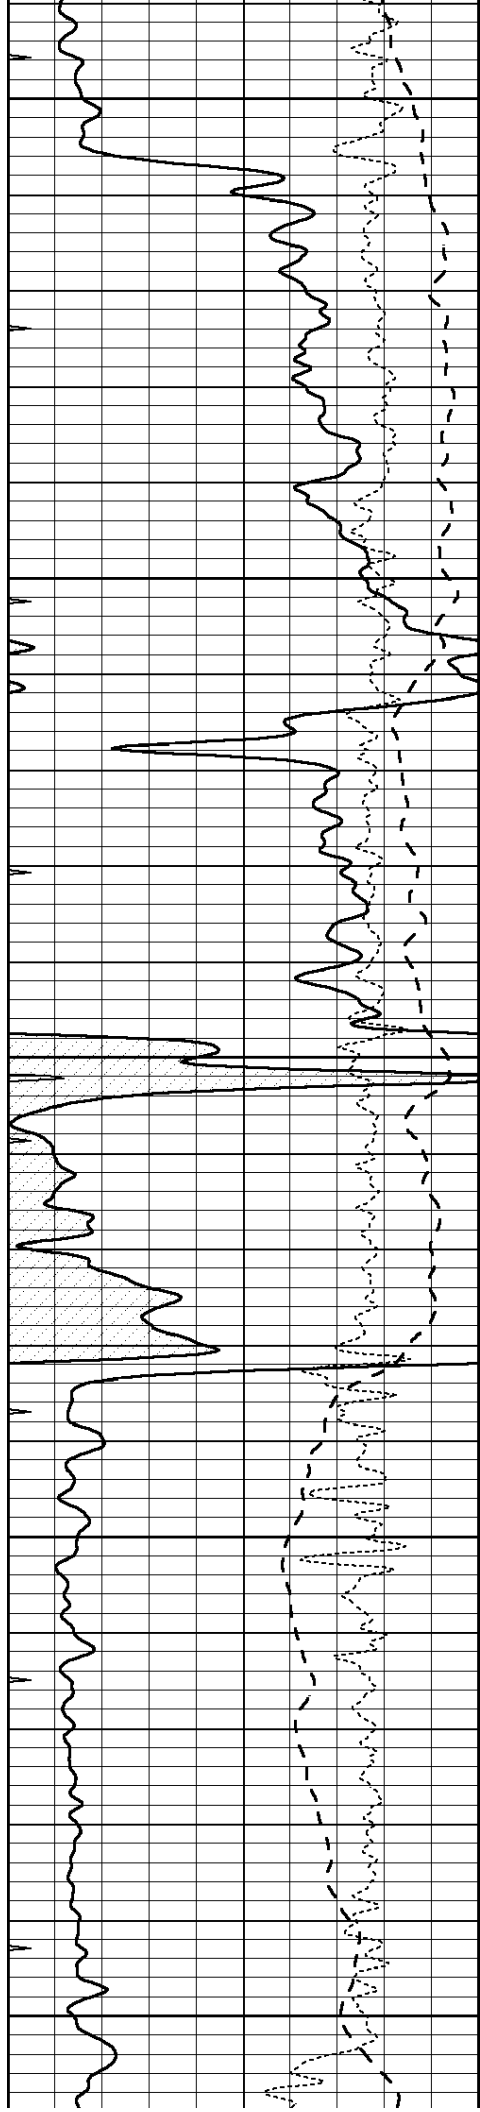


4450


4500

4550


4600

4650

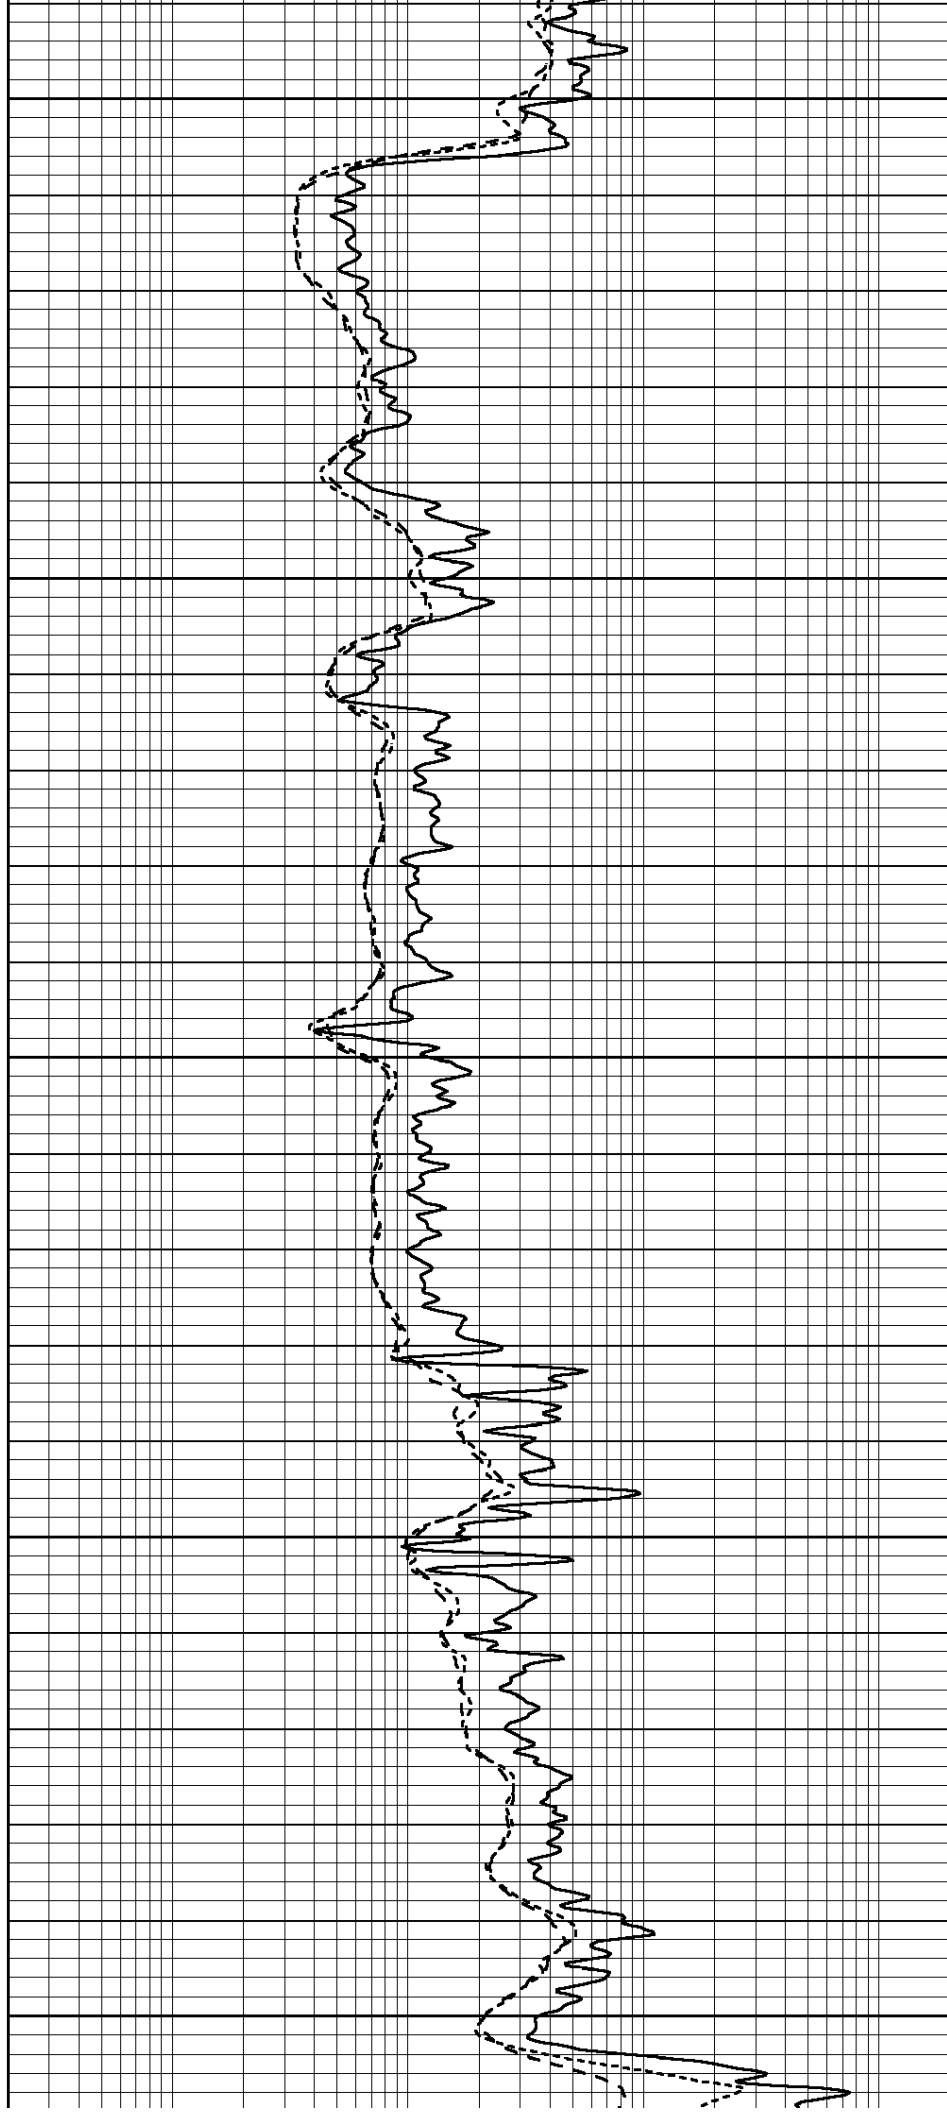


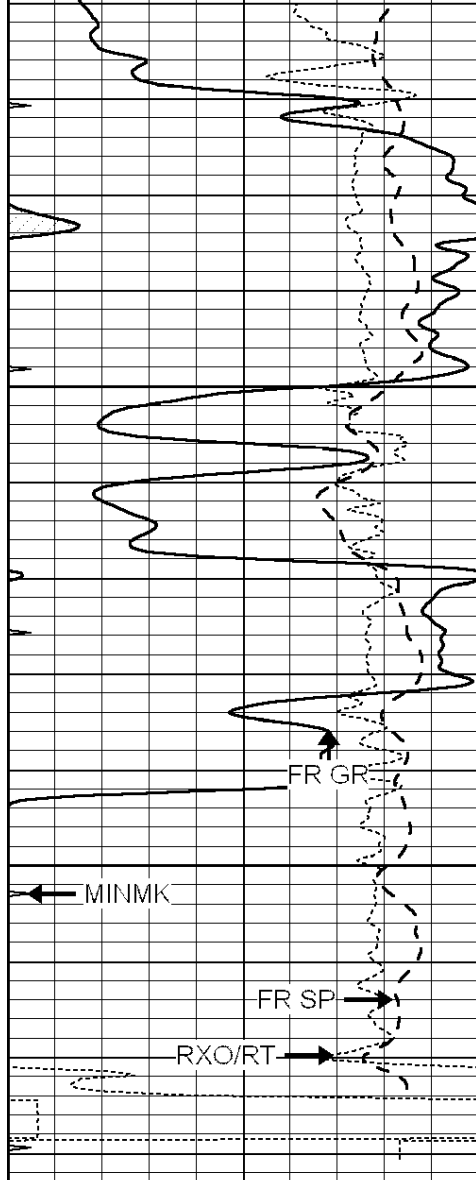

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

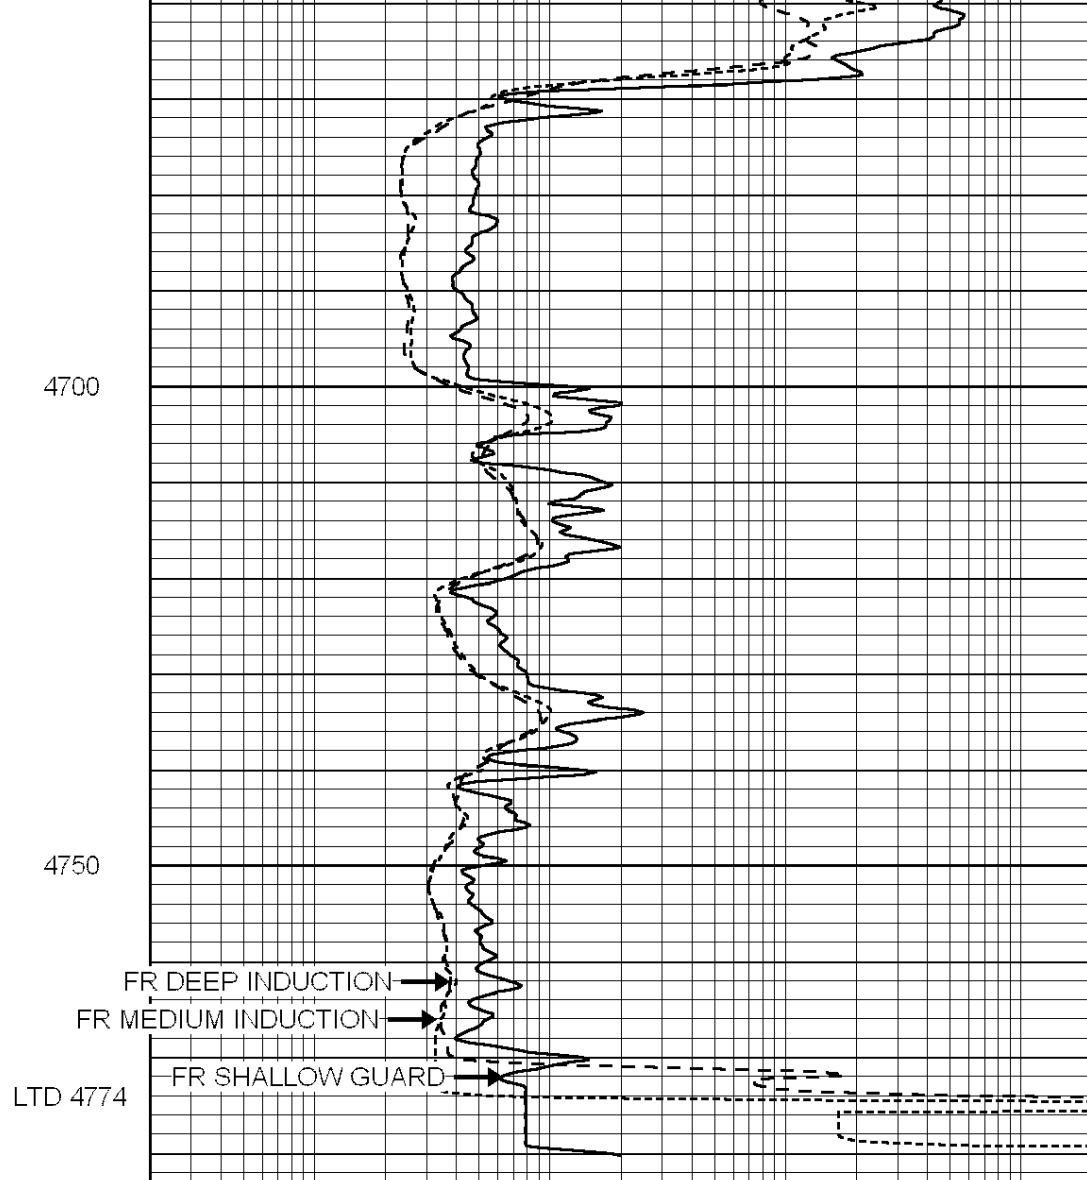

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

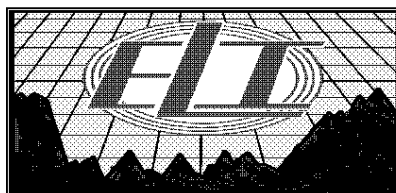


REPEAT SECTION

Database File: 3601pe.db
 Dataset Pathname: pass2.3
 Presentation Format: _dil
 Dataset Creation: Mon Mar 11 09:05:42 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

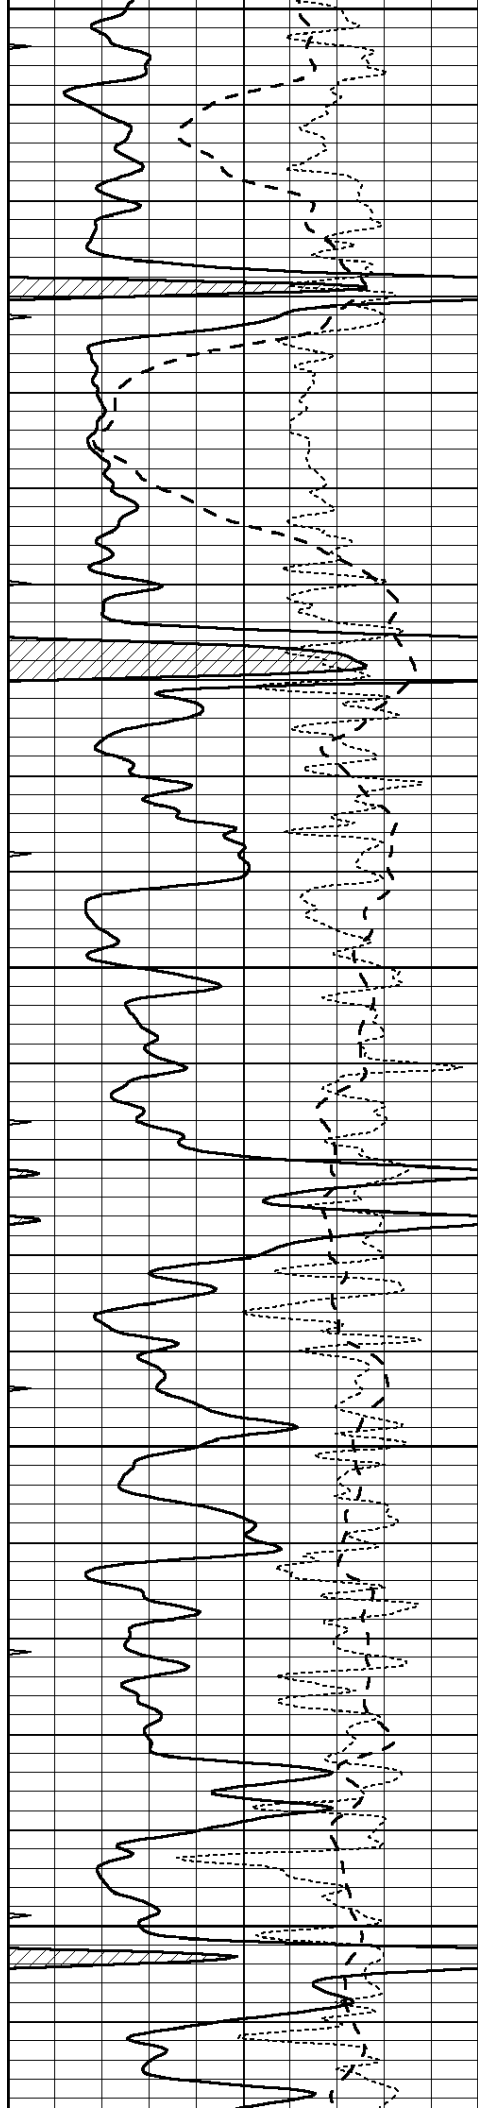


4100


4150

4200

4250

4300

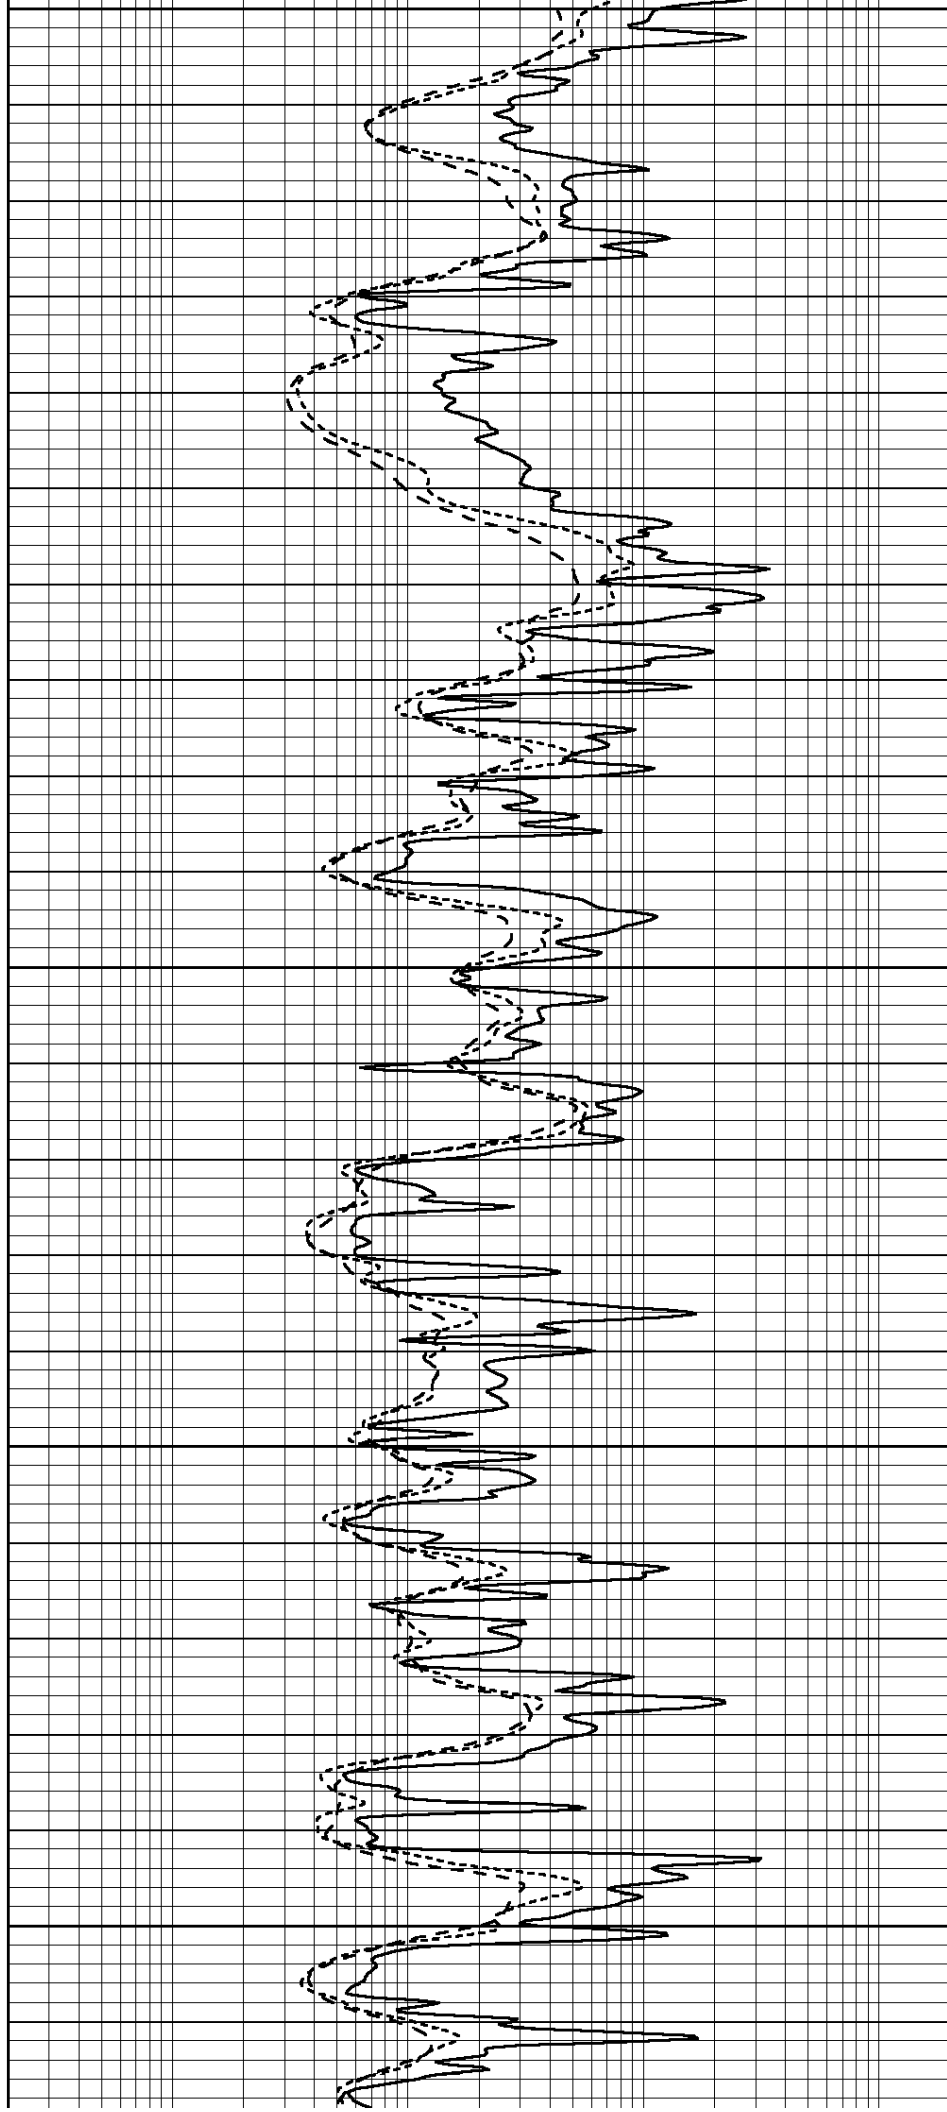

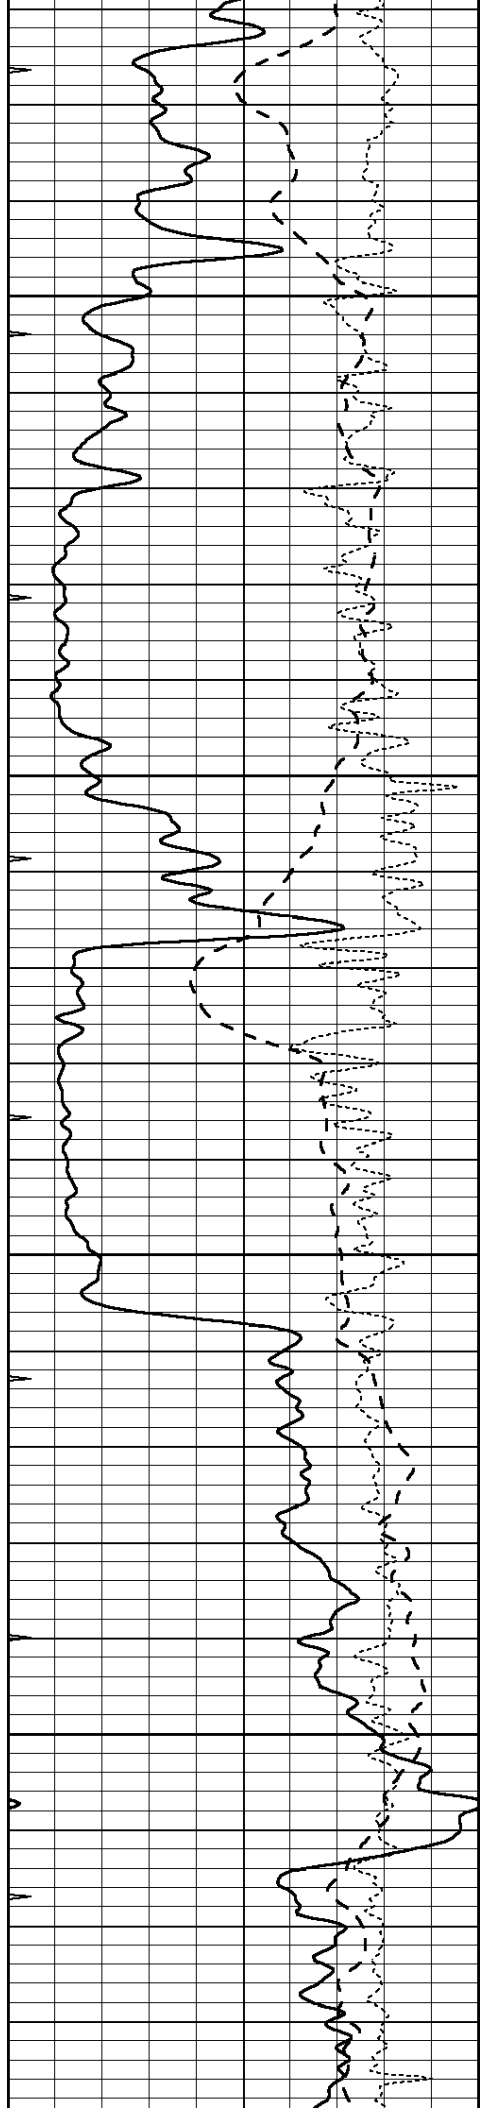



4350

4400

4450

4500

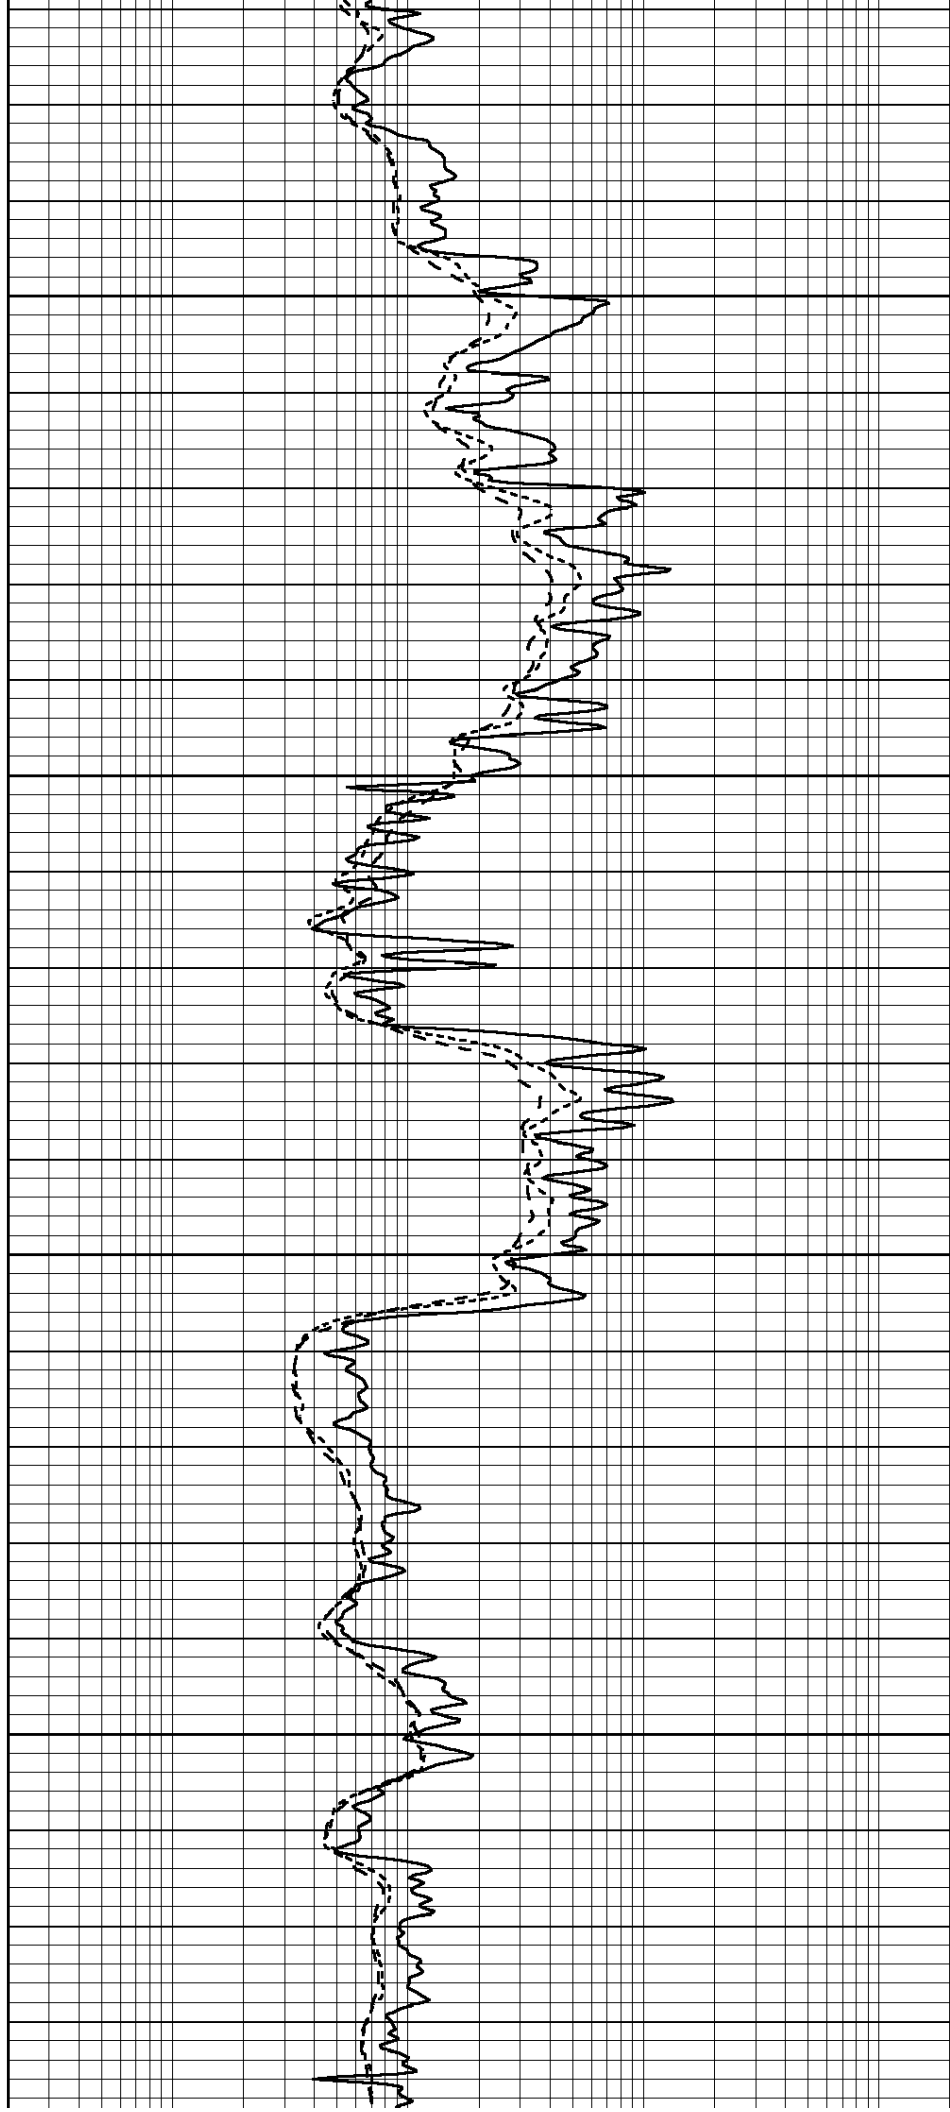

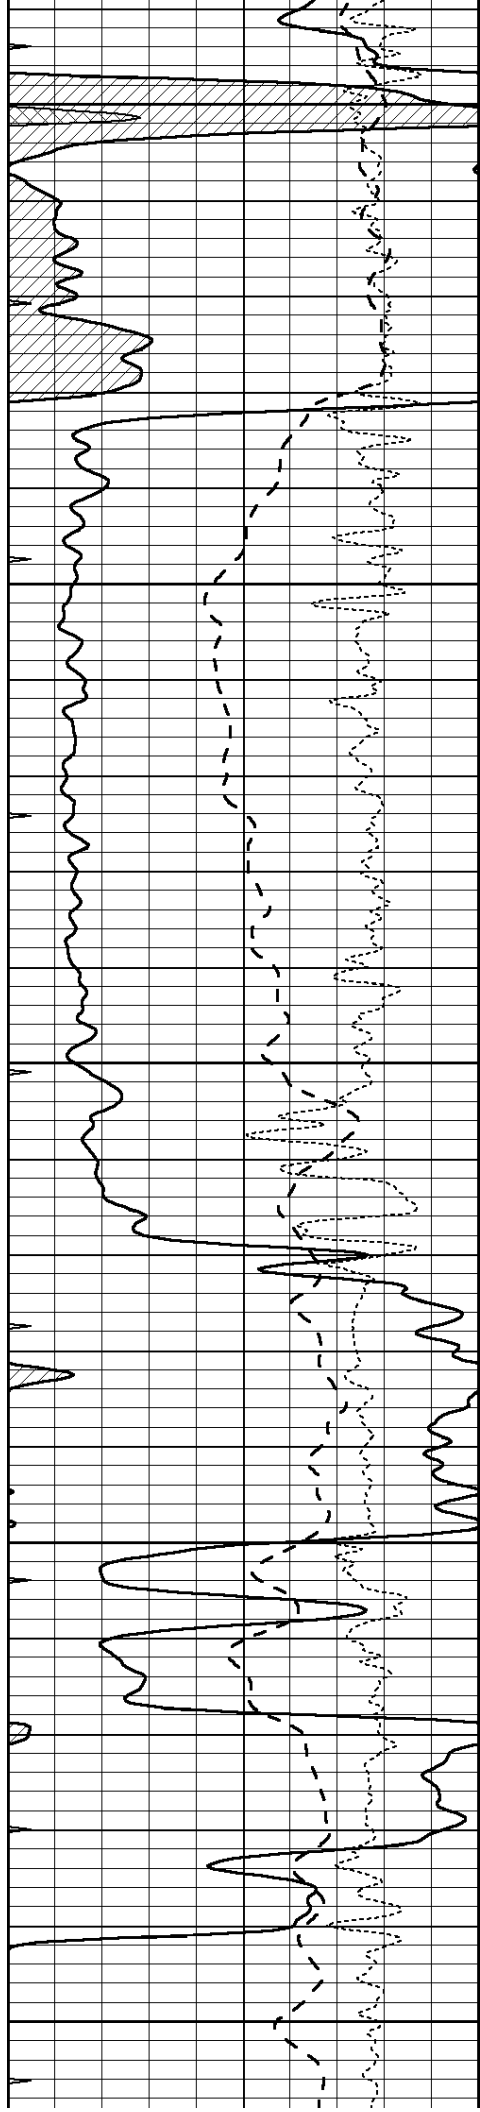


4550


4600

4650

4700

4750

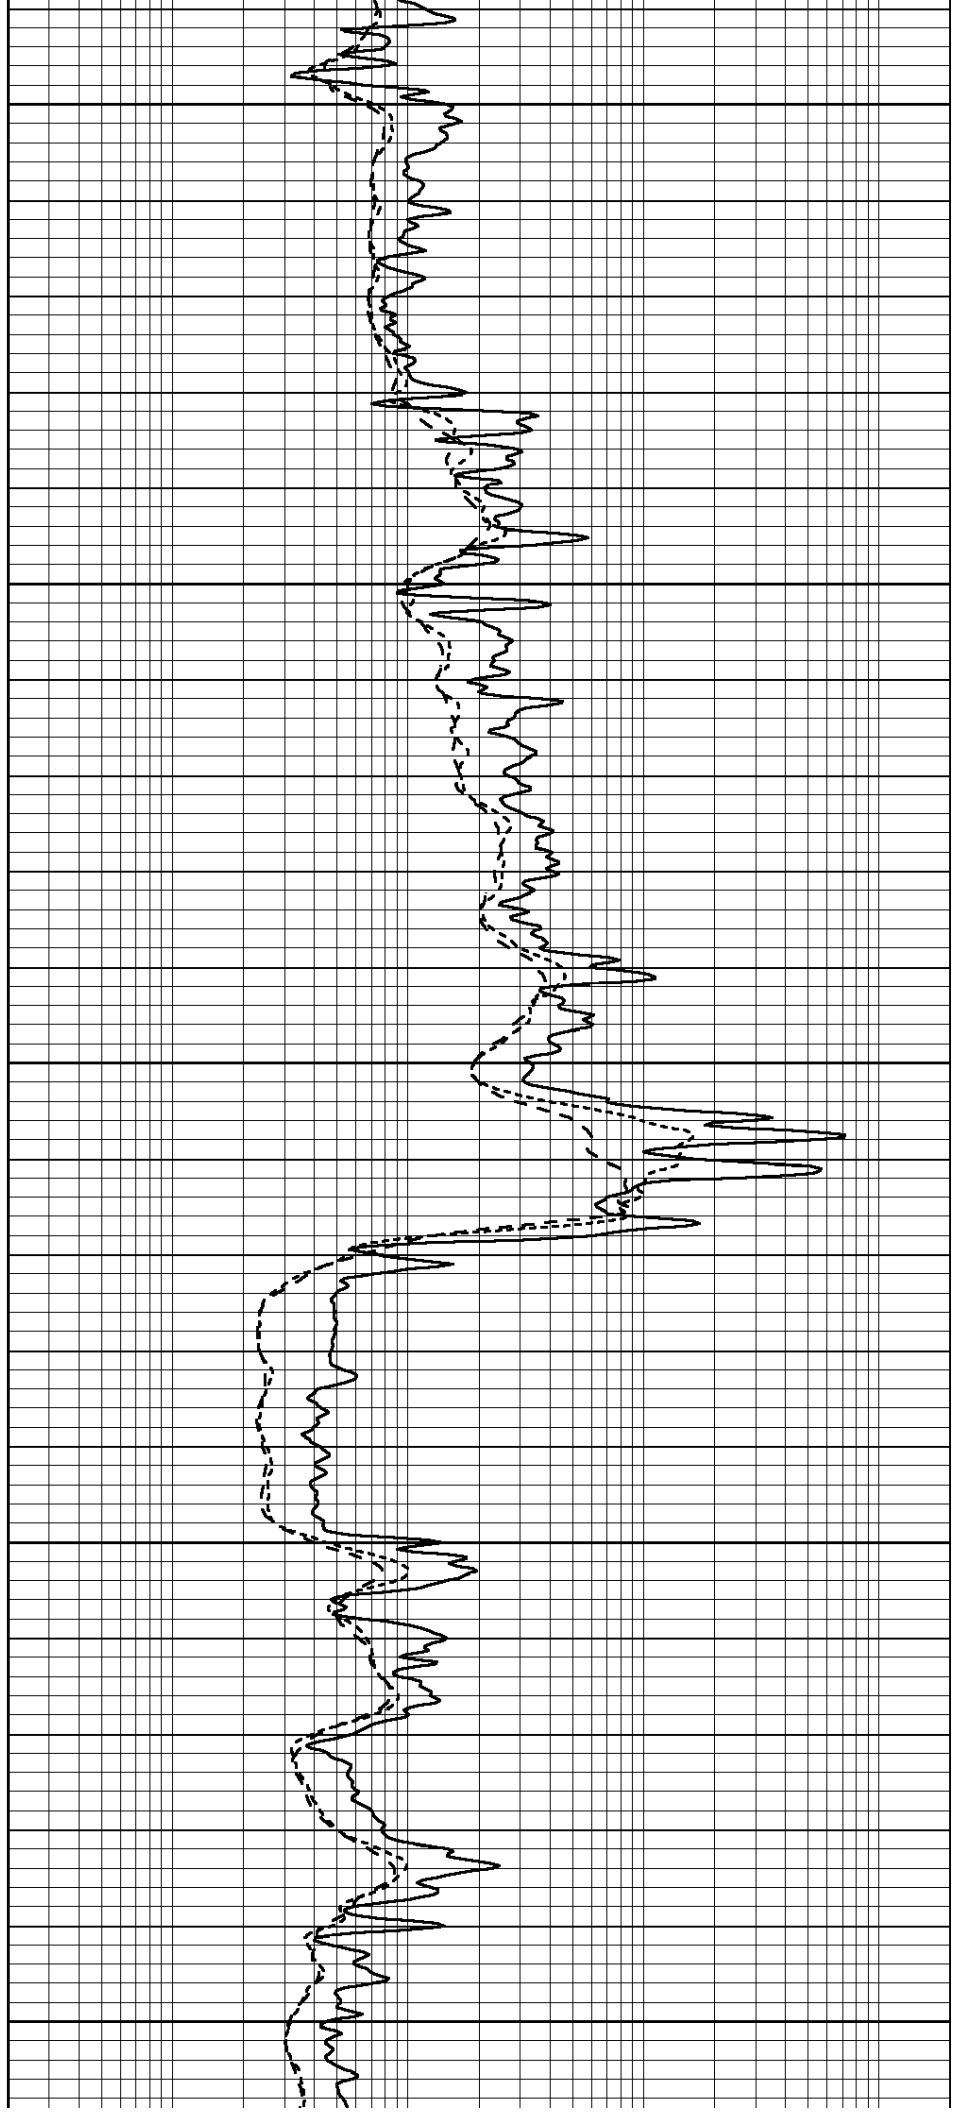

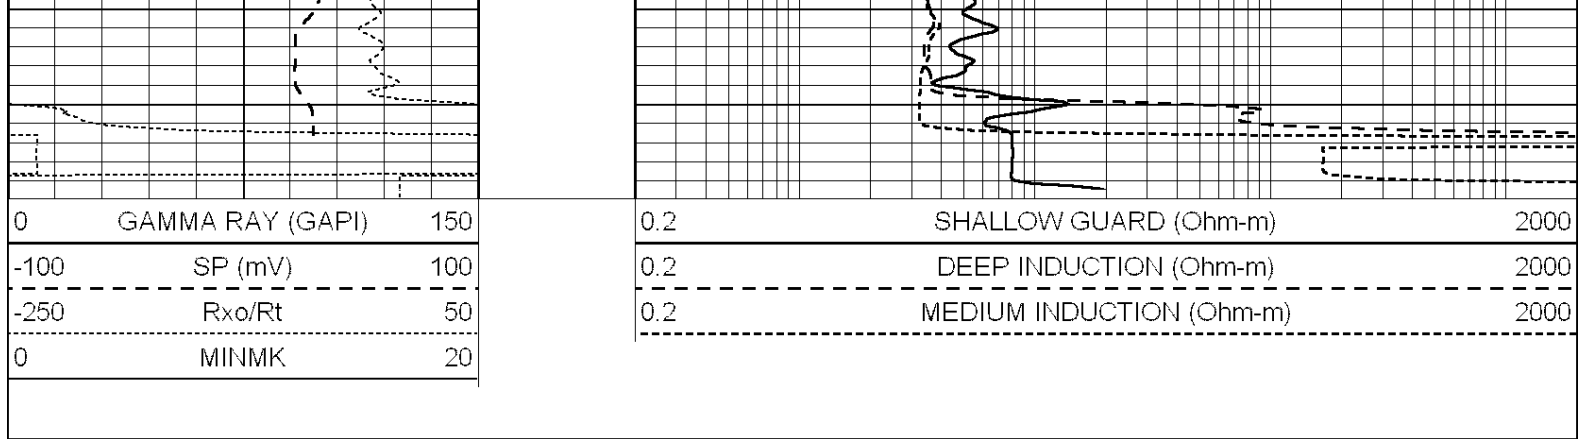

Database File: 1598ddn.db									
Dataset Pathname: pass4									
Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430									
Dual Induction Calibration Report									
Serial-Model:				PROBE7-DILG					
Surface Cal Performed:				Wed Aug 30 00:06:33 2017					
Downhole Cal Performed:				Mon Jul 28 12:02:56 2008					
After Survey Verification Performed:				Mon Jul 28 12:02:56 2008					
Surface Calibration									
		Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b	
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000	
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256	
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102	
Downhole Calibration									
		Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000	
LL3		7.500	V		1400.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-7.200	V		4000.000	mmho-m			
After Survey Verification									
		Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
LL3		1.000	Ohm-m		1.000	Ohm-m			
		0.000	Ohm-m		0.000	Ohm-m			
		1.000	mmho-m		1.000	mmho-m			
Litho Density Calibration Report									
Serial: 002				Model: PRB					
Master Calibration					Performed Mon Aug 21 11:27:42 2017				
Background		Magnesium		Aluminum		Sandstone			

Window 1	837.1	10632.5	2945.1	12110.1	cps
Window 2	772.0	9117.4	2570.1	10197.3	cps
Window 3	631.7	4669.0	1481.9	5042.9	cps
Window 4	187.0	187.5	185.9	189.9	cps
Long Space	0.0	8345.4	1798.1	9425.3	cps
Short Space	1.1	1927.9	1285.9	2050.2	cps
Rho		1.7100	2.5960	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio	: 0.558
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept	: -19.6

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

--

Compensated Neutron Calibration Report
--

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070558
Tool Model:	OPEN_GR
Performed:	Wed May 31 00:09:32 2017

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps