

HALLIBURTON

SPECTRAL DENSITY DUAL SPACED NEUTRON LOG

| | | | |
|--------------------------|-----------------|-------------------|-----------------|
| COMPANY | | RUSSELL OIL, INC. | |
| WELL | | NUSS 'D' #33-1 | |
| FIELD/BLOCK | | NUSS | |
| COUNTY | | RUSSELL | |
| STATE | | KANSAS | |
| Permanent Datum | | GL | Elev. 1918.0 ft |
| Log measured from | | KB | D.F. 1921.0 ft |
| Drilling measured from | | KB | G.L. 1918.0 ft |
| Date | 12-Feb-19 | | |
| Run No. | 1 | | |
| Depth - Driller | 3455.0 ft | | |
| Depth - Logger | 3455.0 ft | | |
| Bottom - Logged Interval | 3445 | | |
| Top - Logged Interval | 927 | | |
| Casing - Driller | 8.625 in | @ 928.0 ft | @ |
| Casing - Logger | 927.0 ft | | |
| Bit Size | 7.875 in | | @ |
| Type Fluid in Hole | Water Based Mud | | |
| Density | 9.0 ppg | 49.00 sl/qt | |
| PH | 9.50 pH | 8.0 cpm | |
| Source of Sample | MUD PIT | | |
| Rm @ Meas. Temperature | 0.51 ohmm | @ 72.00 degF | @ |
| Rmf @ Meas. Temperature | 0.44 ohmm | @ 70.00 degF | @ |
| Rmc @ Meas. Temperature | 0.63 ohmm | @ 70.00 degF | @ |
| Source Rmf | Rmc | MEAS | |
| Rm @ BHT | 0.36 ohmm | @ 105.0 degF | @ |
| Time Since Circulation | 11:00 hr | | |
| Time on Bottom | 12-Feb-19 14:13 | | |
| Max. Rec. Temperature | 105.00 degF | @ 3455.0 ft | @ |
| Equipment | Location | 12156883 | EL RENO, OK |
| Recorded By | WHITLOCK | | |
| Witnessed By | KITT NOAH | | |

Fold here

| | | | | | |
|---|--------------|-----------------------------|----------------------------|---|-----------------|
| Service Ticket No.: 905479538 | | API No.: 15-167-24087-00-00 | | PGM Version: WL INSITE R5.8.9 (Build 6) | |
| CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE | | | RESISTIVITY SCALE CHANGES | | |
| Date | Sample No. | | Type Log | Depth | Scale Up Hole |
| Depth-Driller | | | | | Scale Down Hole |
| Type Fluid in Hole | | | | | |
| Density | Viscosity | | | | |
| Ph | Fluid Loss | | | | |
| Source of Sample | | | RESISTIVITY EQUIPMENT DATA | | |
| Rm @ Meas. Temp | @ | @ | Run No. | Tool Type & No. | Pad Type |
| Rmf @ Meas. Temp. | @ | @ | | | Tool Pos. |
| Rmc @ Meas. Temp. | @ | @ | | | Other |
| Source Rmf | Rmc | | | | |
| Rm @ BHT | @ | @ | | | |
| Rmf @ BHT | @ | @ | | | |
| Rmc @ BHT | @ | @ | | | |
| EQUIPMENT DATA | | | | | |
| GAMMA | | ACOUSTIC | | DENSITY | |
| NEUTRON | | | | | |
| Run No. | Run No. | Run No. | Run No. | Run No. | Run No. |
| Serial No. | Serial No. | Serial No. | Serial No. | Serial No. | Serial No. |
| Model No. | Model No. | Model No. | Model No. | Model No. | Model No. |
| Diameter | No. of Cent. | Diameter | Diameter | Diameter | Diameter |
| Detector Model No. | Spacing | Log Type | Log Type | Log Type | Log Type |
| Type | | Source Type | Source Type | Source Type | Source Type |
| Length | LSA [Y/N] | Serial No. | Serial No. | Serial No. | Serial No. |
| Distance to Source | FWDA [Y/N] | Strength | Strength | Strength | Strength |
| LOGGING DATA | | | | | |
| GENERAL | | GAMMA | | ACOUSTIC | |
| DENSITY | | NEUTRON | | | |
| Run | Depth | Speed | Scale | Scale | Matrix |
| No. | From | To | L | R | L |
| | | ft/min | | | R |
| | | | | | Matrix |
| | | | | | Scale |
| | | | | | L |
| | | | | | R |
| | | | | | Matrix |
| | | | | | Scale |
| | | | | | L |
| | | | | | R |
| | | | | | Matrix |

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: 5 1/2" CASING USED FOR ANNULAR HOLE VOLUME
LIMESTONE MATRIX USED FOR DENSITY/NEUTRON POROSITY CALCULATIONS

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON





Plot Time: 12-Feb-19 16:04:26
Plot Range: 900 ft to 1000 ft
Data: RUSSELL_NUSSWell Based\DAQ-0001-002\
Plot File: \\SDL-DSN\Poro_IQ_5_MAIN


5 INCH MAIN LOG



MAIN SECTION 5" PER 100'

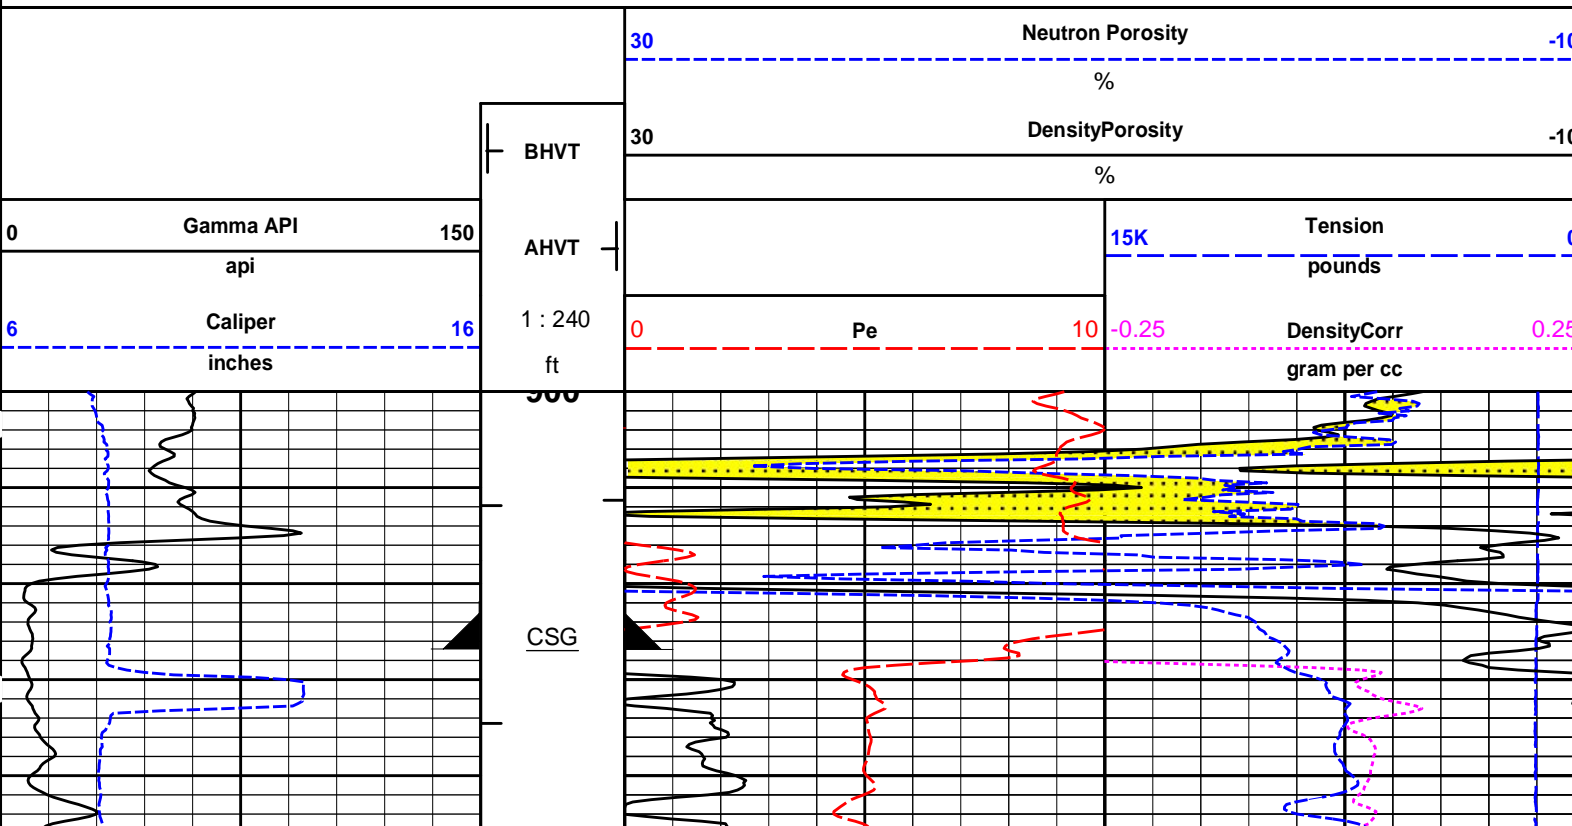

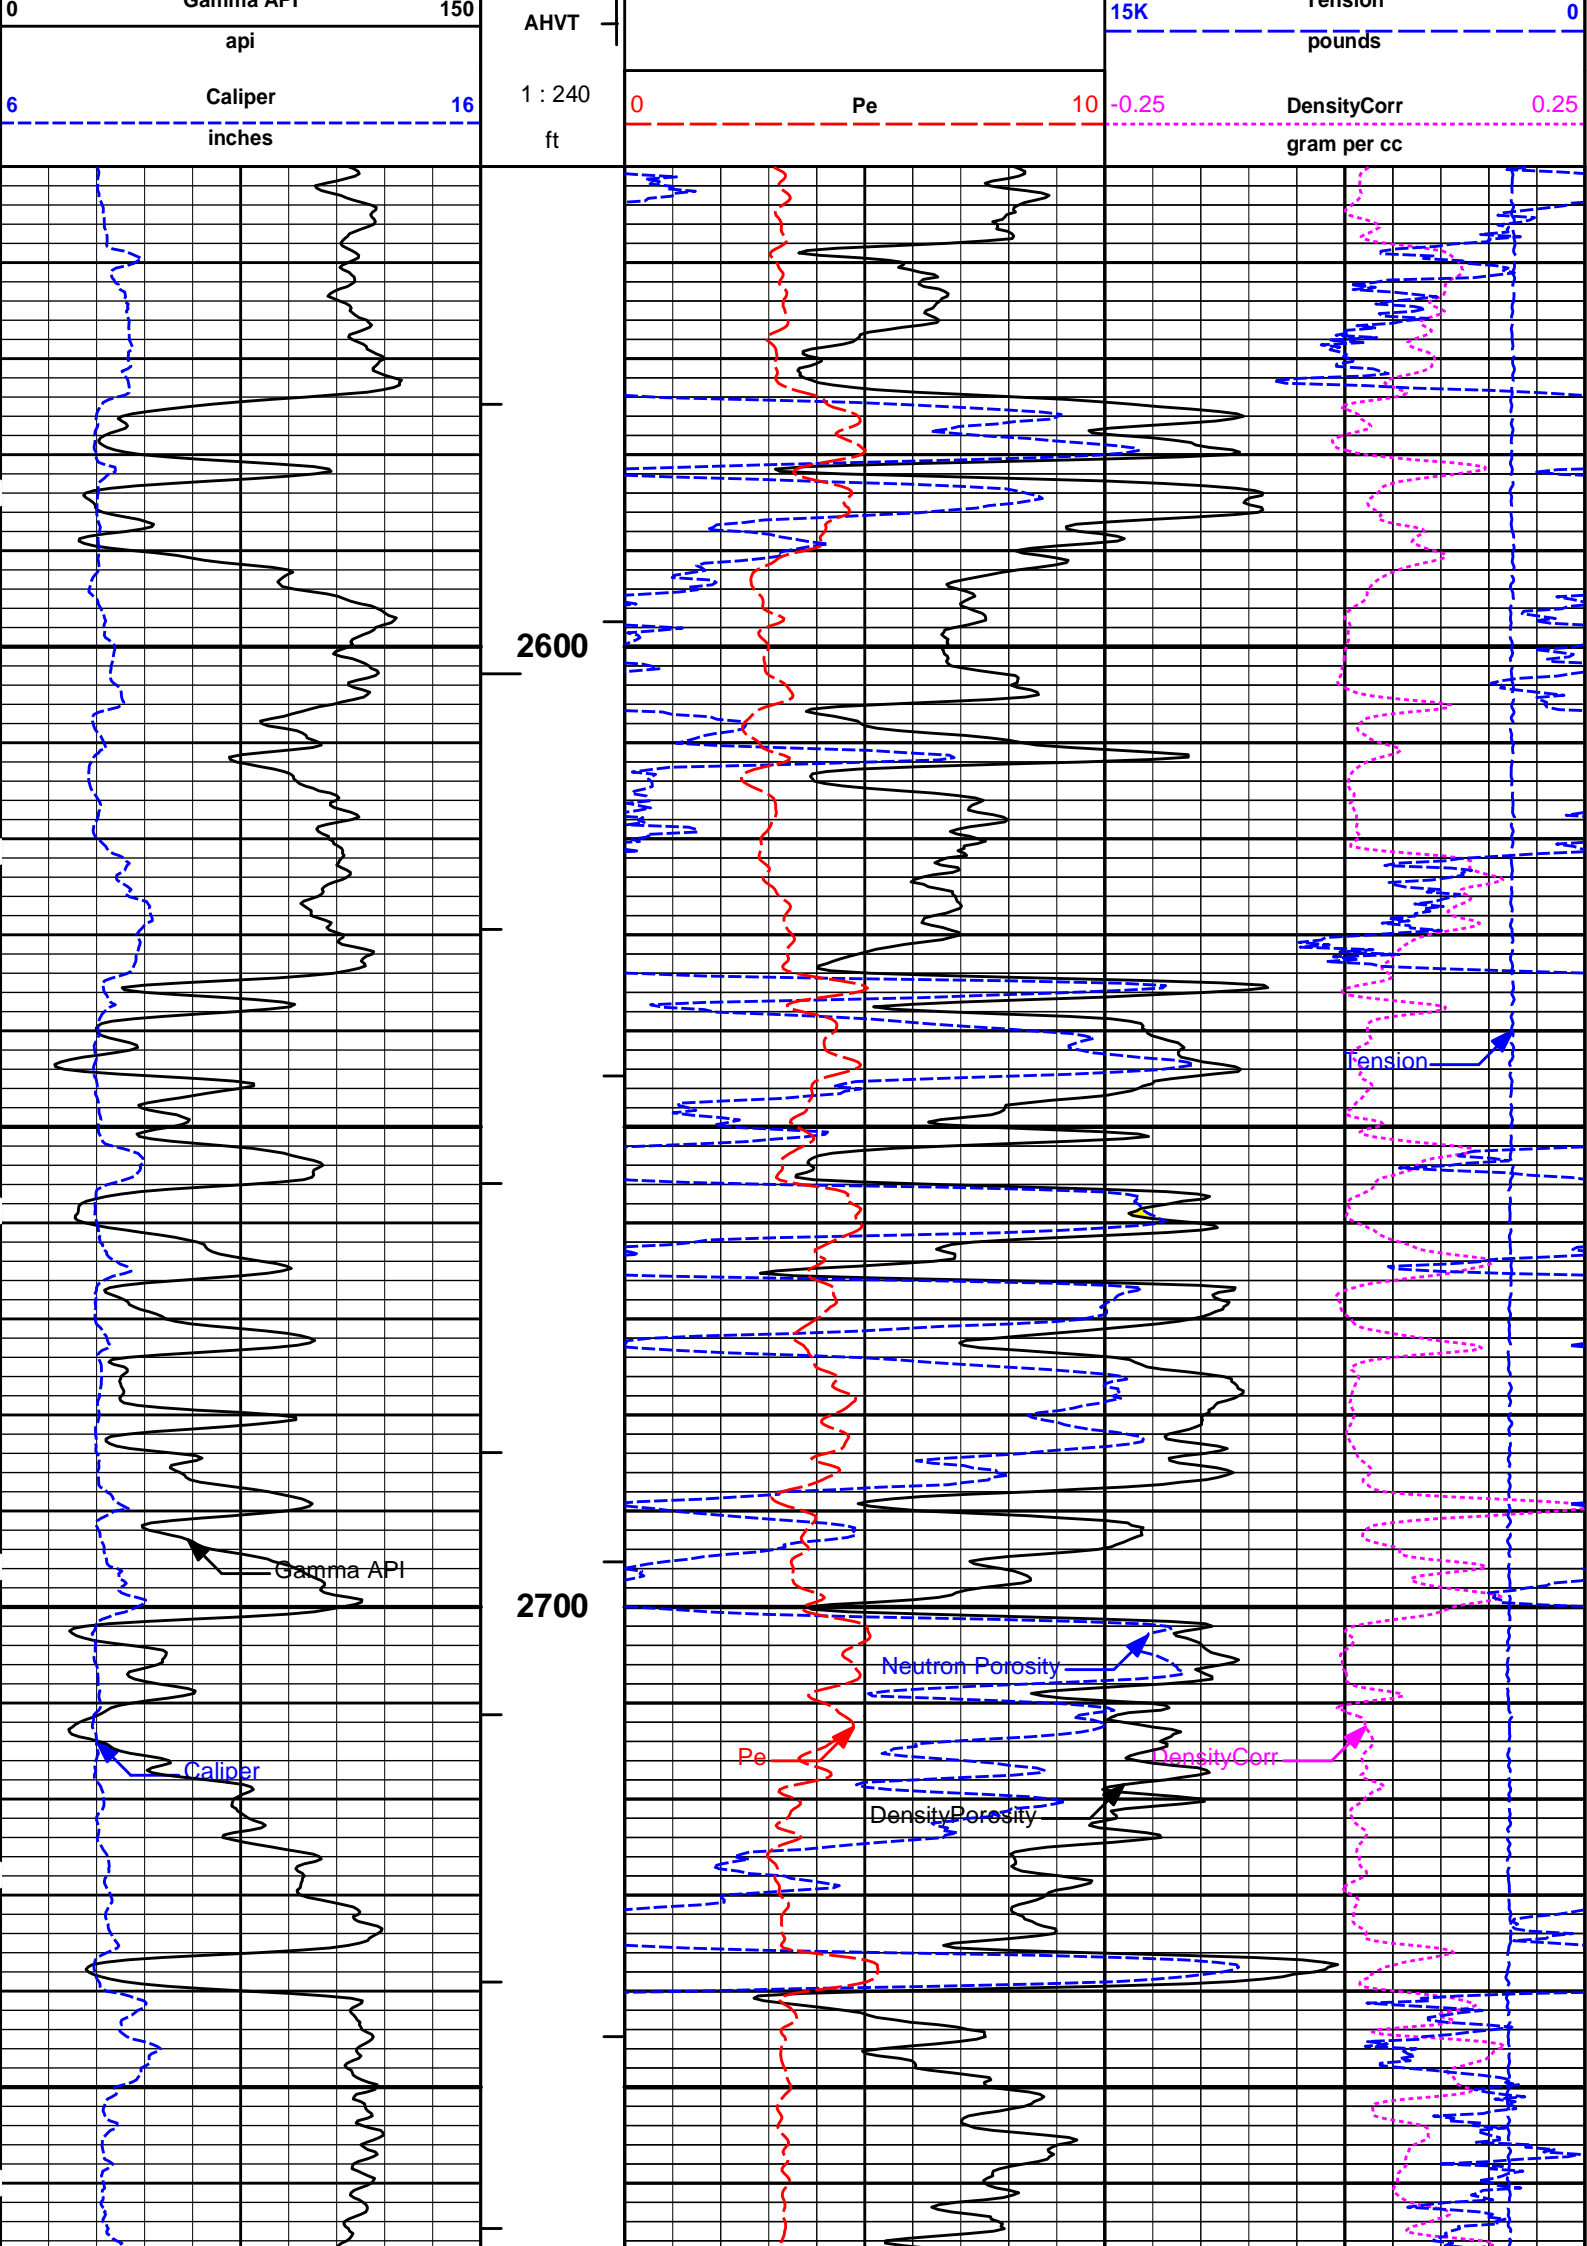

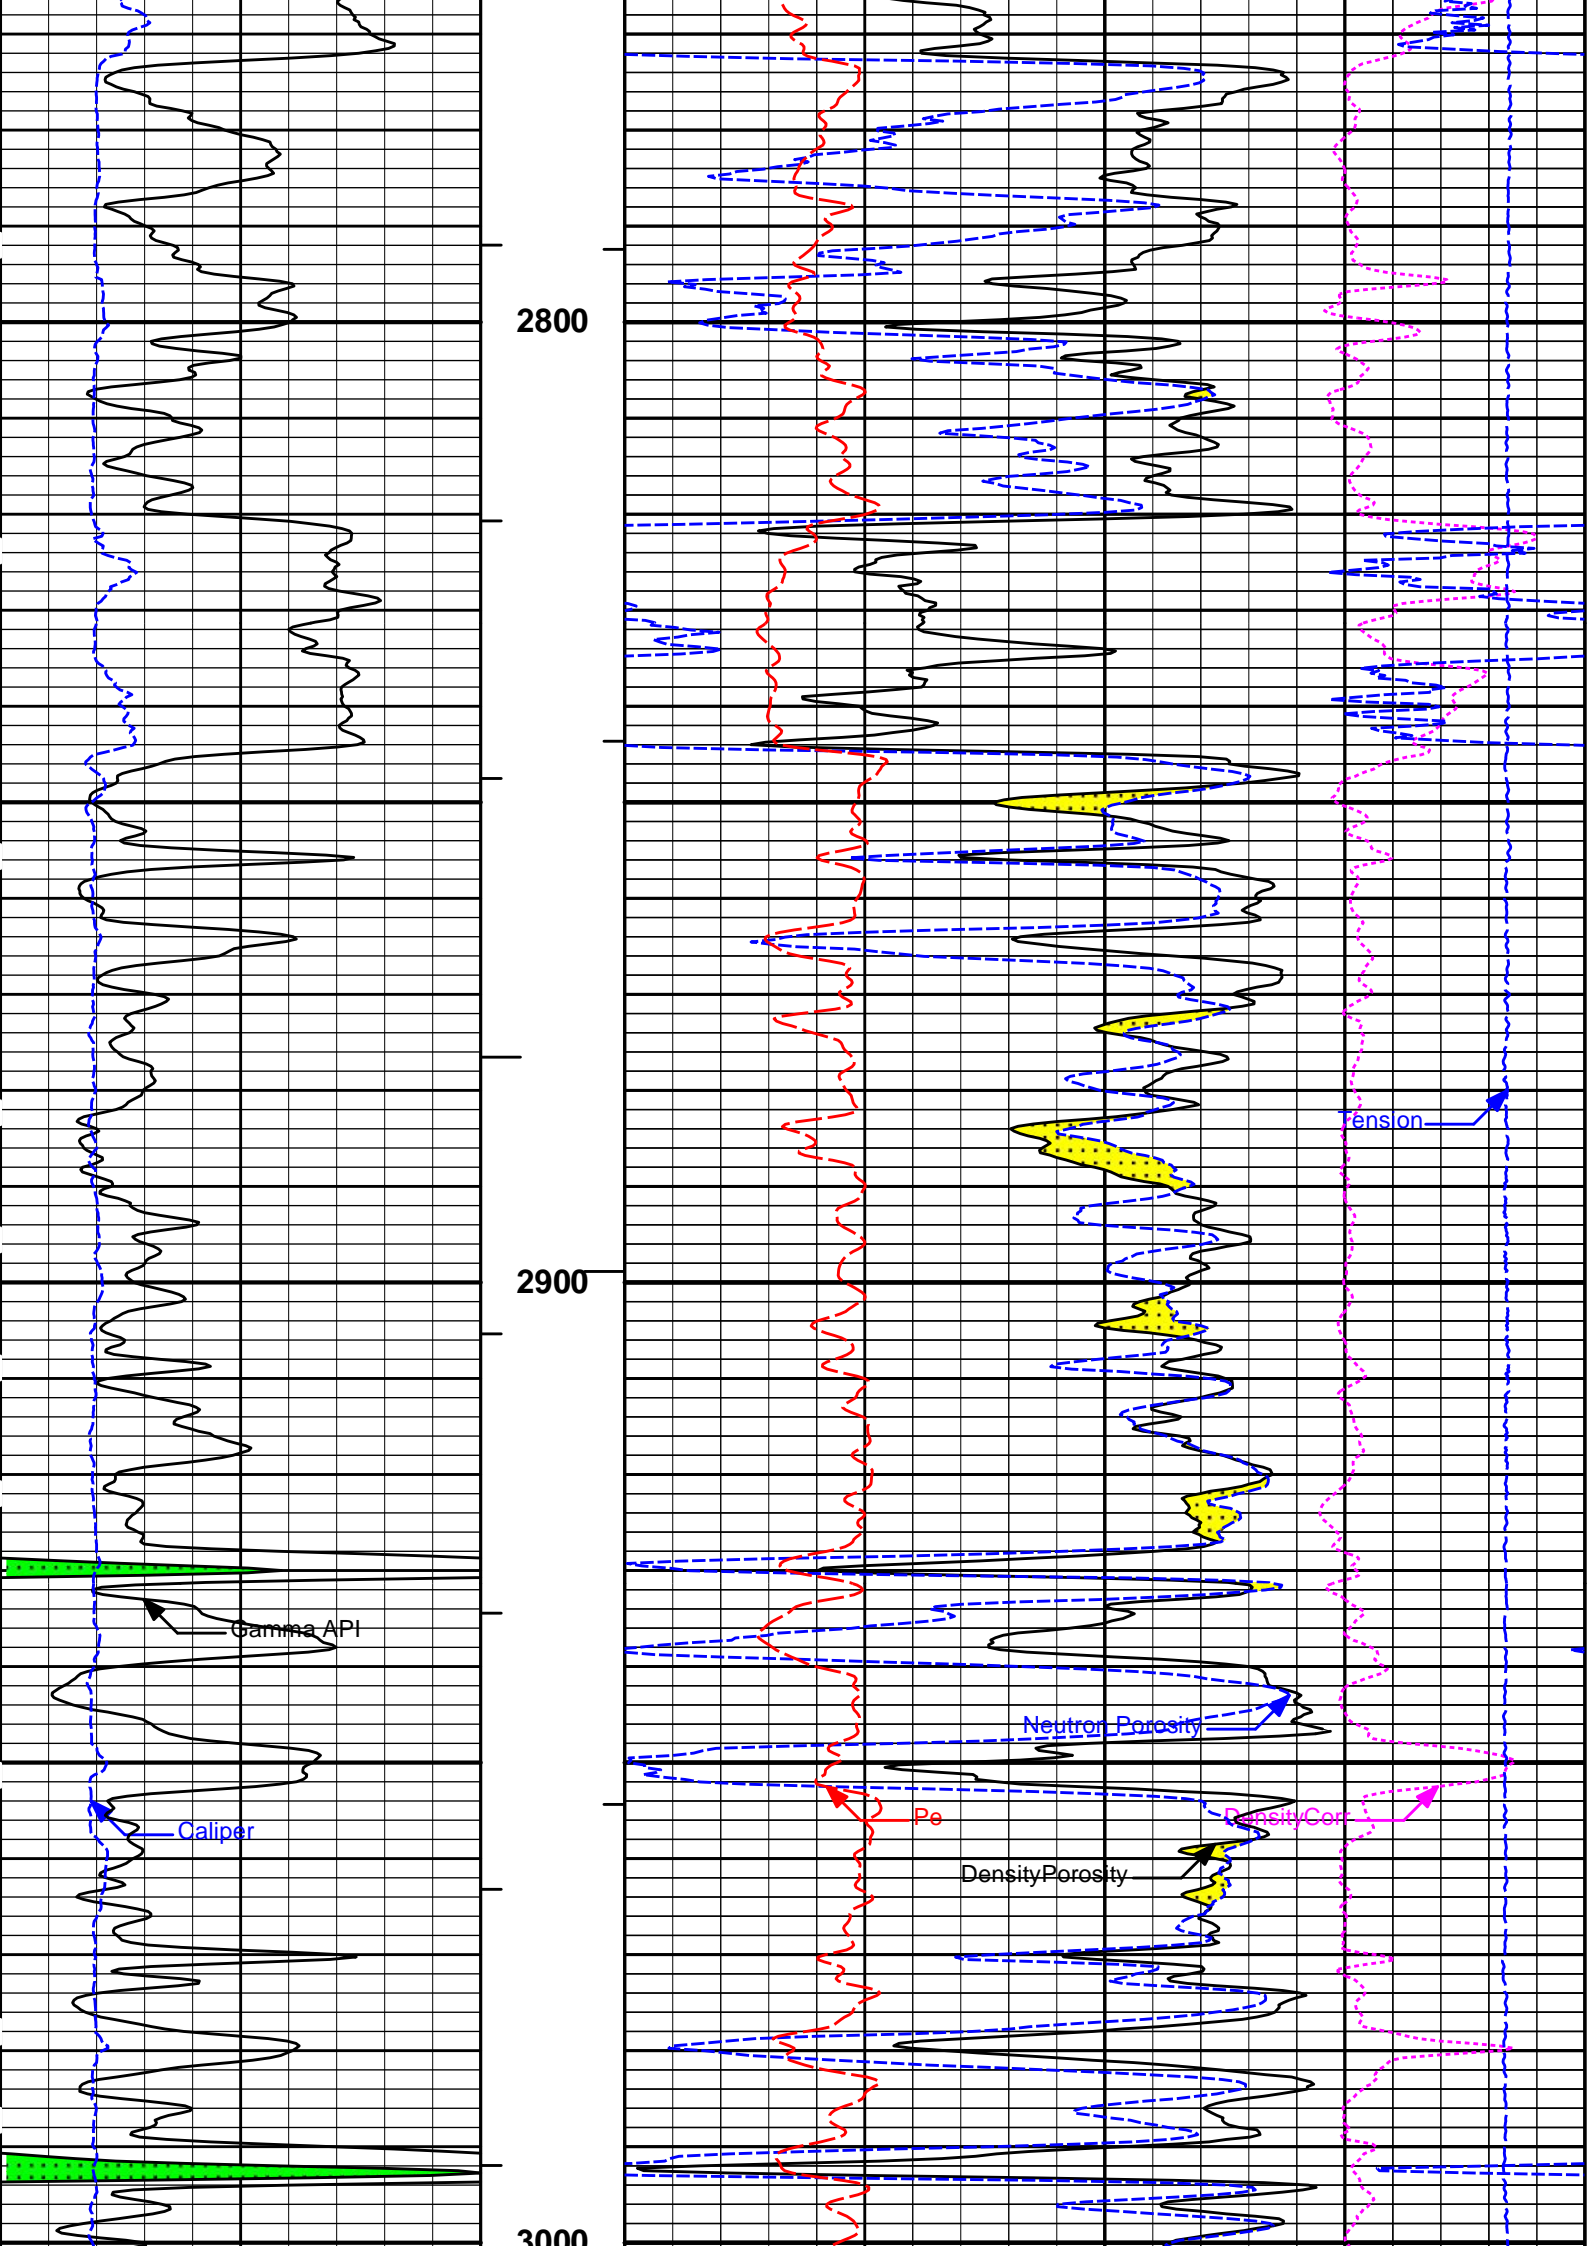

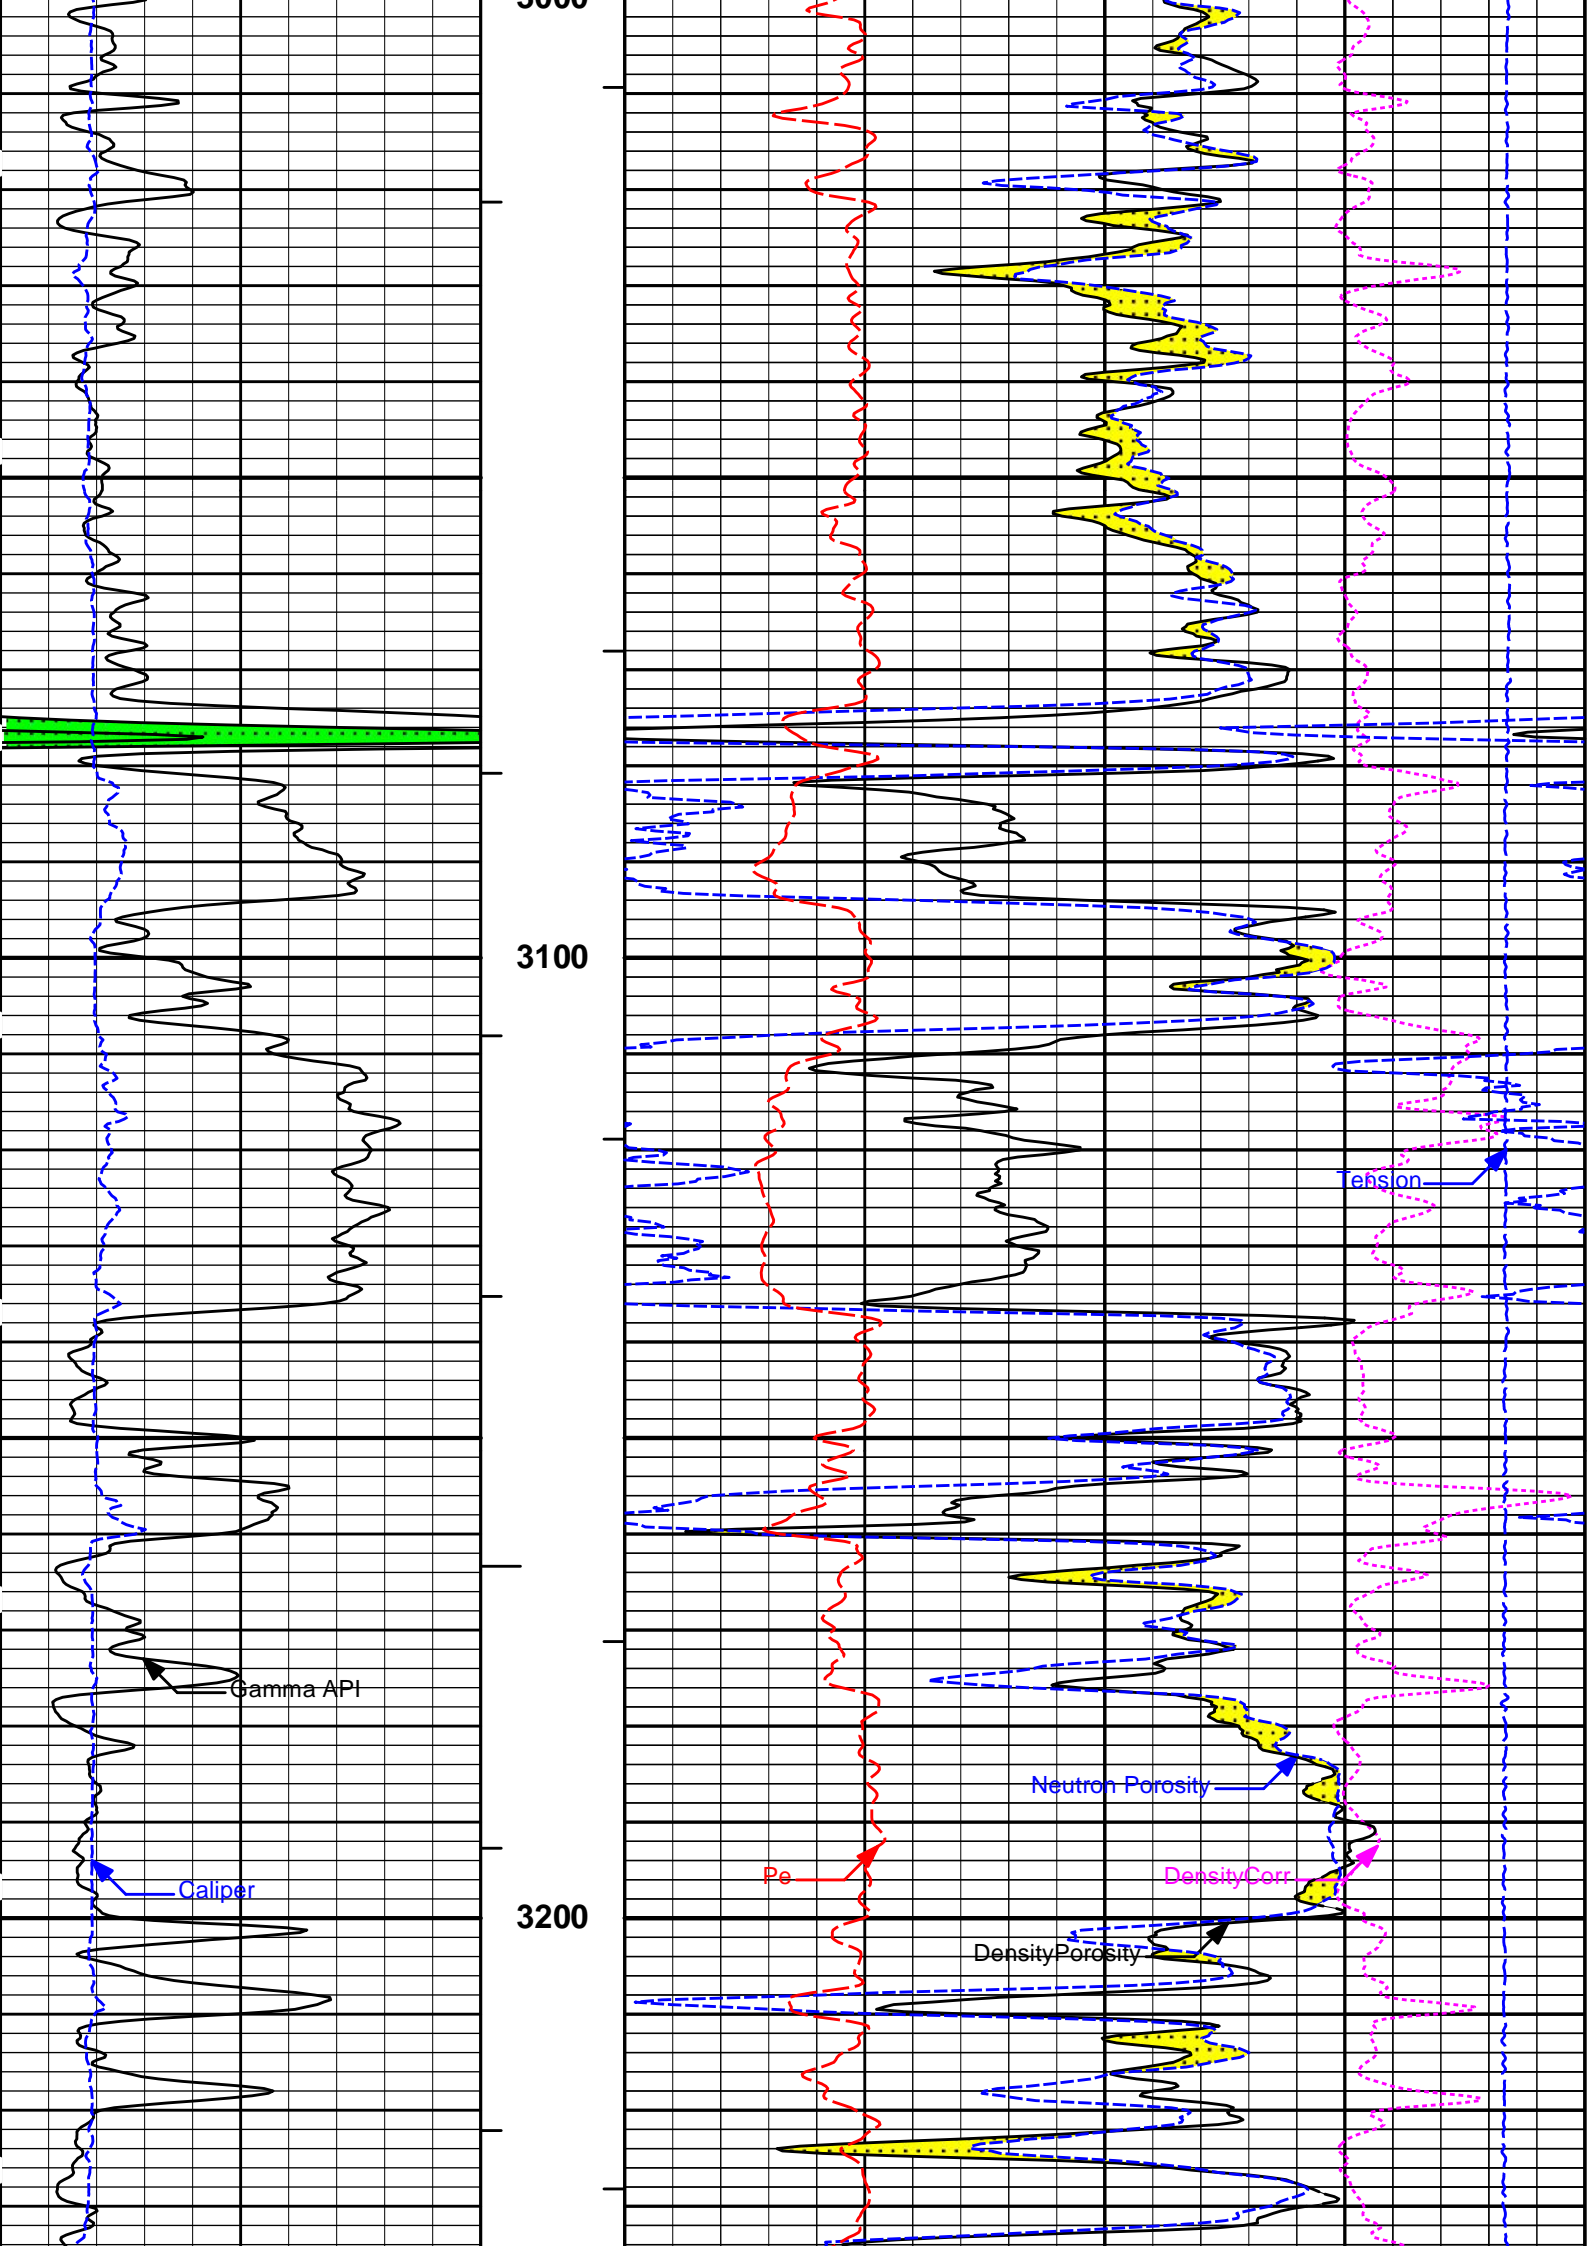

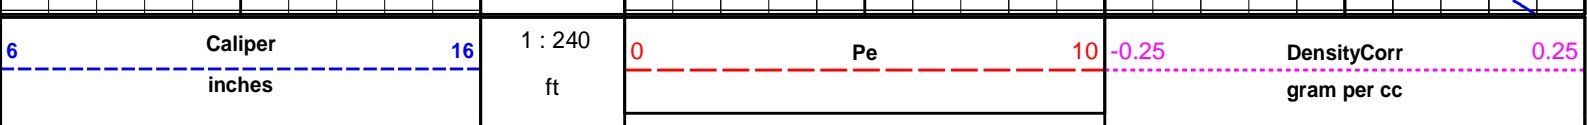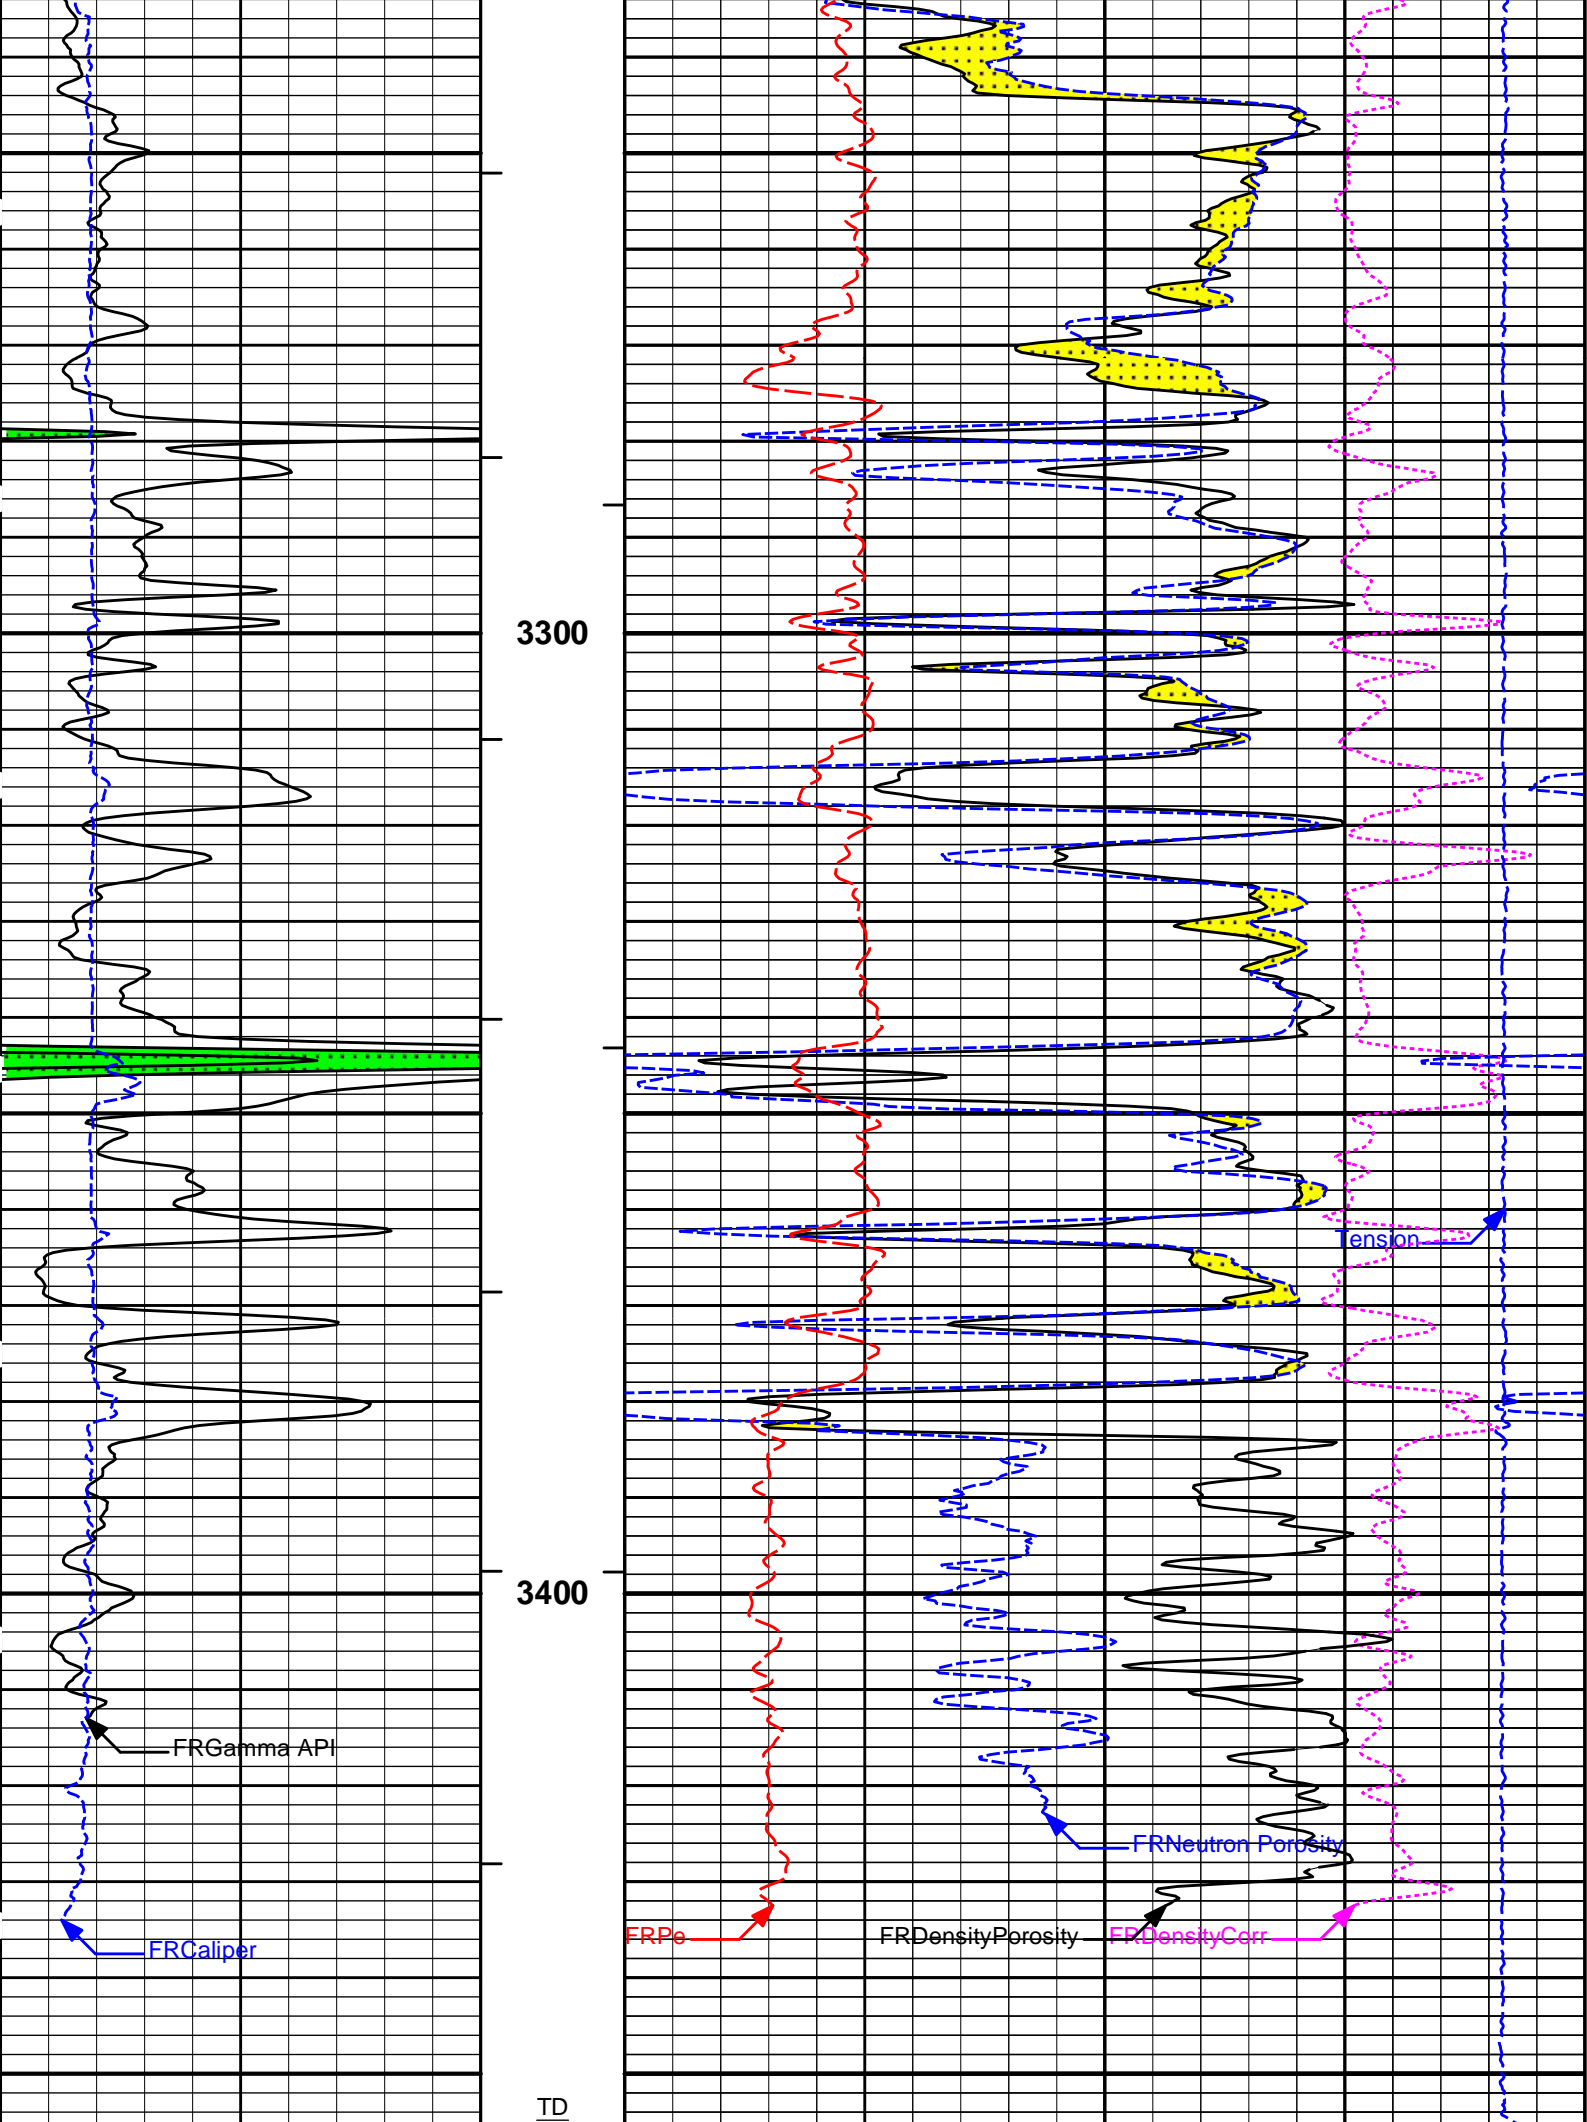

| | | | | | | |
|---|-----------|-----|------|-----|------------------|-----|
| 0 | Gamma API | 150 | AHVT | 15K | Tension | 0 |
| | api | | | | pounds | |
| | | | BHVT | 30 | DensityPorosity | -10 |
| | | | | | % | |
| | | | | 30 | Neutron Porosity | -10 |
| | | | | | % | |

HALLIBURTON

Plot Time: 12-Feb-19 16:04:29
 Plot Range: 2550 ft to 3456.42 ft
 Data: RUSSELL_NUSSWell Based\DAQ-0001-002\
 Plot File: \\SDL-DSN\Poro_IQ_5_MAIN

5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


HALLIBURTON


Plot Time: 12-Feb-19 16:04:30
 Plot Range: 3080 ft to 3458.67 ft
 Data: RUSSELL_NUSSWell Based\REPEAT\
 Plot File: \\SDL-DSN\Poro_IQ_5_MAIN

REPEAT SECTION

REPEAT SECTION

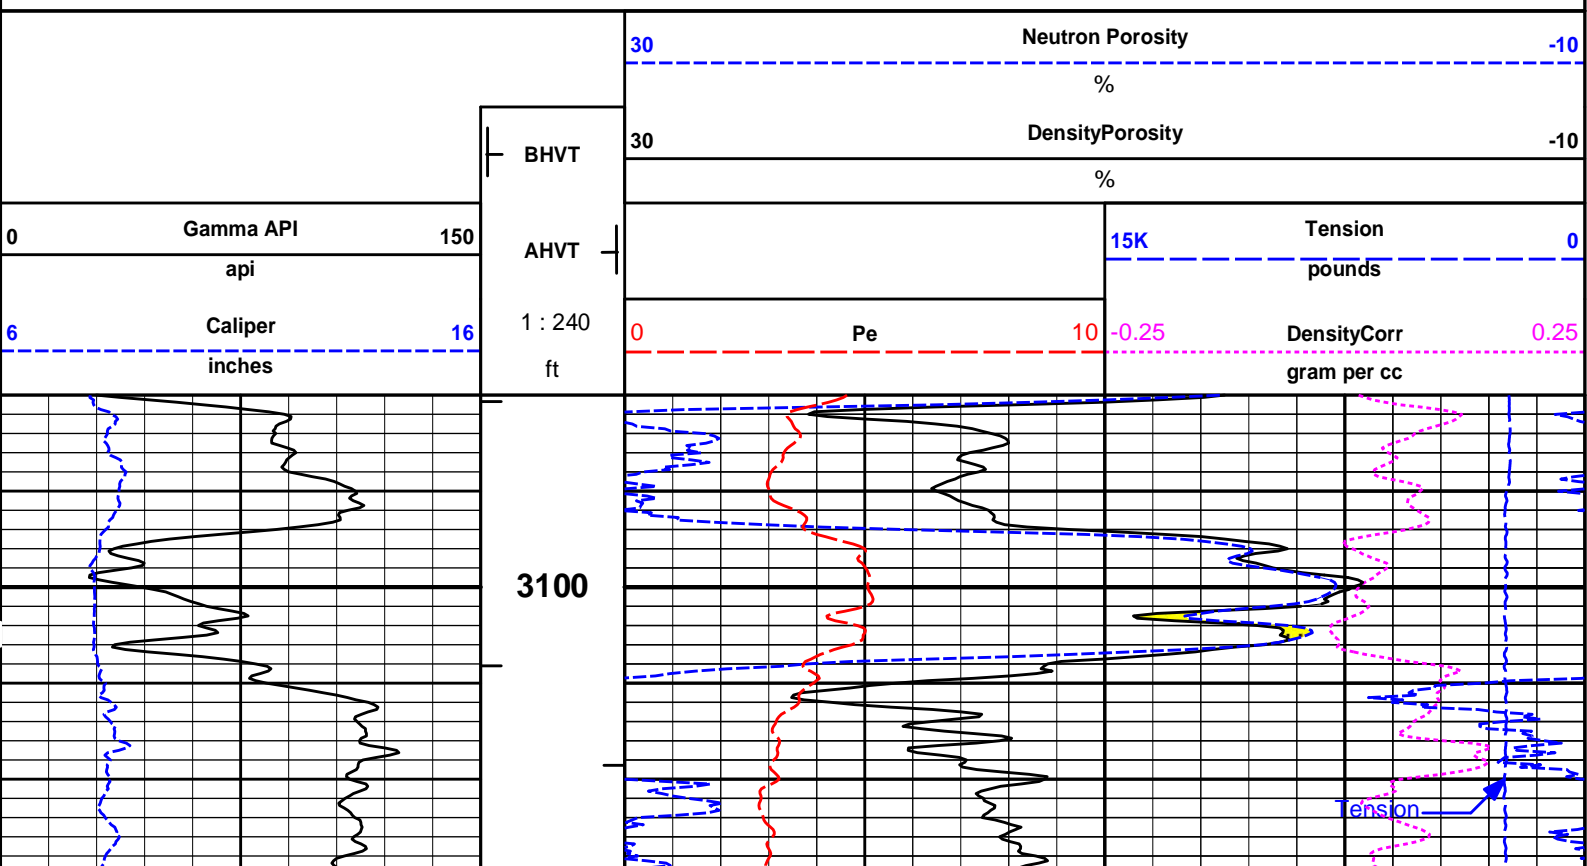

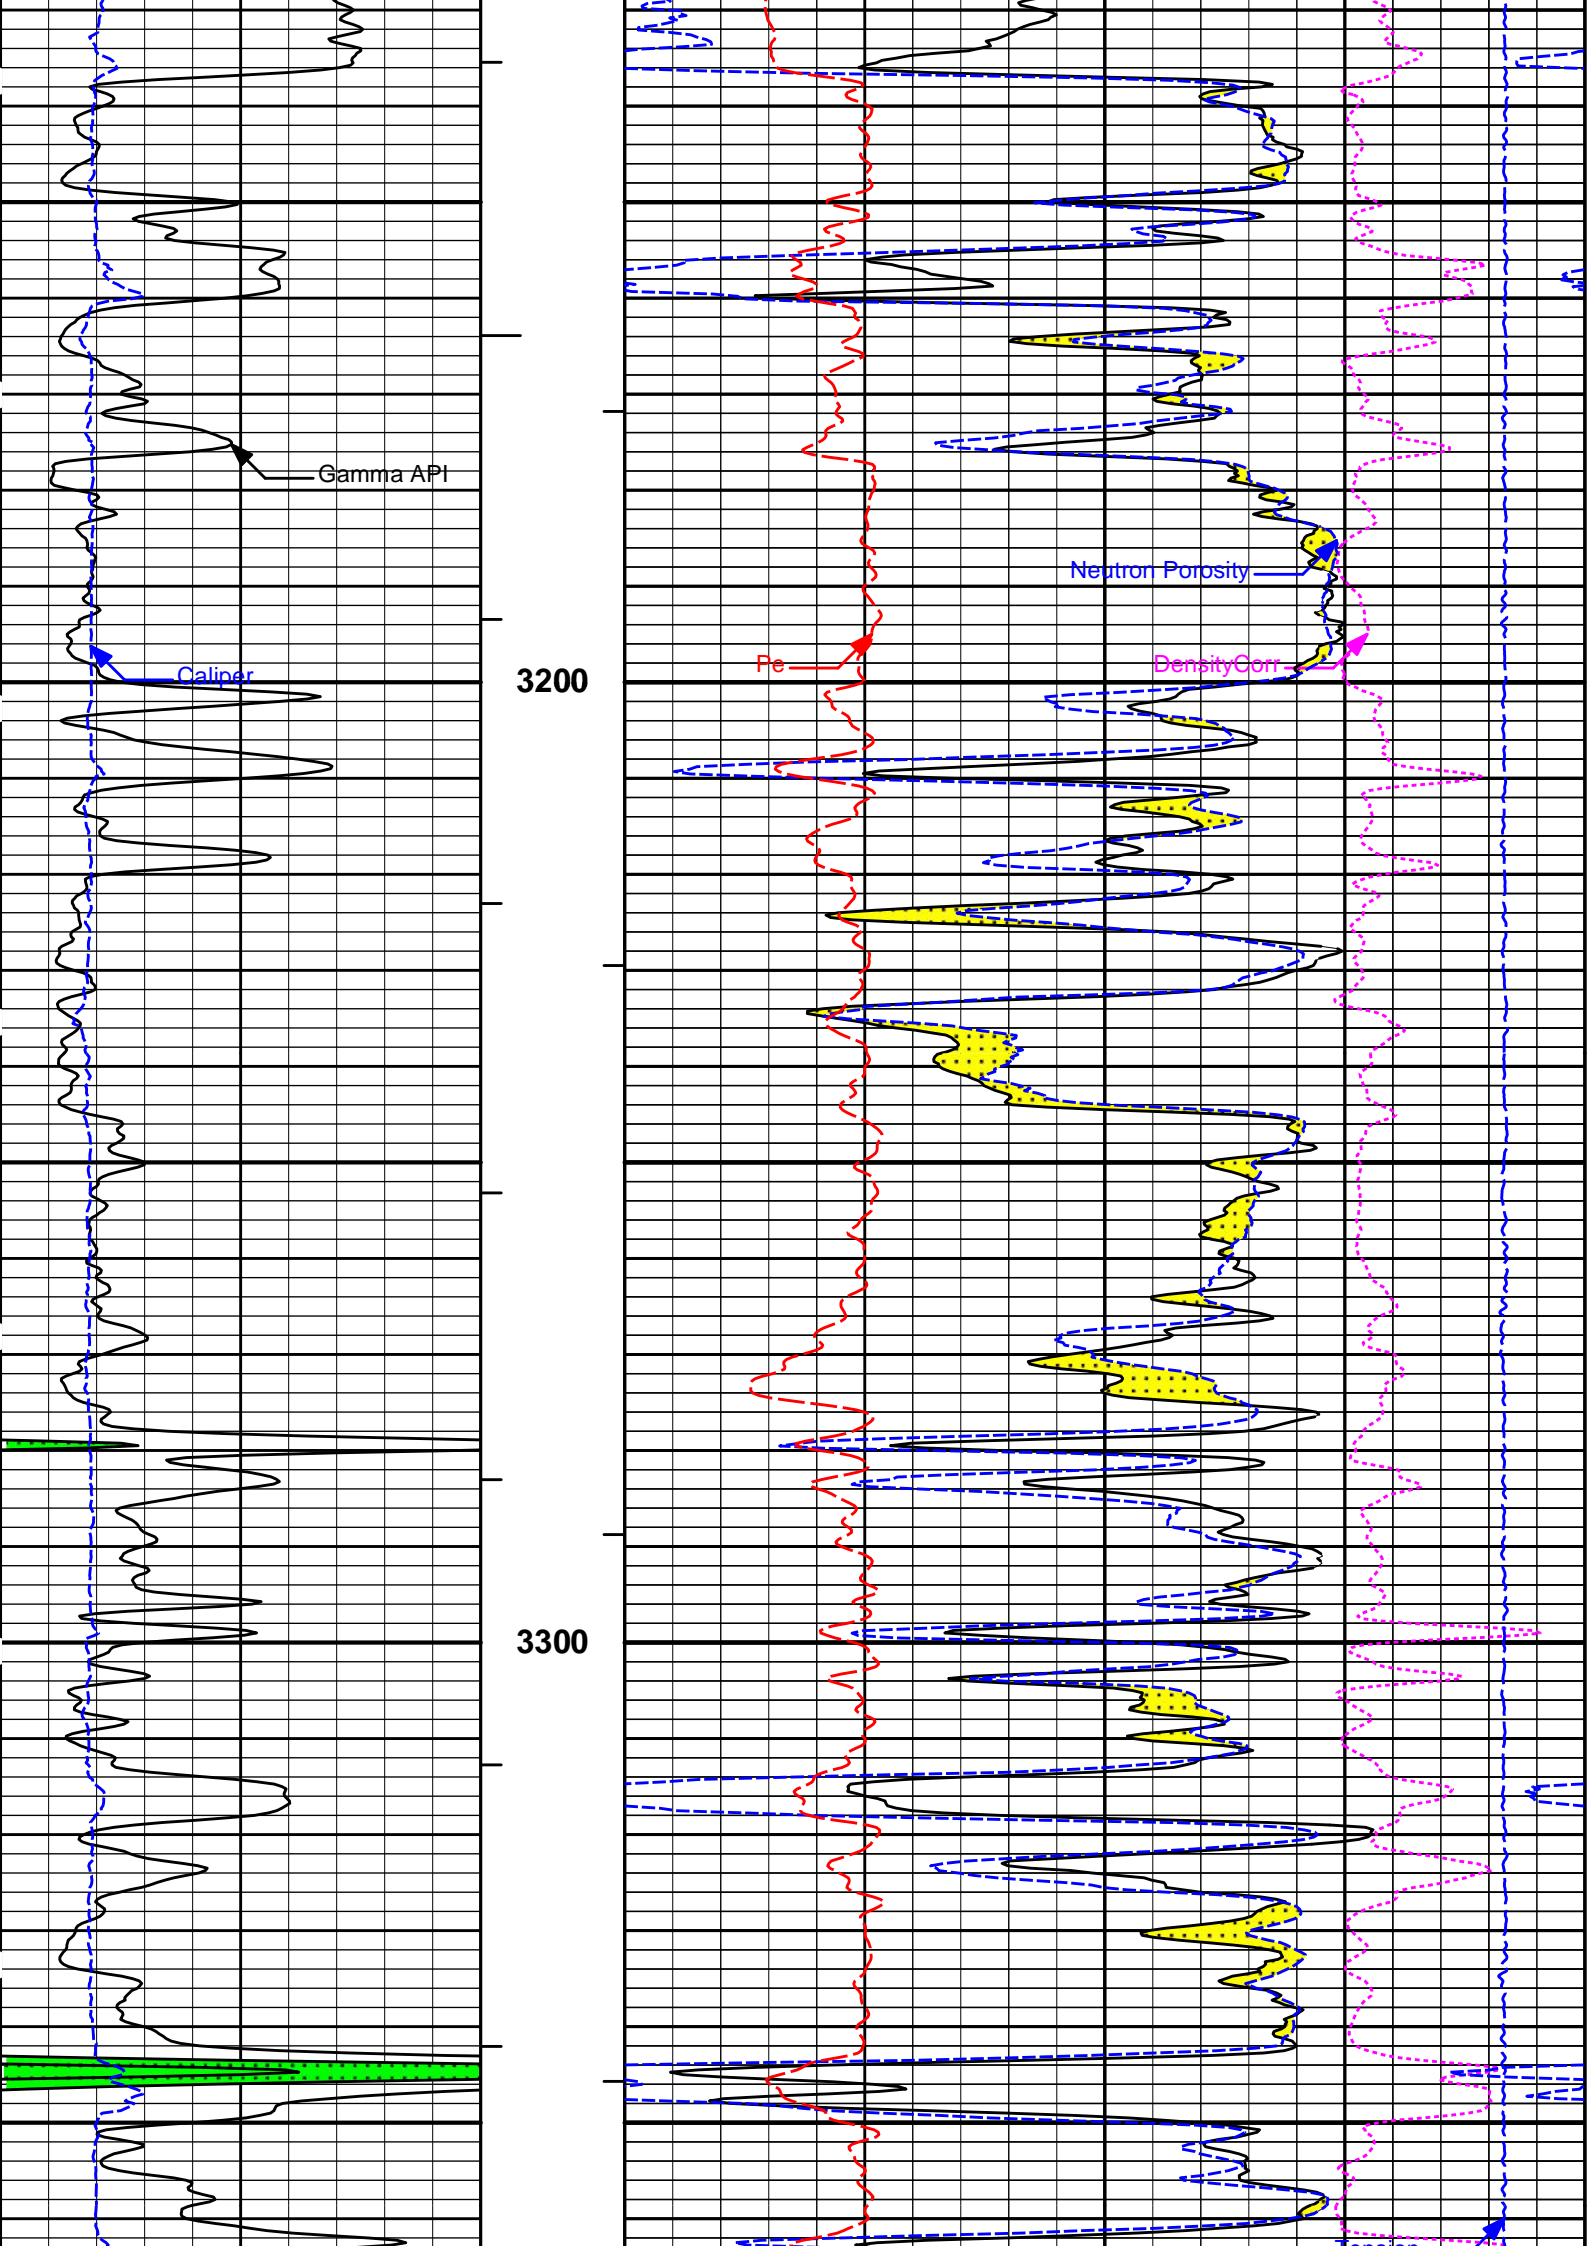

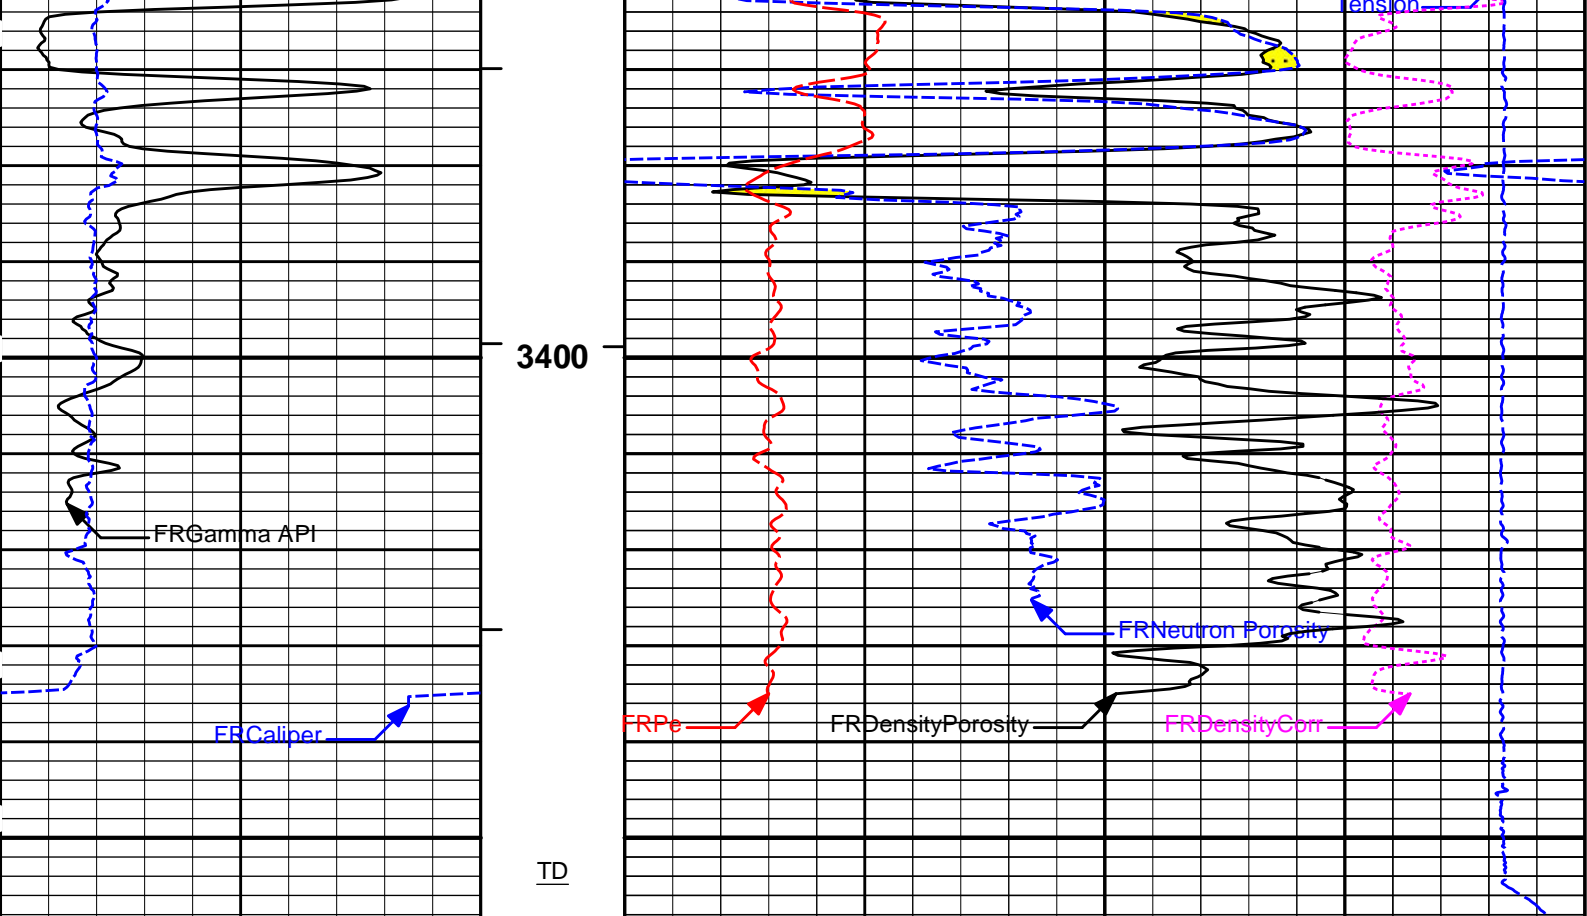

| | | | | | | | | | |
|---|-----------|-----|---------|----|------------------|----|-------|-------------|------|
| 6 | Caliper | 16 | 1 : 240 | 0 | Pe | 10 | -0.25 | DensityCorr | 0.25 |
| | inches | | ft | | | | | gram per cc | |
| 0 | Gamma API | 150 | AHVT | | | | 15K | Tension | 0 |
| | api | | BHVT | 30 | DensityPorosity | | | pounds | |
| | | | | | % | | | | |
| | | | | 30 | Neutron Porosity | | | | -10 |
| | | | | | % | | | | |

HALLIBURTON Plot Time: 12-Feb-19 16:04:31
 Plot Range: 3080 ft to 3458.67 ft
 Data: RUSSELL_NUSSWell Based\REPEAT\
 Plot File: \\SDL-DSN\Poro_IQ_5_MAIN


REPEAT SECTION

REPEAT SECTION

HALLIBURTON Plot Time: 12-Feb-19 16:04:32
 Plot Range: 900 ft to 1000 ft
 Data: RUSSELL_NUSSWell Based\DAQ-0001-002\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

5 INCH MAIN LOG

MAIN SECTION 5" PER 100'

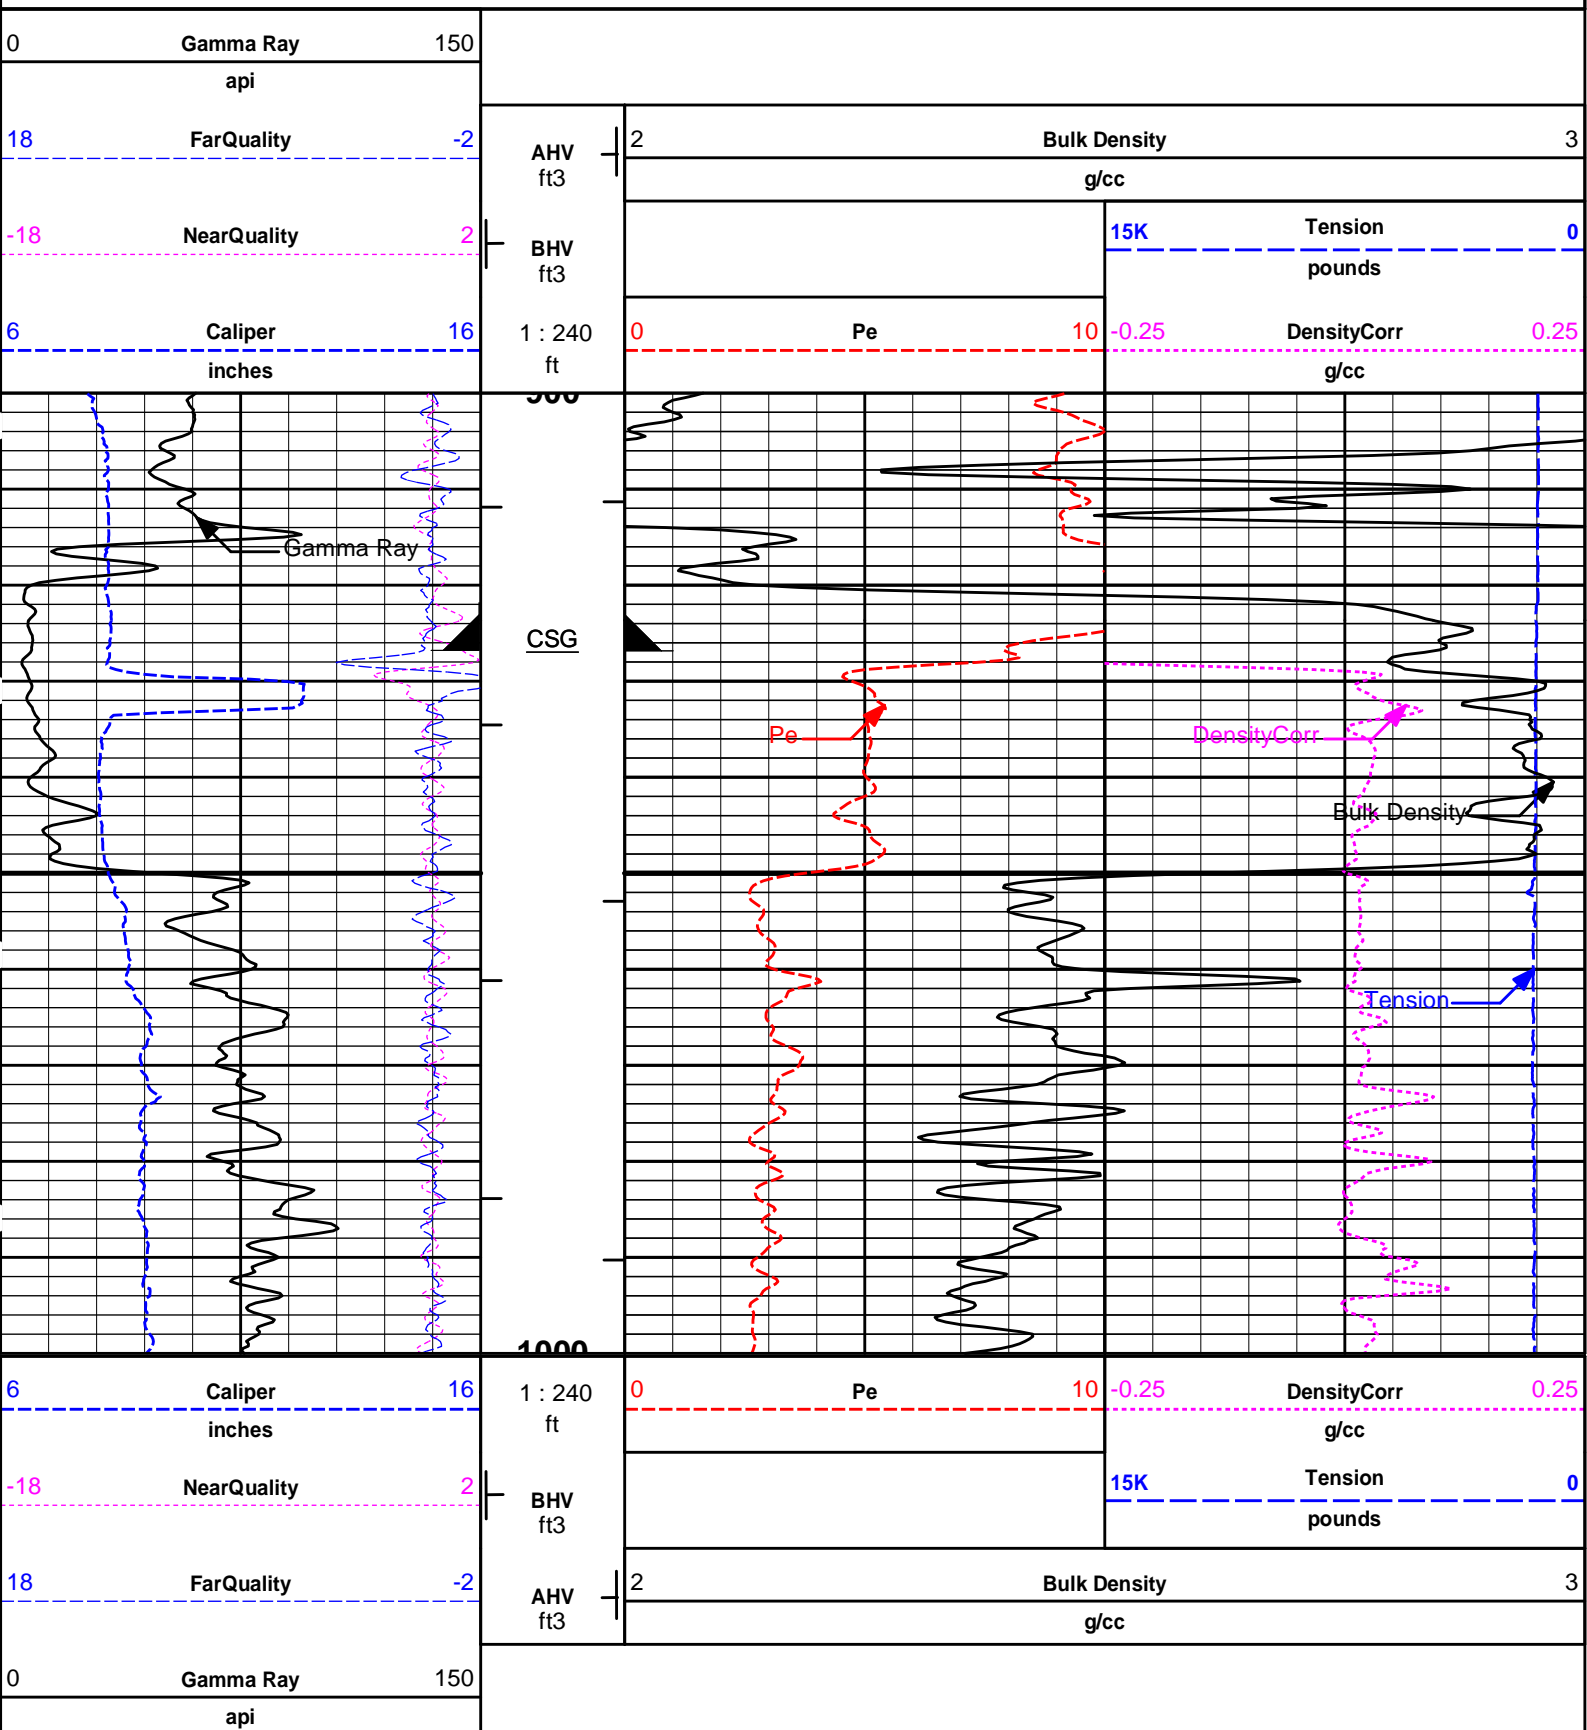

HALLIBURTON

Plot Time: 12-Feb-19 16:04:33
 Plot Range: 900 ft to 1000 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


HALLIBURTON


Plot Time: 12-Feb-19 16:04:33
 Plot Range: 2550 ft to 3456.42 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ


5 INCH MAIN LOG


MAIN SECTION 5" PER 100'

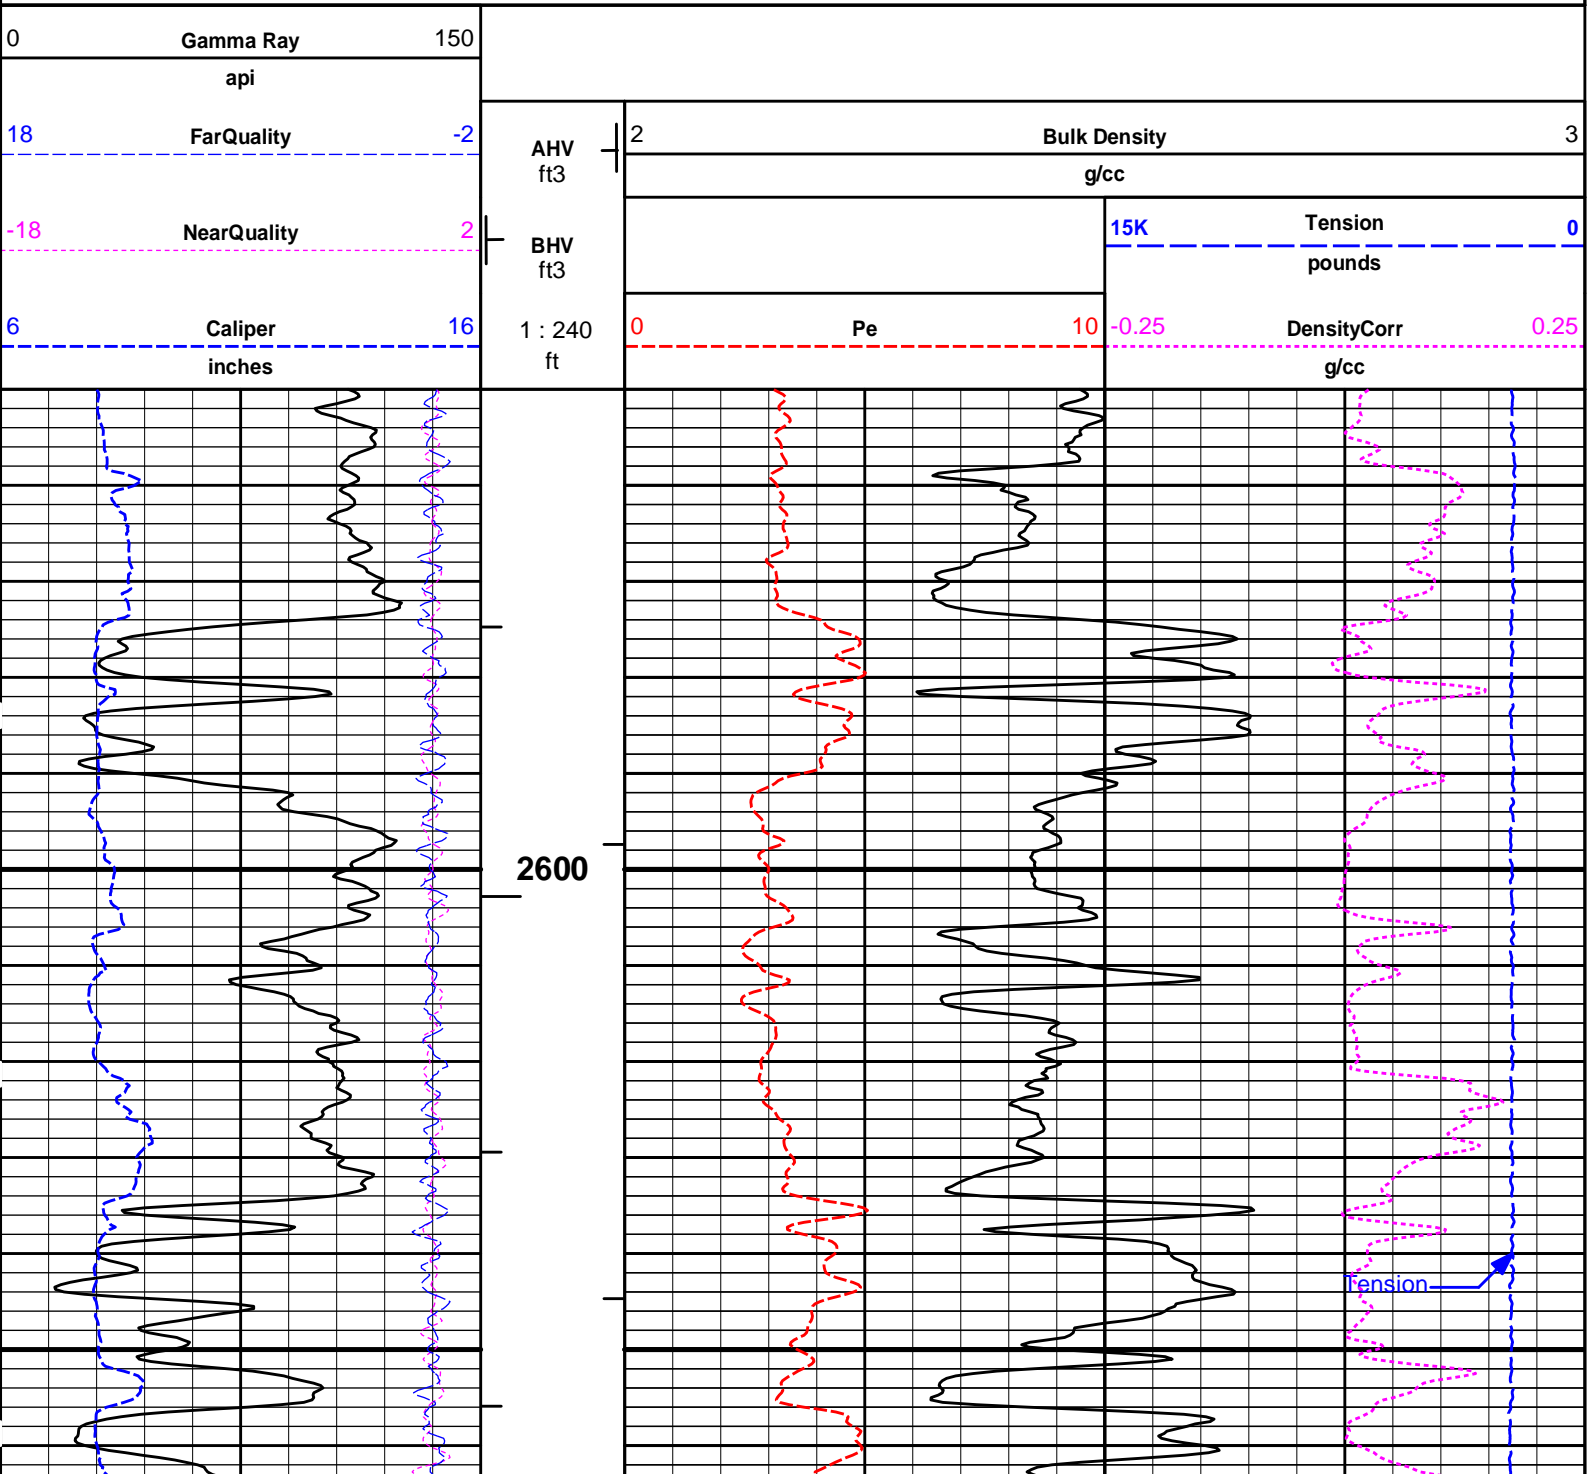

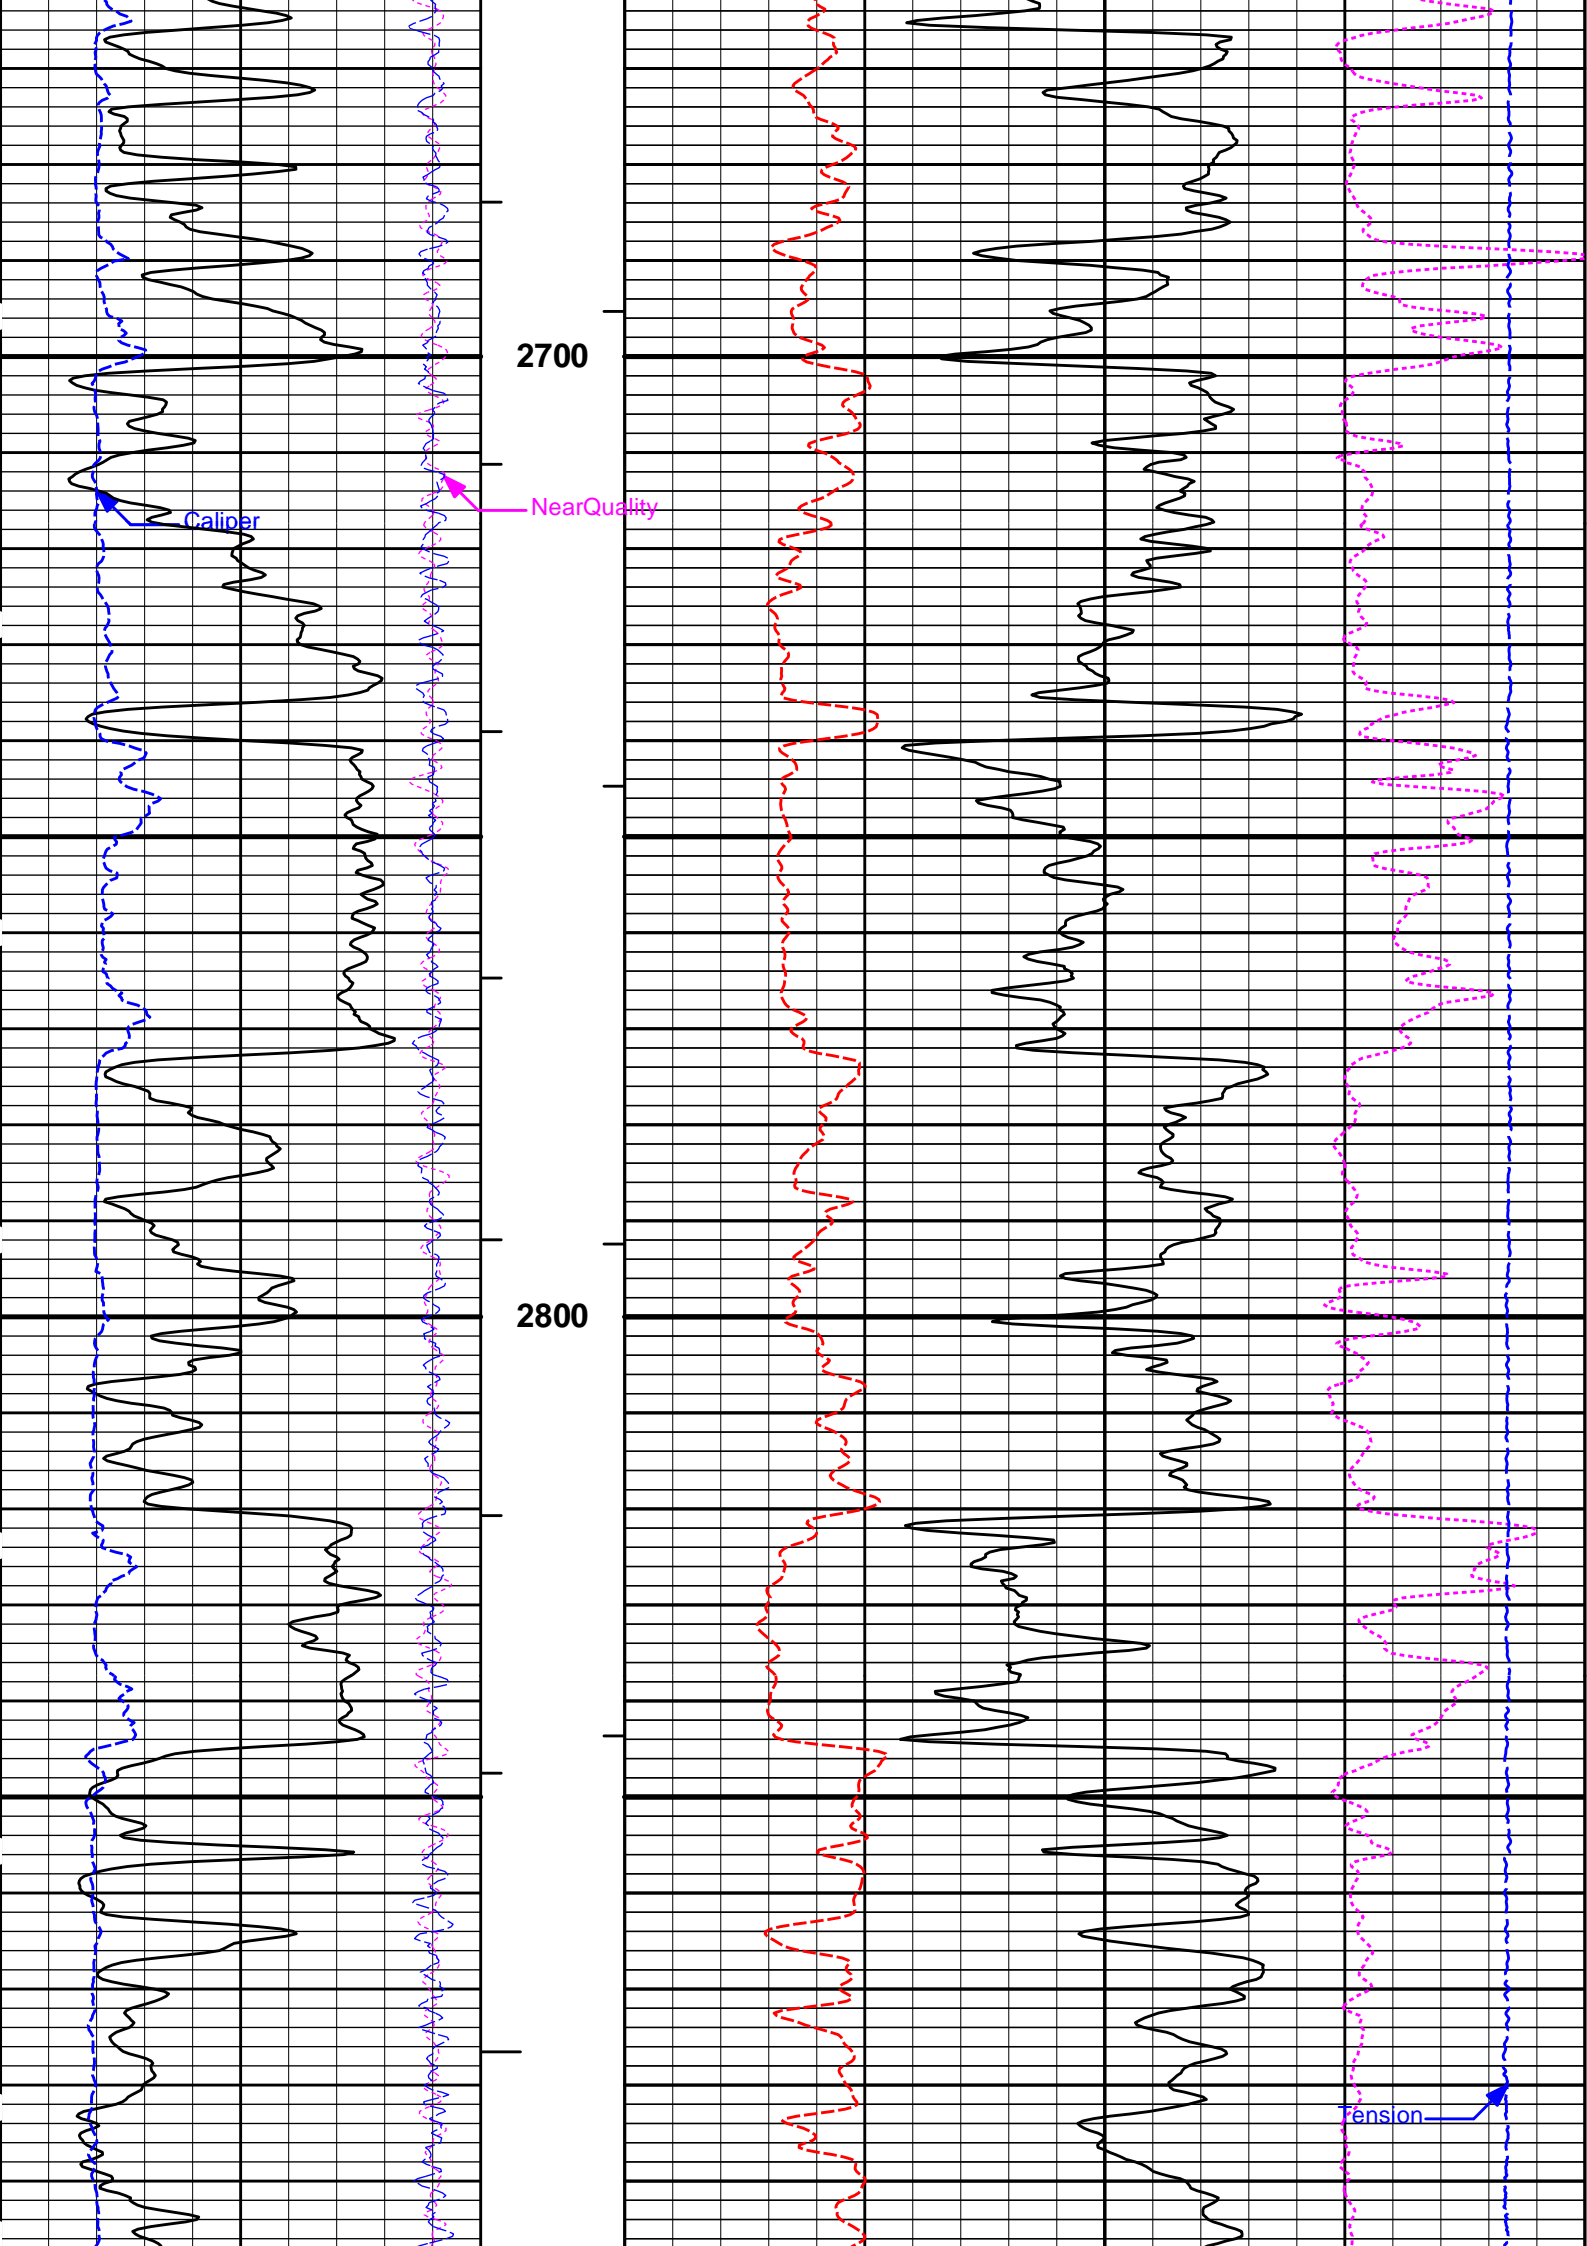

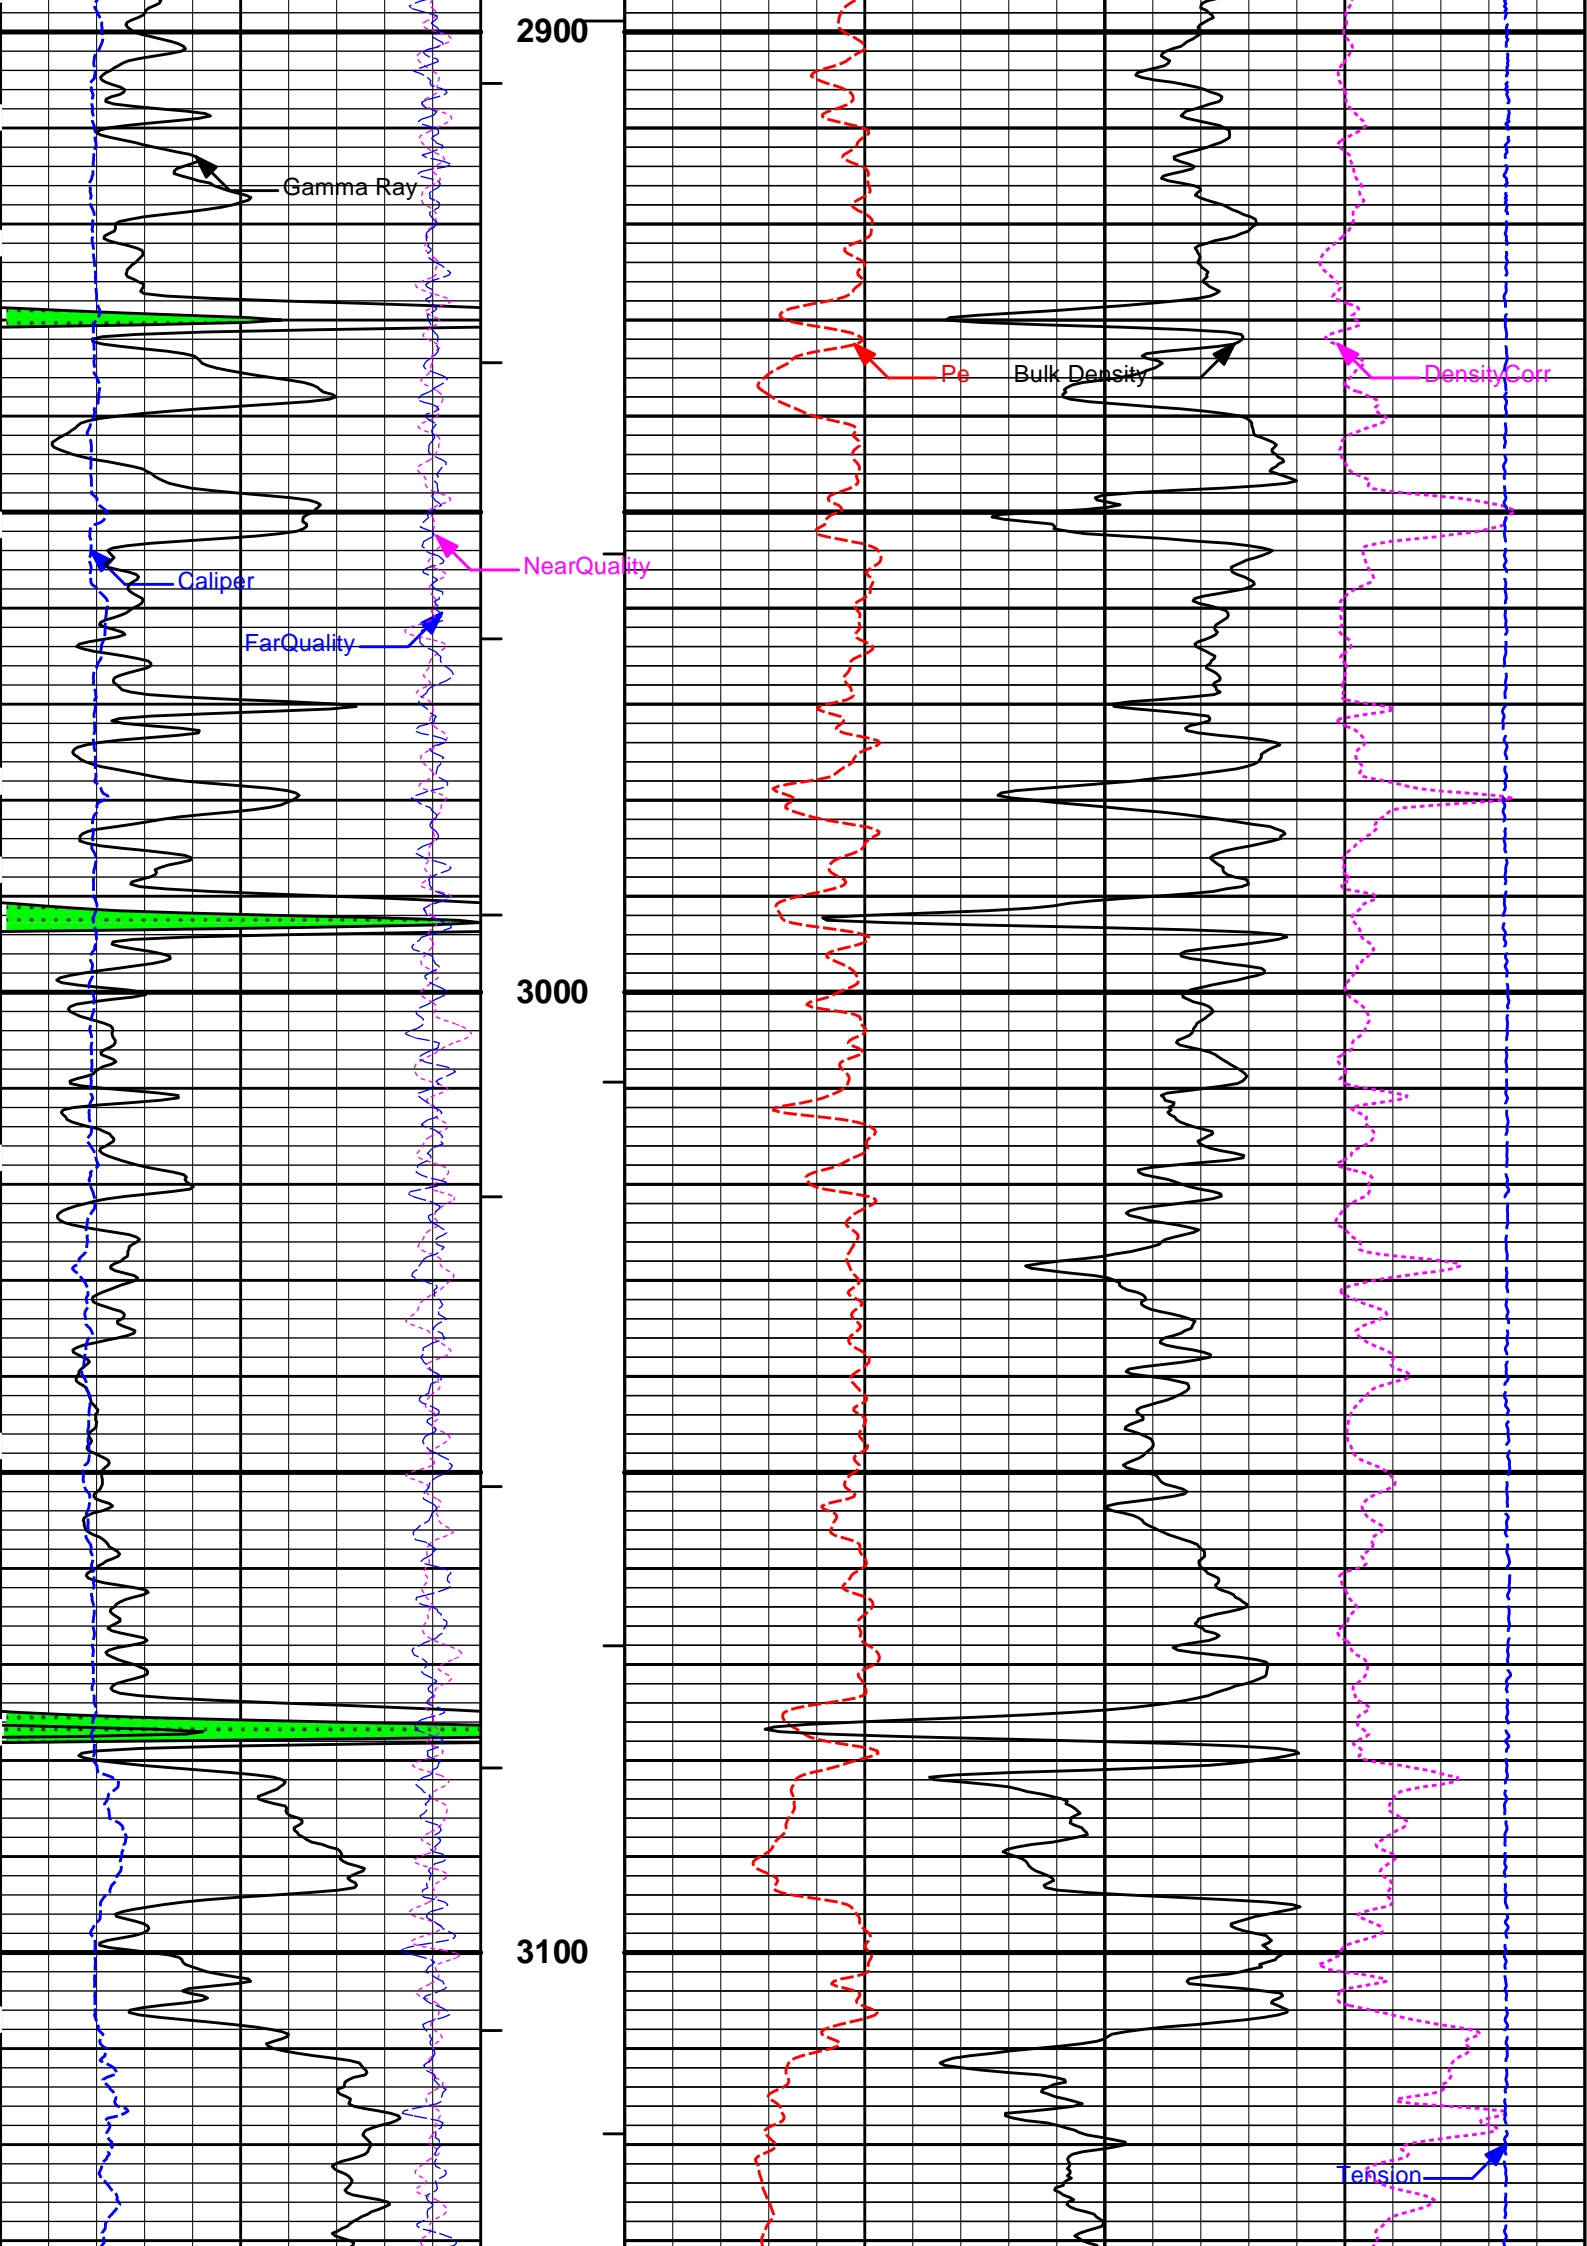

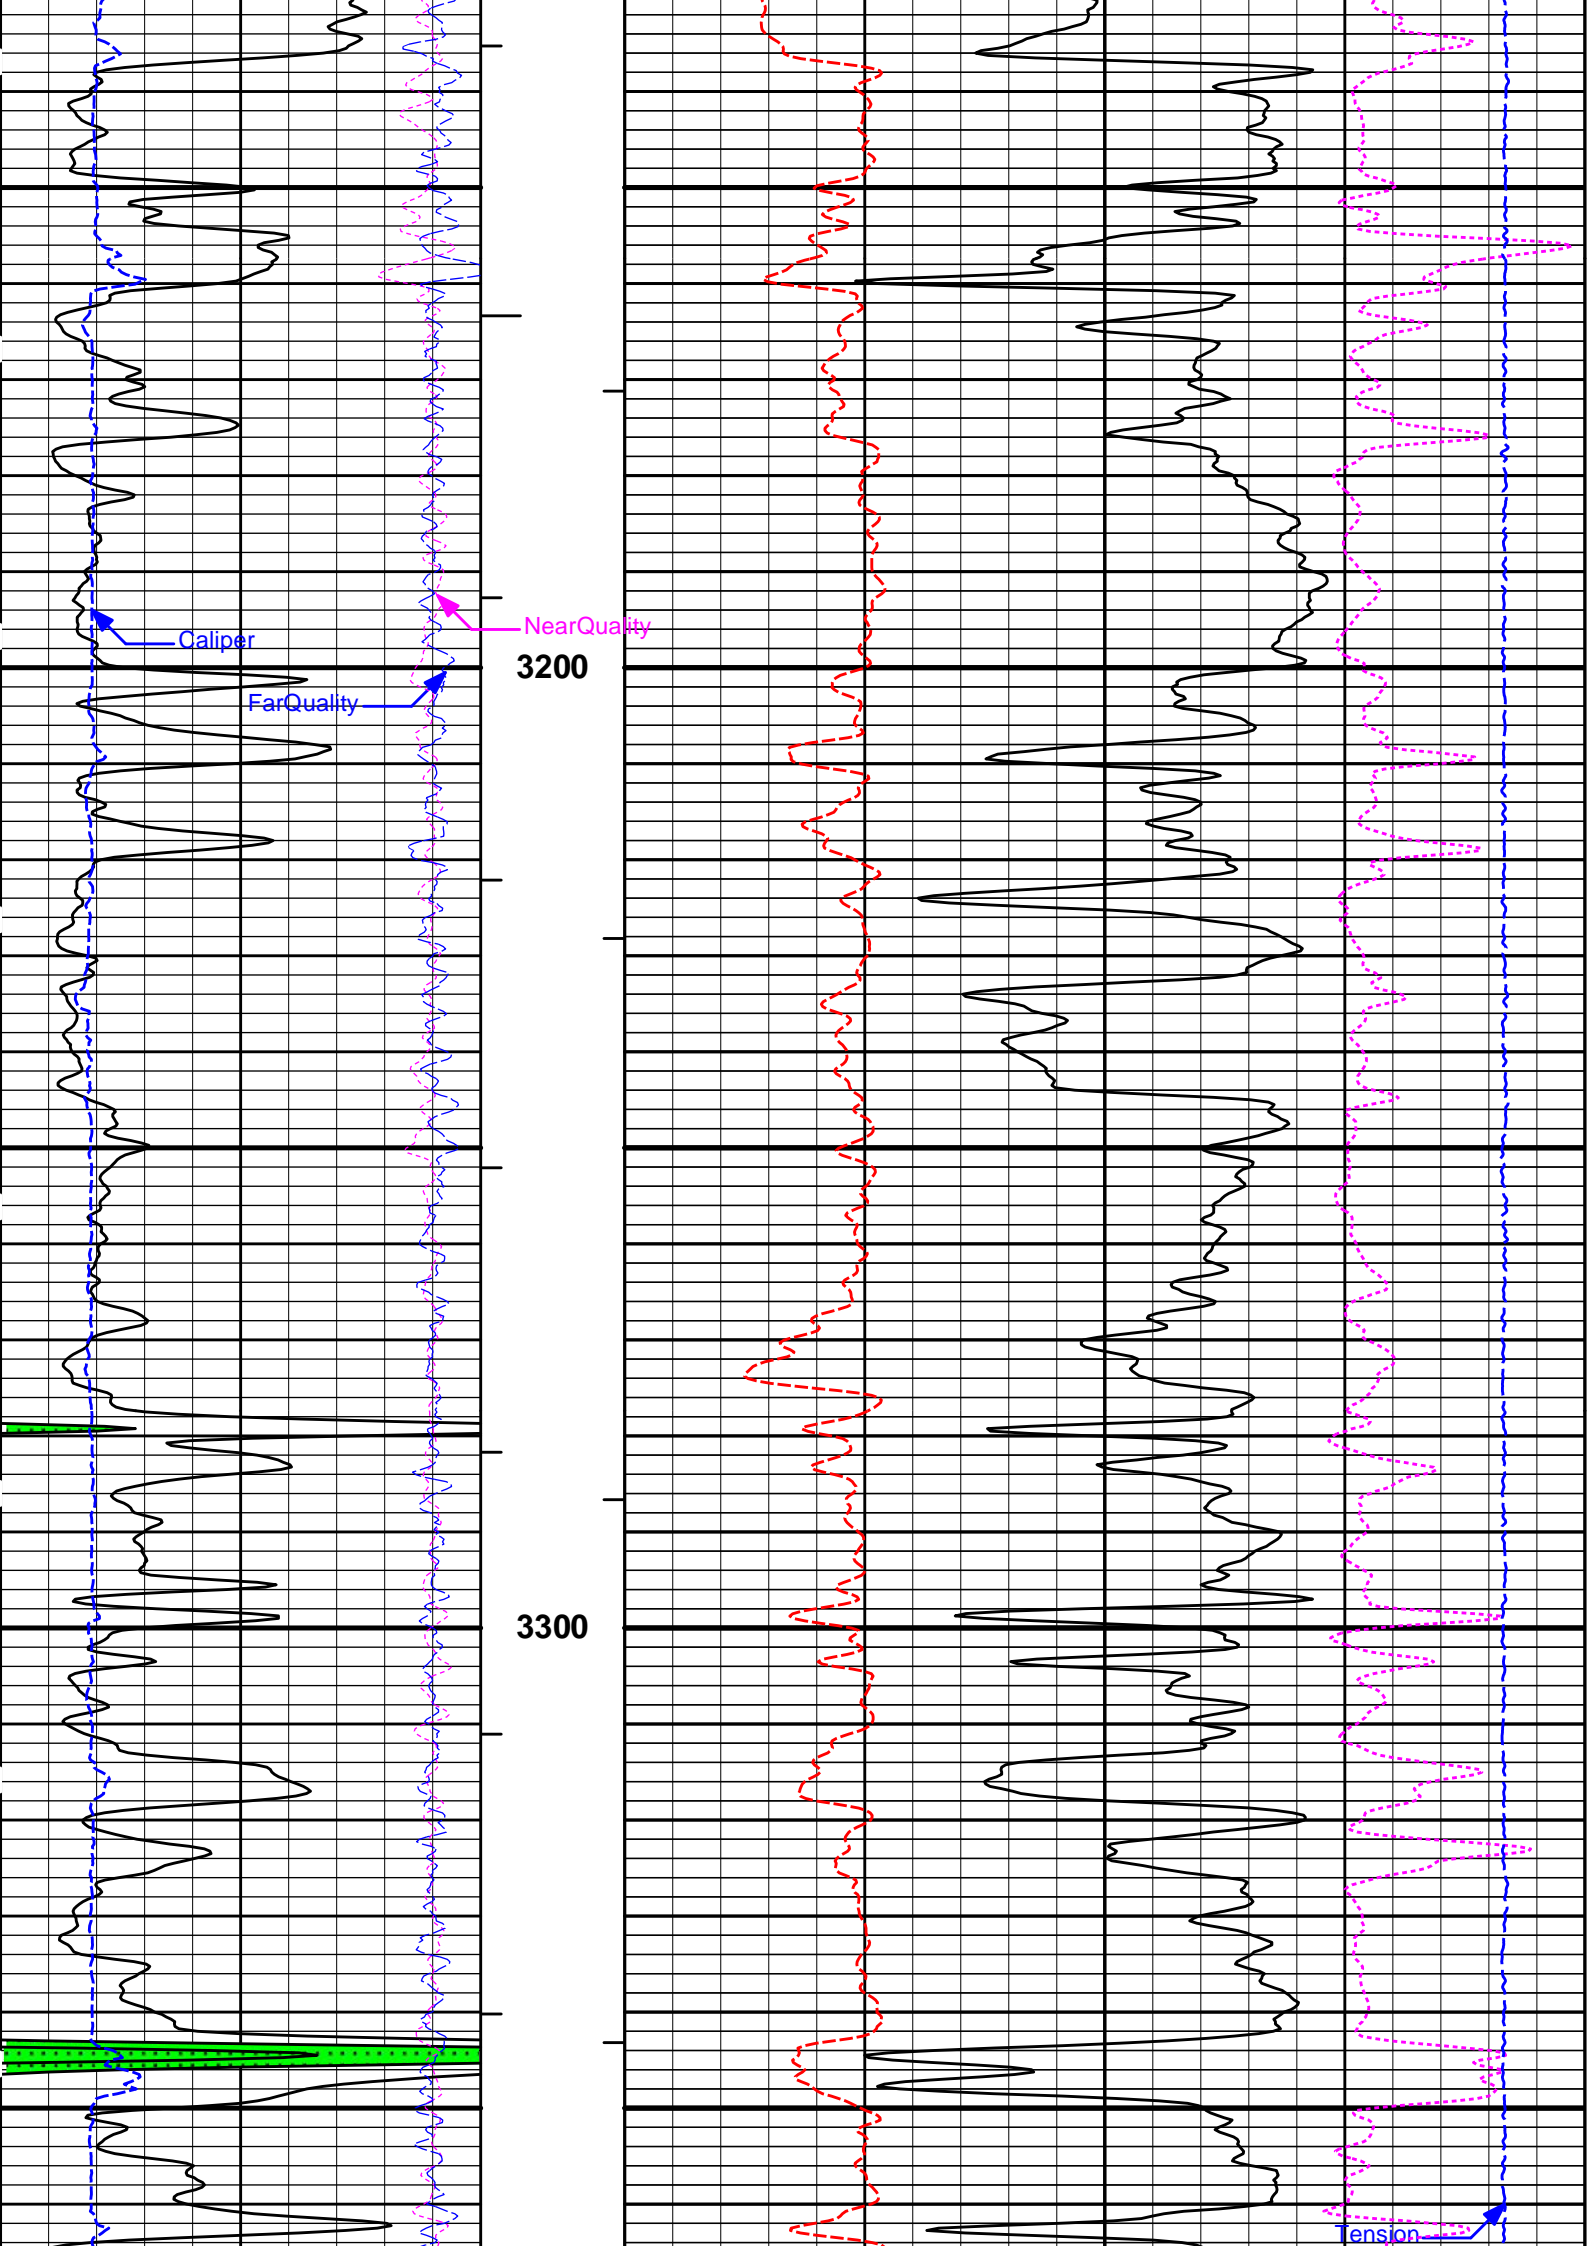

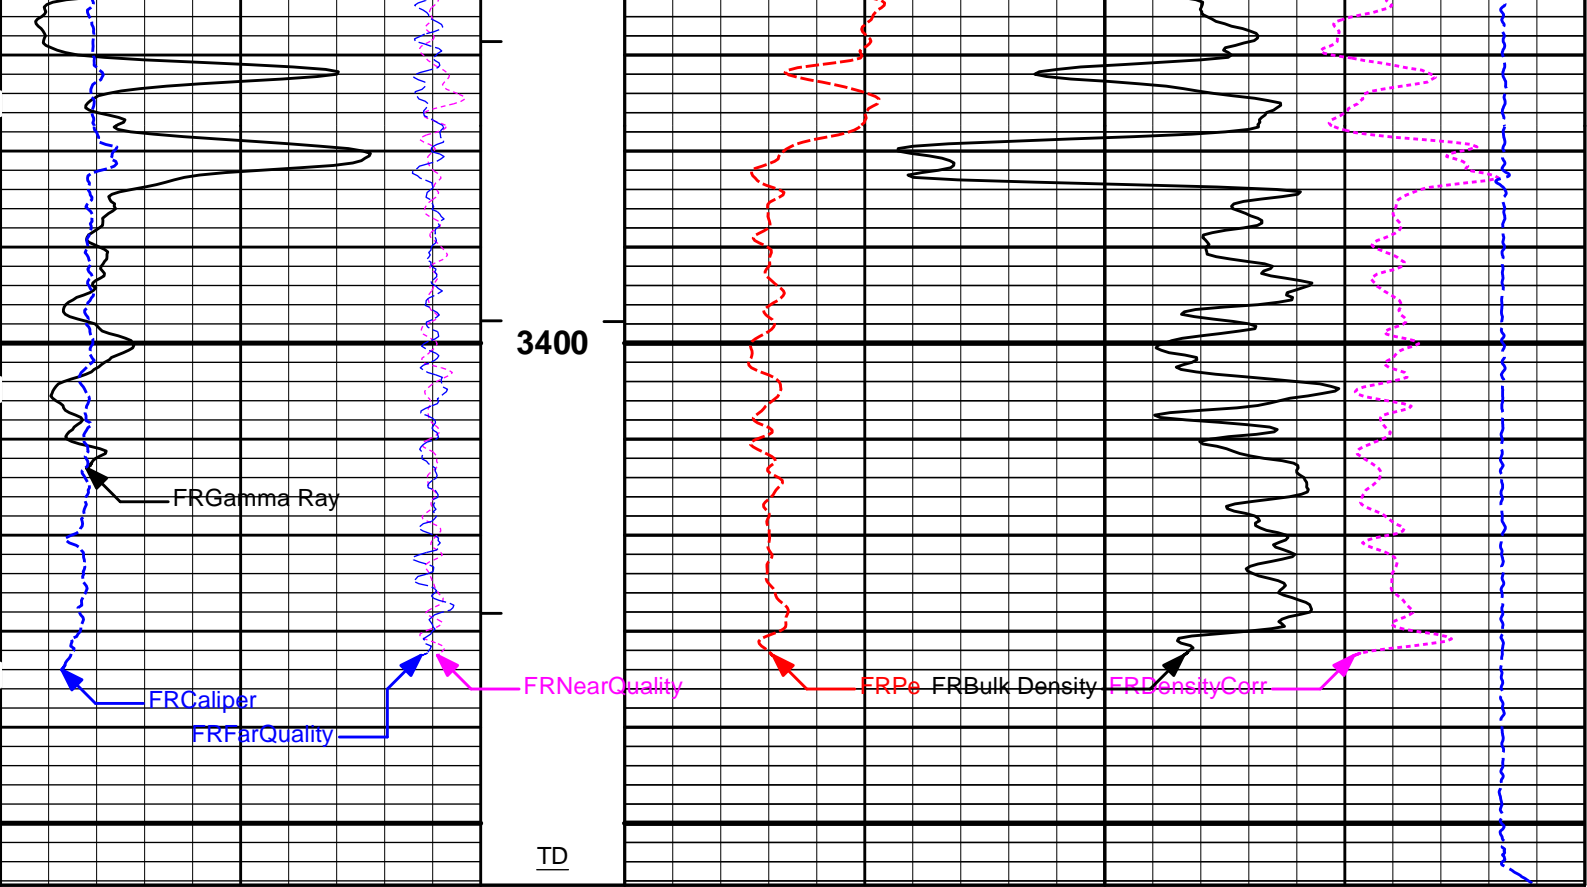

| | | | | | | | | | |
|-----|-------------|-----|---------|---|--------------|----|-------|-------------|------|
| 6 | Caliper | 16 | 1 : 240 | 0 | Pe | 10 | -0.25 | DensityCorr | 0.25 |
| | inches | | ft | | | | | g/cc | |
| -18 | NearQuality | 2 | BHV | | | | 15K | Tension | 0 |
| | | | ft3 | | | | | pounds | |
| 18 | FarQuality | -2 | AHV | 2 | Bulk Density | | | | 3 |
| | | | ft3 | | g/cc | | | | |
| 0 | Gamma Ray | 150 | | | | | | | |
| | api | | | | | | | | |

HALLIBURTON

Plot Time: 12-Feb-19 16:04:35
 Plot Range: 2550 ft to 3456.42 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

5 INCH MAIN LOG


MAIN SECTION 5" PER 100'


HALLIBURTON

Plot Time: 12-Feb-19 16:04:35
 Plot Range: 3080 ft to 3458.67 ft
 Data: RUSSELL_NUSS\Well Based\REPEAT\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

REPEAT SECTION

REPEAT SECTION

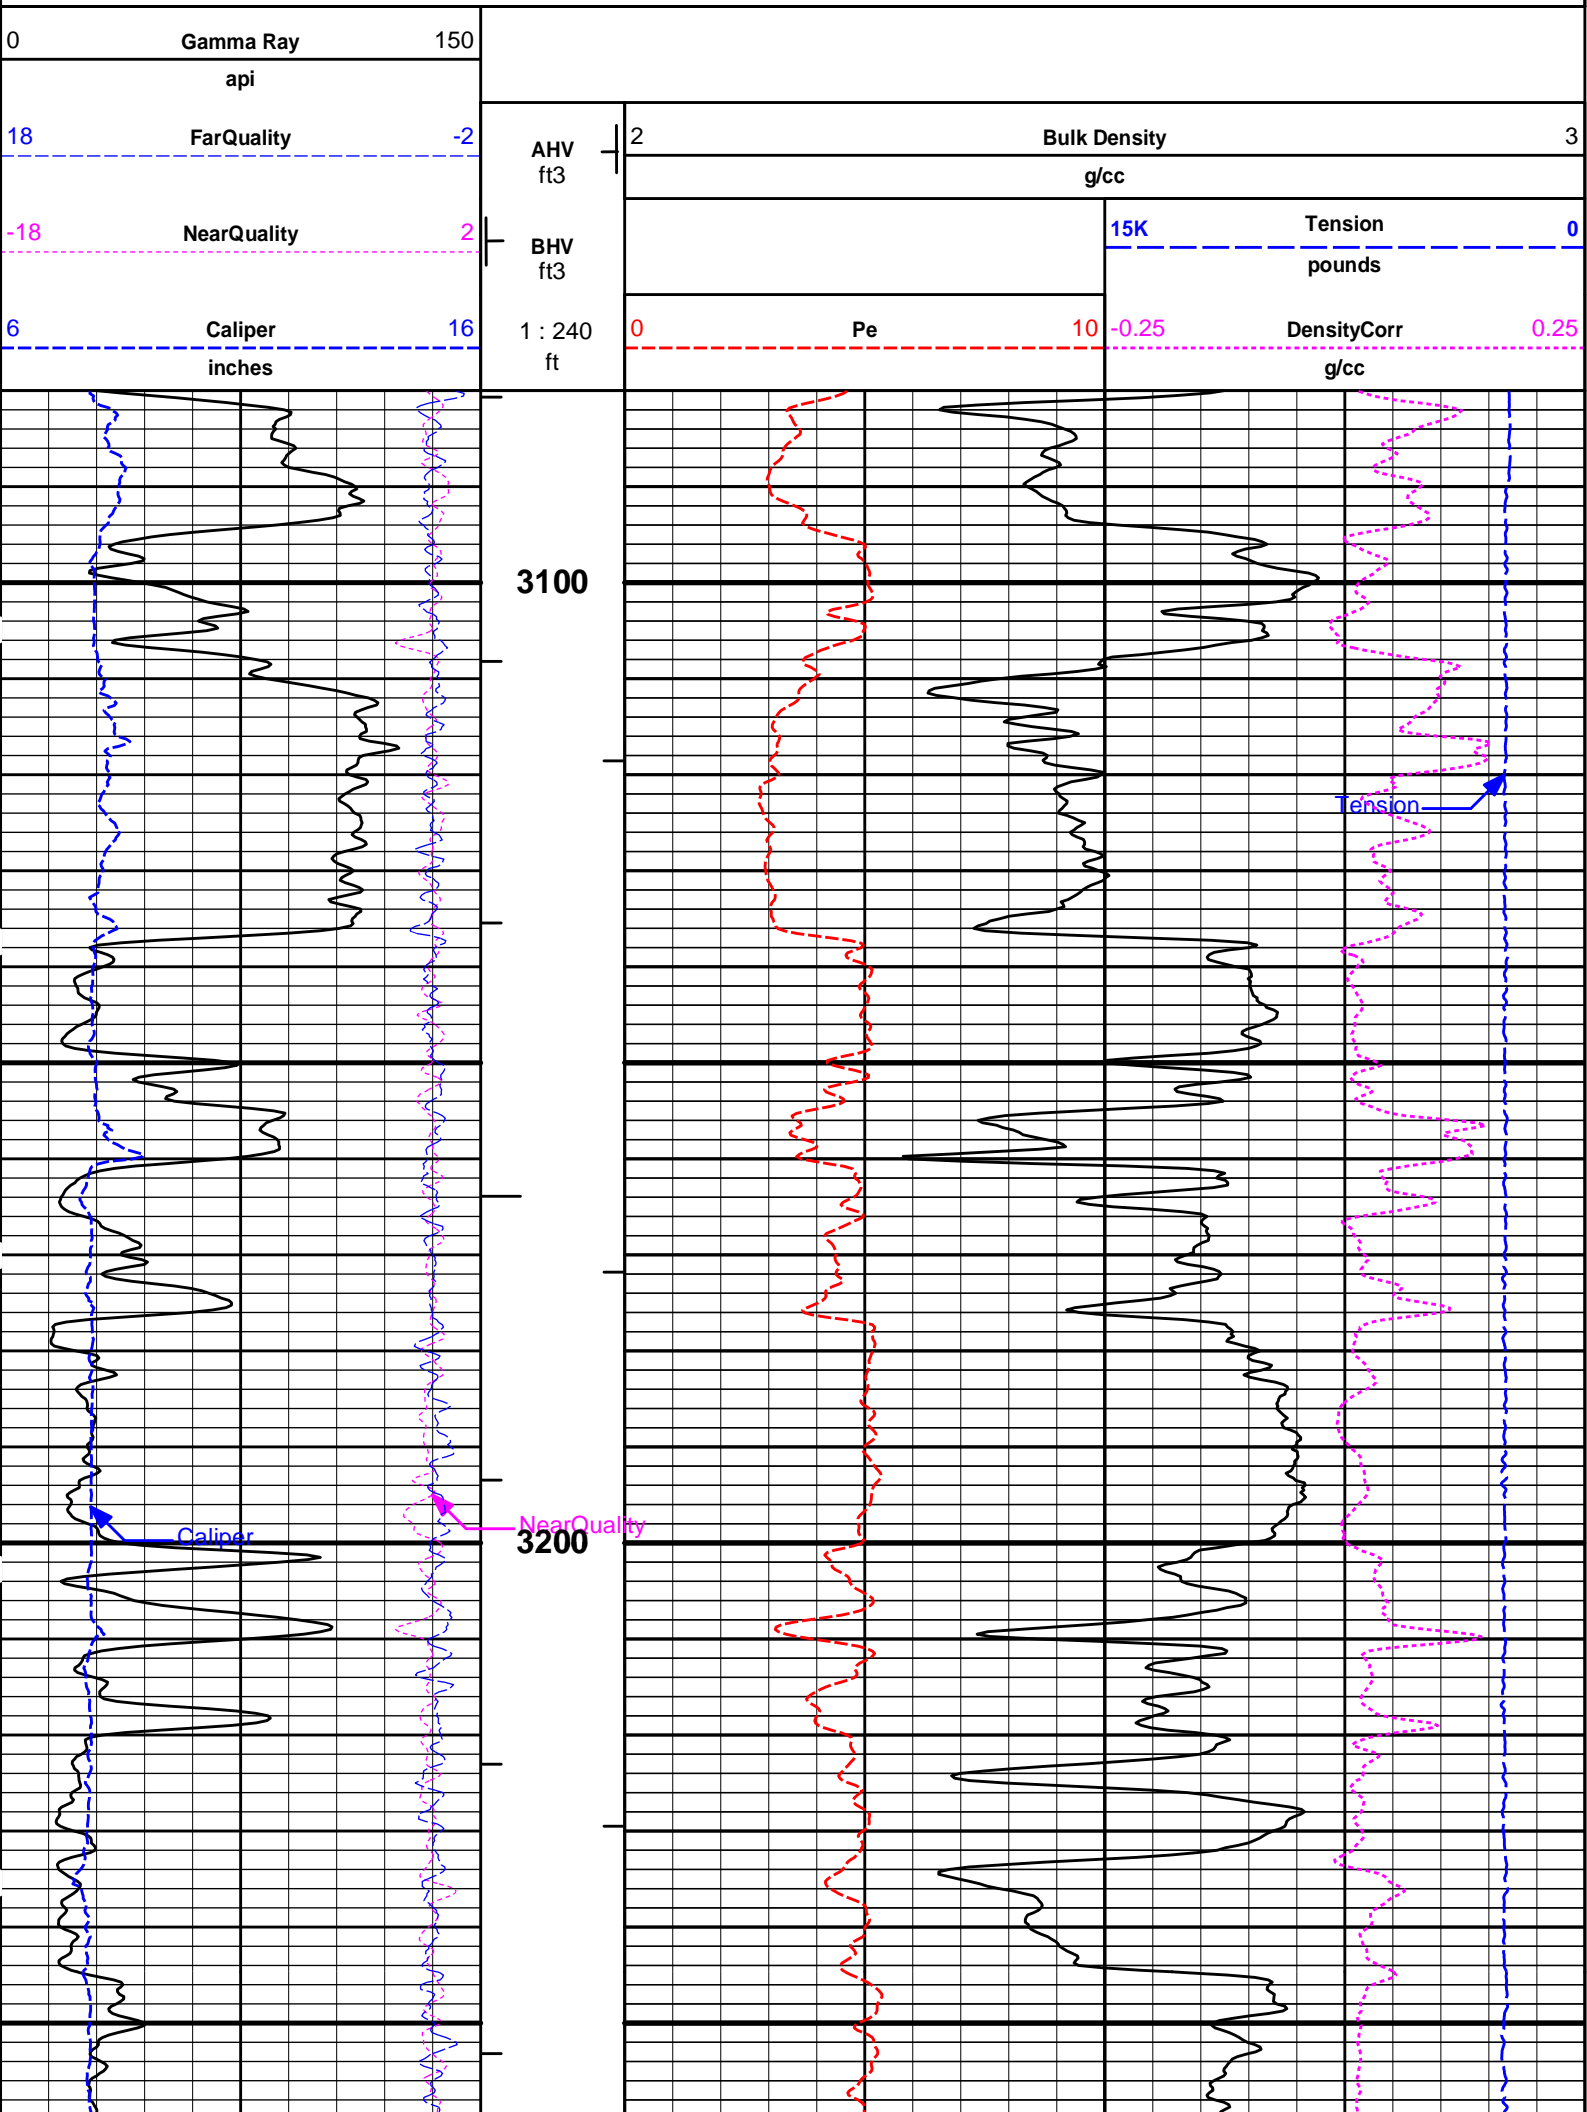

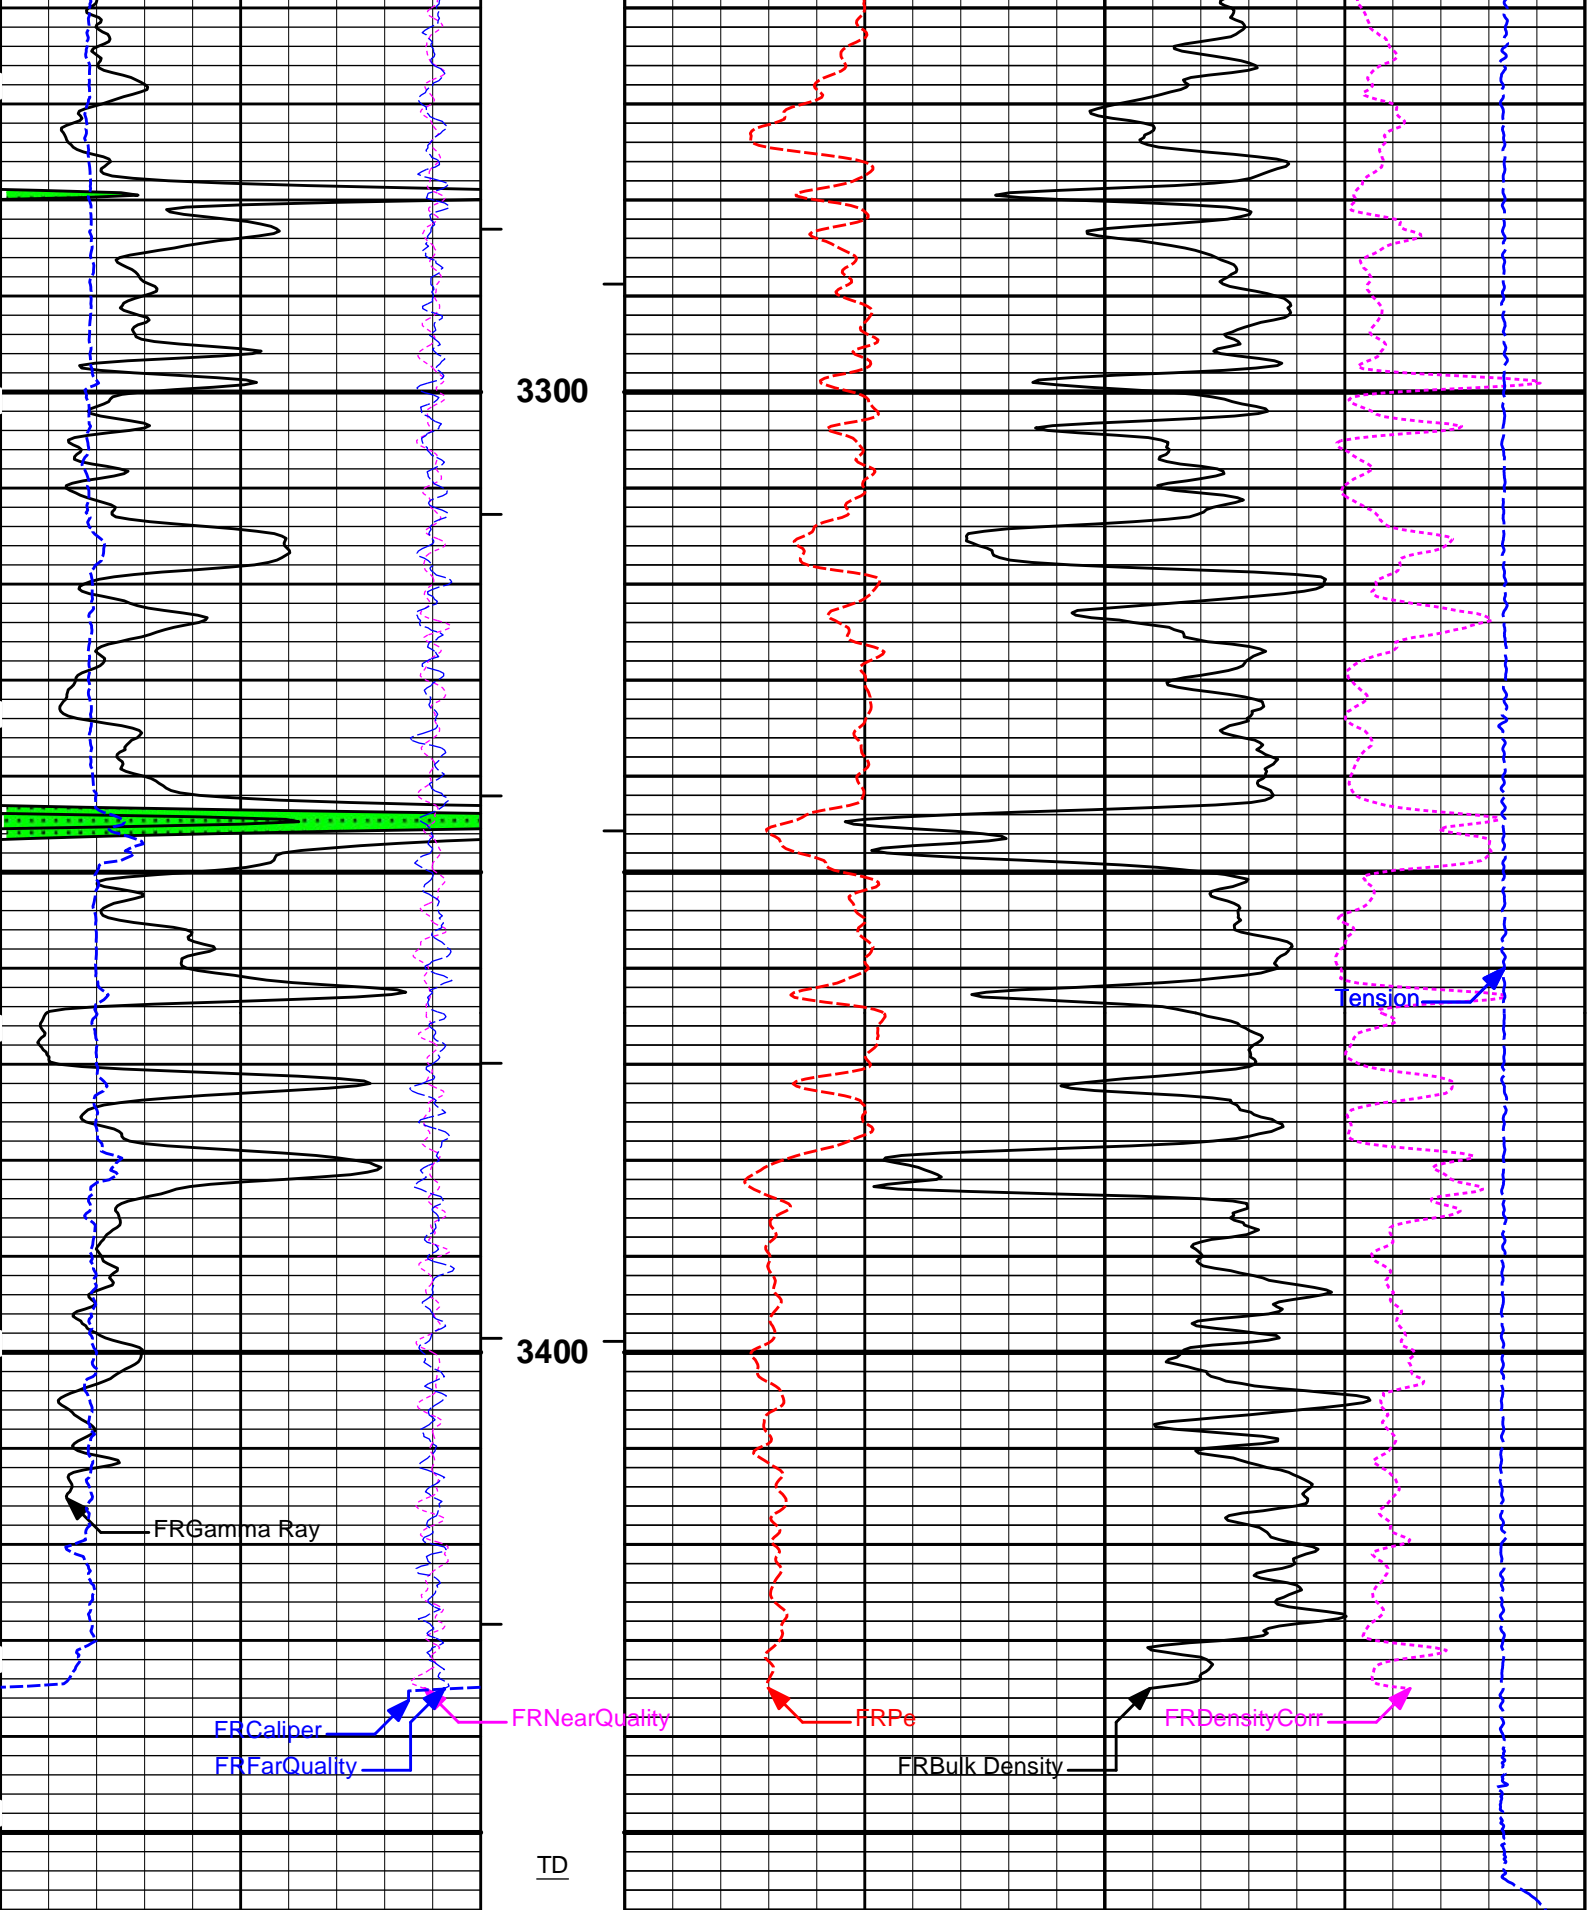

| | | | | | | | | | |
|-----|-------------|-----|---------|---|--------------|-----|-------|-------------|------|
| 6 | Caliper | 16 | 1 : 240 | 0 | Pe | 10 | -0.25 | DensityCorr | 0.25 |
| | inches | | ft | | | | | g/cc | |
| -18 | NearQuality | 2 | BHV | | | 15K | | Tension | 0 |
| | | | ft3 | | | | | pounds | |
| 18 | FarQuality | -2 | AHV | 2 | Bulk Density | | | | 3 |
| | | | ft3 | | g/cc | | | | |
| 0 | Gamma Ray | 150 | | | | | | | |

HALLIBURTON

Plot Time: 12-Feb-19 16:04:37

Plot Range: 3080 ft to 3458.67 ft

Data: RUSSELL_NUSS\Well Based\REPEAT\

Plot File: \\-LOCAL-\RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\SDL-DSN\BULKD_5_MAIN_IQ

REPEAT SECTION**REPEAT SECTION****HALLIBURTON****CALIBRATION REPORT****SURFACE TENSION SHOP CALIBRATION**

Tool Name: Depth Panel - 12345678

Reference Calibration Date: 08-Feb-19 14:23:35

Engineer: SEAN WOLTEMATH

Calibration Date: 09-Feb-19 14:35:03

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

SURFACE TENSION LOAD CELL

| Measurement | Load Cell Value | Measurement | Calibrated | Units |
|-------------|-----------------|-------------|------------|-------|
| Low | 10112.01 | -99.95 | 0.00 | lbs |
| High | 17473.17 | 7809.11 | 7830.00 | lbs |

DOWNHOLE TENSION SHOP CALIBRATION

Tool Name: RWCH - 12345678

Reference Calibration Date: 10-Feb-19 03:20:04

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 23:12:20

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

DOWNHOLE LOAD CELL

| Measurement | Tool Value | Measurement | Calibrated | Units |
|-------------|------------|-------------|------------|-------|
| Low | -427.27 | -5.78 | 0.00 | lbs |
| High | 4412.40 | 456.88 | 1480.00 | lbs |

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 27-Nov-18 10:49:38

Engineer: WHITLOCK

Calibration Date: 14-Dec-18 10:17:09

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

| Measurement | Measured | Calibrated | Units |
|-------------------------|----------|------------|-------|
| Background | 19.9 | 19.6 | api |
| Background + Calibrator | 249.5 | 245.5 | api |
| Calibrator | 229.5 | 225.9 | api |

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 14-Dec-18 10:17:09

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 11:09:14

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Calibrator Source S/N: TB-79

| Field Verification | Shop | Field | Units |
|-------------------------|-------|-------|-------|
| Background | 19.6 | 23.5 | api |
| Background + Calibrator | 245.5 | 243.6 | api |
| Calibrator | 225.9 | 220.1 | api |

| Shop | Field | Difference | Tolerance |
|-------|-------|------------|-----------|
| 225.9 | 220.1 | 5.8 | +/- 9.00 |

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name: DSNT - 11019641 **Reference Calibration Date:** 04-Aug-18 12:26:27
Engineer: SEAN WOLTEMATH **Calibration Date:** 07-Nov-18 10:07:09
Software Version: WL INSITE R5.8.9 (Build 6) **Calibration Version:** 1

Logging Source S/N: DSN-436
 Tank Serial Number: EL RENO HWT
 Reference value assigned to Tank: 56.100
 Snow Block S/N: 12156883
 Calibration Tank Water Temperature: 66 degF
 Min. Tool Housing Outside Diameter: 3.625 in

| CALIBRATION CONSTANTS | | | |
|-----------------------|-------------|-----------|----------------------------|
| Measurement | Prev. Value | New Value | Control Limit On New Value |
| Gain: | 0.97742 | 0.98053 | 0.900 - 1.100 |

| WATER TANK SUMMARY (Horizontal Water Tank) | | | | |
|--|----------------------------------|------------------------|--------|-------------------------|
| Measurement | Current Reading (Previous Coef.) | Calibrated (New Coef.) | Change | Control Limit On Change |
| Porosity (decp): | 0.2348 | 0.2358 | 0.0010 | +/- 0.0020 |
| Calibrated Ratio: | 10.5259 | 10.5595 | 0.034 | +/- 0.050 |

| VERIFIER | | |
|-----------------------------|--------|-------------------|
| Measurement | Value | Control Limit |
| Snow-Block Porosity (decp): | 0.0724 | 0.02000 - 0.09000 |

| PASS/FAIL SUMMARY | |
|-------------------|--------|
| Background Check: | Passed |
| Gain-Range Check: | Passed |
| Snow-Block Check: | Passed |

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name: DSNT - 11019641 **Reference Calibration Date:** 07-Nov-18 10:07:09
Engineer: WHITLOCK **Calibration Date:** 11-Feb-19 10:55:12
Software Version: WL INSITE R5.8.9 (Build 6) **Calibration Version:** 1

Logging Source S/N: DSN-436
 Snow Block S/N: 12156883

| NEUTRON FIELD-CHECK SUMMARY | | | | |
|-----------------------------|--------|--------|------------|-------------------------|
| | Shop | Field | Difference | Control Limit On Change |
| Snow-Block Porosity (decp): | 0.0724 | 0.0771 | 0.0047 | +/- 0.0150 |

| PASS/FAIL SUMMARY | |
|------------------------|--------|
| Block Change Check: | Passed |
| Snow Block Stat Check: | Passed |
| Temperature Check: | Passed |

DENSITY CALIPER SHOP CALIBRATION

| | |
|---|---|
| Tool Name: SDLT - 10960494 | Reference Calibration Date: 01-Jan-70 00:00:00 |
| Engineer: SEAN WOLTEMATH | Calibration Date: 28-Dec-18 10:43:24 |
| Software Version: WL INSITE R5.6.3 (Build 4) | Calibration Version: 1 |
| Host Tool Name: DSNT - 11019641 | |

CALIBRATION COEFFICIENTS

| Measurement | Previous Value | New Value | Control Limit On New Value |
|-------------|----------------|--------------|----------------------------|
| Pad Offset | -3977.11 | -3977.11 | -7000.00 - -1000.00 |
| Pad Gain | 0.0003897 | 0.0003897 | 0.0002000 - 0.0006000 |
| Arm Offset | -3073.13 | -3073.13 | -5000.00 - 3000.00 |
| Arm Gain | 0.0005210 | 0.0005210 | 0.000300 - 0.000700 |
| Arm Power | -0.000005094 | -0.000005094 | -0.000010000 - 0.000010000 |

The ring diameter is computed from: $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$

Tool Diameter: 4.50 in

CALIBRATION RINGS

| Measurement | Current Reading (Previous Coeff.) | Calibrated (New Coeff.) | Change | Control Limit On New Value |
|-----------------------|-----------------------------------|-------------------------|--------|----------------------------|
| PAD EXTENSION: | | | | |
| Small Ring (in) | 2.00 | 2.00 | 0.00 | +/- 0.20 |
| Medium Ring (in) | 3.75 | 3.75 | 0.00 | +/- 0.20 |
| RING DIAMETER: | | | | |
| Small Ring (in) | 6.50 | 6.50 | 0.00 | +/- 0.20 |
| Medium Ring (in) | 8.25 | 8.25 | 0.00 | +/- 0.20 |
| Large Ring (in) | 15.00 | 15.00 | 0.00 | +/- 0.20 |

PASS/FAIL SUMMARY

| | |
|---------------------------------------|--------|
| Calibration-Coefficients Range Check: | Passed |
| Ring-Measurement Check: | Passed |

PASS/FAIL SUMMARY

| | |
|---------------------------------------|--------|
| Calibration-Coefficients Range Check: | Passed |
|---------------------------------------|--------|

SDLT CALIPER FIELD CALIBRATION

| | |
|---|---|
| Tool Name: SDLT - 10960494 | Reference Calibration Date: 28-Dec-18 10:43:24 |
| Engineer: WHITLOCK | Calibration Date: 11-Feb-19 10:52:29 |
| Software Version: WL INSITE R5.6.3 (Build 4) | Calibration Version: 1 |

MEASURED CALIPER VALUES

| Measurement | Shop | Field | Change | Control Limit On New Value |
|---------------|------|-------|--------|----------------------------|
| Pad Extension | 3.75 | 3.79 | 0.04 | +/- 0.10 |
| Ring Diameter | 8.25 | 8.25 | -0.00 | +/- 0.15 |

PASS/FAIL SUMMARY

| | |
|----------------------|--------|
| Pad Extension Check: | Passed |
| Diameter Check: | Passed |

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

| | |
|---|---|
| Tool Name: ACRt Sonde - 11830728 | Reference Calibration Date: 06-Jul-18 13:24:46 |
| Engineer: WHITLOCK | Calibration Date: 31-Oct-18 14:22:50 |
| Software Version: WL INSITE R5.8.9 (Build 6) | Calibration Version: 1 |
| Host Tool Name: ACRt Instrument - 11830684 | |

TYPICAL GAIN RANGE

| Subarray | R12KHz | | R36KHz | | R72KHz | |
|----------|----------|-------|----------|-------|----------|-------|
| | Lower | Upper | Lower | Upper | Lower | Upper |
| | (mmho/m) | | (mmho/m) | | (mmho/m) | |

| | Lower (mmho/m) | Upper | Lower (mmho/m) | Upper | Lower (mmho/m) | Upper | Lower (mmho/m) | Upper | |
|----------|-------------------|--------|-------------------|-------|-------------------|-------|-------------------|--------|------|
| A1 (80") | 0.95 | 1.0279 | 1.05 | 0.95 | 1.0076 | 1.05 | 0.95 | 0.9997 | 1.05 |
| A2 (50") | 0.95 | 1.0334 | 1.05 | 0.95 | 1.0139 | 1.05 | 0.95 | 1.0097 | 1.05 |
| A3 (29") | 0.95 | 1.0346 | 1.05 | 0.95 | 1.0146 | 1.05 | 0.95 | 1.0081 | 1.05 |
| A4 (17") | 0.95 | 1.0279 | 1.05 | 0.95 | 1.0063 | 1.05 | 0.95 | 1.0018 | 1.05 |
| A5 (10") | N/A | N/A | N/A | 0.95 | 1.0001 | 1.05 | 0.95 | 0.9950 | 1.05 |
| A6 (6") | N/A | N/A | N/A | 0.95 | 0.9869 | 1.05 | 0.95 | 0.9818 | 1.05 |

SONDE OFFSET

| Subarray | R12KHz | | | R36KHz | | | R72KHz | | |
|----------|----------|--|--|----------|--|--|----------|--|--|
| | (mmho/m) | | | (mmho/m) | | | (mmho/m) | | |
| A1 (80") | 0.315 | | | -4.964 | | | -5.711 | | |
| A2 (50") | 0.409 | | | -3.450 | | | -5.485 | | |
| A3 (29") | -11.648 | | | -3.720 | | | -3.783 | | |
| A4 (17") | -90.980 | | | -28.724 | | | -23.707 | | |
| A5 (10") | N/A | | | -76.200 | | | -37.537 | | |
| A6 (6") | N/A | | | 280.488 | | | 149.005 | | |

TRANSMITTER CURRENT GAIN

| Signal | Lower | R | Upper |
|--------|-------|------|-------|
| 12K | 0.6 | 0.82 | 1.3 |
| 36K | 1.0 | 1.80 | 2.0 |
| 72K | 1.0 | 1.05 | 2.0 |

R-MUD VERIFICATION

| Signal | Lower (ohm-m) | Measured (ohm-m) | Upper (ohm-m) |
|----------|------------------|---------------------|------------------|
| Mud Cell | 0.95 | 0.99 | 1.05 |

PASS/FAIL SUMMARY

| | |
|------------------|------|
| GAIN RANGE CHK | PASS |
| SONDE OFFSET CHK | PASS |

TOOL OK TO LOG

QUALITY CHECK SHOP CALIBRATION

| | | | |
|--------------------------|----------------------------|------------------------------------|--------------------|
| Tool Name: | ACRt Sonde - 11830728 | Reference Calibration Date: | 06-Jun-18 14:01:20 |
| Engineer: | WHITLOCK | Calibration Date: | 31-Oct-18 14:33:20 |
| Software Version: | WL INSITE R5.8.9 (Build 6) | Calibration Version: | 1 |
| Host Tool Name: | ACRt Instrument - 11830684 | | |

STANDARD DEVIATIONS

| | R12KHz | | | R36KHz | | | R72KHz | | |
|----------|----------------------|----------------------|-----------|----------------------|----------------------|-----------|----------------------|----------------------|-----------|
| | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail |
| A1 (80") | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass |
| A2 (50") | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass |
| A3 (29") | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass |
| A4 (17") | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass |
| A5 (10") | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass |
| A6 (6") | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass | 0.000 | < 0.750 | Pass |

AVERAGES

| | R12KHz | | | R36KHz | | | R72KHz | | |
|----------|----------------------|----------------------|-----------|----------------------|----------------------|-----------|----------------------|----------------------|-----------|
| | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail | Measured (mmho/m) | Expected (mmho/m) | Pass/Fail |
| A1 (80") | 0.000 | < 0.500 | Pass | -0.001 | > -0.500 | Pass | -0.006 | > -0.500 | Pass |
| A2 (50") | 0.000 | < 0.500 | Pass | -0.001 | > -0.500 | Pass | -0.005 | > -0.500 | Pass |
| A3 (29") | -0.000 | < 0.500 | Pass | -0.001 | > -0.500 | Pass | -0.003 | > -0.500 | Pass |
| A4 (17") | -0.002 | > -0.500 | Pass | -0.006 | > -0.500 | Pass | -0.022 | > -0.500 | Pass |
| A5 (10") | -0.010 | > -0.500 | Pass | -0.017 | > -0.500 | Pass | -0.036 | > -0.500 | Pass |

| | | | | | | | | | |
|---------|-------|---------|------|-------|---------|------|-------|---------|------|
| A6 (6") | 0.014 | < 0.500 | Pass | 0.063 | < 0.500 | Pass | 0.138 | < 0.500 | Pass |
|---------|-------|---------|------|-------|---------|------|-------|---------|------|

GAIN TOLERANCE

R12KHz

| | Measured (mmho/m) | Last Month (mmho/m) | Difference (mmho/m) | Tolerance (mmho/m) | Pass/Fail |
|----------|-------------------|---------------------|---------------------|--------------------|-----------|
| A1 (80") | -213173456.000 | -213653808.000 | 480352.000 | 10682690.400 | Pass |
| A2 (50") | -205651744.000 | -206143280.000 | 491536.000 | 10307164.000 | Pass |
| A3 (29") | -200817664.000 | -201197776.000 | 380112.000 | 10059888.800 | Pass |
| A4 (17") | -200193568.000 | -200629872.000 | 436304.000 | 10031493.600 | Pass |
| A5 (10") | -200252336.000 | -200678960.000 | 426624.000 | 10033948.000 | Pass |
| A6 (6") | -199820688.000 | -200219344.000 | 398656.000 | 10010967.200 | Pass |

R36KHz

| | Measured (mmho/m) | Last Month (mmho/m) | Difference (mmho/m) | Tolerance (mmho/m) | Pass/Fail |
|----------|-------------------|---------------------|---------------------|--------------------|-----------|
| A1 (80") | 48114080.000 | 48477272.000 | 363192.000 | 2423863.600 | Pass |
| A2 (50") | 33966292.000 | 34324412.000 | 358120.000 | 1716220.600 | Pass |
| A3 (29") | 28032378.000 | 28346680.000 | 314302.000 | 1417334.000 | Pass |
| A4 (17") | 27853682.000 | 28207516.000 | 353834.000 | 1410375.800 | Pass |
| A5 (10") | 27373208.000 | 27716930.000 | 343722.000 | 1385846.500 | Pass |
| A6 (6") | 26035236.000 | 26360300.000 | 325064.000 | 1318015.000 | Pass |

R72KHz

| | Measured (mmho/m) | Last Month (mmho/m) | Difference (mmho/m) | Tolerance (mmho/m) | Pass/Fail |
|----------|-------------------|---------------------|---------------------|--------------------|-----------|
| A1 (80") | -92927656.000 | -93022904.000 | 95248.000 | 4651145.200 | Pass |
| A2 (50") | -90501024.000 | -90617752.000 | 116728.000 | 4530887.600 | Pass |
| A3 (29") | -88192472.000 | -88292832.000 | 100360.000 | 4414641.600 | Pass |
| A4 (17") | -88397088.000 | -88515880.000 | 118792.000 | 4425794.000 | Pass |
| A5 (10") | -86957704.000 | -87076952.000 | 119248.000 | 4353847.600 | Pass |
| A6 (6") | -87976216.000 | -88080696.000 | 104480.000 | 4404034.800 | Pass |

PASS/FAIL SUMMARY

| | |
|-----------------------------|------|
| Std Deviation Verification | Pass |
| Average Verification | Pass |
| Gain Tolerance Verification | Pass |

MICRO LOG SHOP CALIBRATION

| | |
|---|---|
| Tool Name: Microlog Pad - 10960494 | Reference Calibration Date: 14-Dec-18 13:35:14 |
| Engineer: WHITLOCK | Calibration Date: 01-Feb-19 14:12:10 |
| Software Version: WL INSITE R5.8.9 (Build 6) | Calibration Version: 1 |
| Host Tool Name: DSNT - 11019641 | |

CALIBRATION COEFFICIENT SUMMARY

| Measurement | Micro Log Normal | | Micro Log Lateral | | Units |
|----------------------|------------------|------------|-------------------|------------|-------|
| | Measured | Calibrated | Measured | Calibrated | |
| Tool Zero | -0.07 | -0.10 | -0.01 | -0.01 | ohmm |
| Calibration Point #1 | 0.03 | 0.00 | 0.00 | 0.00 | ohmm |
| Calibration Point #2 | 20.03 | 20.00 | 20.00 | 20.00 | ohmm |
| Internal Reference | 19.92 | 19.89 | 19.99 | 19.98 | ohmm |

| Measurement | Micro Log Normal Tool Value | Micro Log Lateral Tool Value | Units |
|----------------------|-----------------------------|------------------------------|-------|
| Tool Zero | 0.39 | 0.30 | V |
| Calibration Point #1 | 26.06 | 2.13 | V |
| Calibration Point #2 | 5327.83 | 6938.00 | V |
| Internal Reference | 5298.82 | 6931.52 | V |

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10960494

Reference Calibration Date: 01-Feb-19 14:12:10

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 11:12:53

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

| Measurement | Micro Log Normal | | Micro Log Lateral | | Units |
|--------------------|------------------|-------|-------------------|-------|-------|
| | Shop | Field | Shop | Field | |
| Tool Zero | -0.10 | -0.10 | -0.01 | -0.01 | ohmm |
| Internal Reference | 19.89 | 19.90 | 19.98 | 19.99 | ohmm |

| Summary | | | | |
|------------------|-------|-------|------------|-----------|
| Signal | Shop | Field | Difference | Tolerance |
| Microlog Normal | 19.89 | 19.90 | -0.01 | +/- 0.80 |
| Microlog Lateral | 19.98 | 19.99 | -0.01 | +/- 0.80 |

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - 11213308

Reference Calibration Date: 14-Dec-18 10:49:18

Engineer: WHITLOCK

Calibration Date: 14-Dec-18 11:15:00

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Logging Source S/N: 5475GW

Aluminum Block S/N: El Reno Aluminum Block

Density: 2.581g/cc

Pe: 3.170

Magnesium Block S/N: El Reno Magnesium Block

Density: 1.687g/cc

Pe: 2.594

| DENSITY CALIBRATION SUMMARY | | | |
|-----------------------------|----------------|-----------|---------------|
| Measurement | Previous Value | New Value | Control Limit |
| Near Bar Gain | 0.9935 | 0.9902 | 0.90 - 1.10 |
| Near Dens Gain | 0.9891 | 0.9881 | 0.90 - 1.10 |
| Near Peak Gain | 1.0020 | 1.0148 | 0.90 - 1.10 |
| Near Lith Gain | 1.0071 | 1.0175 | 0.90 - 1.10 |
| Far Bar Gain | 1.0015 | 1.0048 | 0.90 - 1.10 |
| Far Dens Gain | 0.9919 | 0.9938 | 0.90 - 1.10 |
| Far Peak Gain | 0.9878 | 0.9921 | 0.90 - 1.10 |
| Far Lith Gain | 0.9743 | 0.9808 | 0.90 - 1.10 |
| | | | |
| Near Bar Offset | 0.1918 | 0.2246 | NONE |
| Near Dens Offset | 0.2308 | 0.2401 | NONE |
| Near Peak Offset | 0.0959 | -0.0122 | NONE |
| Near Lith Offset | 0.0296 | -0.0574 | NONE |
| Far Bar Offset | 0.0411 | 0.0135 | NONE |
| Far Dens Offset | 0.1442 | 0.1314 | NONE |
| Far Peak Offset | 0.1660 | 0.1305 | NONE |
| Far Lith Offset | 0.2364 | 0.1860 | NONE |
| | | | |
| Near Bar Background | 937.48 | 939.15 | 700 - 1450 |
| Near Dens Background | 311.57 | 312.43 | 230 - 480 |
| Near Peak Background | 135.23 | 136.70 | 100 - 210 |
| Near Lith Background | 166.58 | 166.31 | 125 - 260 |
| Far Bar Background | 479.15 | 478.16 | 450 - 900 |
| Far Dens Background | 191.75 | 190.12 | 175 - 345 |
| Far Peak Background | 77.50 | 76.92 | 70 - 140 |
| Far Lith Background | 79.00 | 78.81 | 75 - 145 |

| CALIBRATION BLOCK SUMMARY | | | | |
|---------------------------|---------------------------------|-----------------------|--------|-------------------------|
| Measurement | Current Reading (Previous Coef) | Calibrated (New Coef) | Change | Control Limit On Change |
| MAGNESIUM | | | | |
| Density (g/cc) | 1.689 | 1.687 | -0.002 | +/- 0.015 |

| | | | | |
|-----------------|-------|-------|--------|-------------|
| Pe | 2.556 | 2.551 | -0.005 | +/- 0.150 |
| ALUMINUM | | | | |
| Density (g/cc) | 2.580 | 2.581 | 0.001 | +/- 0.01500 |
| Pe | 3.107 | 3.123 | 0.016 | +/- 0.150 |

| TOOL SUMMARY | | | | |
|----------------------------|---------------|----------------|--------------|----------------|
| Measurement | Near Detector | | Far Detector | |
| | Value | Control Limits | Value | Control Limits |
| QUALITY | | | | |
| Background | -0.0000 | +/- 0.0110 | -0.0004 | +/- 0.0140 |
| Magnesium Block | -0.0005 | +/- 0.0110 | -0.0010 | +/- 0.0140 |
| Aluminum Block | -0.0013 | +/- 0.0110 | 0.0004 | +/- 0.0140 |
| Resolution | 9.27 | 6.00 - 11.50 | 9.45 | 6.00 - 11.50 |
| Internal Verifier(B+D+P+L) | 1555 | 1200 - 2700 | 824 | 800 - 1700 |

| PASS/FAIL SUMMARY | |
|--------------------------------|--------|
| Background Quality Check: | Passed |
| Background Range Check: | Passed |
| Background Resolution Check: | Passed |
| Background Verification Check: | Passed |
| Magnesium Quality Check: | Passed |
| Aluminum Quality Check: | Passed |
| Gains Check: | Passed |
| Changes in Calibration Blocks: | Passed |

SPECTRAL DENSITY FIELD CHECK

Tool Name: SDLT Pad - 11213308

Reference Calibration Date: 14-Dec-18 11:15:00

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 11:09:03

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Pad Temperature: 64.4 degF

| DENSITY FIELD CALIBRATION SUMMARY | | | | |
|--|----------|----------|--------|-------------------|
| Measurement | Shop | Field | Change | Control Limit +/- |
| Near (B+D+P+L) cps | 1554.595 | 1558.839 | 4.244 | 15.869 |
| Far (B+D+P+L) cps | 824.007 | 820.518 | -3.489 | 15.826 |
| Near Resolution | 9.27 | 9.21 | -0.060 | 0.50 |
| Far Resolution | 9.45 | 9.46 | 0.010 | 1.00 |

| PASS/FAIL SUMMARY | |
|--------------------------|--------|
| Bkg Quality Check: | Passed |
| Bkg Resolution Check: | Passed |
| Bkg Verification Check: | Passed |

CALIBRATION SUMMARY

| Sensor | Shop | Field | Post | Difference | Tolerance | Units |
|-----------------------------|---------|--------|-------|------------|------------|-------|
| Depth Panel-12345678 | | | | | | |
| Tension Zero | 0.00 | ----- | ----- | 0.00 | ----- | lbs |
| Tension Cal | 7830.00 | ----- | ----- | 0.00 | ----- | lbs |
| RWCH-12345678 | | | | | | |
| DH Tension Zero | 0.00 | ----- | ----- | 0.00 | ----- | lbs |
| DH Tension Cal | 1480.00 | ----- | ----- | 0.00 | ----- | lbs |
| GTET-11013113 | | | | | | |
| Gamma Ray Calibrator | 225.9 | 220.1 | ----- | 5.8 | +/- 9.00 | api |
| DSNT-11019641 | | | | | | |
| Snow Block Porosity | 0.0724 | 0.0774 | | 0.0047 | +/- 0.0150 | decn |

| SDLT-10960494 | | | | | | |
|--|----------|----------|-------|--------|--------------------------|-------|
| Pad Extension | 3.75 | 3.79 | ----- | -0.04 | +/-0.10 | in |
| Ring Diameter | 8.25 | 8.25 | ----- | 0.00 | +/-0.15 | in |
| ACRt Sonde-11830728 | | | | | | |
| Mud Cell | 0.99 | ----- | ----- | 0 | ----- | ohm-m |
| Microlog Pad-10960494 | | | | | | |
| MicroLog Normal | 19.89 | 19.90 | ----- | -0.01 | +/-0.80 | ohmm |
| MicroLog Lateral | 19.98 | 19.99 | ----- | -0.01 | +/-0.80 | ohmm |
| SDLT Pad-11213308 | | | | | | |
| Near(B+D+P+L) | 1554.595 | 1558.839 | ----- | -4.244 | +/-15.869 | cps |
| Far(B+D+P+L) | 824.007 | 820.518 | ----- | 3.489 | +/-15.826 | cps |
| Data: RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\IDLE | | | | | Date: 12-Feb-19 13:22:15 | |

HALLIBURTON

PARAMETERS REPORT

| Depth (ft) | Tool Name | Mnemonic | Description | Value | Units |
|------------|-----------------|----------|---|------------|-------|
| TOP | | | | | |
| | SHARED | BS | Bit Size | 7.875 | in |
| | SHARED | UBS | Use Bit Size instead of Caliper for all applications. | No | |
| | SHARED | MDBS | Mud Base | Water | |
| | SHARED | MDWT | Borehole Fluid Weight | 9.000 | ppg |
| | SHARED | WAGT | Weighting Agent | Natural | |
| | SHARED | BSAL | Borehole salinity | 0.00 | ppm |
| | SHARED | FSAL | Formation Salinity NaCl | 0.00 | ppm |
| | SHARED | KPCT | Percent K in Mud by Weight? | 0.00 | % |
| | SHARED | RMUD | Mud Resistivity | 0.550 | ohmm |
| | SHARED | TRM | Temperature of Mud | 75.0 | degF |
| | SHARED | CSD | Logging Interval is Cased? | No | |
| | SHARED | ICOD | AHV Casing OD | 5.500 | in |
| | SHARED | CSTR | Compressive Strength | 1000.00 | psia |
| | SHARED | ST | Surface Temperature | 75.0 | degF |
| | SHARED | TD | Total Well Depth | 10000.00 | ft |
| | SHARED | BHT | Bottom Hole Temperature | 115.0 | degF |
| | SHARED | SVTM | Navigation and Survey Master Tool | NONE | |
| | SHARED | AZTM | High Res Z Accelerometer Master Tool | GTET | |
| | SHARED | TEMM | CBM Temperature Master Tool | GTET | |
| | SHARED | SOCI | Source of Casing Information | Parameters | |
| | SHARED | MSAL | Water-base mud filtrate salinity | 0.00 | ppm |
| | Rwa / CrossPlot | XPOK | Process Crossplot? | Yes | |
| | Rwa / CrossPlot | FCHO | Select Source of F | Automatic | |
| | Rwa / CrossPlot | AFAC | Archie A factor | 0.6200 | |
| | Rwa / CrossPlot | MFAC | Archie M factor | 2.1500 | |
| | Rwa / CrossPlot | RMFR | Rmf Reference | 0.10 | ohmm |
| | Rwa / CrossPlot | TMFR | Rmf Ref Temp | 75.00 | degF |
| | Rwa / CrossPlot | RWA | Resistivity of Formation Water | 0.05 | ohmm |
| | Rwa / CrossPlot | ADP | Use Air Porosity to calculate CrossplotPhi | No | |
| | Rwa / CrossPlot | BHSM | Borehole Size Source Tool | SDLT | |
| | Rwa / CrossPlot | ROIN | Input for RO Calculation | Rwa | |


| | | | | |
|--------------|------|--|----------------|------|
| GTET | GROK | Process Gamma Ray? | Yes | |
| GTET | GEOK | Process Gamma Ray EVR? | No | |
| GTET | TPOS | Tool Position for Gamma Ray Tools. | Eccentered | |
| GTET | BHSM | Borehole Size Source Tool | SDLT | |
| DSNT | DNOK | Process DSN? | Yes | |
| DSNT | DEOK | Process DSN EVR? | No | |
| DSNT | NLIT | Neutron Lithology | Limestone | |
| DSNT | DNSO | DSN Standoff - 0.25 in (6.35 mm) Recommended | 0.250 | in |
| DSNT | DNTT | Temperature Correction Type | None | |
| DSNT | DPRS | DSN Pressure Correction Type | None | |
| DSNT | SHCO | View More Correction Options | No | |
| DSNT | UTVD | Use TVD for Gradient Corrections? | No | |
| DSNT | LHWT | Logging Horizontal Water Tank? | No | |
| DSNT | UCLA | Classic Neutron Parameter utilized? | No | |
| DSNT | BHSM | Borehole Size Source Tool | SDLT | |
| SDLT | CLOK | Process Caliper Outputs? | Yes | |
| Microlog Pad | MLOK | Process MicroLog Outputs? | Yes | |
| SDLT Pad | DNOK | Process Density? | Yes | |
| SDLT Pad | DNOK | Process Density EVR? | No | |
| SDLT Pad | CB | Logging Calibration Blocks? | No | |
| SDLT Pad | SPVT | SDLT Pad Temperature Valid? | Yes | |
| SDLT Pad | DTWN | Disable temperature warning | No | |
| SDLT Pad | DMA | Formation Density Matrix | 2.710 | g/cc |
| SDLT Pad | DFL | Formation Density Fluid | 1.000 | g/cc |
| SDLT Pad | BHSM | Borehole Size Source Tool | SDLT | |
| ACRt Sonde | RTOK | Process ACRt? | Yes | |
| ACRt Sonde | MNSO | Minimum Tool Standoff | 1.50 | in |
| ACRt Sonde | TCS1 | Temperature Correction Source | FP Lwr & FP Up | |
| ACRt Sonde | TPOS | Tool Position | Free Hanging | |
| ACRt Sonde | RMOP | Rmud Source | Mud Cell | |
| ACRt Sonde | RMIN | Minimum Resistivity for MAP | 0.20 | ohmm |
| ACRt Sonde | RMAX | Maximum Resistivity for MAP | 200.00 | ohmm |
| ACRt Sonde | THQY | Threshold Quality | 0.50 | |
| ACRt Sonde | MRFX | Fixed mud resistivity | 2000 | ohmm |
| ACRt Sonde | BHSM | Borehole Size Source Tool | SDLT | |
| ACRt Sonde | MBFL | Apply Corkscrew Effect? | No | |

BOTTOM _____
 Data: RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\IDLE Date: 12-Feb-19 13:23:25



TOOL STRING DIAGRAM REPORT

| Description | Overbody Description | O.D. | Diagram | Sensors @ Delays | Length | Accumulated Length |
|------------------------------|---------------------------------------|---------------|---------|------------------------------|---------|--------------------|
| | | Ø 2.310 in → | | ← Fishing Neck @ 57.71 ft | | 58.59 ft |
| RWCH-12345678 135.00 lbs | | Ø 3.625 in → | | ← Load Cell @ 54.91 ft | 6.25 ft | |
| | Weak Point Solid-00000025 0.01 lbs | Ø 0.010 in* → | | ← BH Temperature @ 54.34 ft | | 52.34 ft |
| SP Sub-11812437 60.00 lbs | | Ø 3.625 in → | | ← SP @ 50.56 ft | 3.74 ft | |
| | | | | ← Z-Accelerometer @ 48.15 ft | | 48.60 ft |

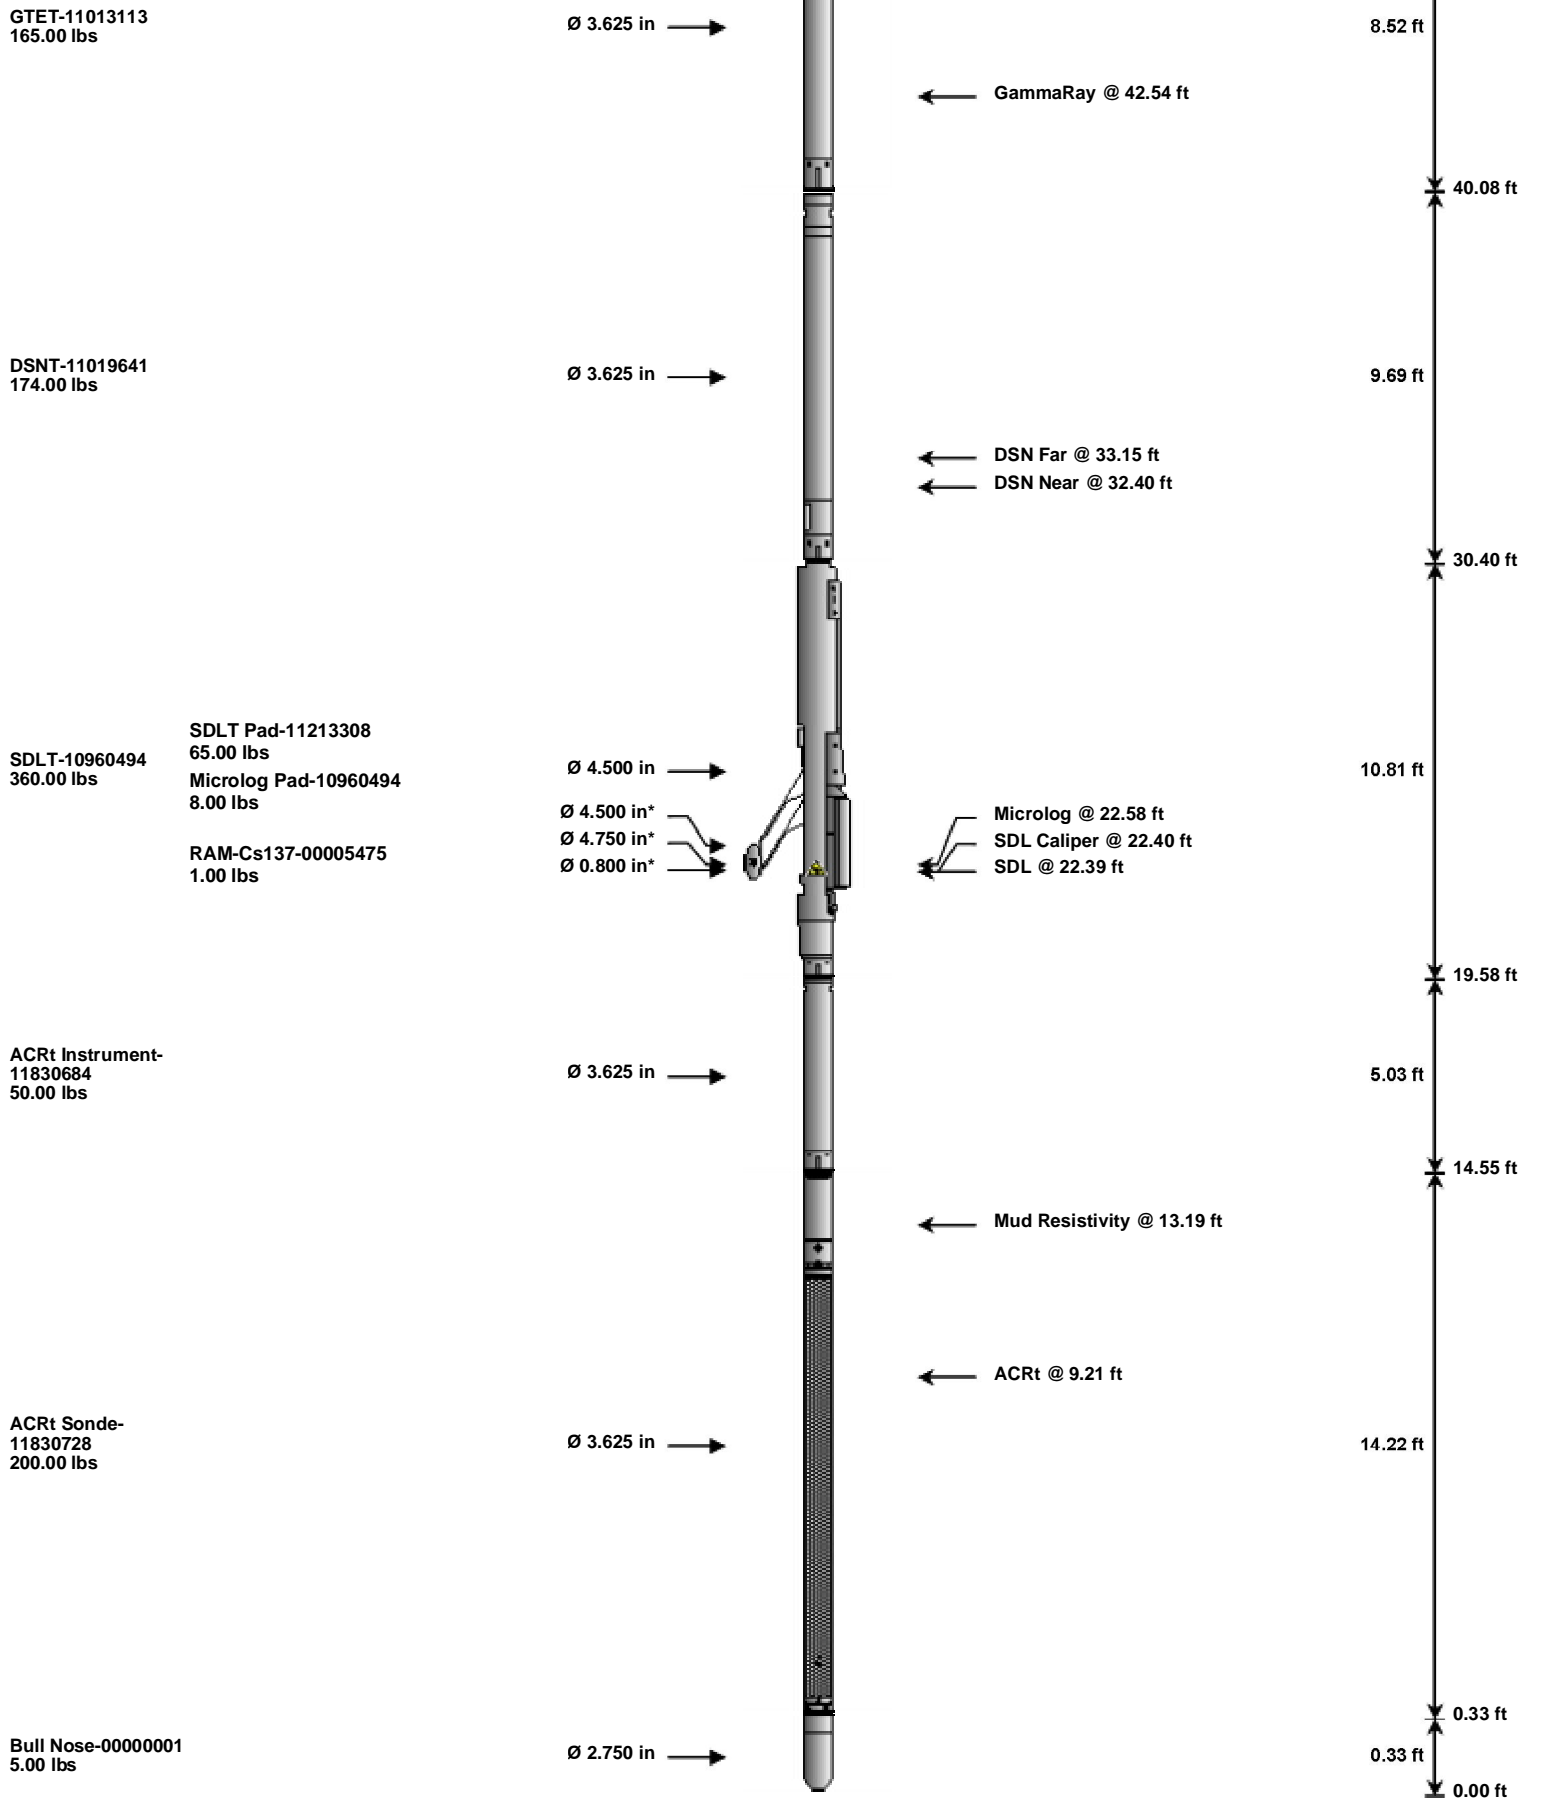

| Mnemonic | Tool Name | Serial Number | Weight (lbs) | Length (ft) | Accumulated Length (ft) | Max. Log. Speed (fpm) |
|----------|---|---------------|--------------|-------------|-------------------------|-----------------------|
| RWCH | Releasable Wireline Cable Head | 12345678 | 135.00 | 6.25 | 52.34 | 300.00 |
| WPSS | Weak Point Solid | 00000025 | 0.01 | 0.01 | * 52.34 | 300.00 |
| SP | SP Sub | 11812437 | 60.00 | 3.74 | 48.60 | 300.00 |
| GTET | Gamma Telemetry Tool | 11013113 | 165.00 | 8.52 | 40.08 | 60.00 |
| DSNT | Dual Spaced Neutron | 11019641 | 174.00 | 9.69 | 30.40 | 60.00 |
| SDLT | Spectral Density Tool | 10960494 | 360.00 | 10.81 | 19.58 | 60.00 |
| SDLP | Density Insite Pad | 11213308 | 65.00 | 2.55 | * 21.79 | 60.00 |
| Ca137 | Logging Source - SDLT L-1 78 Ci - Ca137 | 00005475 | 1.00 | 0.80 | * 22.02 | 200.00 |

| | | | | | | |
|-------|---|----------|--------|--------|-------|--------|
| Cs137 | Logging Source, SDL1-I, 1.78 Ci - Cs137 | 00005475 | 1.00 | 0.80 | 22.02 | 300.00 |
| MICP | Microlog Pad | 10960494 | 8.00 | 1.00 * | 22.08 | 60.00 |
| ACRt | Array Compensated True Resistivity Instrument Section | 11830684 | 50.00 | 5.03 | 14.55 | 120.00 |
| ACRt | Array Compensated True Resistivity Sonde Section | 11830728 | 200.00 | 14.22 | 0.33 | 120.00 |
| BLNS | Bull Nose | 00000001 | 5.00 | 0.33 | 0.00 | 300.00 |

| | | | | | | |
|--------------|--|--|-----------------|--------------|--|--|
| Total | | | 1,223.01 | 58.59 | | |
|--------------|--|--|-----------------|--------------|--|--|

* Not included in Total Length and Length Accumulation.

Data: RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\IDLE

Date: 12-Feb-19 13:23:35