

HALLIBURTON

ARRAY COMPENSATED TRUE RESISTIVITY LOG

COMPANY		RUSSELL OIL, INC.		COMPANY		RUSSELL OIL, INC.	
WELL		NUSS 'D' #33-1		WELL		NUSS 'D' #33-1	
FIELD/BLOCK		NUSS		FIELD/BLOCK		NUSS	
COUNTY		RUSSELL		COUNTY		RUSSELL	
STATE		KANSAS		STATE		KANSAS	
Permanent Datum	GL	Sect.	33	Twp.	15S	Rge.	14W
Log measured from	KB	Location (SHL) NE SW NW SW 1925' FSL & 560' FWL					
Drilling measured from	KB	Elev. 1918.0 ft 5.0 ft above perm. Datum					
Date	12-Feb-19	Other Services: ACRT SDL-DSN MICROLOG					
Run No.	1						
Depth - Driller	3455.0 ft						
Depth - Logger	3455.0 ft						
Bottom - Logged Interval	3445						
Bottom - Logged Interval	927						
Casing - Driller	8.625 in	@					
Casing - Logger	927.0 ft	@					
Bit Size	7.875 in	@					
Type Fluid in Hole	Water Based Mud	@					
Density	9.0 ppg	49.00 sl/qt					
PH	9.50 pH	8.0 cpm					
Source of Sample	MUD PIT						
Rm @ Meas. Temperature	0.51 ohmm	@ 72.00 degF					
Rmf @ Meas. Temperature	0.44 ohmm	@ 70.00 degF					
Rmc @ Meas. Temperature	0.63 ohmm	@ 70.00 degF					
Source Rmf	Rmc	MEAS					
Rm @ BHT	0.36 ohmm	@ 105.0 degF					
Time Since Circulation	11:00 hr						
Time on Bottom	12-Feb-19 14:13						
Max. Rec. Temperature	105.00 degF	@ 3455.0 ft					
Equipment	Location	12156883 EL RENO, OK					
Recorded By	WHITLOCK						
Witnessed By	KITT NOAH						

Fold here

Service Ticket No.: 905479538		API No.: 15-167-24087-00-00		PGM Version: WL INSITE R5.8.9 (Build 6)					
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES					
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole		
Depth-Driller									
Type Fluid in Hole									
Density	Viscosity								
Ph	Fluid Loss								
Source of Sample				RESISTIVITY EQUIPMENT DATA					
Rm @ Meas. Temp	@	@		Run No.	Tool Type & No.	Pad Type	Tool Pos.		
Rmf @ Meas. Temp.	@	@							
Rmc @ Meas. Temp.	@	@							
Source Rmf	Rmc								
Rm @ BHT	@	@							
Rmf @ BHT	@	@							
Rmc @ BHT	@	@							
EQUIPMENT DATA									
GAMMA		ACOUSTIC		DENSITY		NEUTRON			
Run No.		Run No.		Run No.		Run No.			
Serial No.		Serial No.		Serial No.		Serial No.			
Model No.		Model No.		Model No.		Model No.			
Diameter		No. of Cent.		Diameter		Diameter			
Detector Model No.		Spacing		Log Type		Log Type			
Type		Source Type		Source Type		Source Type			
Length		LSA [Y/N]		Serial No.		Serial No.			
Distance to Source		FWDA [Y/N]		Strength		Strength			
LOGGING DATA									
GENERAL		GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run	Depth	Speed	Scale	Scale	Matrix	Scale	Matrix	Scale	Matrix
No.	From	To	L	R	L	R	L	R	L

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: 5 1/2" CASING USED FOR ANNULAR HOLE VOLUME
LIMESTONE MATRIX USED FOR DENSITY/NEUTRON POROSITY CALCULATIONS


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON



HALLIBURTON Plot Time: 12-Feb-19 16:10:52
 Plot Range: 850 ft to 3456.42 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\ACRT\ACRT_2_main



2 INCH MAIN LOG



2 INCH MAIN LOG

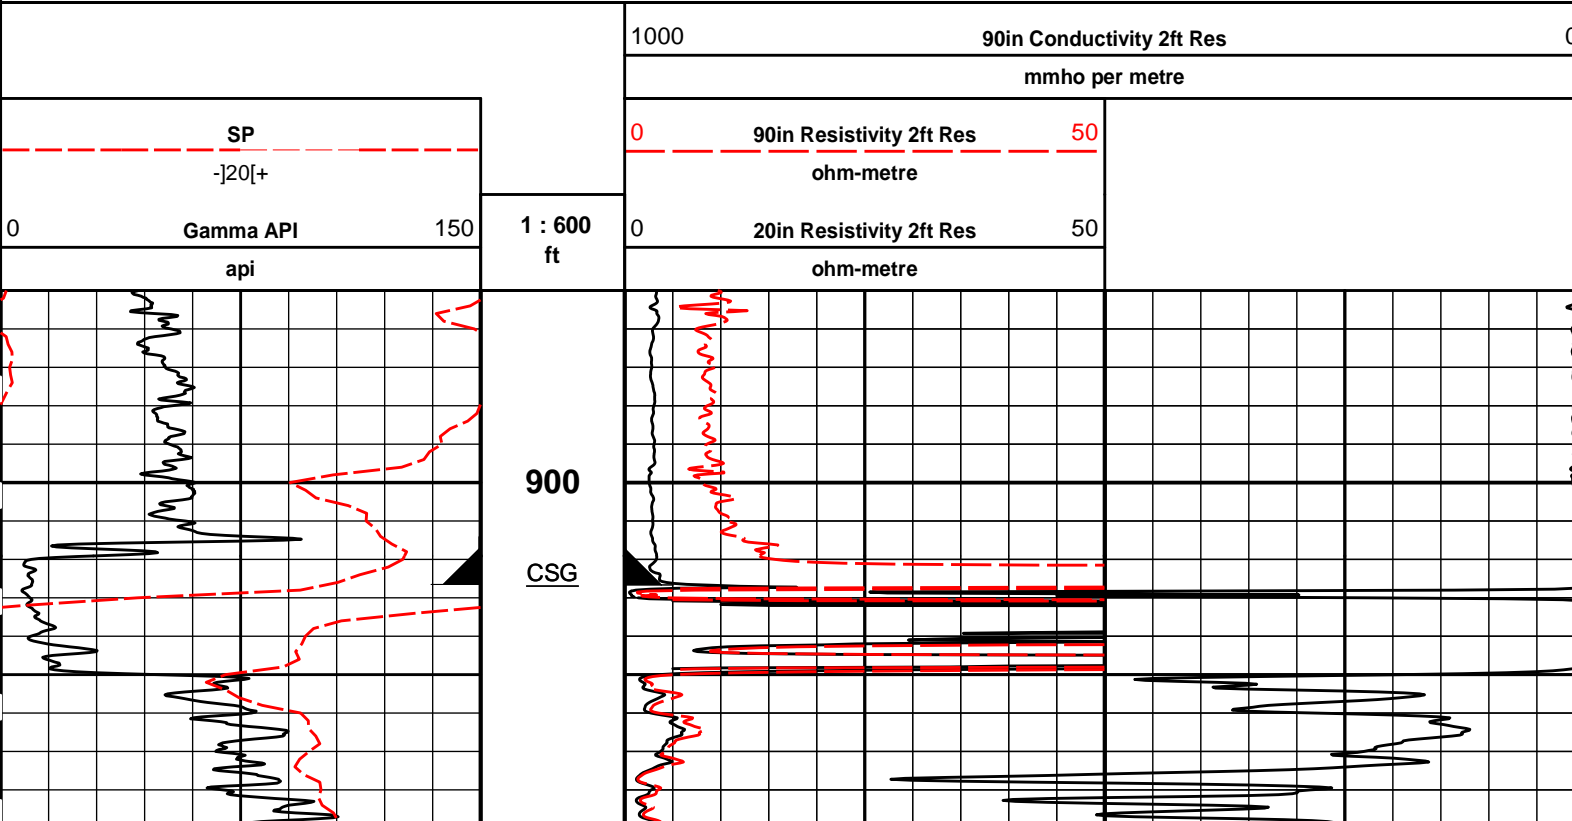


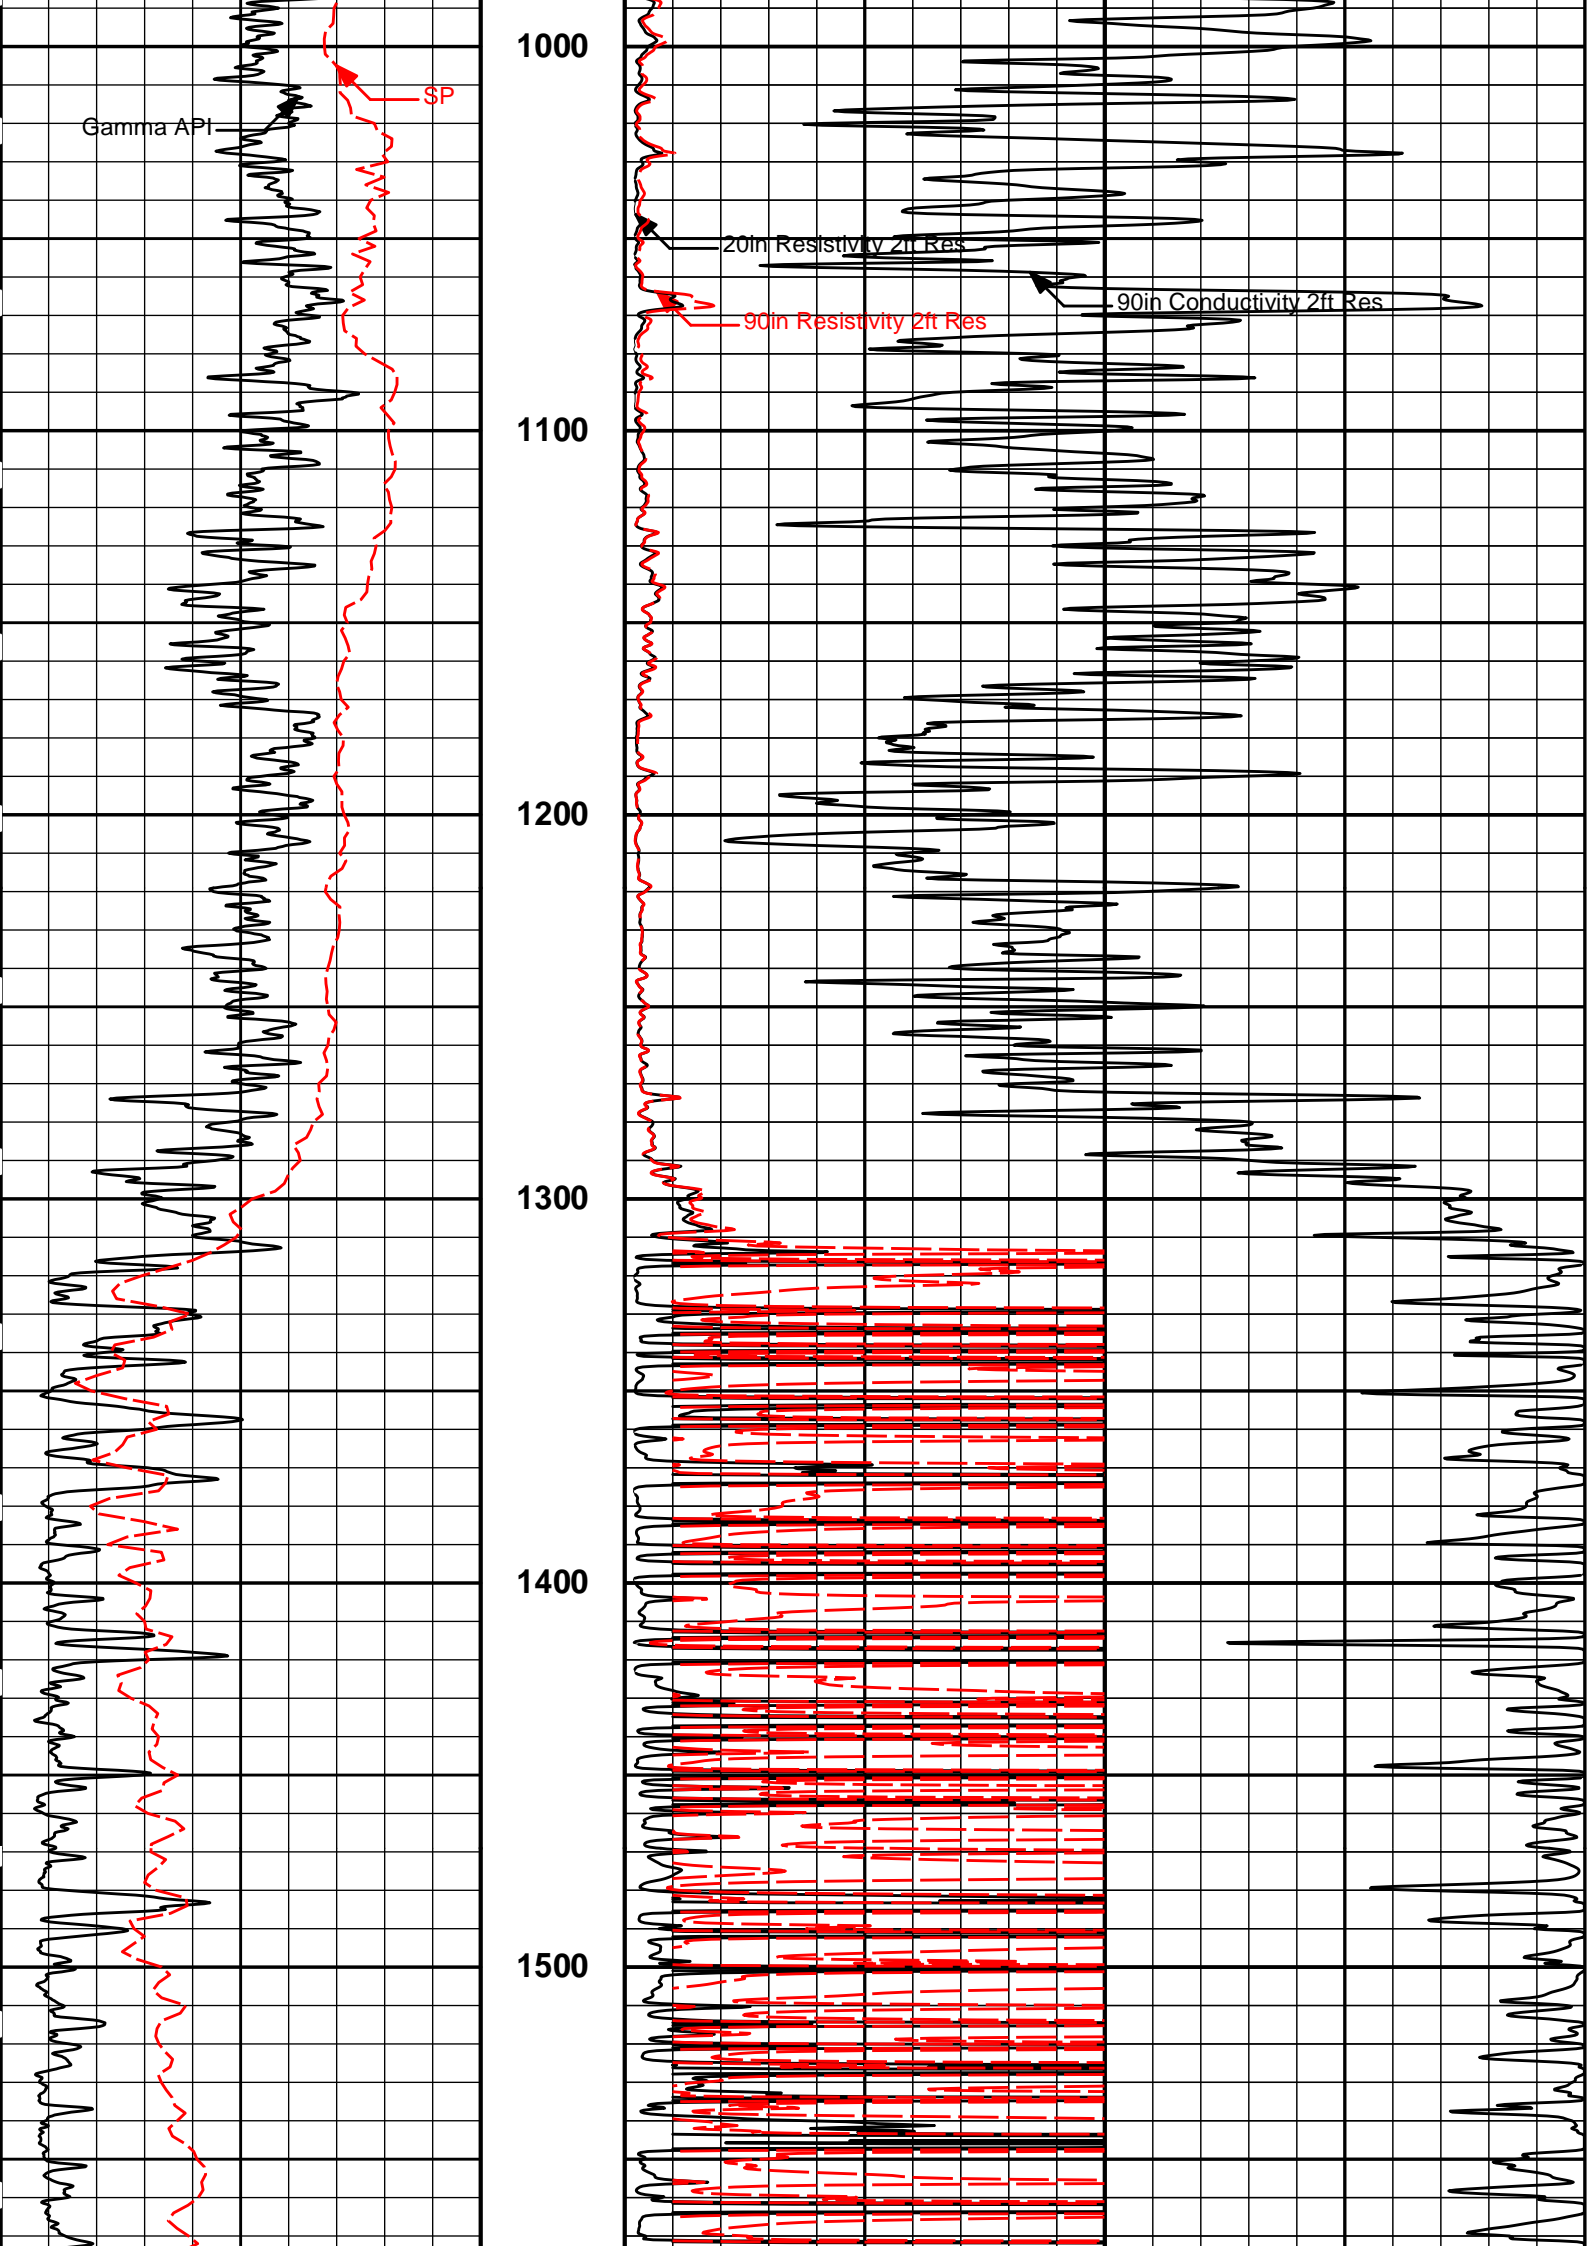

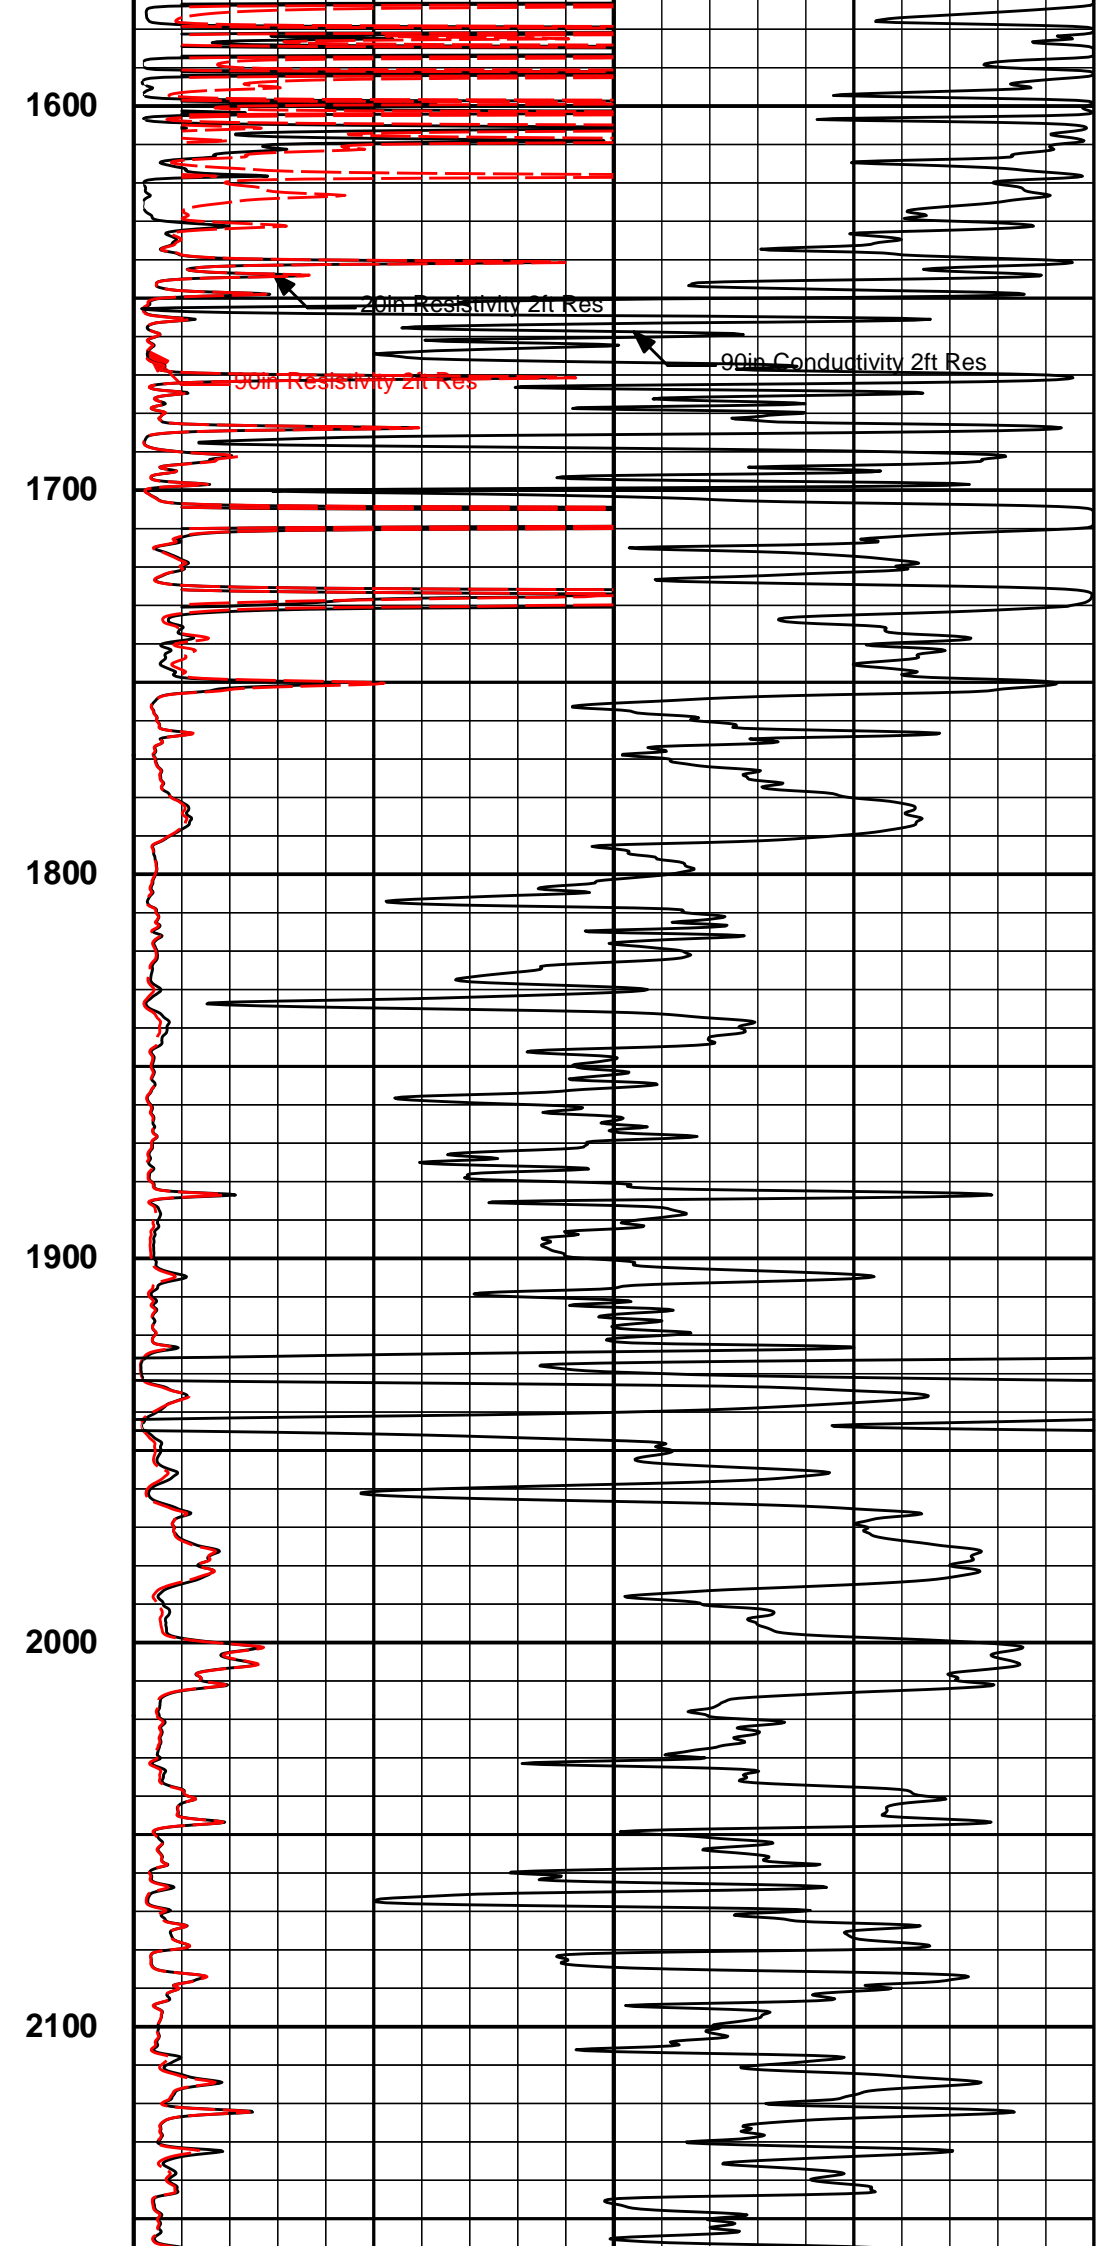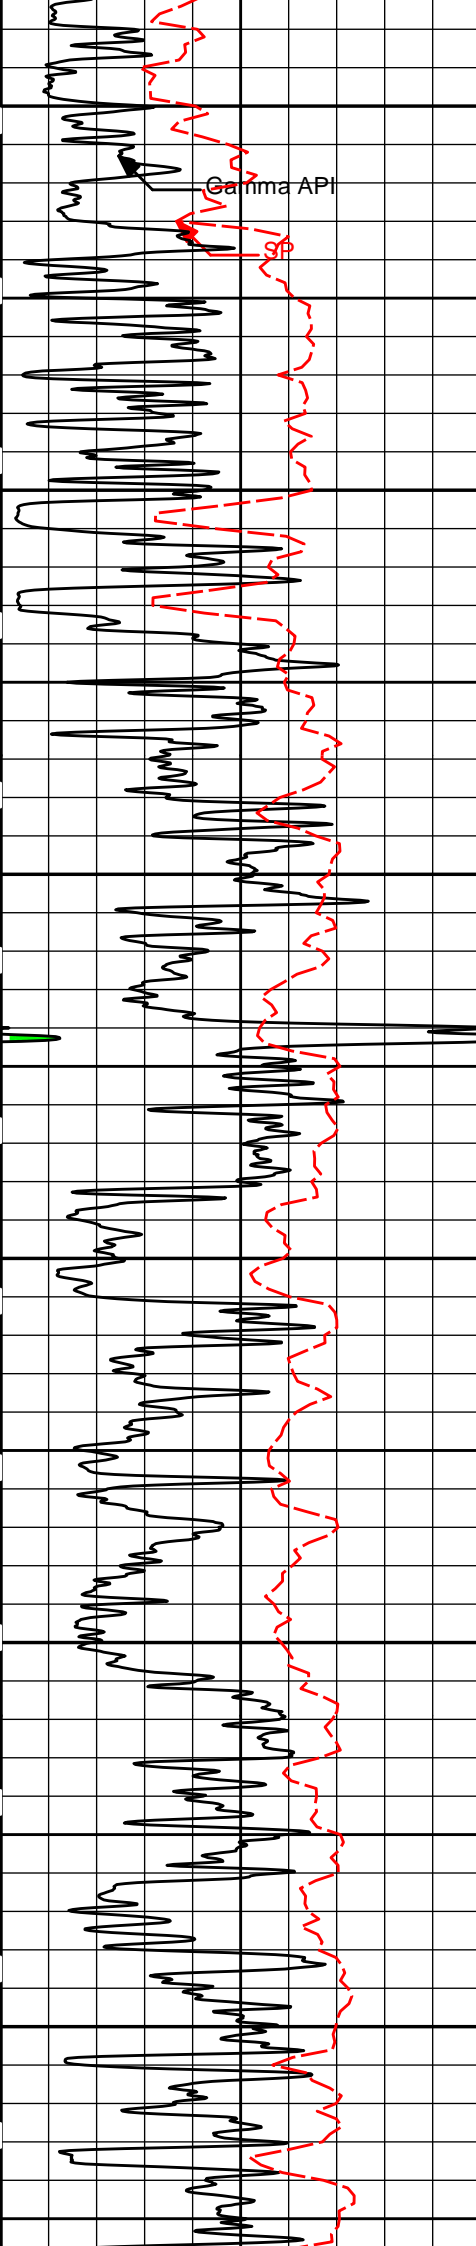

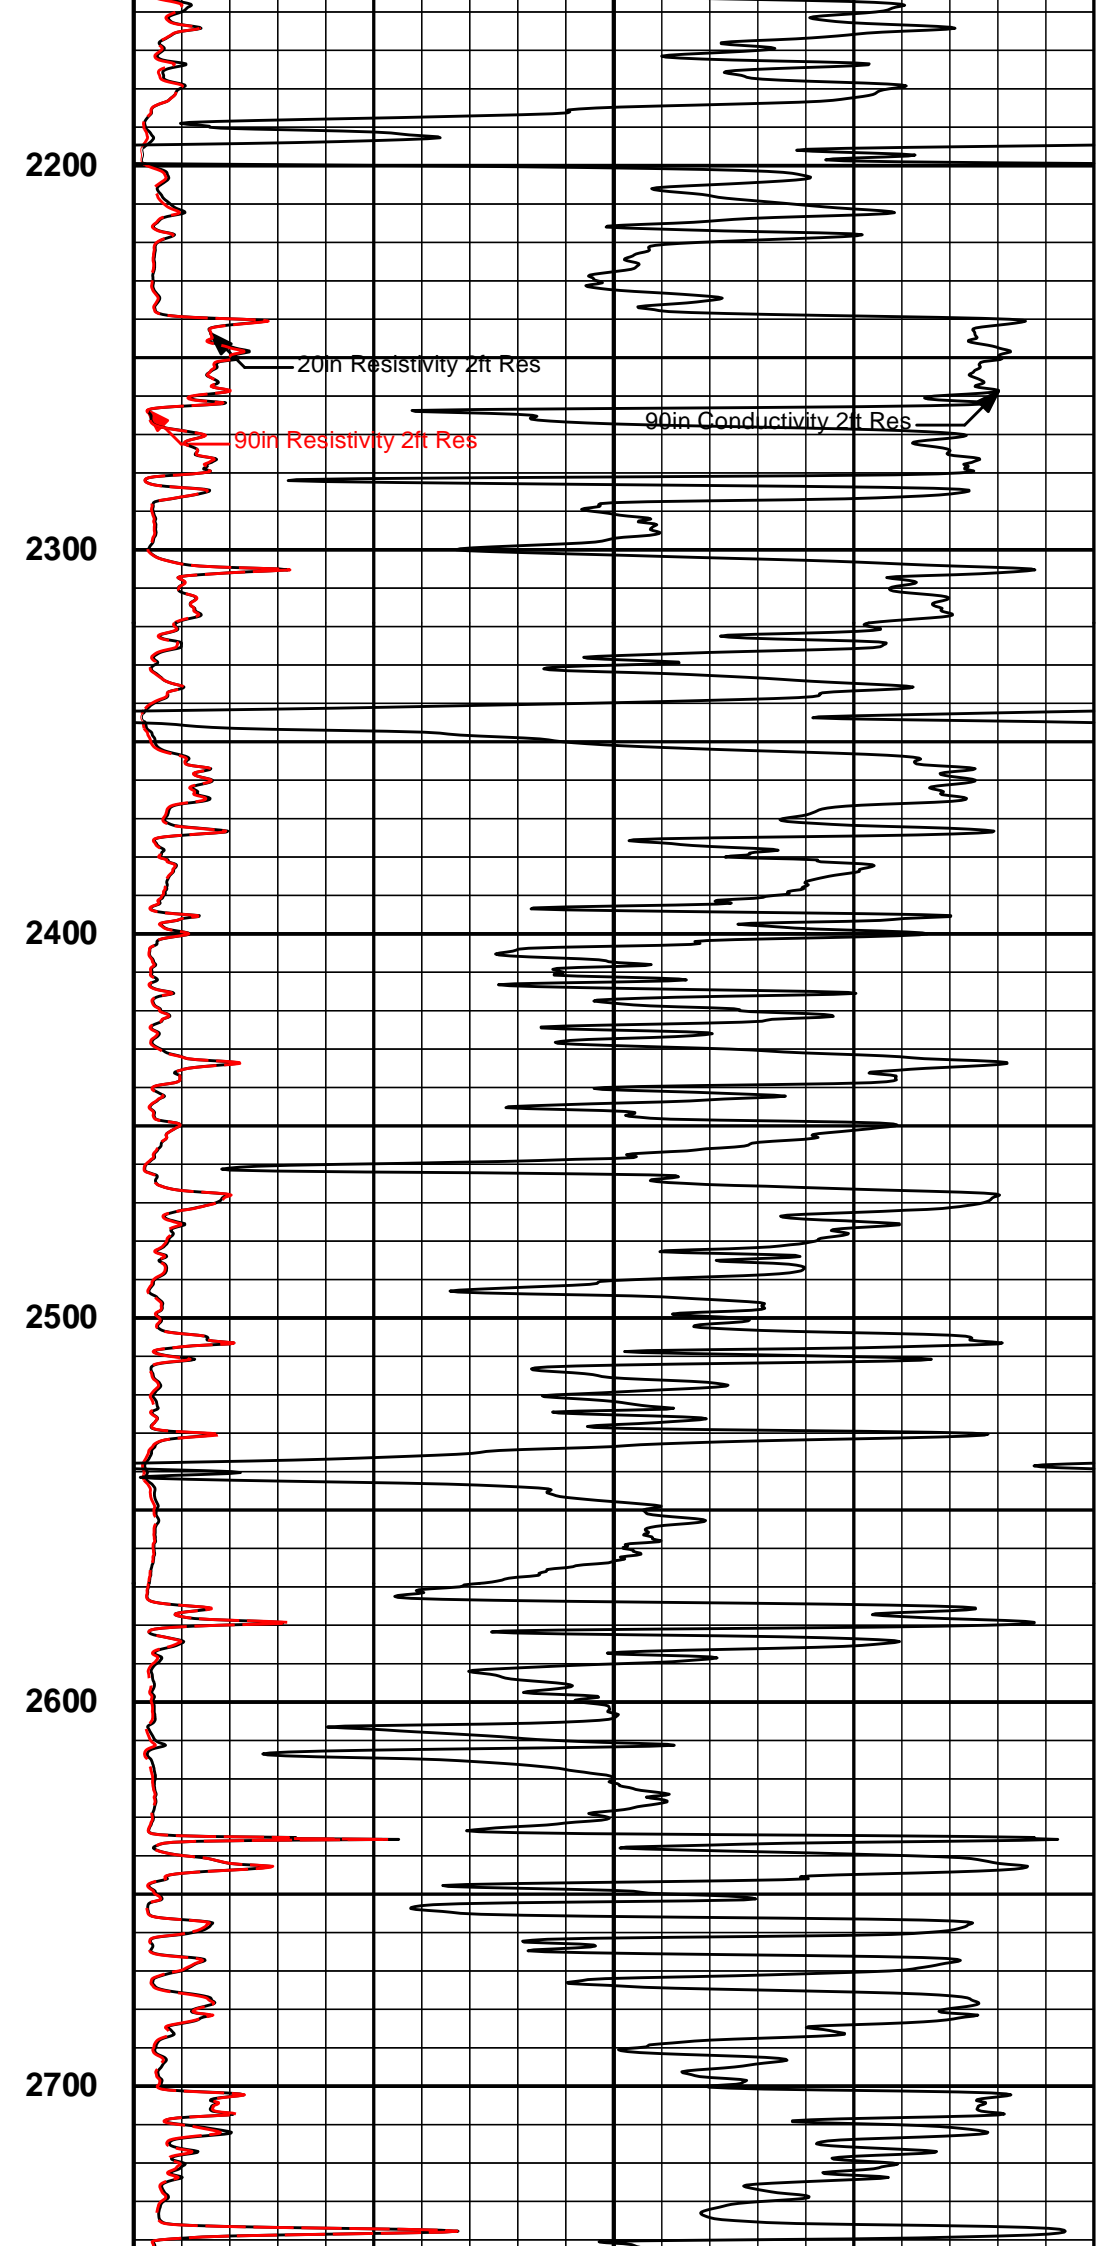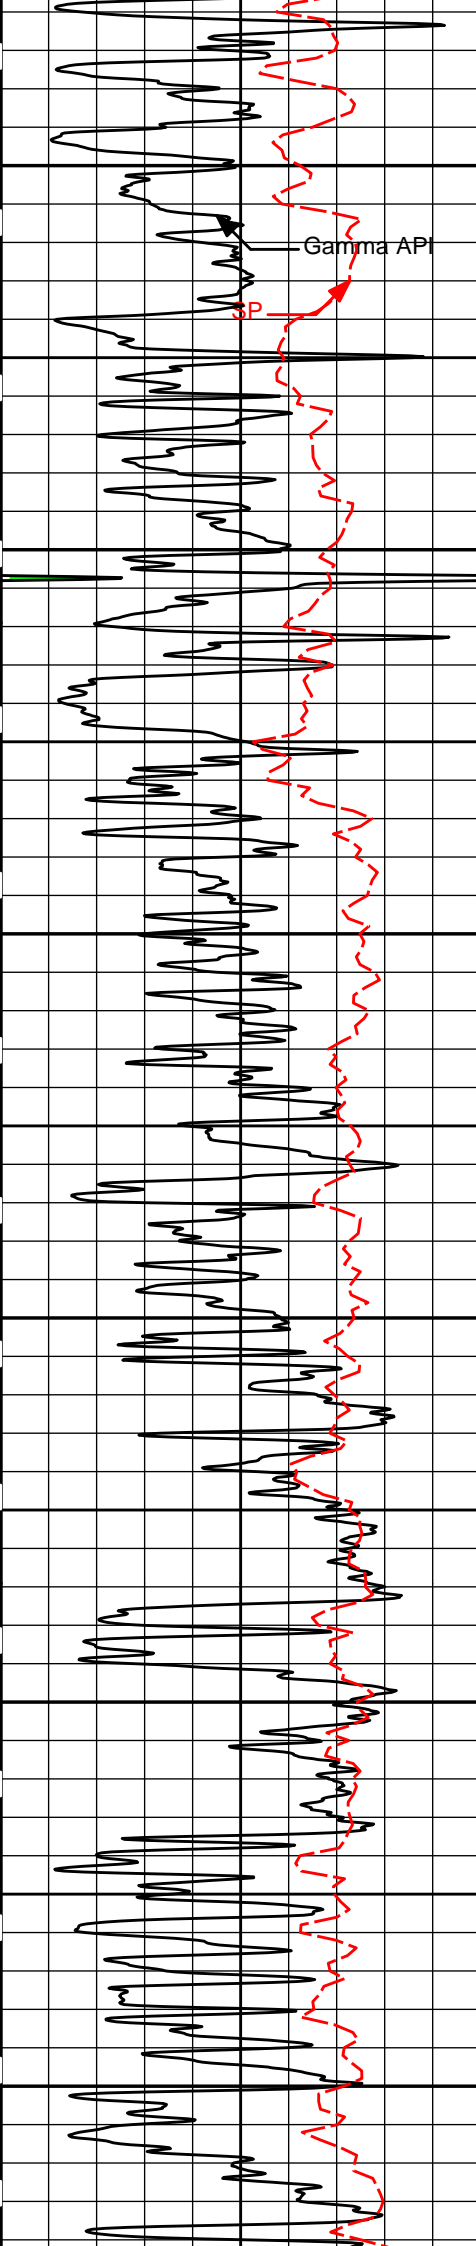

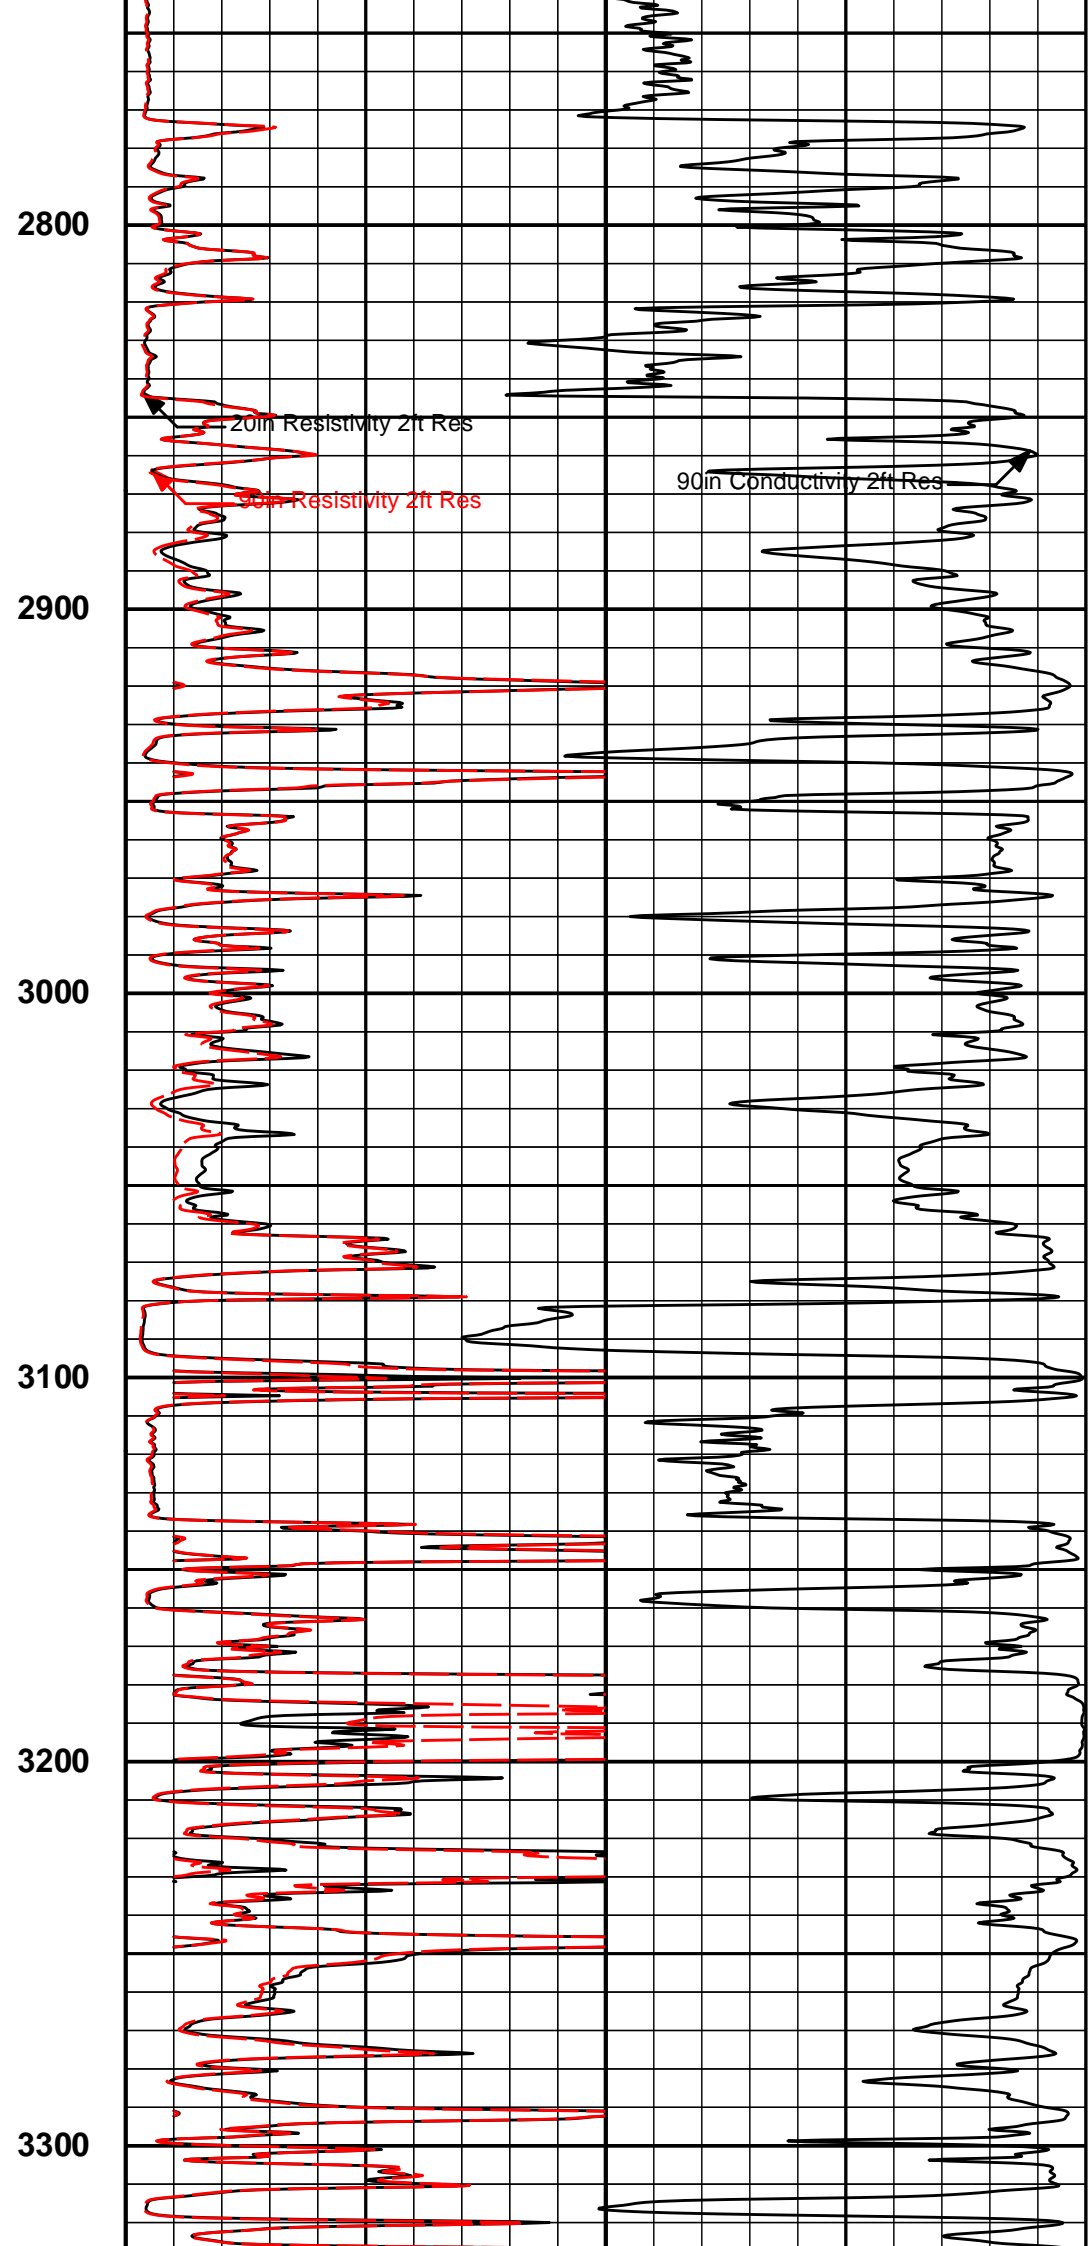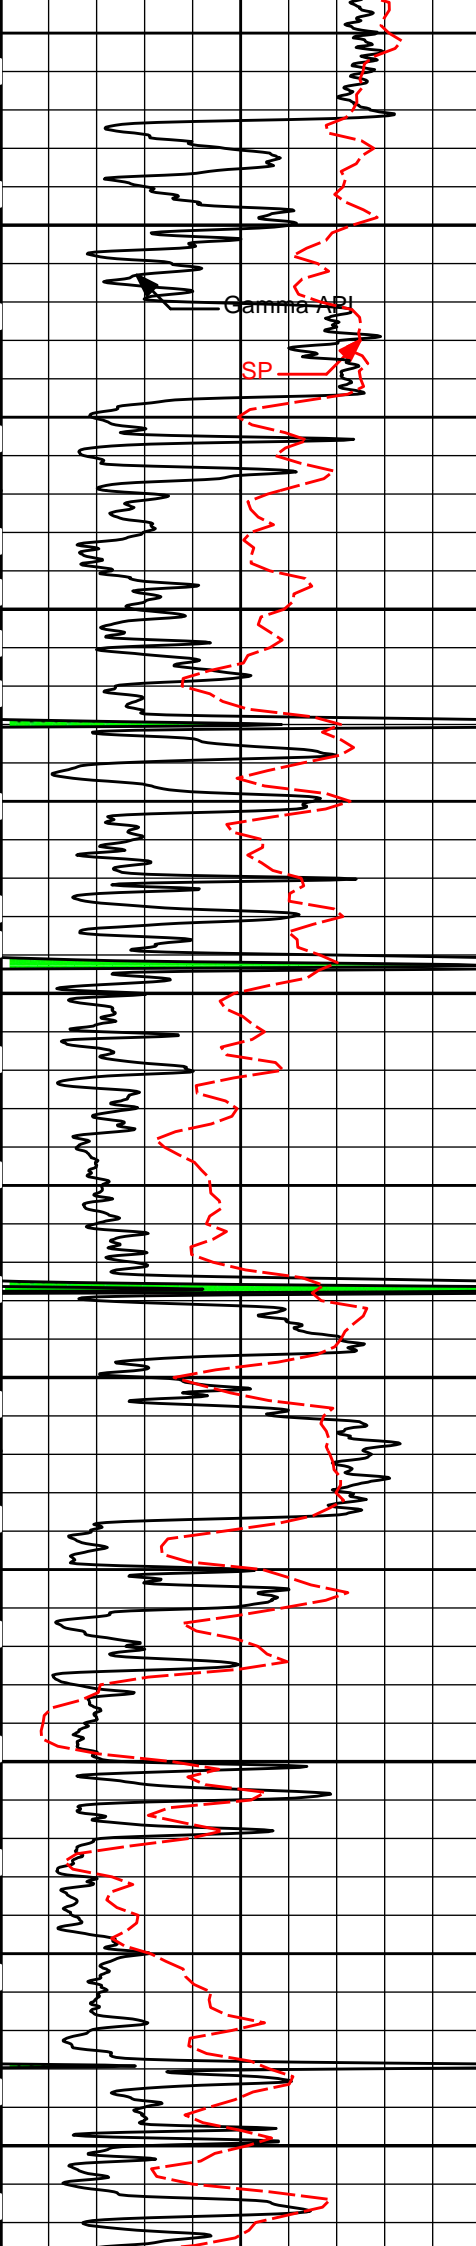

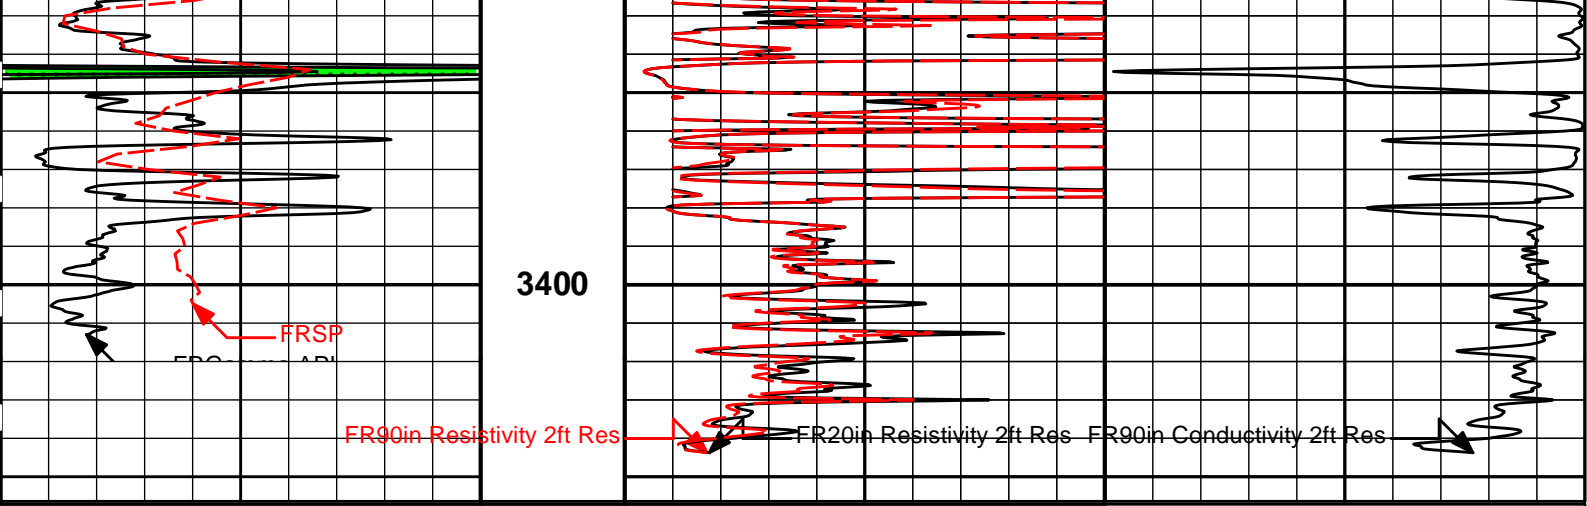

0	Gamma API	150	1 : 600 ft	0	20in Resistivity 2ft Res	50
	api			0	90in Resistivity 2ft Res	50
	SP					
	-]20[+			1000	90in Conductivity 2ft Res	0
					mmho per metre	

HALLIBURTON

Plot Time: 12-Feb-19 16:10:54
 Plot Range: 850 ft to 3456.42 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-\\RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\ACRT\ACRT_2_main

2 INCH MAIN LOG

2 INCH MAIN LOG


HALLIBURTON

Plot Time: 12-Feb-19 16:10:54
 Plot Range: 850 ft to 3456.42 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-\\RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\ACRT\ACRT_5inch_main

5 INCH MAIN LOG

5 INCH MAIN LOG

0.2	10in Resistivity 2ft Res	2K
	ohmm	
0.2	20in Resistivity 2ft Res	2000
	ohmm	
0.2	30in Resistivity 2ft Res	2000
	ohm-metre	
0.2	60in Resistivity 2ft Res	2000

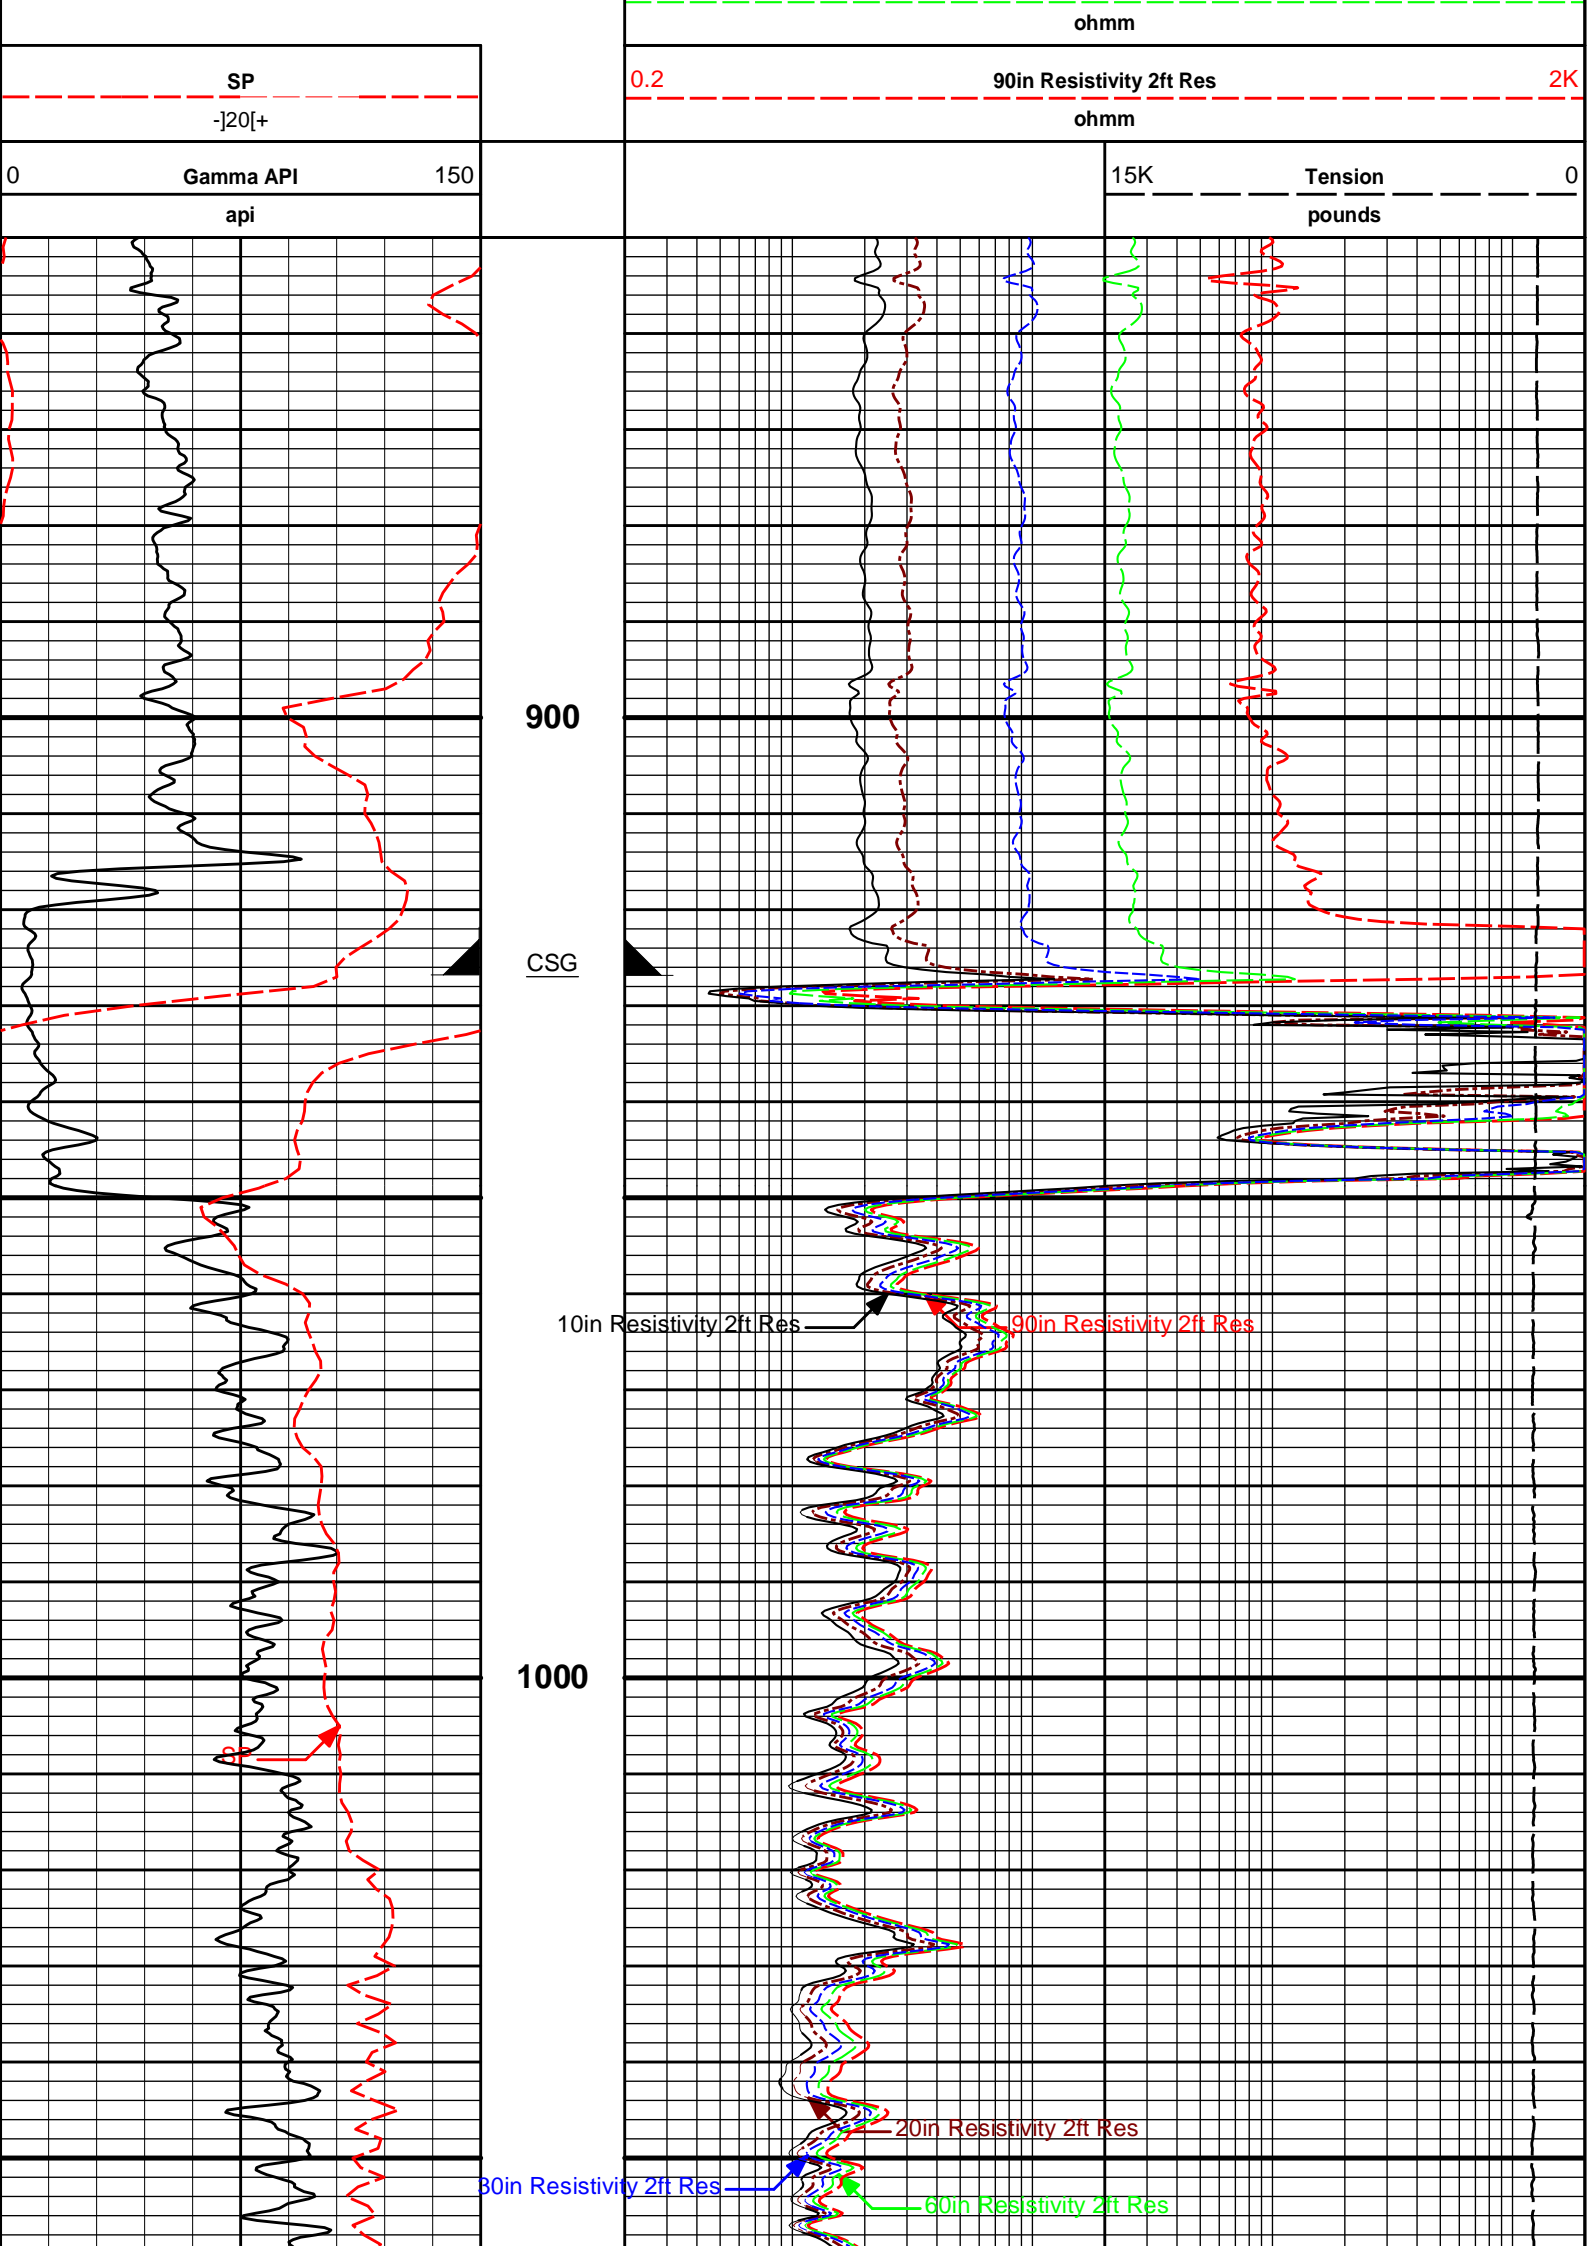



1100


1200

10in Resistivity 2ft Res

90in Resistivity 2ft Res

20in Resistivity 2ft Res

30in Resistivity 2ft Res

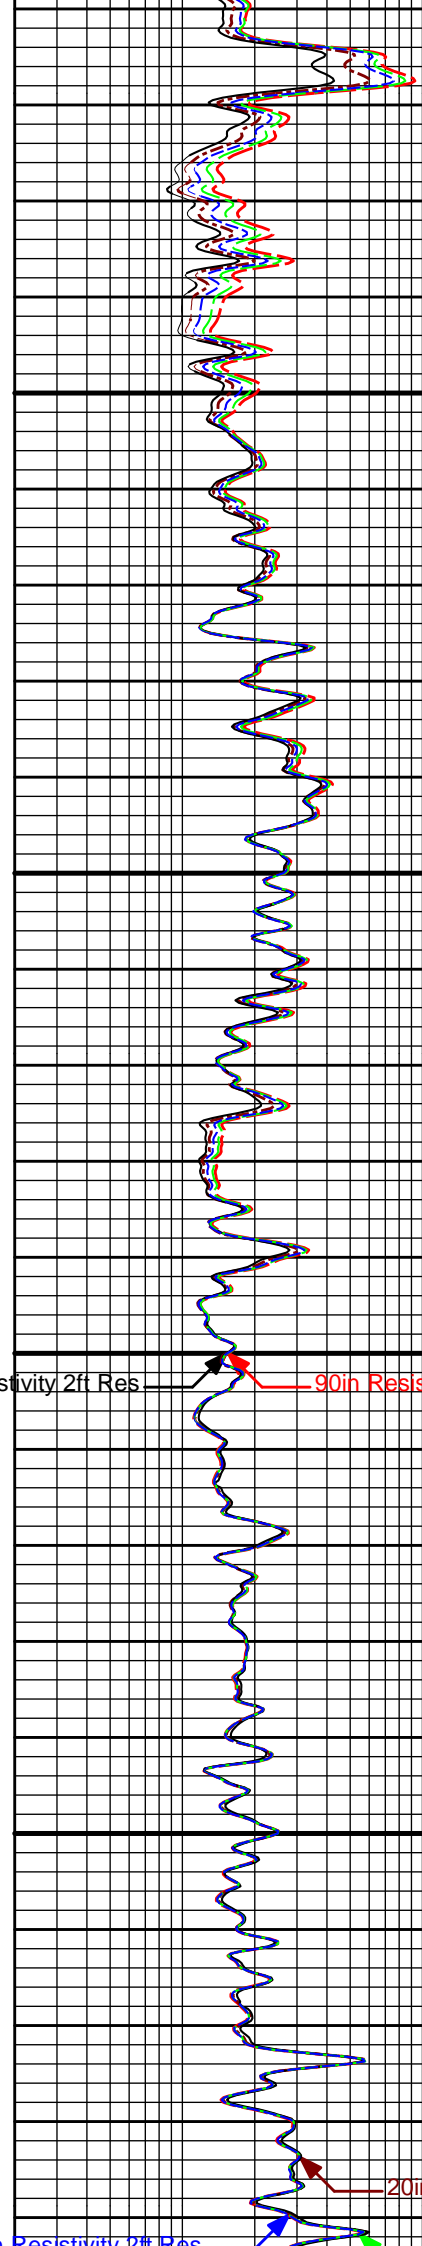

SP

20

20

20

20

20

20

20

20

20

20

20

20


20

20

20

20


20

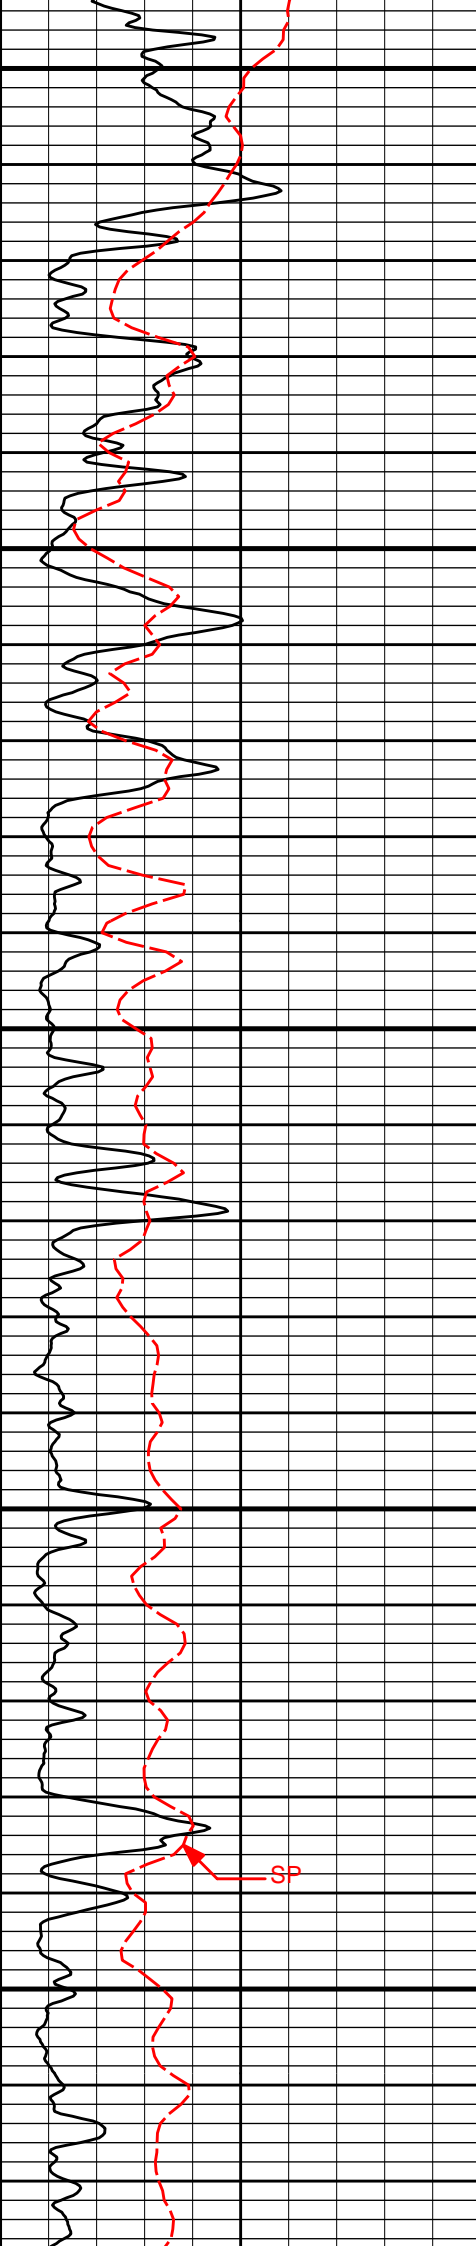

1300

1400

1500

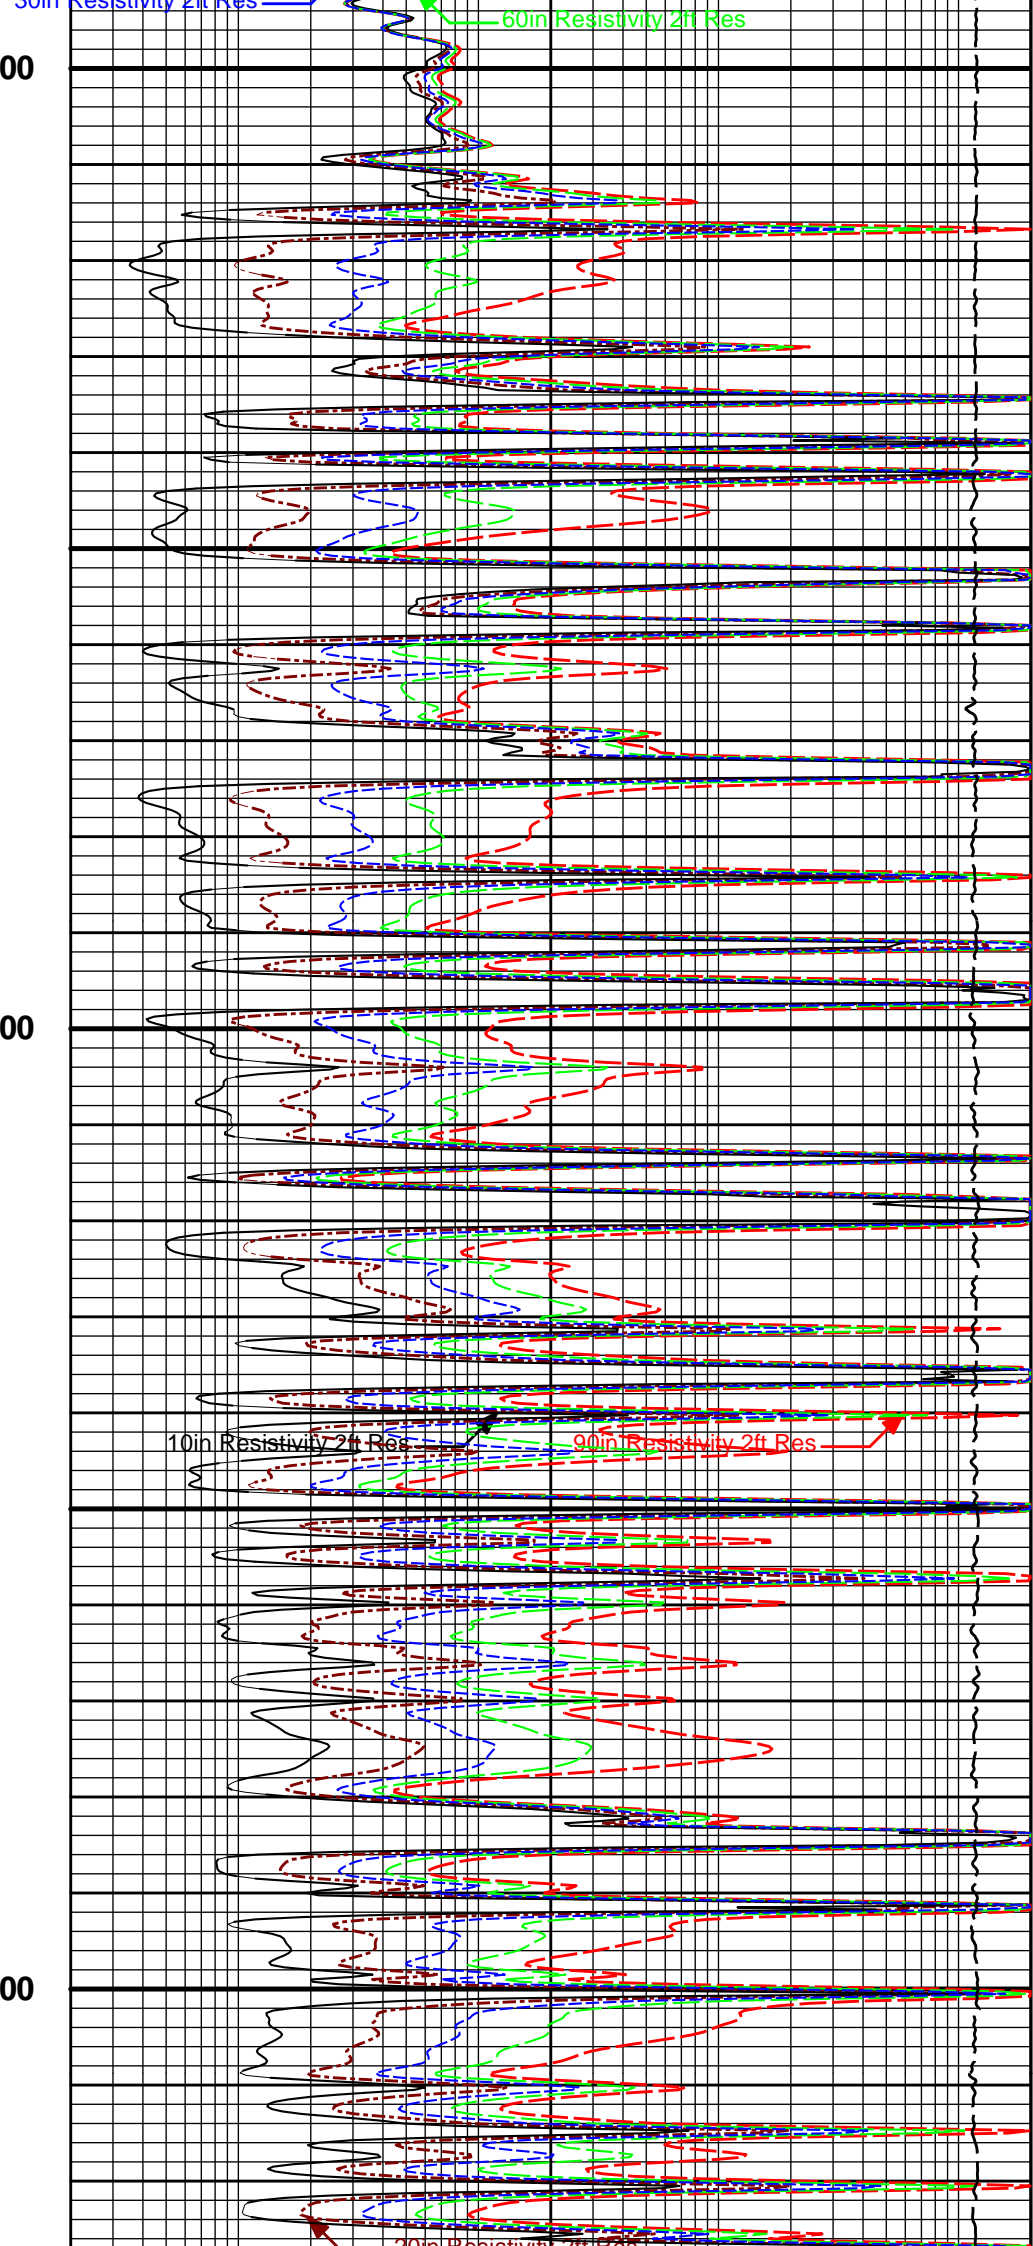



50in Resistivity 2ft Res



60in Resistivity 2ft Res


10in Resistivity 2ft Res

90in Resistivity 2ft Res

70in Resistivity 2ft Res

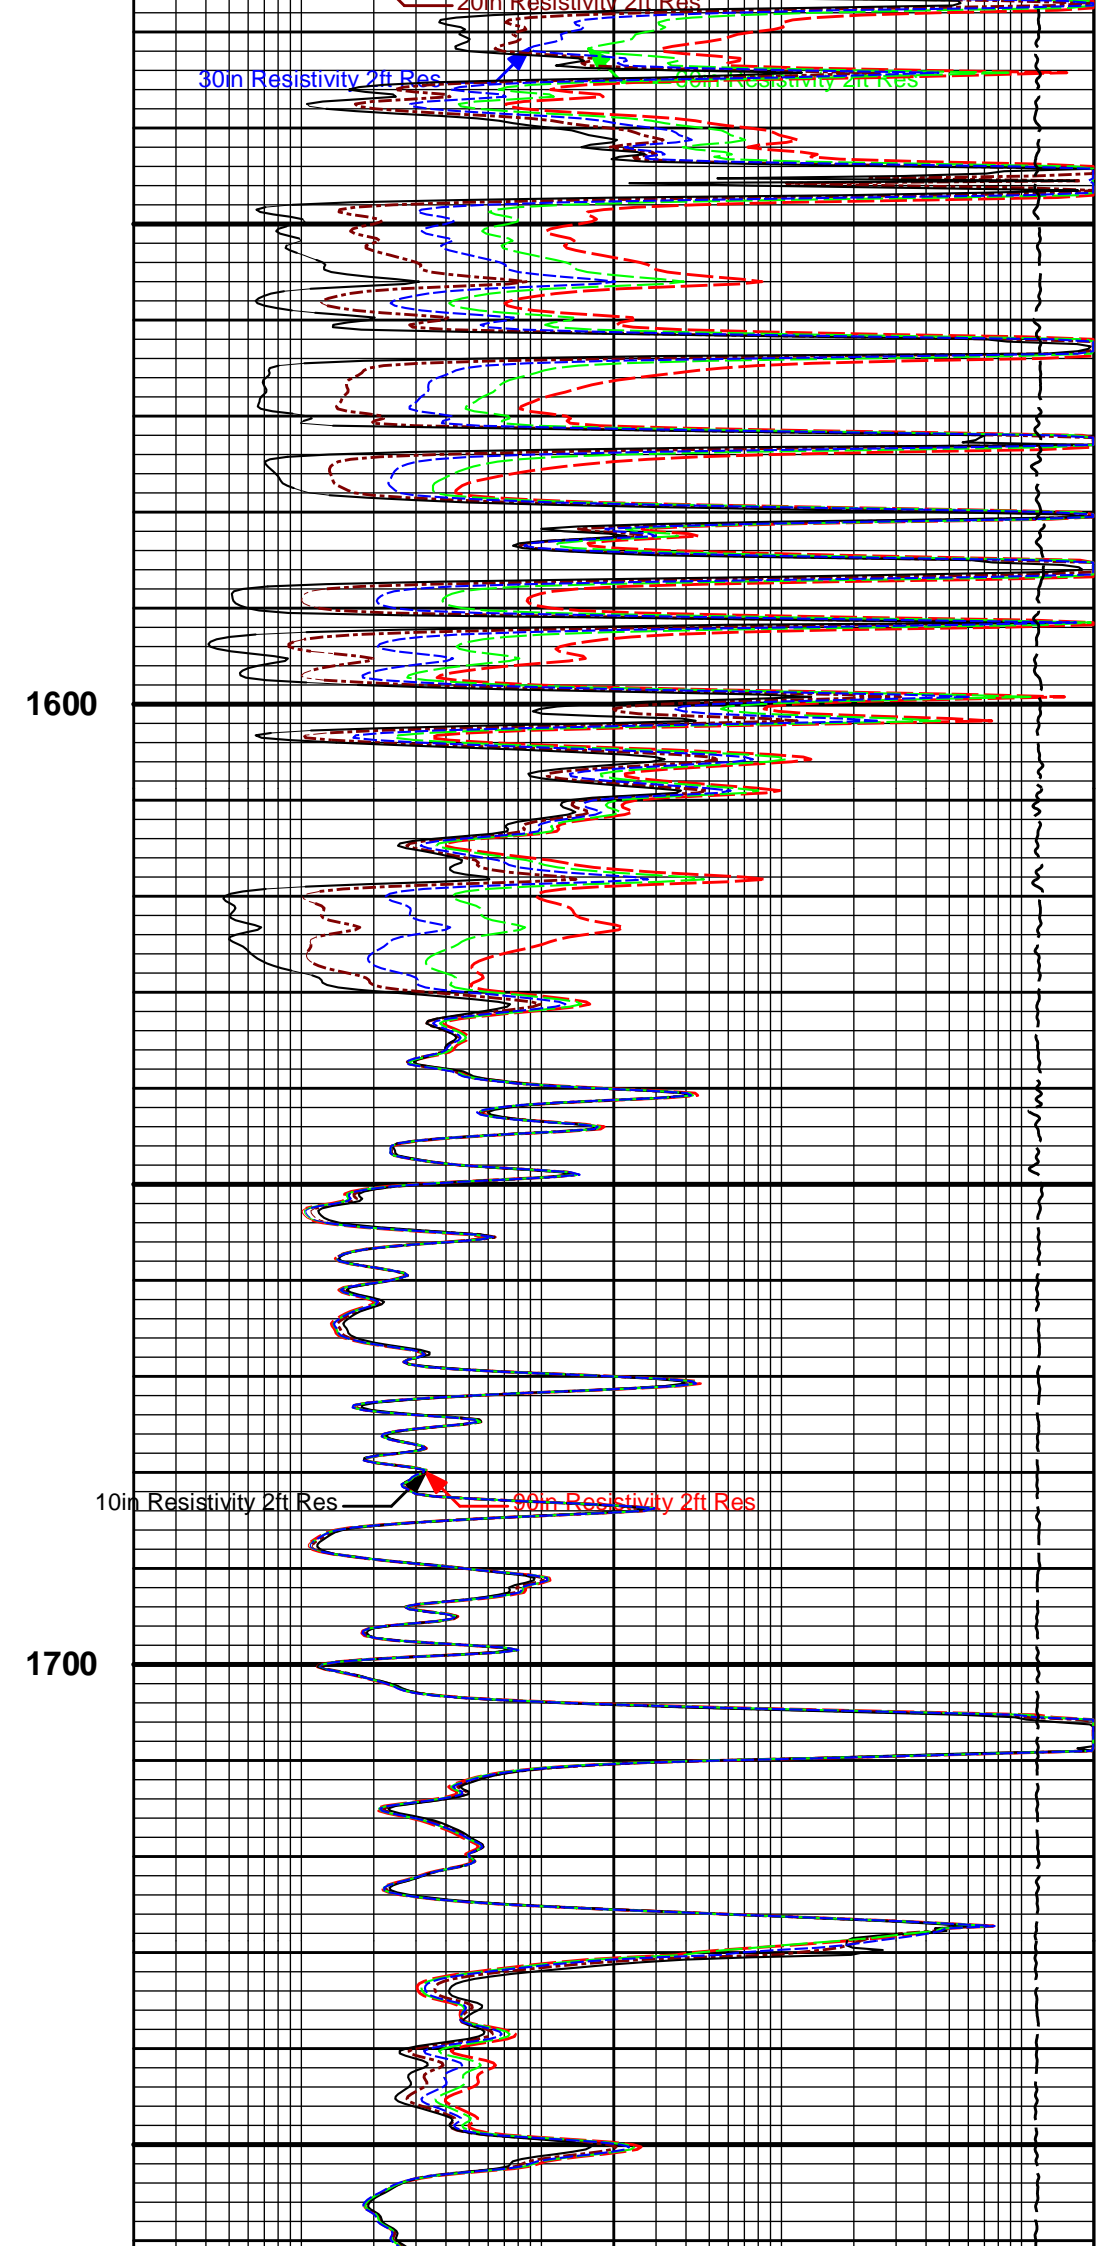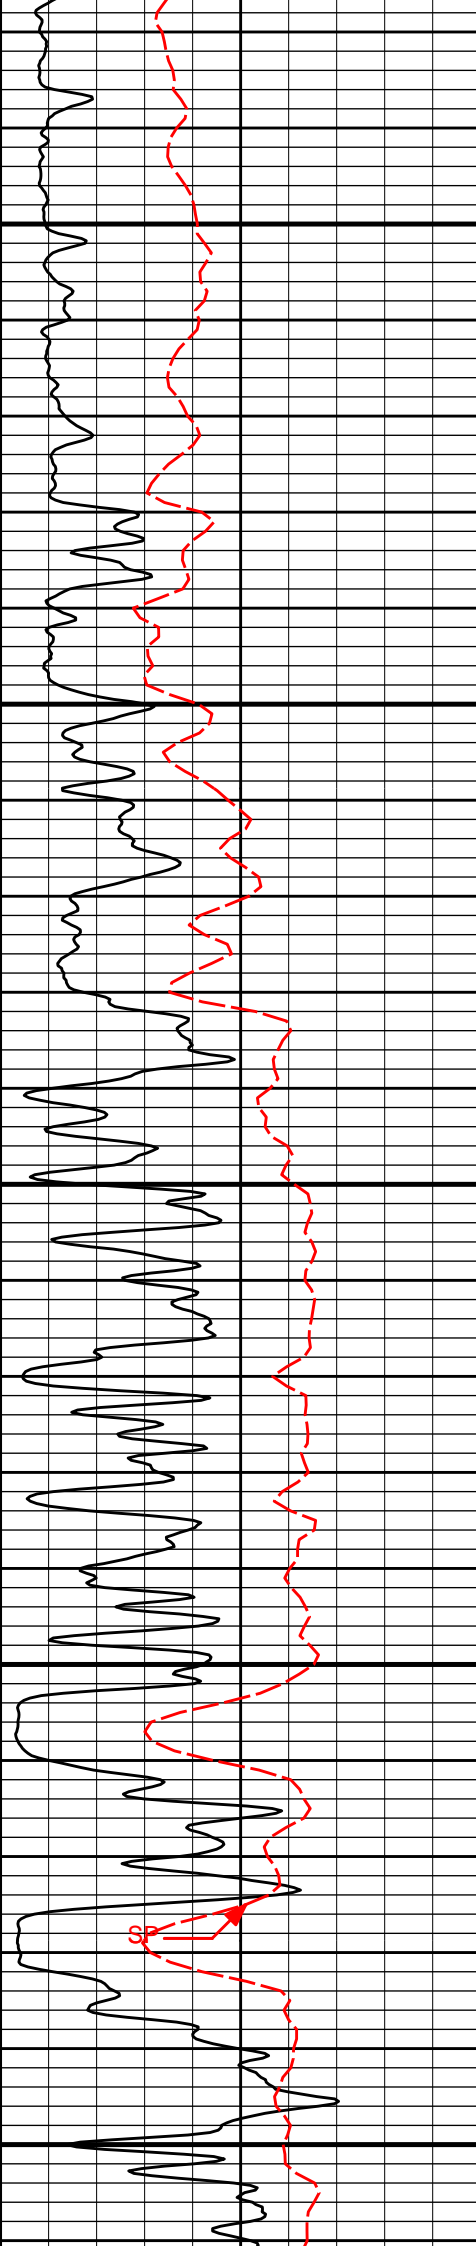

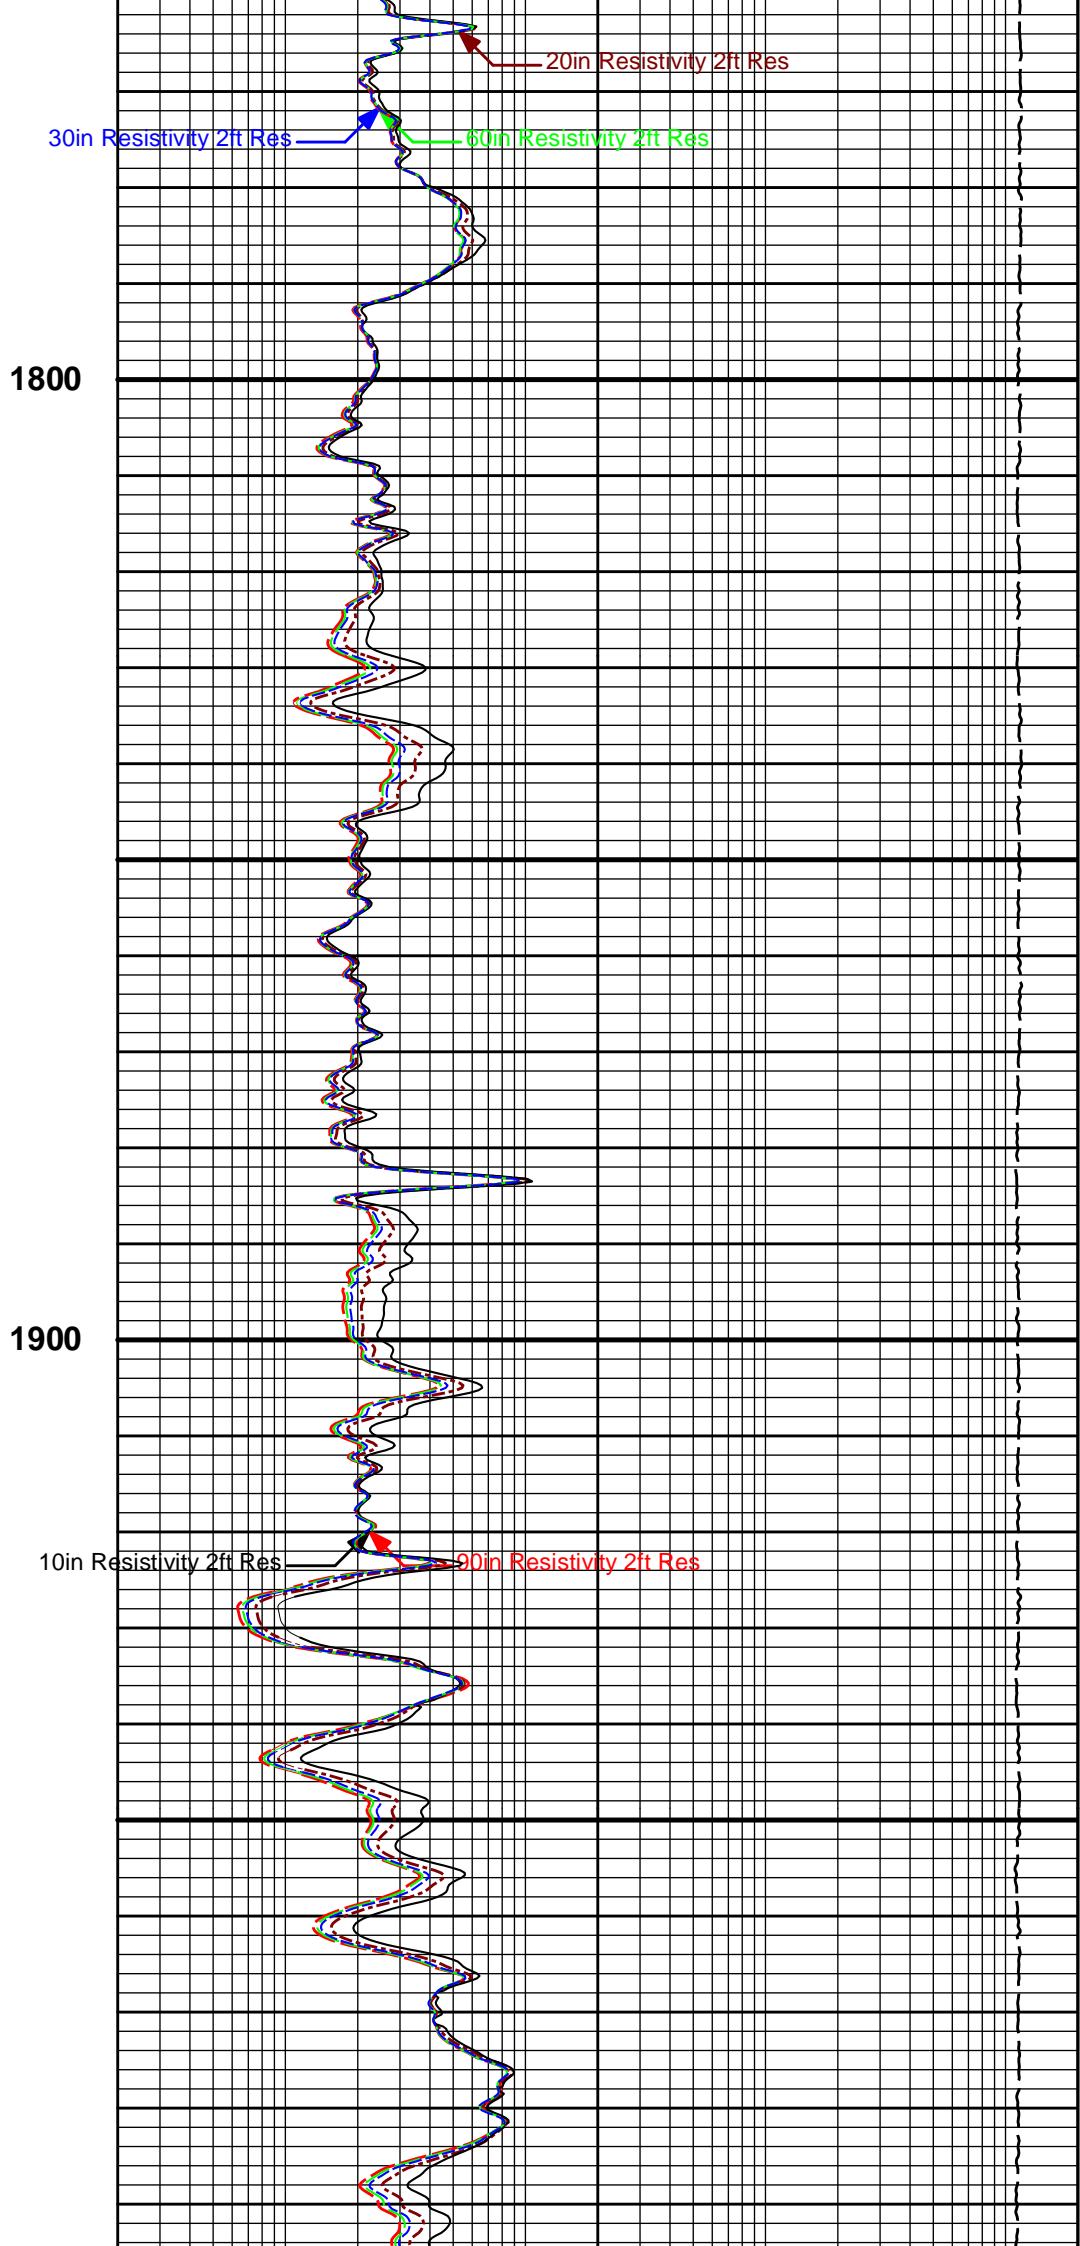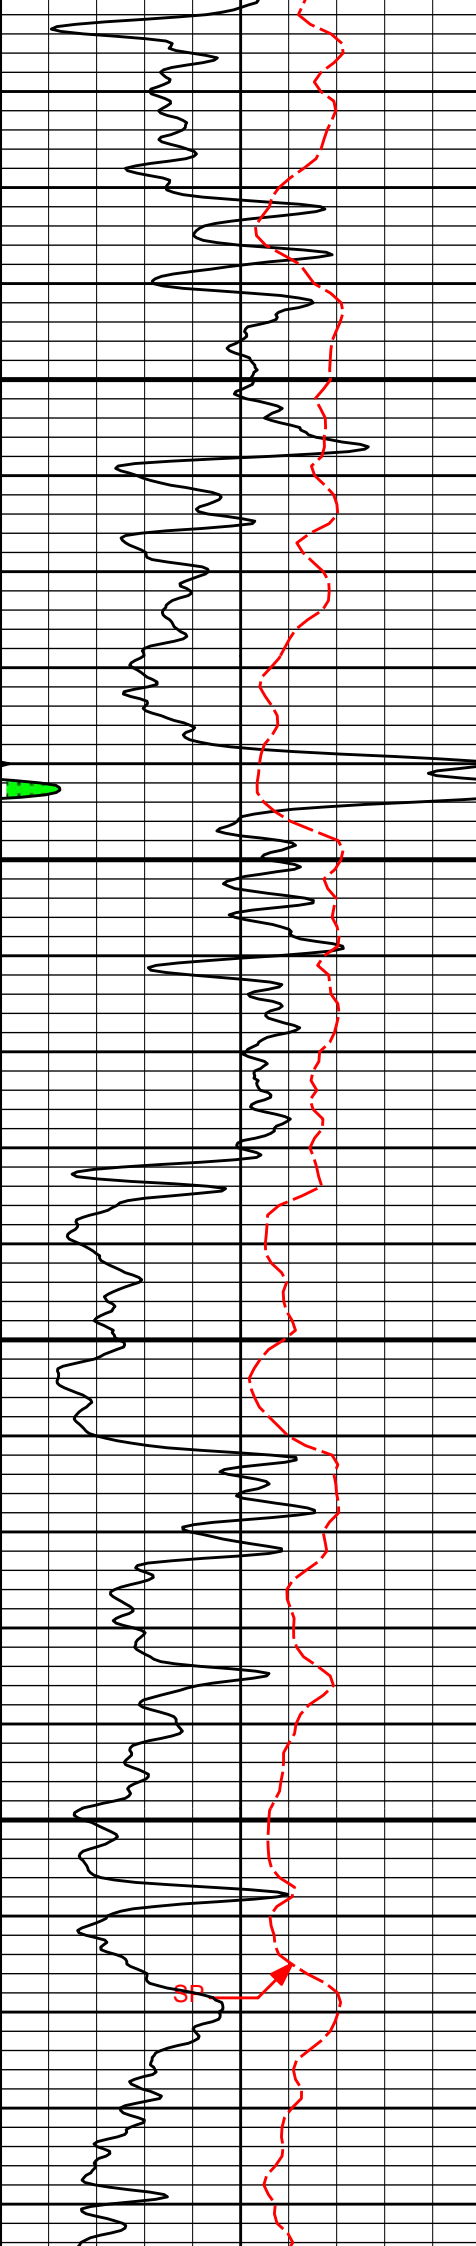

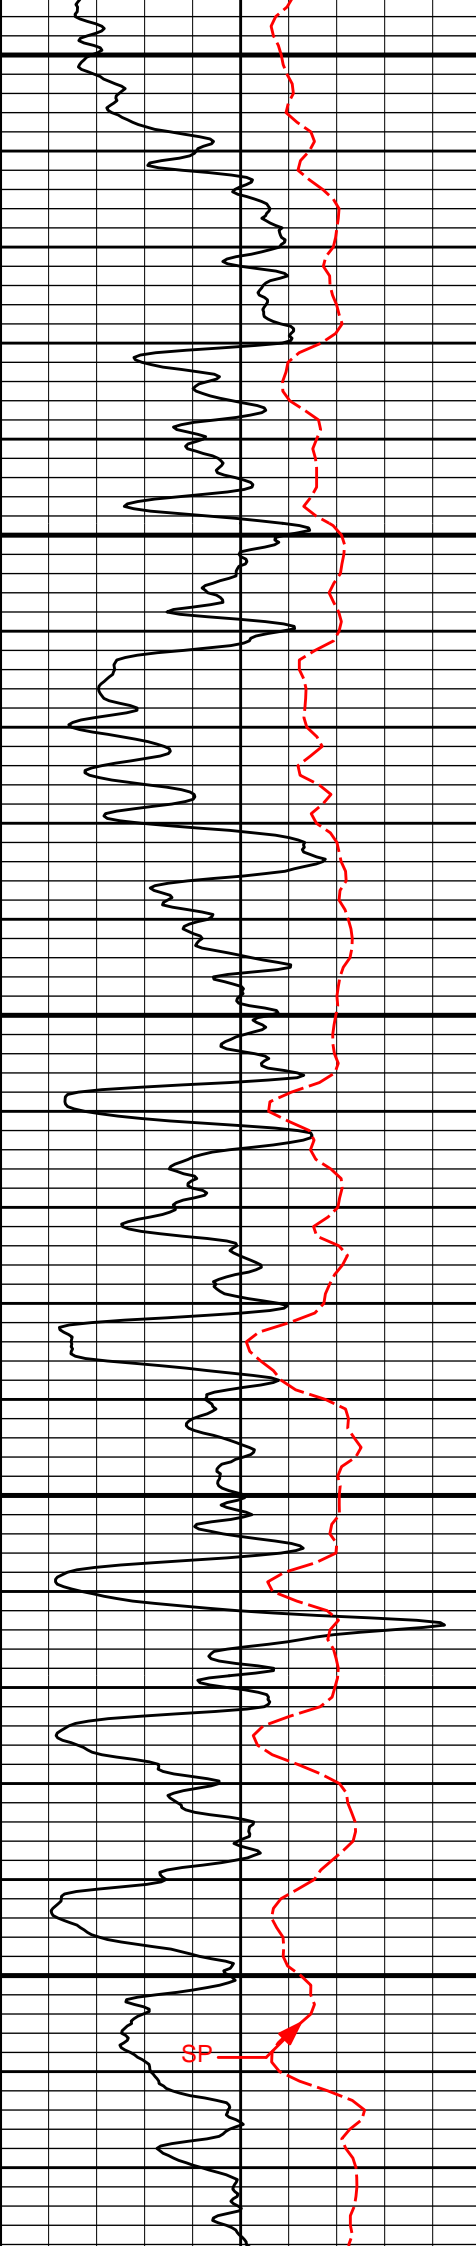

2000

30in Resistivity 2ft Res

20in Resistivity 2ft Res

60in Resistivity 2ft Res


2100

10in Resistivity 2ft Res

90in Resistivity 2ft Res

2200


SP

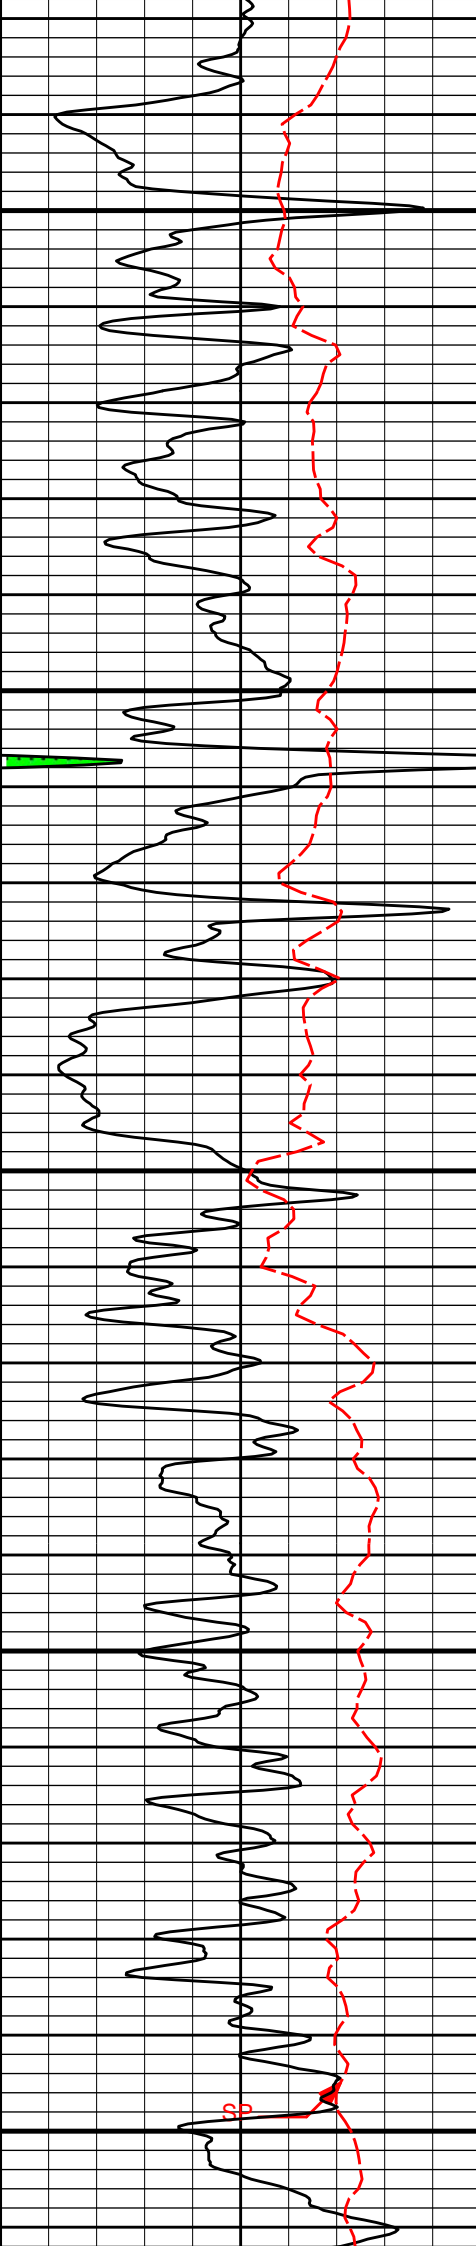

2300

2400

10in Resistivity 2ft Res

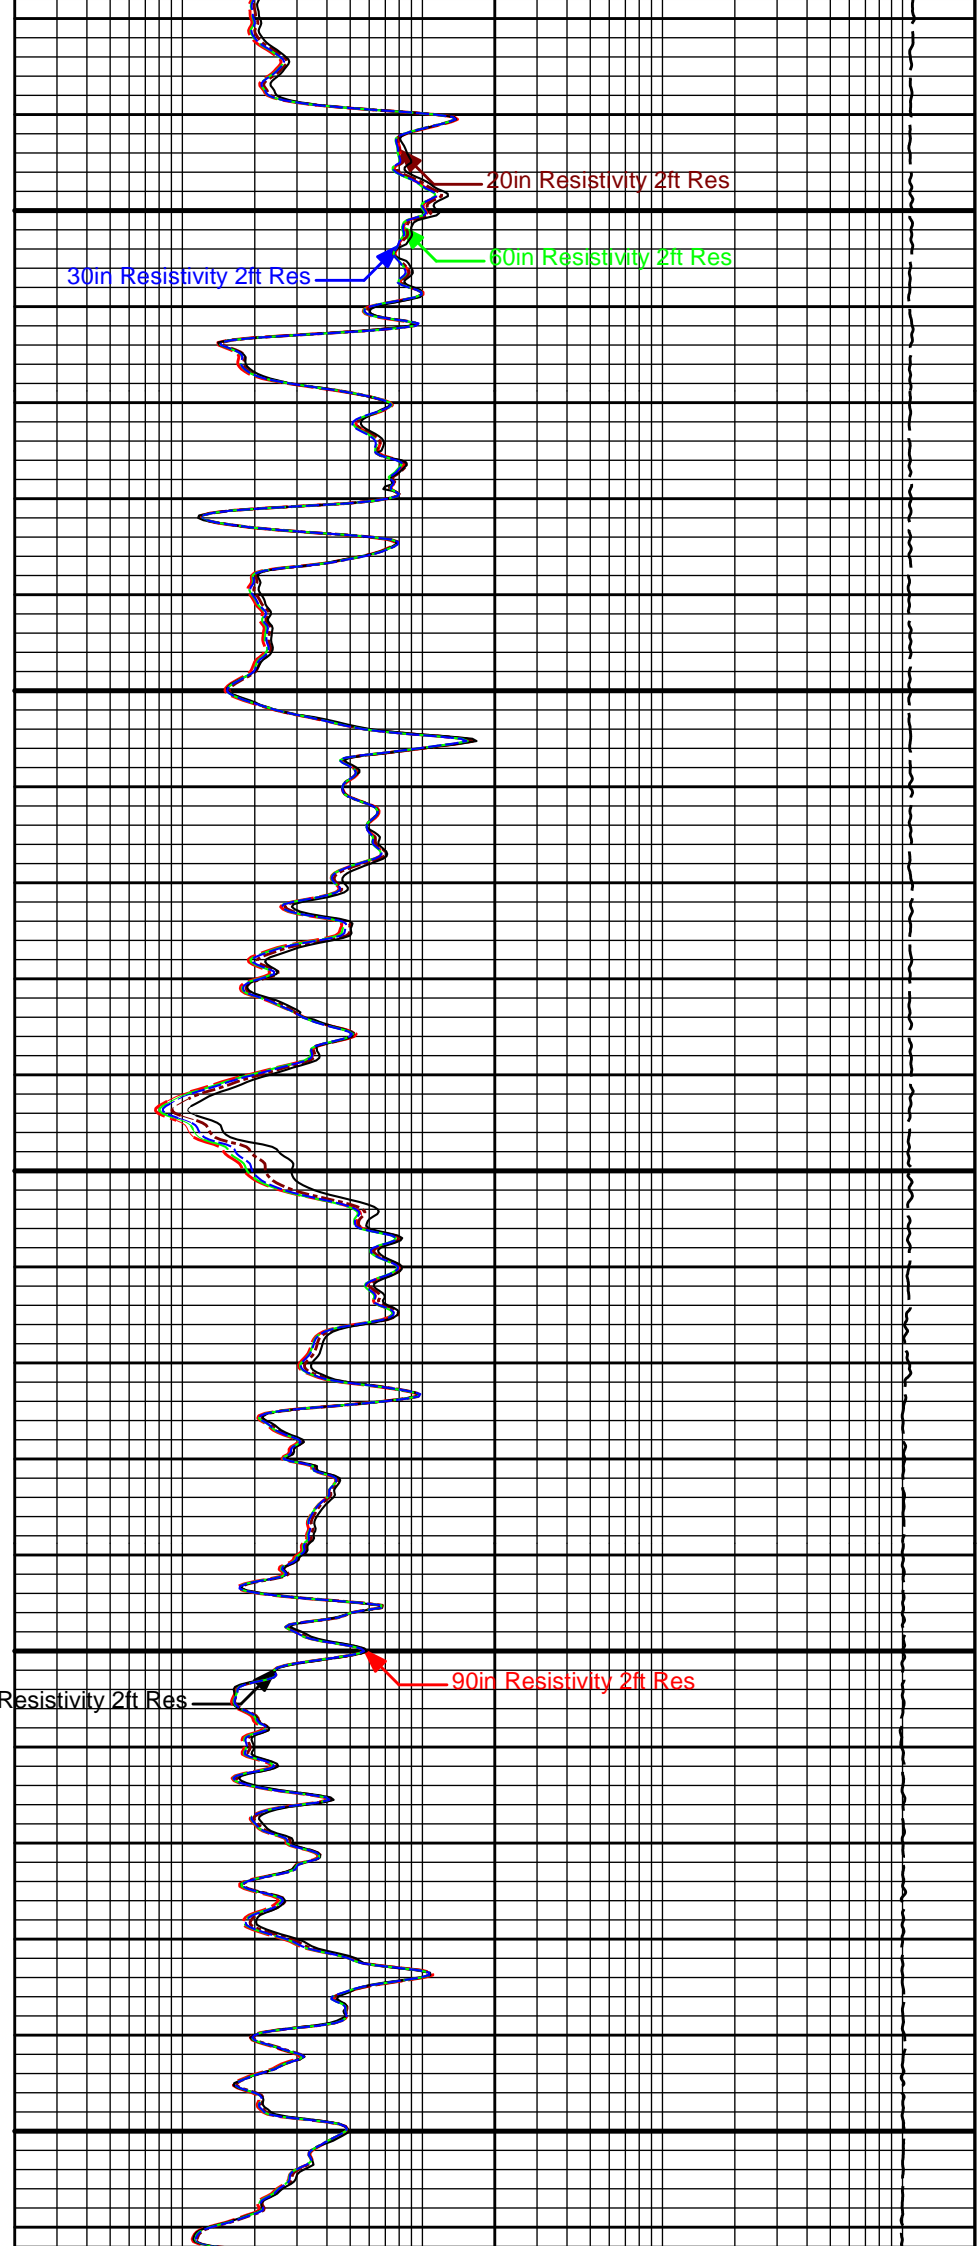


20in Resistivity 2ft Res

30in Resistivity 2ft Res

60in Resistivity 2ft Res


90in Resistivity 2ft Res

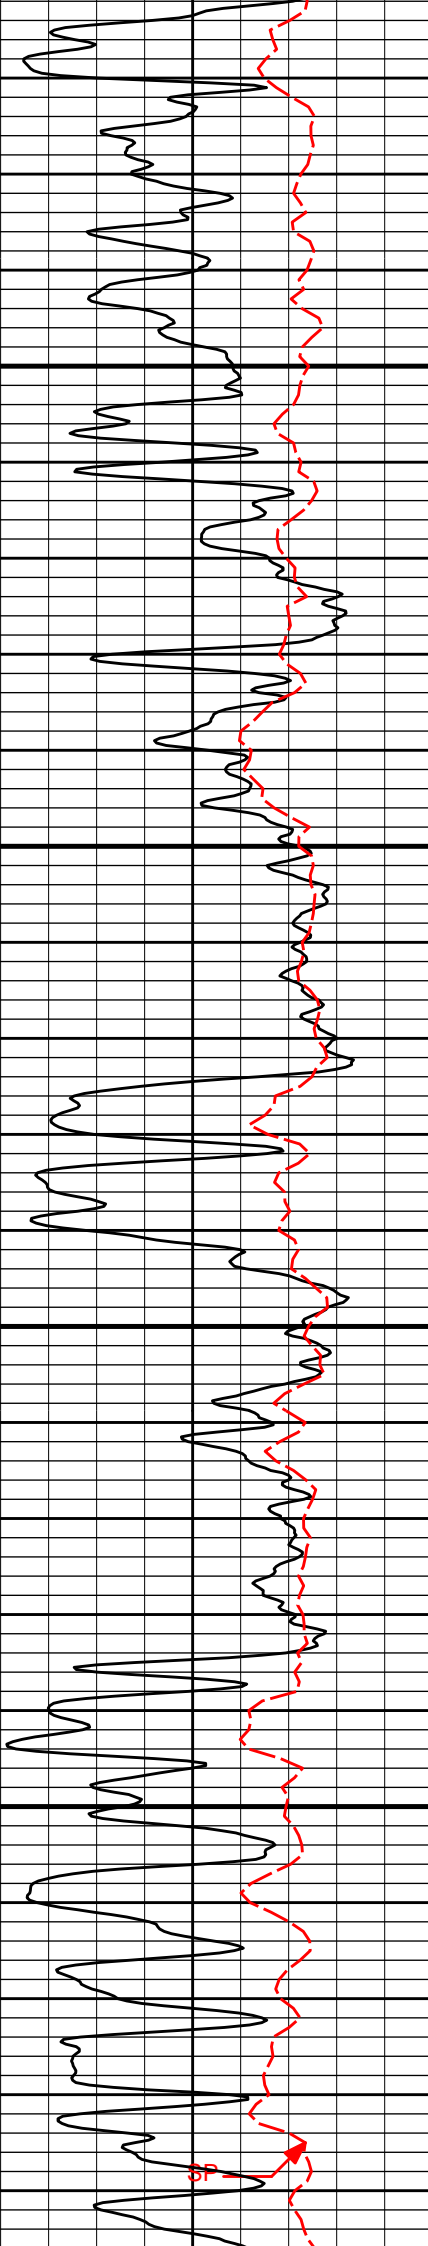

30in Resistivity 2ft Res
2500

2600


10in Resistivity 2ft Res

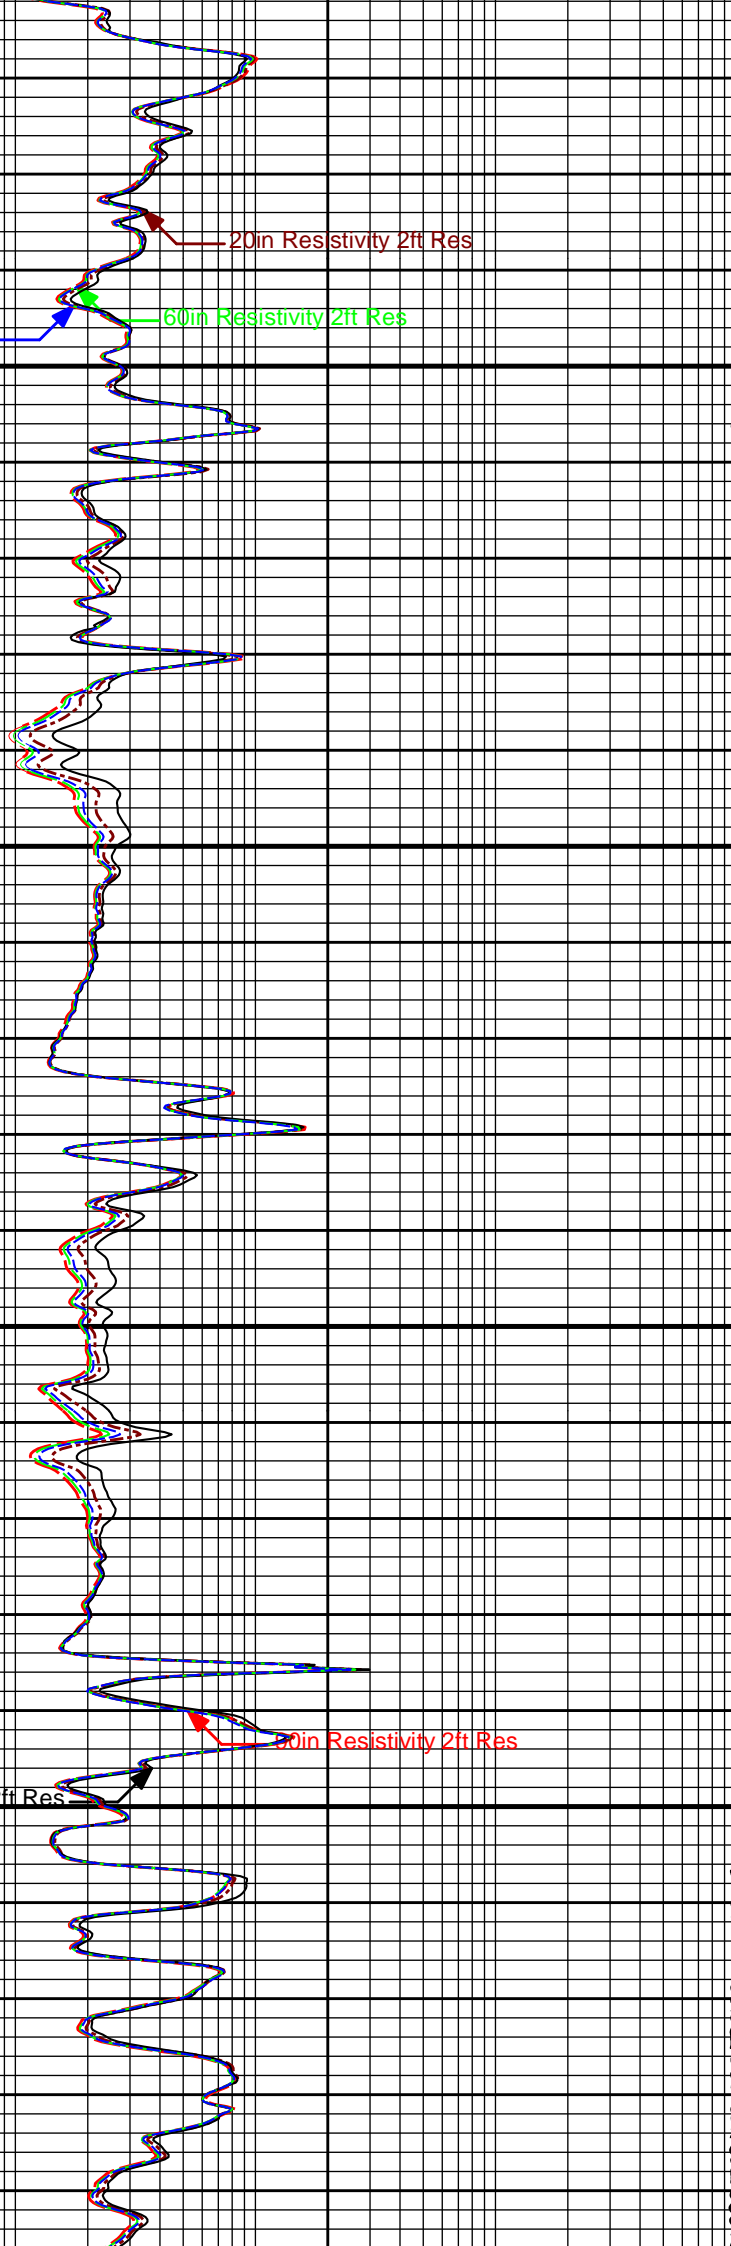

20in Resistivity 2ft Res

60in Resistivity 2ft Res

20in Resistivity 2ft Res

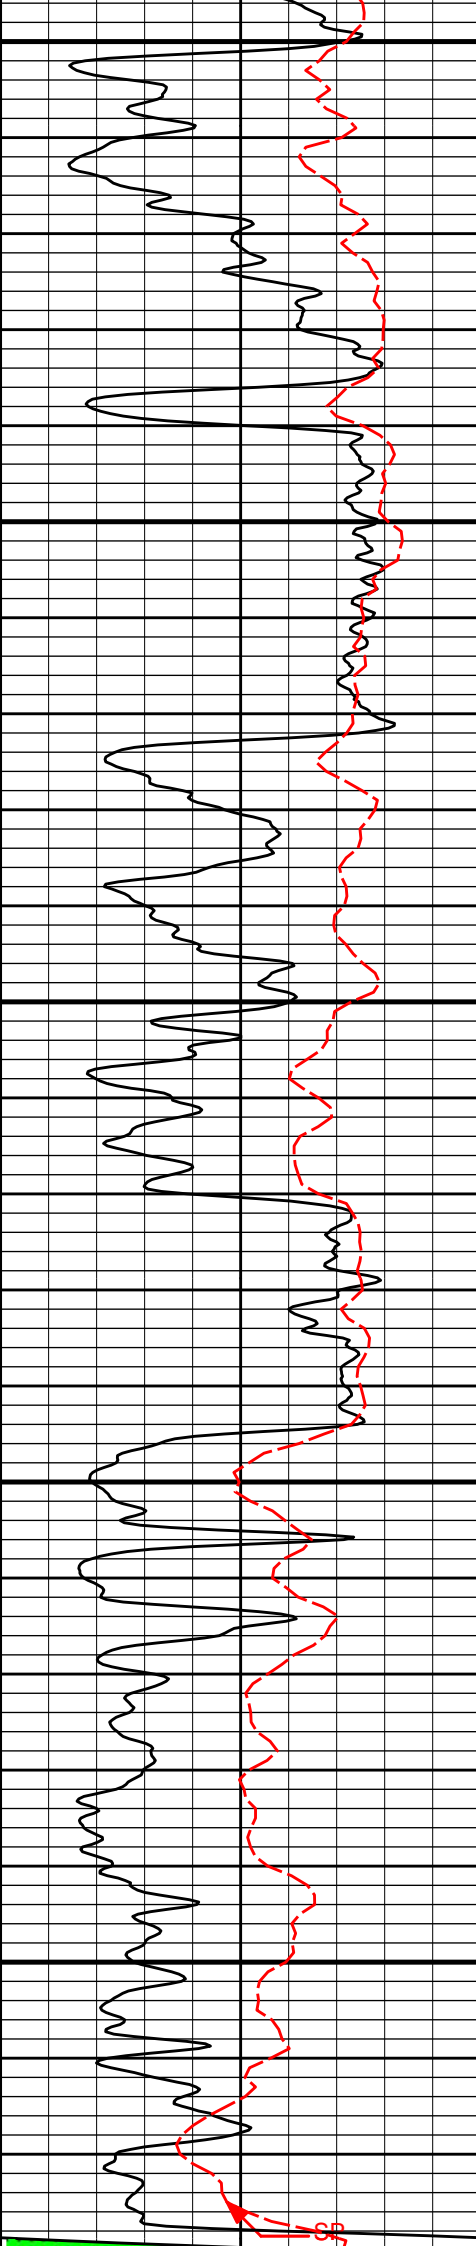

2700

20in Resistivity 2ft Res

30in Resistivity 2ft Res

60in Resistivity 2ft Res


2800

2900

10in Resistivity 2ft Res


90in Resistivity 2ft Res

SP

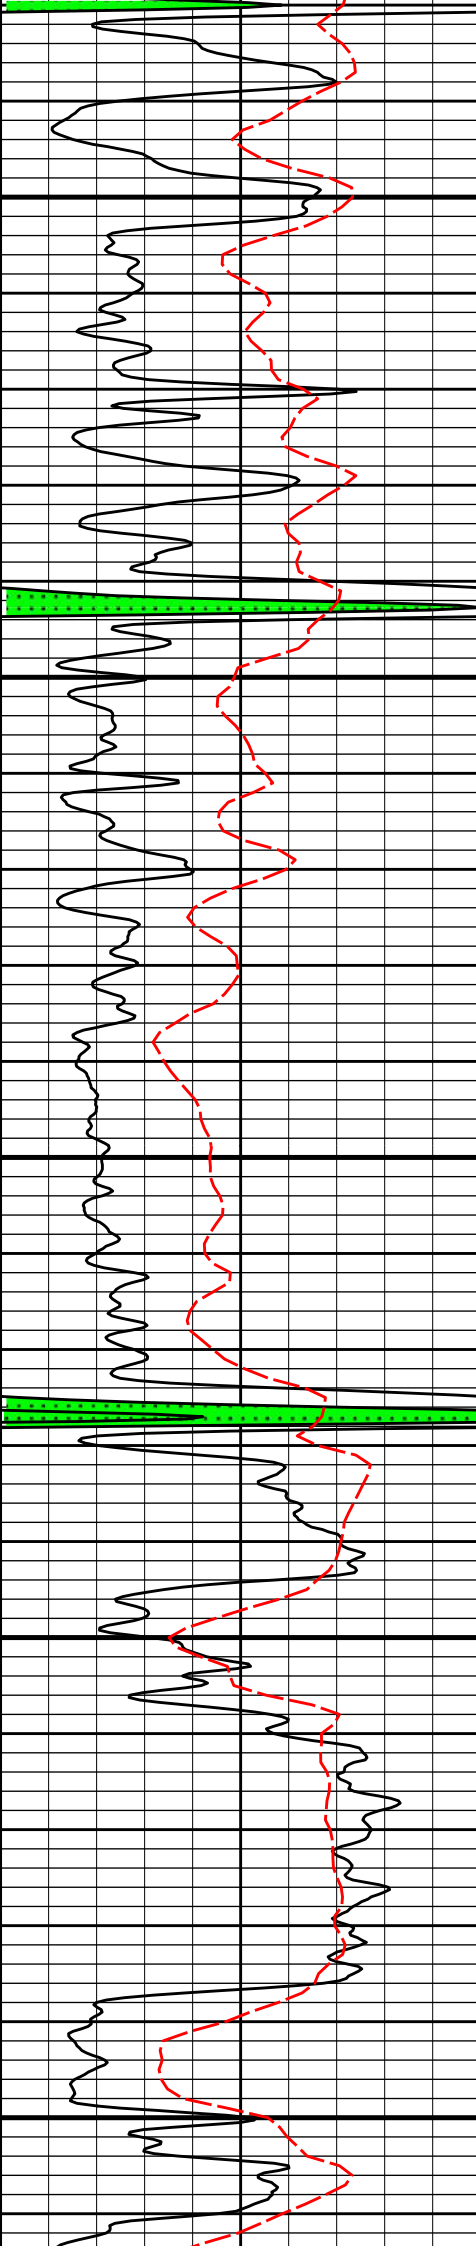

3000

3100

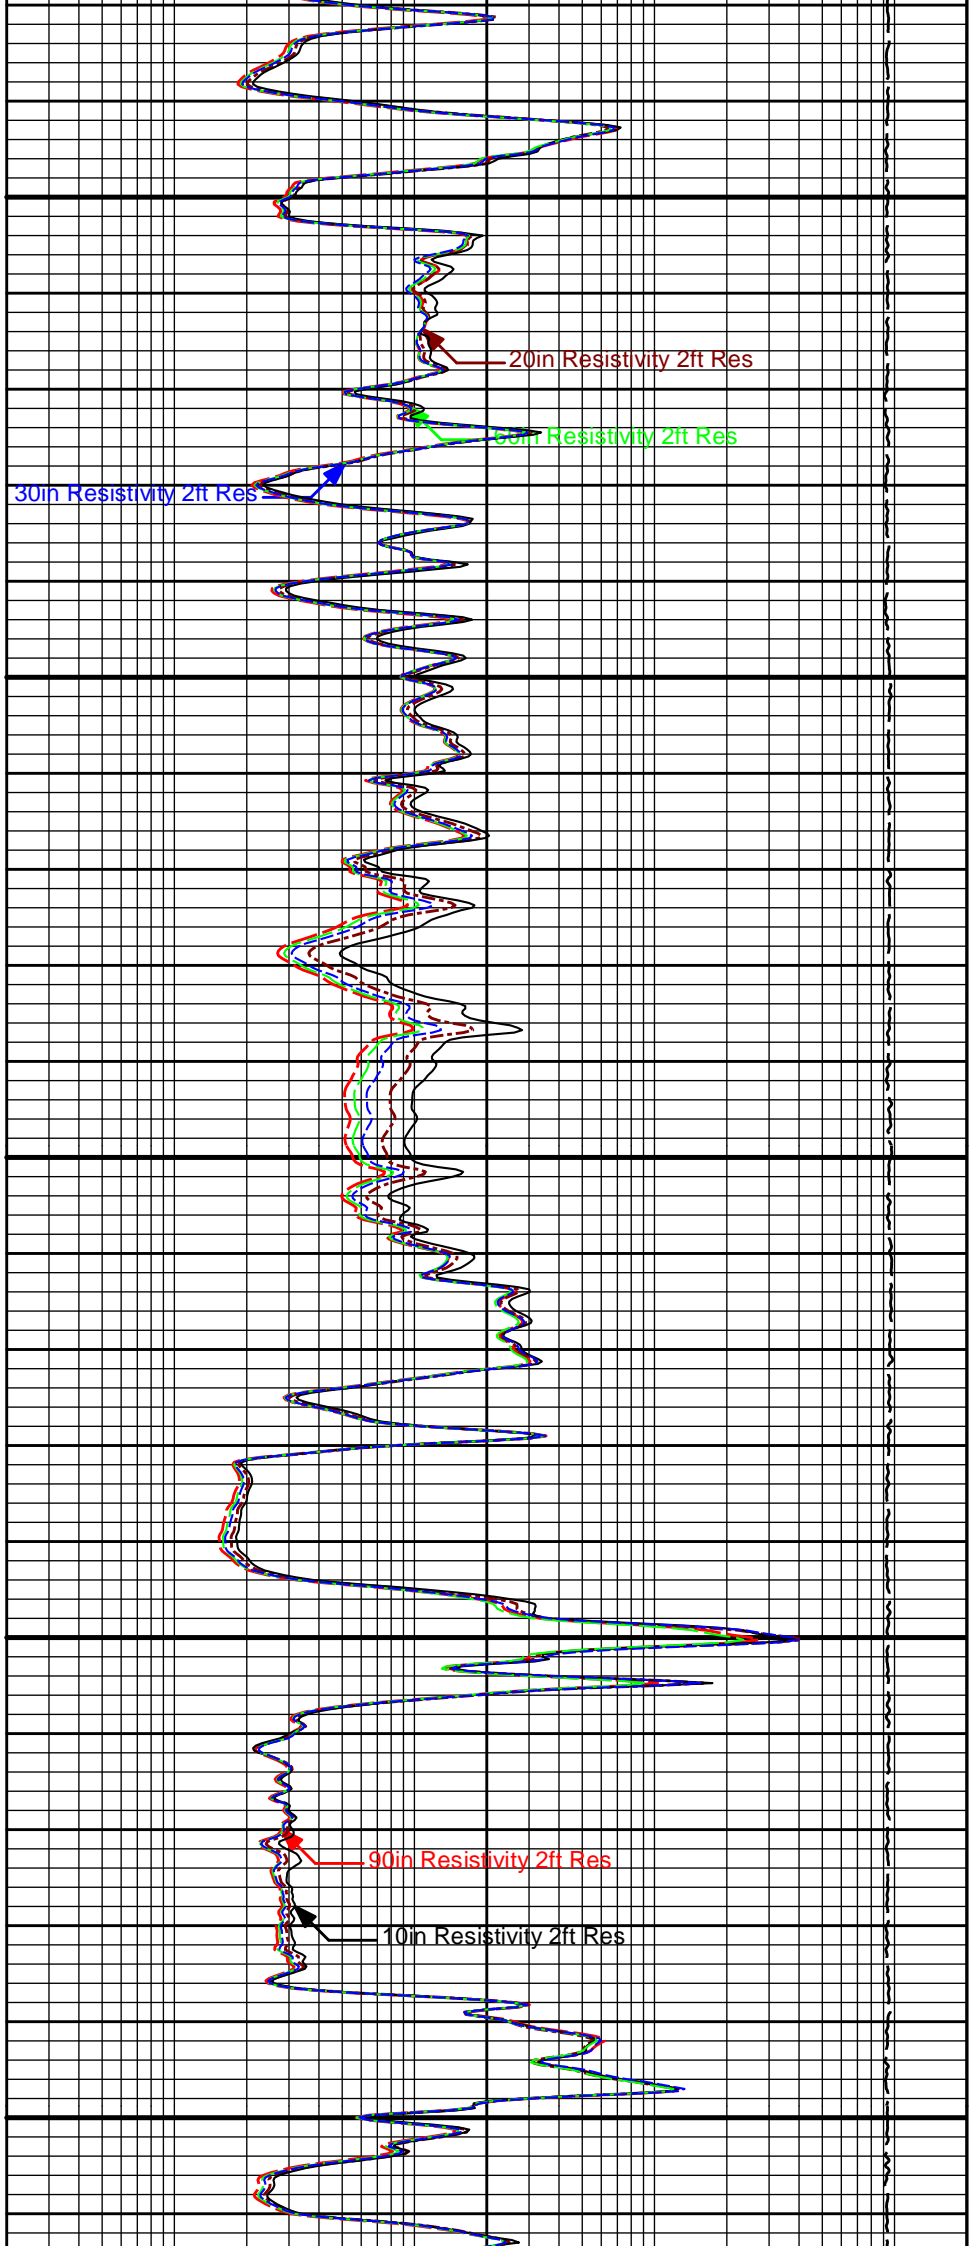


20in Resistivity 2ft Res

60in Resistivity 2ft Res

30in Resistivity 2ft Res


90in Resistivity 2ft Res


10in Resistivity 2ft Res

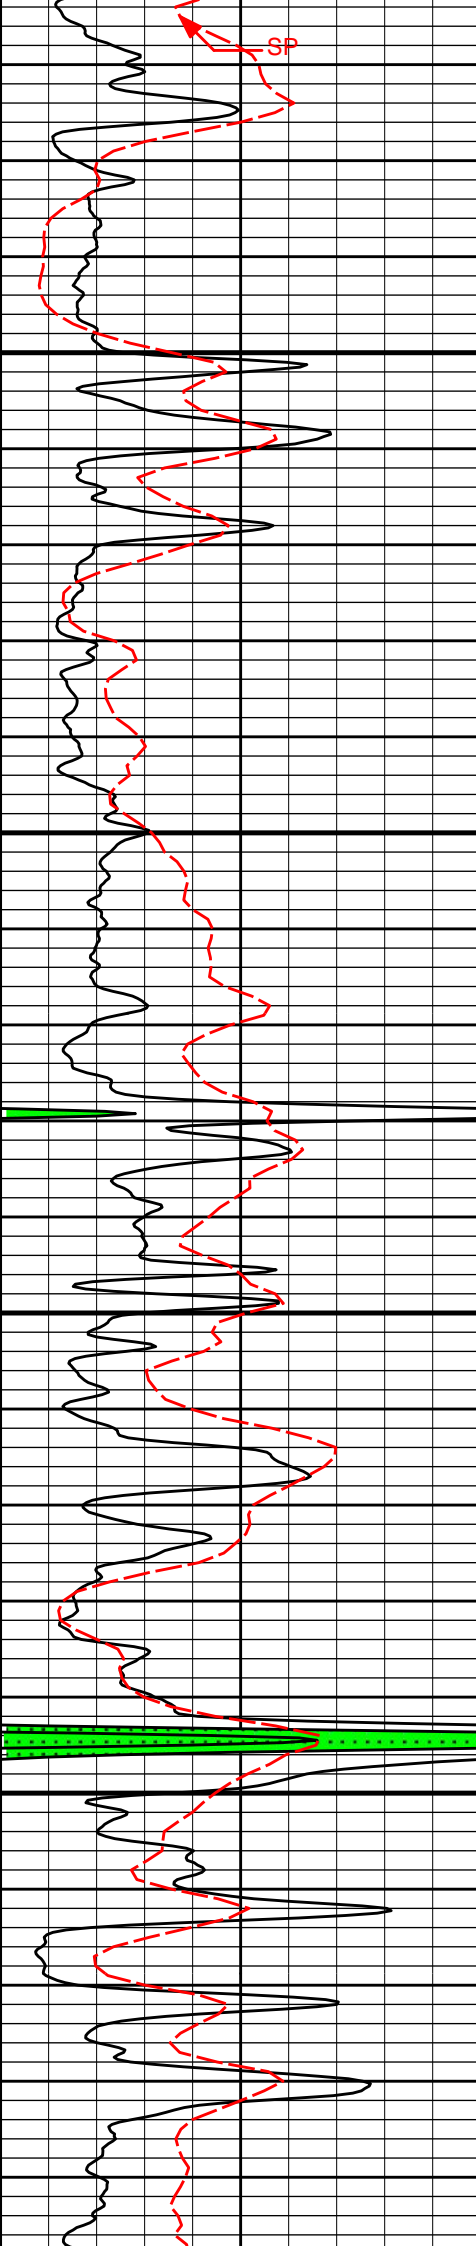

3200

3300

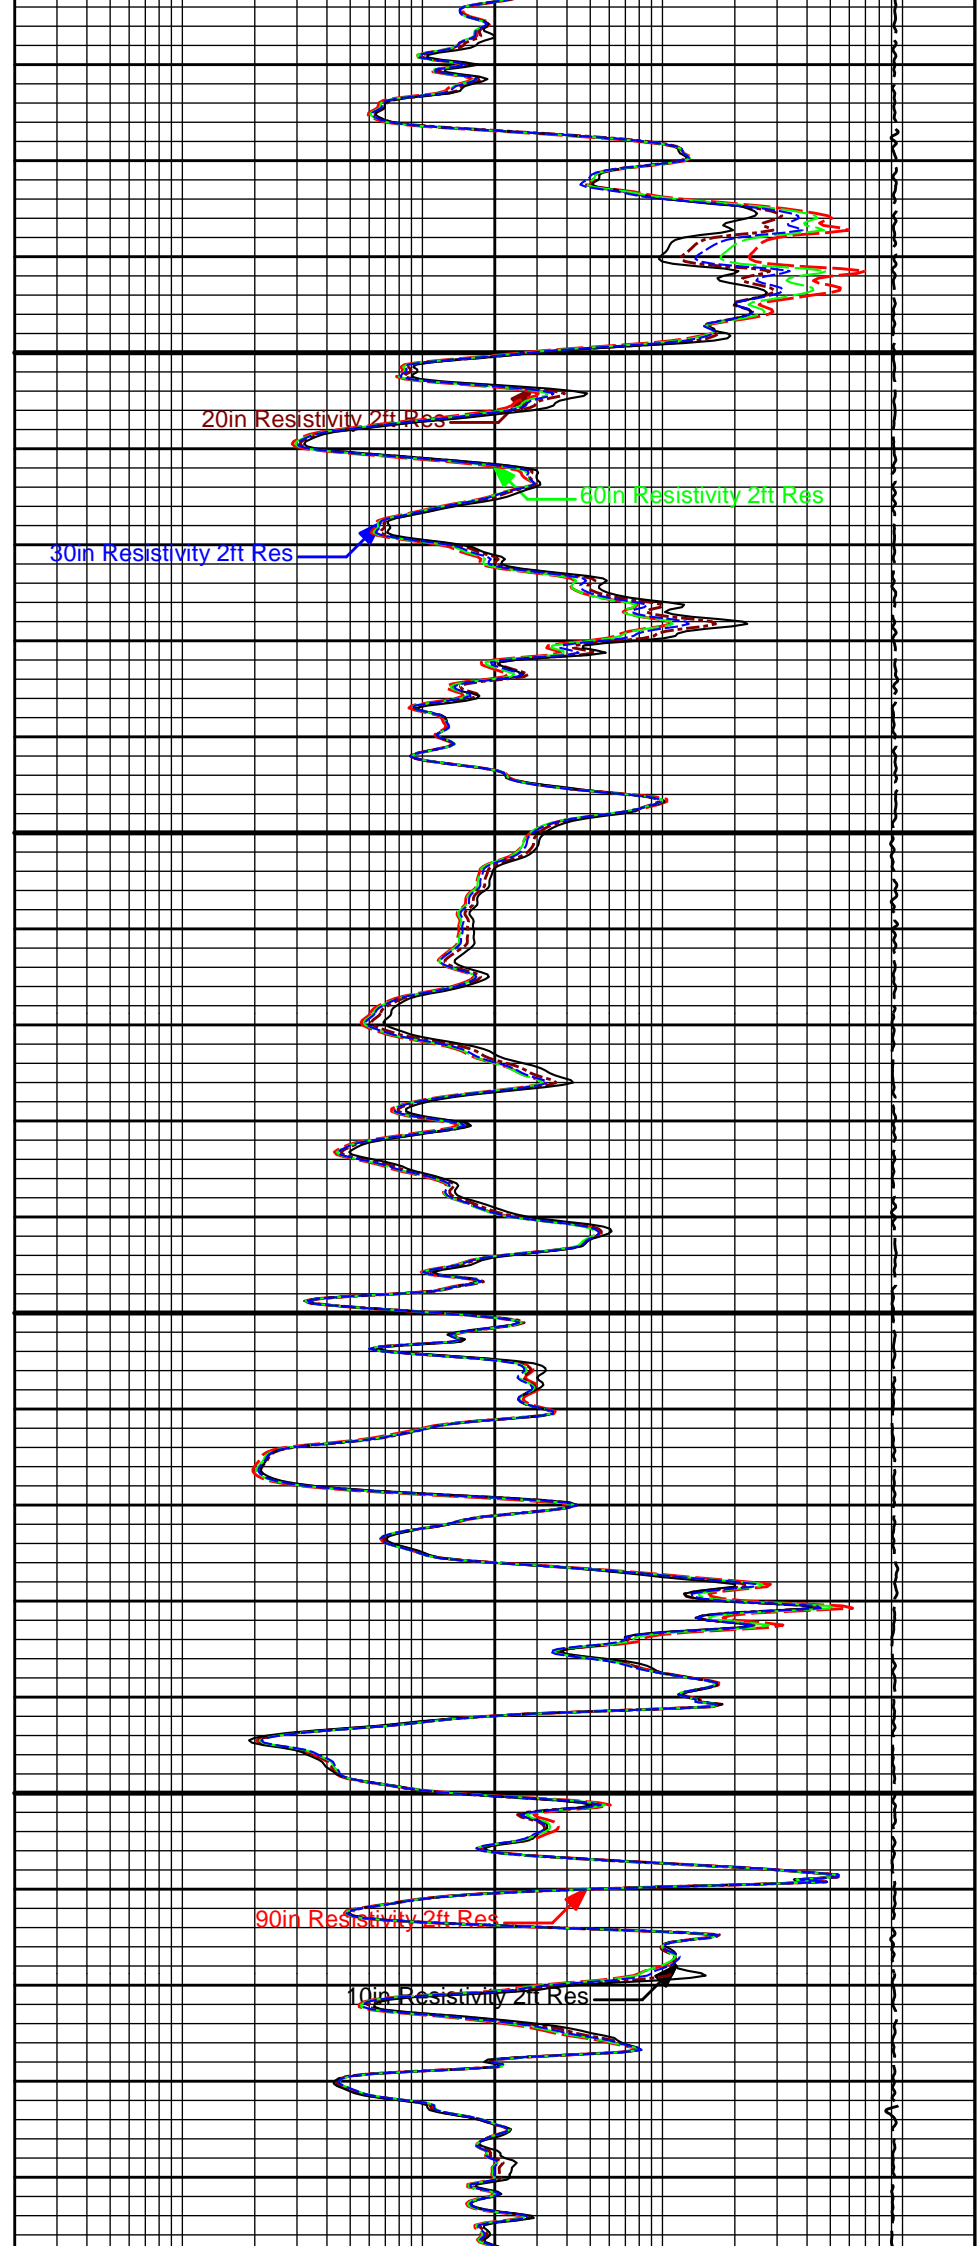

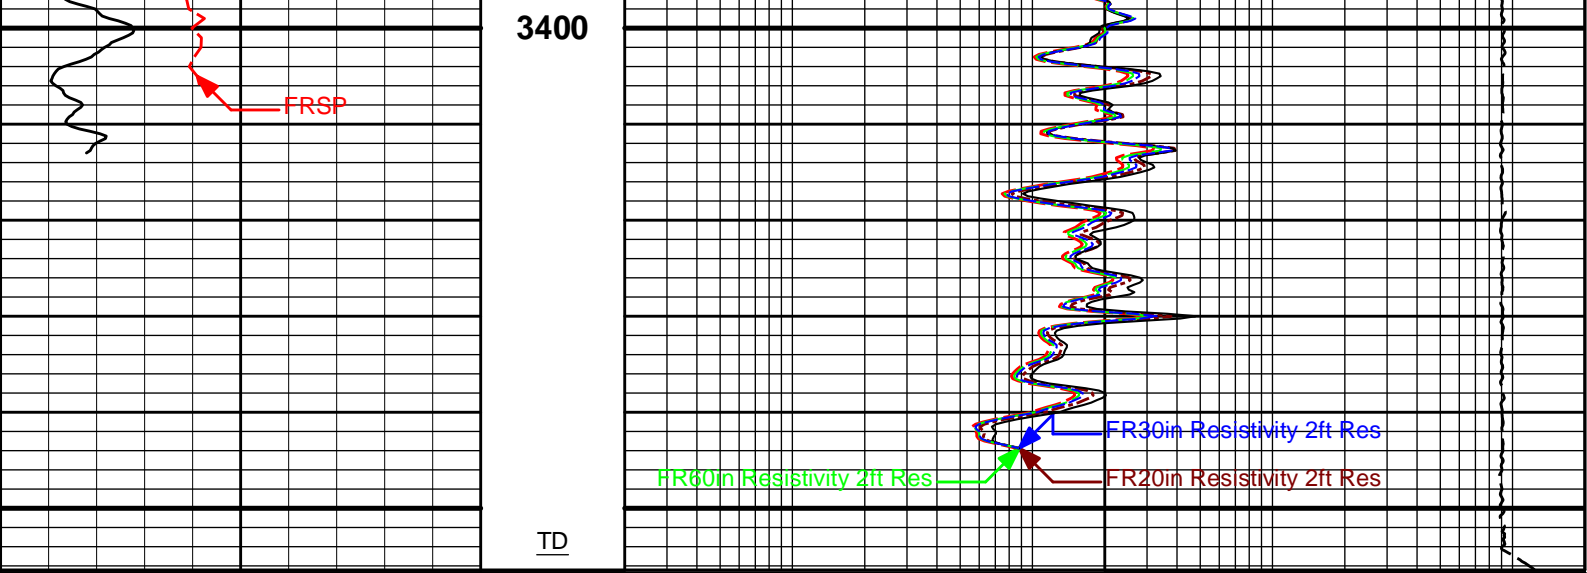

0	Gamma API	150	15K	Tension	0
	api			pounds	
	SP		0.2	90in Resistivity 2ft Res	2K
	-]20[+			ohmm	
			0.2	60in Resistivity 2ft Res	2000
				ohmm	
			0.2	30in Resistivity 2ft Res	2000
				ohm-metre	
			0.2	20in Resistivity 2ft Res	2000
				ohmm	
			0.2	10in Resistivity 2ft Res	2K
				ohmm	

HALLIBURTON

Plot Time: 12-Feb-19 16:10:57
 Plot Range: 850 ft to 3456.42 ft
 Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\ACRT\ACRT_5inch_main

5 INCH MAIN LOG


5 INCH MAIN LOG


HALLIBURTON

Plot Time: 12-Feb-19 16:10:57
 Plot Range: 3080 ft to 3458.67 ft
 Data: RUSSELL_NUSS\Well Based\REPEAT\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\ACRT\ACRT_5inch_main

REPEAT SECTION

REPEAT SECTION

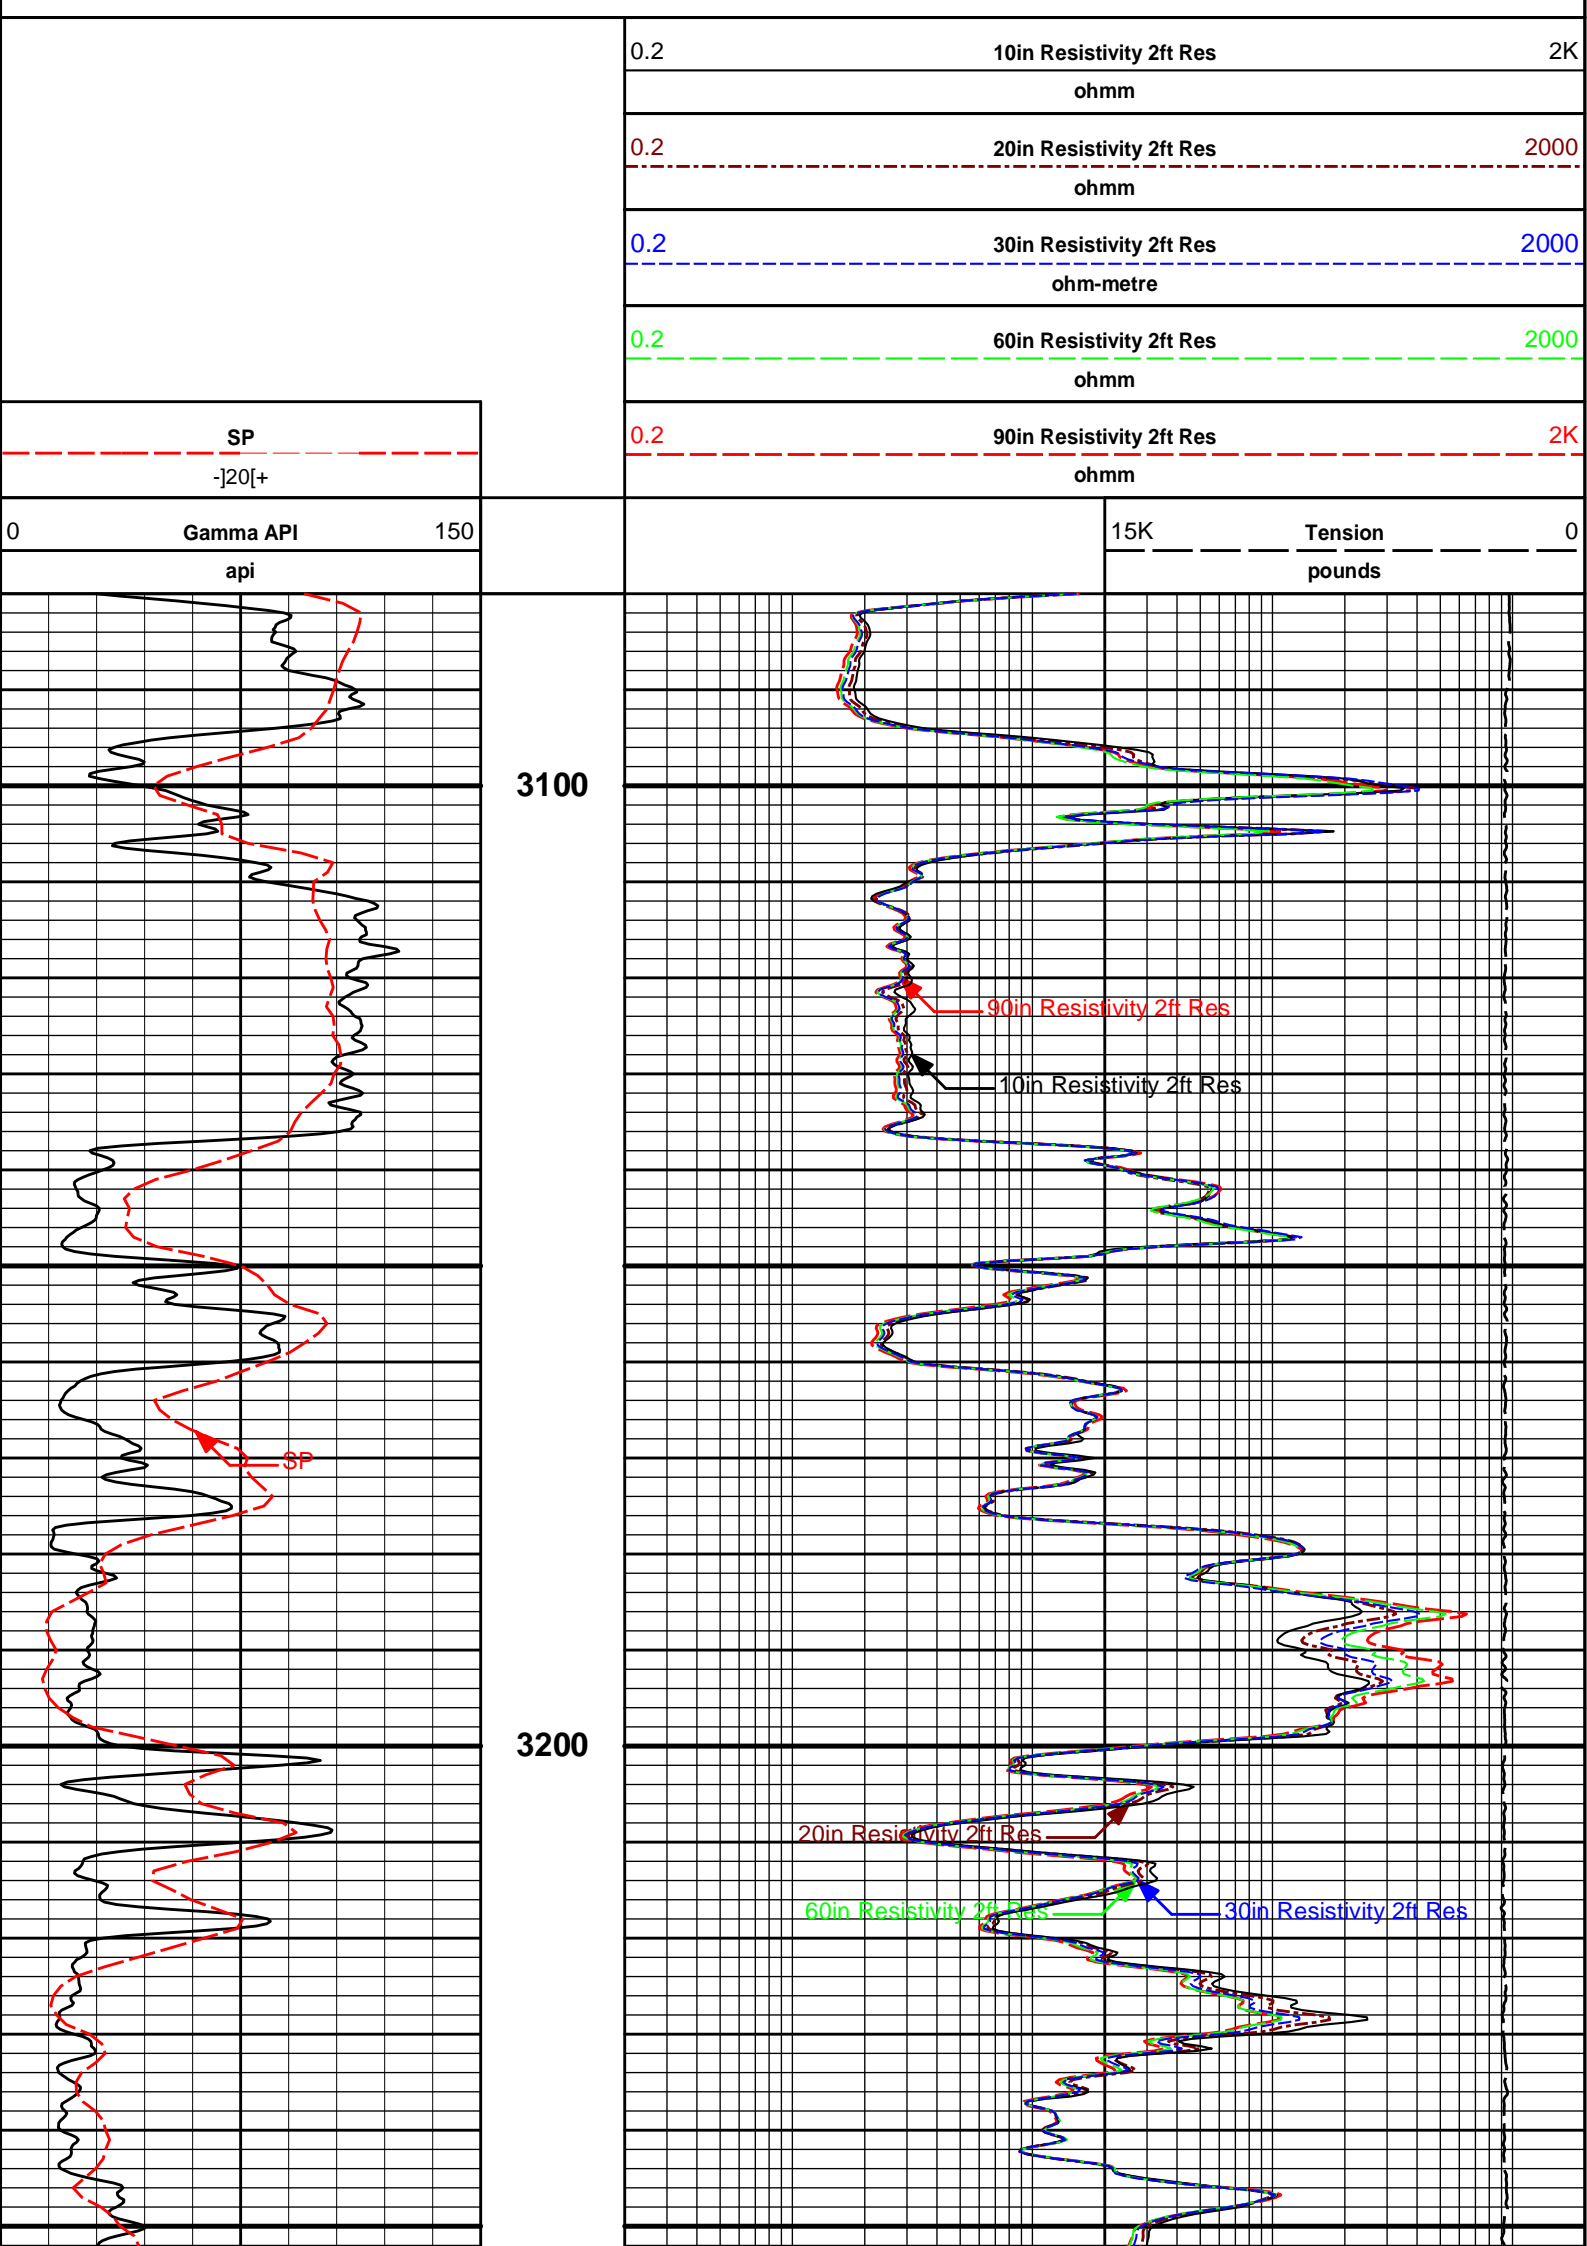


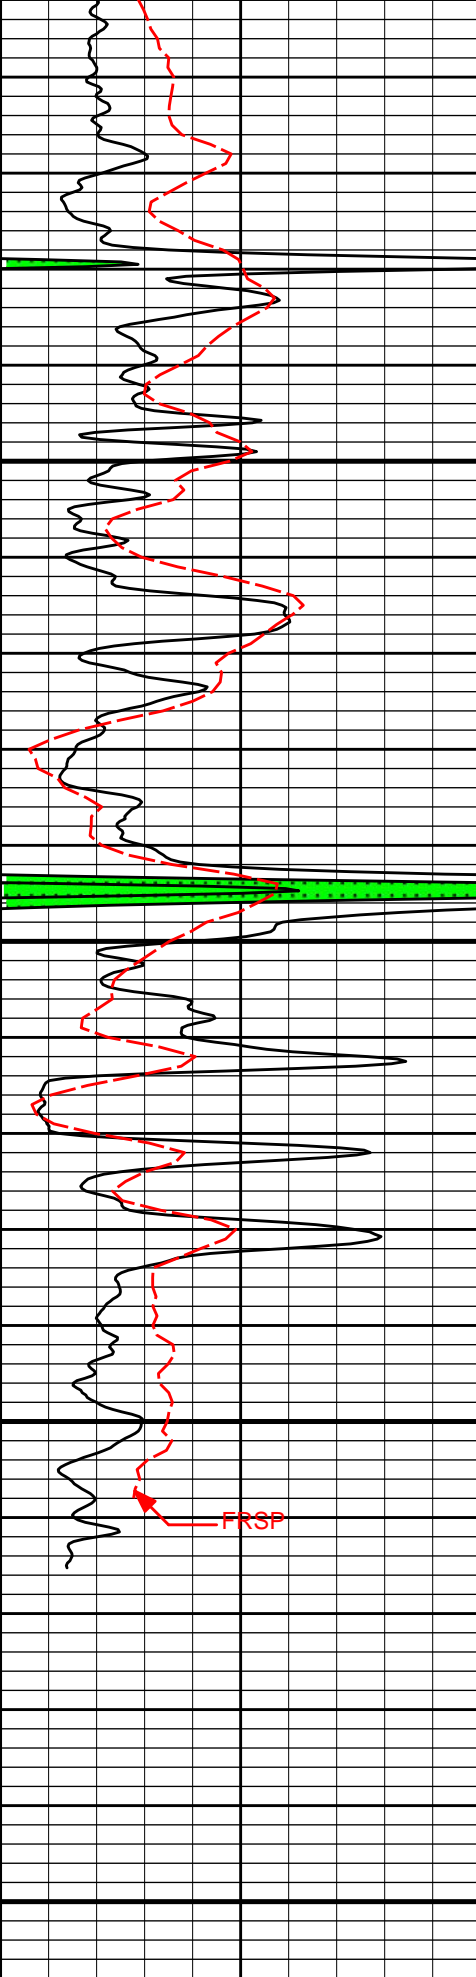

3300

3400

TD

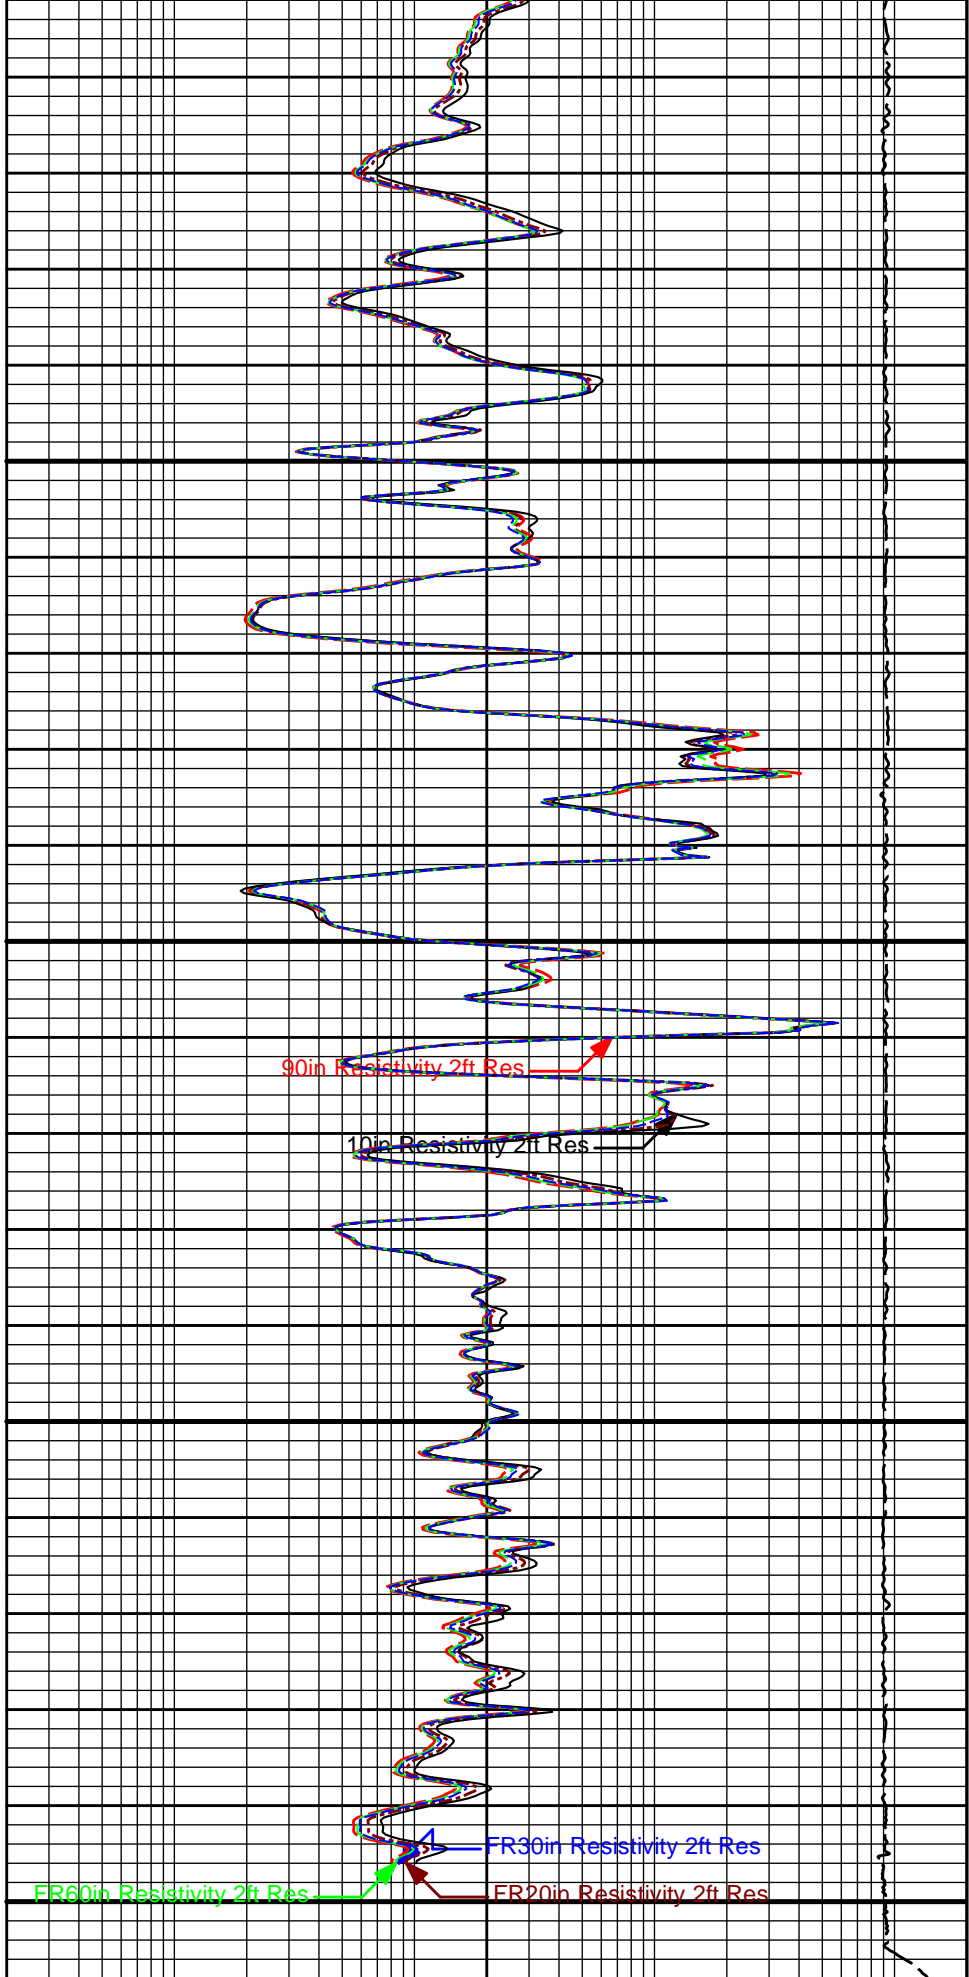

90in Resistivity 2ft Res

10in Resistivity 2ft Res

FR30in Resistivity 2ft Res

FR60in Resistivity 2ft Res

FR20in Resistivity 2ft Res

0 Gamma API 150
api

SP
-20[+

15K Tension 0
pounds

0.2 90in Resistivity 2ft Res 2K
ohmm

0.2 60in Resistivity 2ft Res 2000

	ohmm	
0.2	30in Resistivity 2ft Res	2000
	ohm-metre	
0.2	20in Resistivity 2ft Res	2000
	ohmm	
0.2	10in Resistivity 2ft Res	2K
	ohmm	

HALLIBURTON

Plot Time: 12-Feb-19 16:10:58
 Plot Range: 3080 ft to 3458.67 ft
 Data: RUSSELL_NUSS\Well Based\REPEAT\
 Plot File: \\-LOCAL-RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\ACRT\ACRT_5inch_main

REPEAT SECTION

REPEAT SECTION

HALLIBURTON

CALIBRATION REPORT

SURFACE TENSION SHOP CALIBRATION

Tool Name: Depth Panel - 12345678 Reference Calibration Date: 08-Feb-19 14:23:35
 Engineer: SEAN WOLTEMATH Calibration Date: 09-Feb-19 14:35:03
 Software Version: WL INSITE R5.8.9 (Build 6) Calibration Version: 1

SURFACE TENSION LOAD CELL					
Measurement	Load Cell Value	Measurement	Calibrated	Units	
Low	10112.01	-99.95	0.00	lbs	
High	17473.17	7809.11	7830.00	lbs	

DOWNHOLE TENSION SHOP CALIBRATION

Tool Name: RWCH - 12345678 Reference Calibration Date: 10-Feb-19 03:20:04
 Engineer: WHITLOCK Calibration Date: 11-Feb-19 23:12:20
 Software Version: WL INSITE R5.8.9 (Build 6) Calibration Version: 1

DOWNHOLE LOAD CELL					
Measurement	Tool Value	Measurement	Calibrated	Units	
Low	-427.27	-5.78	0.00	lbs	
High	4412.40	456.88	1480.00	lbs	

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11013113 Reference Calibration Date: 27-Nov-18 10:49:38
 Engineer: WHITLOCK Calibration Date: 14-Dec-18 10:17:09
 Software Version: WL INSITE R5.8.9 (Build 6) Calibration Version: 1

Calibrator Source S/N: TB-79
 Calibrator API Reference:222.00 api
 Equivalent Calibrator API Reference:225.9 api

Measurement	Measured	Calibrated	Units
Background	19.9	19.6	api
Background + Calibrator	249.5	245.5	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11013113

Reference Calibration Date: 14-Dec-18 10:17:09

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 11:09:14

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Field Verification	Shop	Field	Units
Background	19.6	23.5	api
Background + Calibrator	245.5	243.6	api
Calibrator	225.9	220.1	api

Shop	Field	Difference	Tolerance
225.9	220.1	5.8	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name: DSNT - 11019641

Reference Calibration Date: 04-Aug-18 12:26:27

Engineer: SEAN WOLTEMATH

Calibration Date: 07-Nov-18 10:07:09

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Logging Source S/N: DSN-436

Tank Serial Number: EL RENO HWT

Reference value assigned to Tank: 56.100

Snow Block S/N: 12156883

Calibration Tank Water Temperature: 66 degF

Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.97742	0.98053	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2348	0.2358	0.0010	+/- 0.0020
Calibrated Ratio:	10.5259	10.5595	0.034	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0724	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name: DSNT - 11019641

Reference Calibration Date: 07-Nov-18 10:07:09

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 10:55:12

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Logging Source S/N: DSN-436

Snow Block S/N: 12156883

NEUTRON FIELD-CHECK SUMMARY			
Shop	Field	Difference	Control Limit

	Shop	Field	Difference	On Change
Snow-Block Porosity (decip):	0.0724	0.0771	0.0047	+/- 0.0150

PASS/FAIL SUMMARY

Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION

Tool Name:	SDLT - 10960494	Reference Calibration Date:	01-Jan-70 00:00:00
Engineer:	SEAN WOLTEMATH	Calibration Date:	28-Dec-18 10:43:24
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1
Host Tool Name:	DSNT - 11019641		

CALIBRATION COEFFICIENTS

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-3977.11	-3977.11	-7000.00 - -1000.00
Pad Gain	0.0003897	0.0003897	0.0002000 - 0.0006000
Arm Offset	-3073.13	-3073.13	-5000.00 - 3000.00
Arm Gain	0.0005210	0.0005210	0.000300 - 0.000700
Arm Power	-0.000005094	-0.000005094	-0.000010000 - 0.000010000

The ring diameter is computed from: $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$
 Tool Diameter: 4.50 in

CALIBRATION RINGS

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

SDLT CALIPER FIELD CALIBRATION

Tool Name:	SDLT - 10960494	Reference Calibration Date:	28-Dec-18 10:43:24
Engineer:	WHITLOCK	Calibration Date:	11-Feb-19 10:52:29
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

MEASURED CALIPER VALUES

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.79	0.04	+/- 0.10
Ring Diameter	8.25	8.25	-0.00	+/- 0.15

PASS/FAIL SUMMARY

Pad Extension Check:	Passed
Diameter Check:	Passed

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name:	ACRt Sonde - 11830728	Reference Calibration Date:	06-Jul-18 13:24:46
-------------------	------------------------------	------------------------------------	---------------------------

Engineer: WHITLOCK

Calibration Date: 31-Oct-18 14:22:50

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Host Tool Name: ACRt Instrument - 11830684

TYPICAL GAIN RANGE

Table with columns: Subarray, R12KHz (Lower, mmho/m, Upper), R36KHz (Lower, mmho/m, Upper), R72KHz (Lower, mmho/m, Upper). Rows include A1 (80"), A2 (50"), A3 (29"), A4 (17"), A5 (10"), and A6 (6").

SONDE OFFSET

Table with columns: Subarray, R12KHz (mmho/m), R36KHz (mmho/m), R72KHz (mmho/m). Rows include A1 (80"), A2 (50"), A3 (29"), A4 (17"), A5 (10"), and A6 (6").

TRANSMITTER CURRENT GAIN

R-MUD VERIFICATION

Two side-by-side tables. Left table: Signal, Lower, R, Upper. Right table: Signal, Lower (ohm-m), Measured (ohm-m), Upper (ohm-m). Rows include 12K, 36K, 72K and Mud Cell.

PASS/FAIL SUMMARY

Summary table with two rows: GAIN RANGE CHK (PASS) and SONDE OFFSET CHK (PASS).

TOOL OK TO LOG

QUALITY CHECK SHOP CALIBRATION

Table with calibration details: Tool Name (ACRt Sonde - 11830728), Reference Calibration Date (06-Jun-18 14:01:20), Engineer (WHITLOCK), Calibration Date (31-Oct-18 14:33:20), Software Version (WL INSITE R5.8.9 (Build 6)), Calibration Version (1), Host Tool Name (ACRt Instrument - 11830684).

STANDARD DEVIATIONS

Table with columns: Subarray, R12KHz (Measured, Expected, Pass/Fail), R36KHz (Measured, Expected, Pass/Fail), R72KHz (Measured, Expected, Pass/Fail). Rows include A1 (80") through A6 (6").

AVERAGES

Table with columns: R12KHz, R36KHz, R72KHz.

	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail
A1 (80")	0.000	< 0.500	Pass	-0.001	> -0.500	Pass	-0.006	> -0.500	Pass
A2 (50")	0.000	< 0.500	Pass	-0.001	> -0.500	Pass	-0.005	> -0.500	Pass
A3 (29")	-0.000	< 0.500	Pass	-0.001	> -0.500	Pass	-0.003	> -0.500	Pass
A4 (17")	-0.002	> -0.500	Pass	-0.006	> -0.500	Pass	-0.022	> -0.500	Pass
A5 (10")	-0.010	> -0.500	Pass	-0.017	> -0.500	Pass	-0.036	> -0.500	Pass
A6 (6")	0.014	< 0.500	Pass	0.063	< 0.500	Pass	0.138	< 0.500	Pass

GAIN TOLERANCE

R12KHz

	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	-213173456.000	-213653808.000	480352.000	10682690.400	Pass
A2 (50")	-205651744.000	-206143280.000	491536.000	10307164.000	Pass
A3 (29")	-200817664.000	-201197776.000	380112.000	10059888.800	Pass
A4 (17")	-200193568.000	-200629872.000	436304.000	10031493.600	Pass
A5 (10")	-200252336.000	-200678960.000	426624.000	10033948.000	Pass
A6 (6")	-199820688.000	-200219344.000	398656.000	10010967.200	Pass

R36KHz

	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	48114080.000	48477272.000	363192.000	2423863.600	Pass
A2 (50")	33966292.000	34324412.000	358120.000	1716220.600	Pass
A3 (29")	28032378.000	28346680.000	314302.000	1417334.000	Pass
A4 (17")	27853682.000	28207516.000	353834.000	1410375.800	Pass
A5 (10")	27373208.000	27716930.000	343722.000	1385846.500	Pass
A6 (6")	26035236.000	26360300.000	325064.000	1318015.000	Pass

R72KHz

	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	-92927656.000	-93022904.000	95248.000	4651145.200	Pass
A2 (50")	-90501024.000	-90617752.000	116728.000	4530887.600	Pass
A3 (29")	-88192472.000	-88292832.000	100360.000	4414641.600	Pass
A4 (17")	-88397088.000	-88515880.000	118792.000	4425794.000	Pass
A5 (10")	-86957704.000	-87076952.000	119248.000	4353847.600	Pass
A6 (6")	-87976216.000	-88080696.000	104480.000	4404034.800	Pass

PASS/FAIL SUMMARY

Std Deviation Verification	Pass
Average Verification	Pass
Gain Tolerance Verification	Pass

MICRO LOG SHOP CALIBRATION

Tool Name:	Microlog Pad - 10960494	Reference Calibration Date:	14-Dec-18 13:35:14
Engineer:	WHITLOCK	Calibration Date:	01-Feb-19 14:12:10
Software Version:	WL INSITE R5.8.9 (Build 6)	Calibration Version:	1
Host Tool Name:	DSNT - 11019641		

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.07	-0.10	-0.01	-0.01	ohmm
Calibration Point #1	0.03	0.00	0.00	0.00	ohmm
Calibration Point #2	20.03	20.00	20.00	20.00	ohmm
Internal Reference	19.92	19.89	19.99	19.98	ohmm

Measurement	Micro Log Normal Tool Value	Micro Log Lateral Tool Value	Units
Tool Zero	0.39	0.30	V
Calibration Point #1	26.06	2.13	V
Calibration Point #2	5327.83	6938.00	V
Internal Reference	5298.82	6931.52	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 10960494 **Reference Calibration Date:** 01-Feb-19 14:12:10
Engineer: WHITLOCK **Calibration Date:** 11-Feb-19 11:12:53
Software Version: WL INSITE R5.8.9 (Build 6) **Calibration Version:** 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.10	-0.10	-0.01	-0.01	ohmm
Internal Reference	19.89	19.90	19.98	19.99	ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.89	19.90	-0.01	+/- 0.80
Microlog Lateral	19.98	19.99	-0.01	+/- 0.80

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - 11213308 **Reference Calibration Date:** 14-Dec-18 10:49:18
Engineer: WHITLOCK **Calibration Date:** 14-Dec-18 11:15:00
Software Version: WL INSITE R5.8.9 (Build 6) **Calibration Version:** 1

Logging Source S/N: 5475GW

Aluminum Block S/N: El Reno Aluminum Block

Density: 2.581g/cc

Pe: 3.170

Magnesium Block S/N: El Reno Magnesium Block

Density: 1.687g/cc

Pe: 2.594

DENSITY CALIBRATION SUMMARY			
Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	0.9935	0.9902	0.90 - 1.10
Near Dens Gain	0.9891	0.9881	0.90 - 1.10
Near Peak Gain	1.0020	1.0148	0.90 - 1.10
Near Lith Gain	1.0071	1.0175	0.90 - 1.10
Far Bar Gain	1.0015	1.0048	0.90 - 1.10
Far Dens Gain	0.9919	0.9938	0.90 - 1.10
Far Peak Gain	0.9878	0.9921	0.90 - 1.10
Far Lith Gain	0.9743	0.9808	0.90 - 1.10
Near Bar Offset	0.1918	0.2246	NONE
Near Dens Offset	0.2308	0.2401	NONE
Near Peak Offset	0.0959	-0.0122	NONE
Near Lith Offset	0.0296	-0.0574	NONE
Far Bar Offset	0.0411	0.0135	NONE
Far Dens Offset	0.1442	0.1314	NONE
Far Peak Offset	0.1660	0.1305	NONE
Far Lith Offset	0.2364	0.1860	NONE
Near Bar Background	937.48	939.15	700 - 1450
Near Dens Background	311.57	312.43	230 - 480
Near Peak Background	135.23	136.70	100 - 210
Near Lith Background	166.58	166.31	125 - 260
Far Bar Background	479.15	478.16	450 - 900
Far Dens Background	191.75	190.12	175 - 345
Far Peak Background	77.50	76.92	70 - 140

CALIBRATION BLOCK SUMMARY

Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.689	1.687	-0.002	+/- 0.015
Pe	2.556	2.551	-0.005	+/- 0.150
ALUMINUM				
Density (g/cc)	2.580	2.581	0.001	+/- 0.01500
Pe	3.107	3.123	0.016	+/- 0.150

TOOL SUMMARY

Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	-0.0000	+/- 0.0110	-0.0004	+/- 0.0140
Magnesium Block	-0.0005	+/- 0.0110	-0.0010	+/- 0.0140
Aluminum Block	-0.0013	+/- 0.0110	0.0004	+/- 0.0140
Resolution	9.27	6.00 - 11.50	9.45	6.00 - 11.50
Internal Verifier(B+D+P+L)	1555	1200 - 2700	824	800 - 1700

PASS/FAIL SUMMARY

Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK

Tool Name: SDLT Pad - 11213308

Reference Calibration Date: 14-Dec-18 11:15:00

Engineer: WHITLOCK

Calibration Date: 11-Feb-19 11:09:03

Software Version: WL INSITE R5.8.9 (Build 6)

Calibration Version: 1

Pad Temperature: 64.4 degF

DENSITY FIELD CALIBRATION SUMMARY

Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1554.595	1558.839	4.244	15.869
Far (B+D+P+L) cps	824.007	820.518	-3.489	15.826
Near Resolution	9.27	9.21	-0.060	0.50
Far Resolution	9.45	9.46	0.010	1.00

PASS/FAIL SUMMARY

Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
Depth Panel-12345678						
Tension Zero	0.00	-----	-----	0.00	-----	lbs
Tension Cal	7830.00	-----	-----	0.00	-----	lbs

RWCH-12345678						
DH Tension Zero	0.00	-----	-----	0.00	-----	lbs
DH Tension Cal	1480.00	-----	-----	0.00	-----	lbs
GTET-11013113						
Gamma Ray Calibrator	225.9	220.1	-----	5.8	+/- 9.00	api
DSNT-11019641						
Snow-Block Porosity	0.0724	0.0771	-----	-0.0047	+/- 0.0150	decp
SDLT-10960494						
Pad Extension	3.75	3.79	-----	-0.04	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
ACRt Sonde-11830728						
Mud Cell	0.99	-----	-----	0	-----	ohm-m
Microlog Pad-10960494						
MicroLog Normal	19.89	19.90	-----	-0.01	+/-0.80	ohmm
MicroLog Lateral	19.98	19.99	-----	-0.01	+/-0.80	ohmm
SDLT Pad-11213308						
Near(B+D+P+L)	1554.595	1558.839	-----	-4.244	+/-15.869	cps
Far(B+D+P+L)	824.007	820.518	-----	3.489	+/-15.826	cps

Data: RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT-IDLE Date: 12-Feb-19 13:22:15

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.000	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	0.550	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	CSTR	Compressive Strength	1000.00	psia
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	10000.00	ft
	SHARED	BHT	Bottom Hole Temperature	115.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	CBM Temperature Master Tool	GTET	
	SHARED	SOCI	Source of Casing Information	Parameters	
	SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF

CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	SDLT	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTT	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	UCLA	Classic Neutron Parameter utilized?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	RTOK	Process ACRT?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Upr	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	



BOTTOM


Data: RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRTVIDLE

Date: 12-Feb-19 13:23:25

HALLIBURTON

TOOL STRING DIAGRAM REPORT

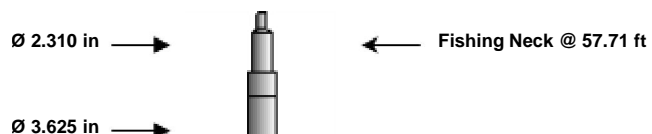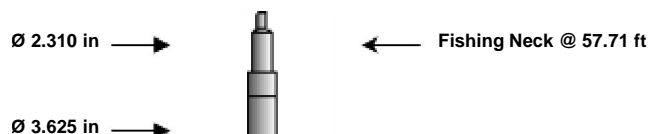Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
		Ø 2.310 in		Fishing Neck @ 57.71 ft		58.59 ft
		Ø 3.625 in		Load Cell @ 54.91 ft	6.25 ft	
RWCH-12345678		135.00 lbs				

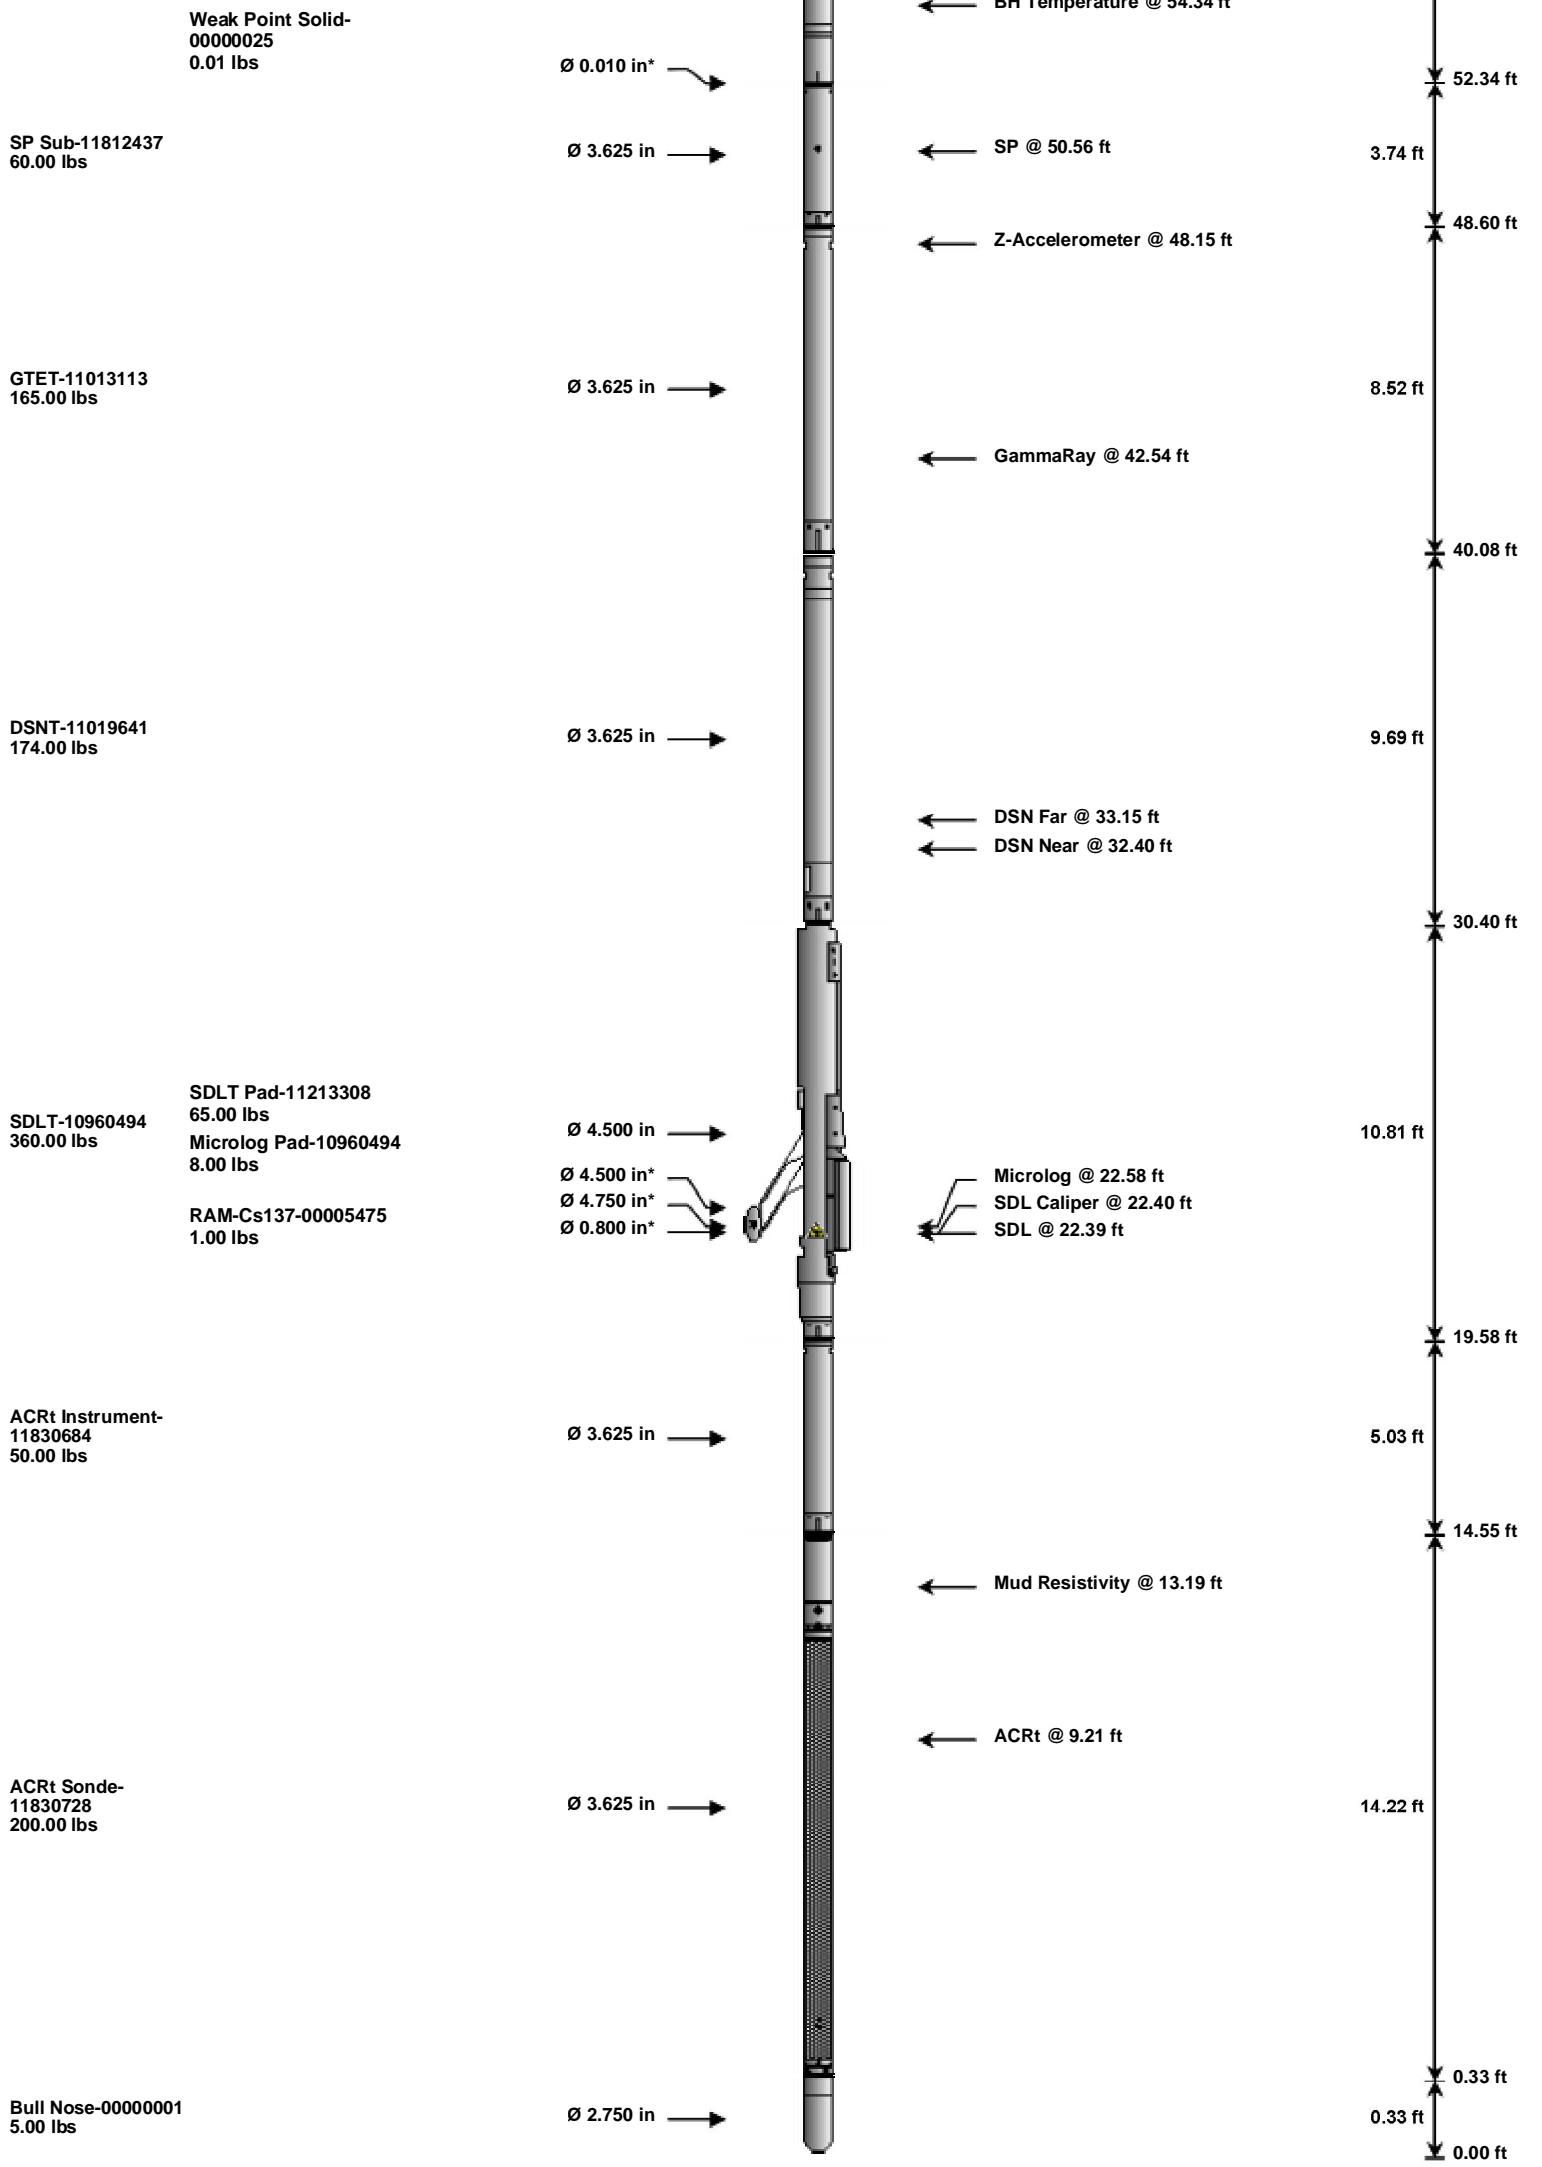

Weak Point Solid-
00000025
0.01 lbs

SP Sub-11812437
60.00 lbs

GTET-11013113
165.00 lbs

DSNT-11019641
174.00 lbs

SDLT-10960494
360.00 lbs

SDLT Pad-11213308
65.00 lbs

Microlog Pad-10960494
8.00 lbs

RAM-Cs137-00005475
1.00 lbs

ACRt Instrument-
11830684
50.00 lbs

ACRt Sonde-
11830728
200.00 lbs

Bull Nose-00000001
5.00 lbs

Ø 0.010 in*

Ø 3.625 in

Ø 3.625 in

Ø 3.625 in

Ø 4.500 in

Ø 4.500 in*

Ø 4.750 in*

Ø 0.800 in*

Ø 3.625 in

Ø 3.625 in

Ø 2.750 in

BH Temperature @ 54.34 ft

SP @ 50.56 ft

Z-Accelerometer @ 48.15 ft

GammaRay @ 42.54 ft

DSN Far @ 33.15 ft

DSN Near @ 32.40 ft

Microlog @ 22.58 ft

SDL Caliper @ 22.40 ft

SDL @ 22.39 ft

Mud Resistivity @ 13.19 ft

ACRt @ 9.21 ft

52.34 ft

3.74 ft

48.60 ft

8.52 ft

40.08 ft

9.69 ft

30.40 ft

10.81 ft

19.58 ft

5.03 ft

14.55 ft

14.22 ft

0.33 ft

0.33 ft

0.00 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length	Max. Log. Speed
----------	-----------	---------------	--------------	-------------	--------------------	-----------------


		Number	(lbs)	(ft)	(ft)	(fpm)
RWCH	Releasable Wireline Cable Head	12345678	135.00	6.25	52.34	300.00
WPSS	Weak Point Solid	00000025	0.01	0.01	*	52.34 300.00
SP	SP Sub	11812437	60.00	3.74	48.60	300.00
GTET	Gamma Telemetry Tool	11013113	165.00	8.52	40.08	60.00
DSNT	Dual Spaced Neutron	11019641	174.00	9.69	30.40	60.00
SDLT	Spectral Density Tool	10960494	360.00	10.81	19.58	60.00
SDLP	Density Insite Pad	11213308	65.00	2.55	*	21.79 60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	00005475	1.00	0.80	*	22.02 300.00
MICP	Microlog Pad	10960494	8.00	1.00	*	22.08 60.00
ACRt	Array Compensated True Resistivity Instrument Section	11830684	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section	11830728	200.00	14.22	0.33	120.00
BLNS	Bull Nose	00000001	5.00	0.33	0.00	300.00


Total **1,223.01** **58.59**


* Not included in Total Length and Length Accumulation.

Data: RUSSELL_NUSS\0001 RWCH-SP-GTET-DSNT-SDLT-ACRT\LDLE

Date: 12-Feb-19 13:23:35

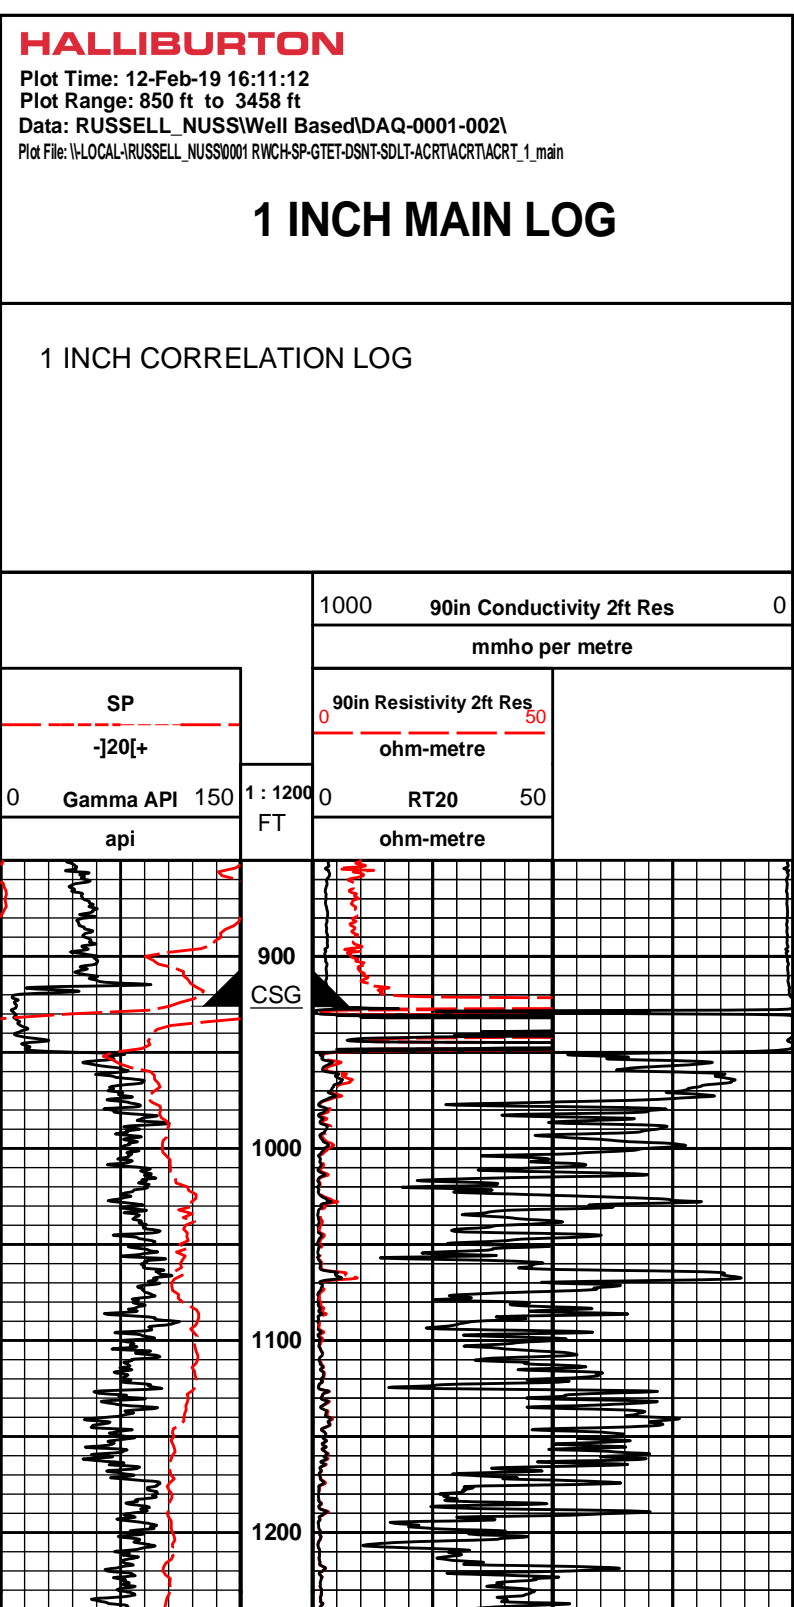

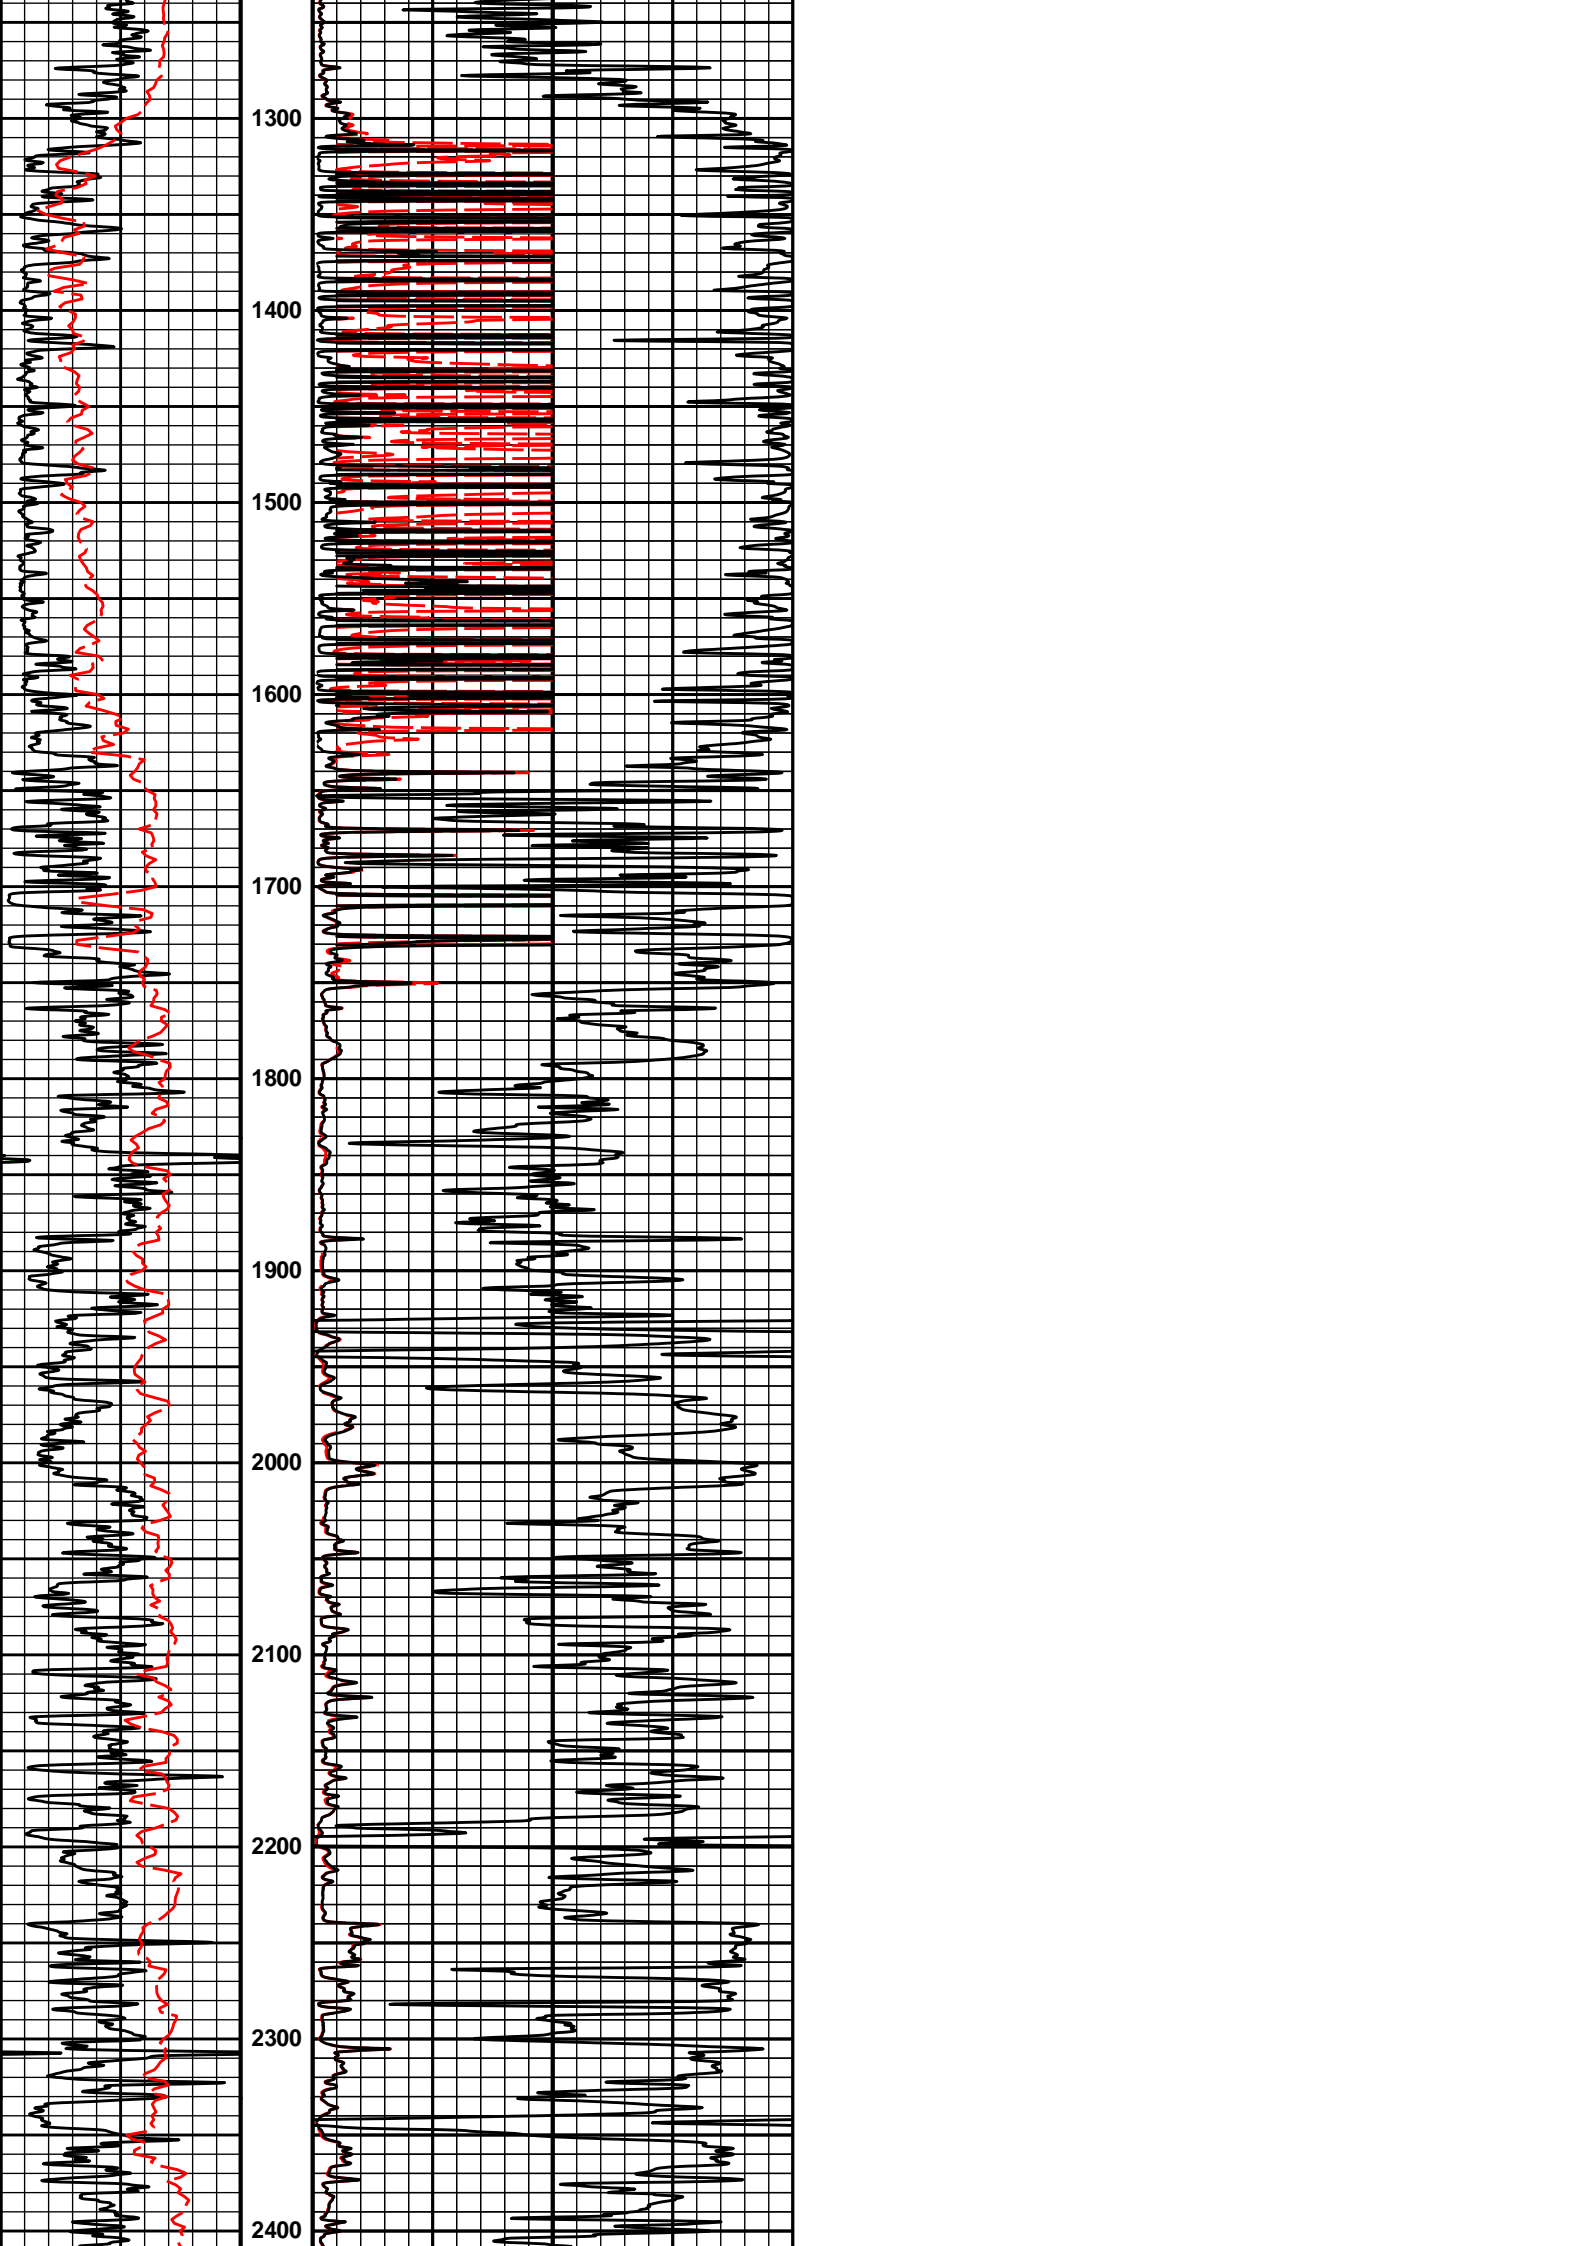

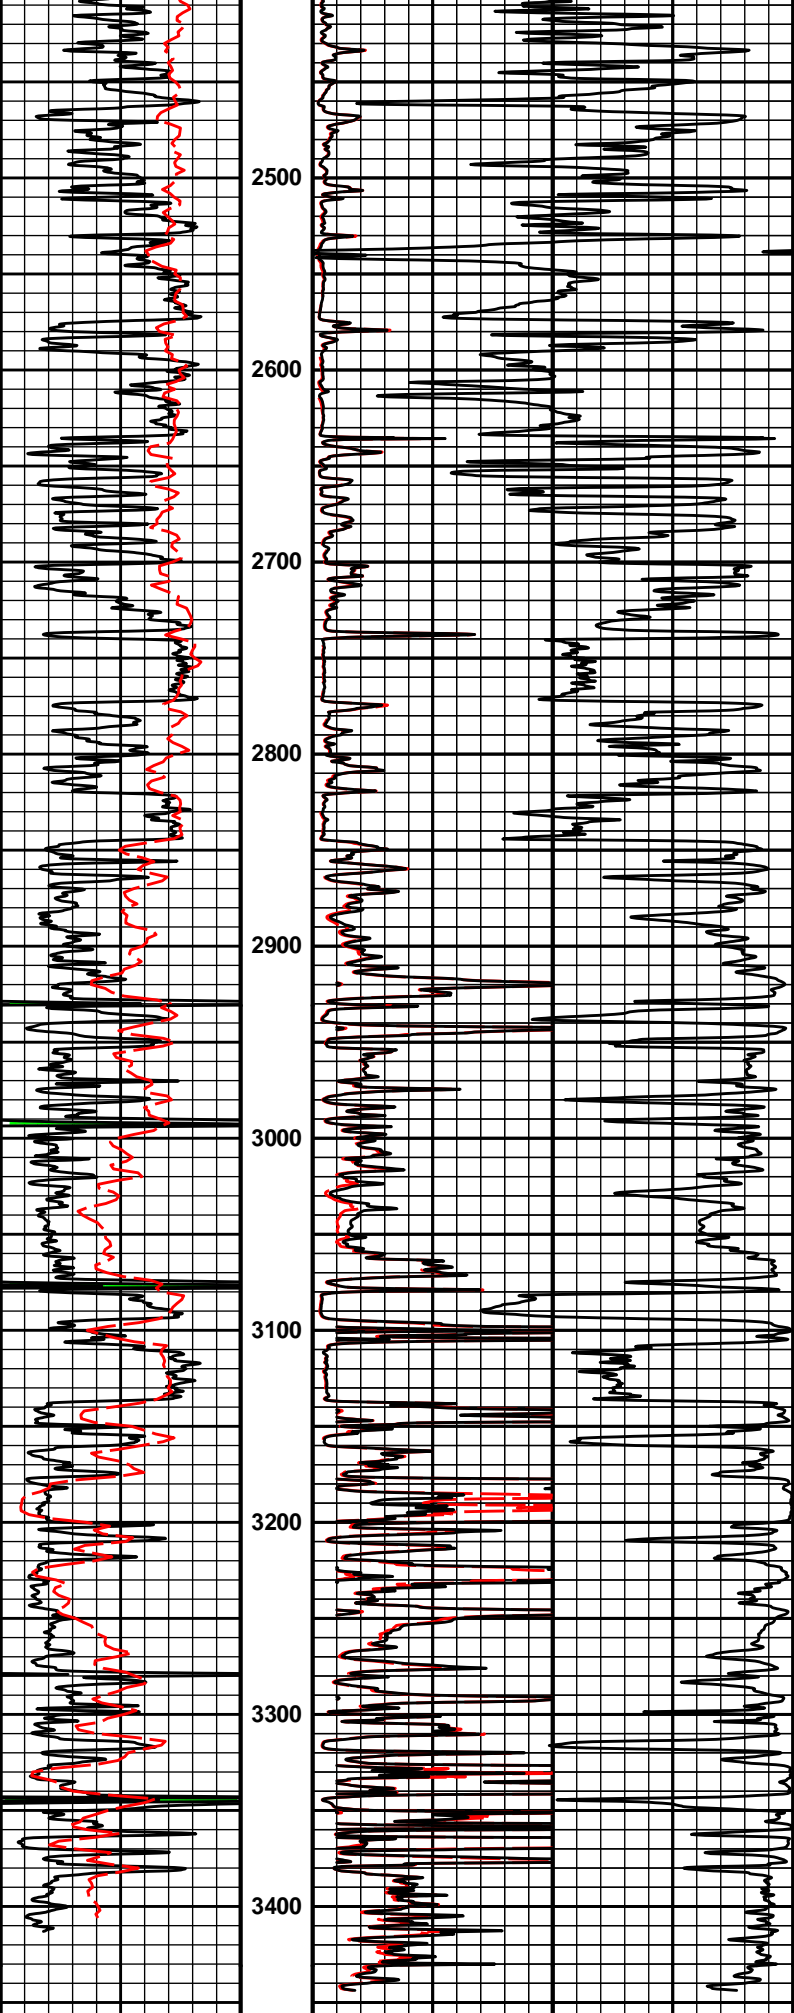

0	Gamma API	150	1 : 1200	0	RT20	50
	api		FT		ohm-metre	
	SP			0	90in Resistivity 2ft Res	50
	- 20 +				ohm-metre	

1000 00in Conductivity 2ft Res 0

HALLIBURTON

Plot Time: 12-Feb-19 16:11:13

Plot Range: 850 ft to 3458 ft

Data: RUSSELL_NUSS\Well Based\DAQ-0001-002\

Plot File: \\LOCAL-RUSSELL_NUSS0001 RWCH-SP-GTET-DSNT-SDLT-ACRTACRTACRT_1_main

1 INCH MAIN LOG

1 INCH CORRELATION LOG