



DUAL INDUCTION LOG

Company	VINCENT OIL CORPORATION		
Well	IMEL #5-5		
Field	KINGSDOWN NORTHWEST		
County	FORD		
State	KANSAS		
Company	VINCENT OIL CORPORATION		
Well	IMEL #5-5		
Field	KINGSDOWN NORTHWEST		
County	FORD		
State	KANSAS		
Location:	APL # : 15-057-21008-0000 2255' FSL & 1724' FWL SE - NW - NE - SW		
Permanent Datum	GROUND LEVEL	Elevation	2504
Log Measured From	KELLY BUSHING 12' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 5	TWP 29S	RGE 22W	
Date	3/12/19		
Run Number	ONE		
Depth Driller	5320		
Depth Logger	5290		
Bottom Logged Interval	5288		
Top Log Interval	00		
Casing Driller	8 5/8"@693'		
Casing Logger	693		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,100 PPM	
Density / Viscosity	9.2/61		
pH / Fluid Loss	11.0/8.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@50F		
Rmf @ Meas. Temp	.450@50F		
Rmc @ Meas. Temp	.720@50F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.234@128F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	7:15 P.M.		
Maximum Recorded Temperature	128F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	TOM DUDGEON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
KINGSDOWN, KS., & HWY 54, 1N. ON "RD. 125" TO "WILDFIRE RD.", 1/2E., N. INTO




MAIN SECTION

Database File: 3602pe.db
Dataset Pathname: pass4.8
Presentation Format: dil2
Dataset Creation: Mon Mar 11 20:53:47 2019
Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

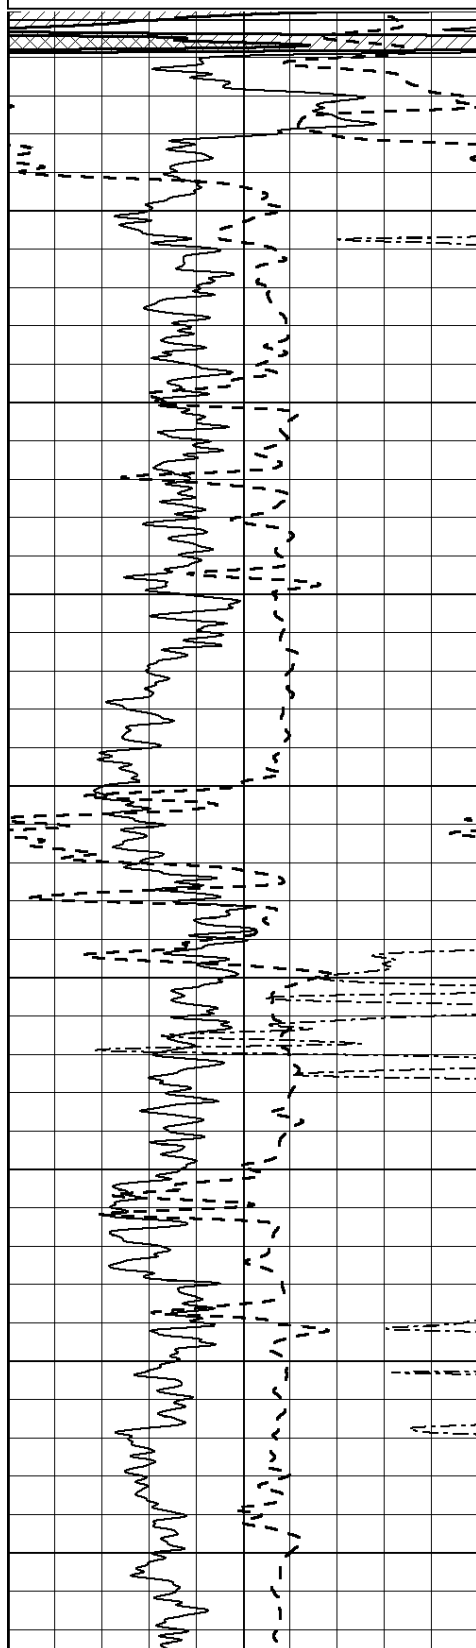

0
50
100
150
200
250
300
350
400

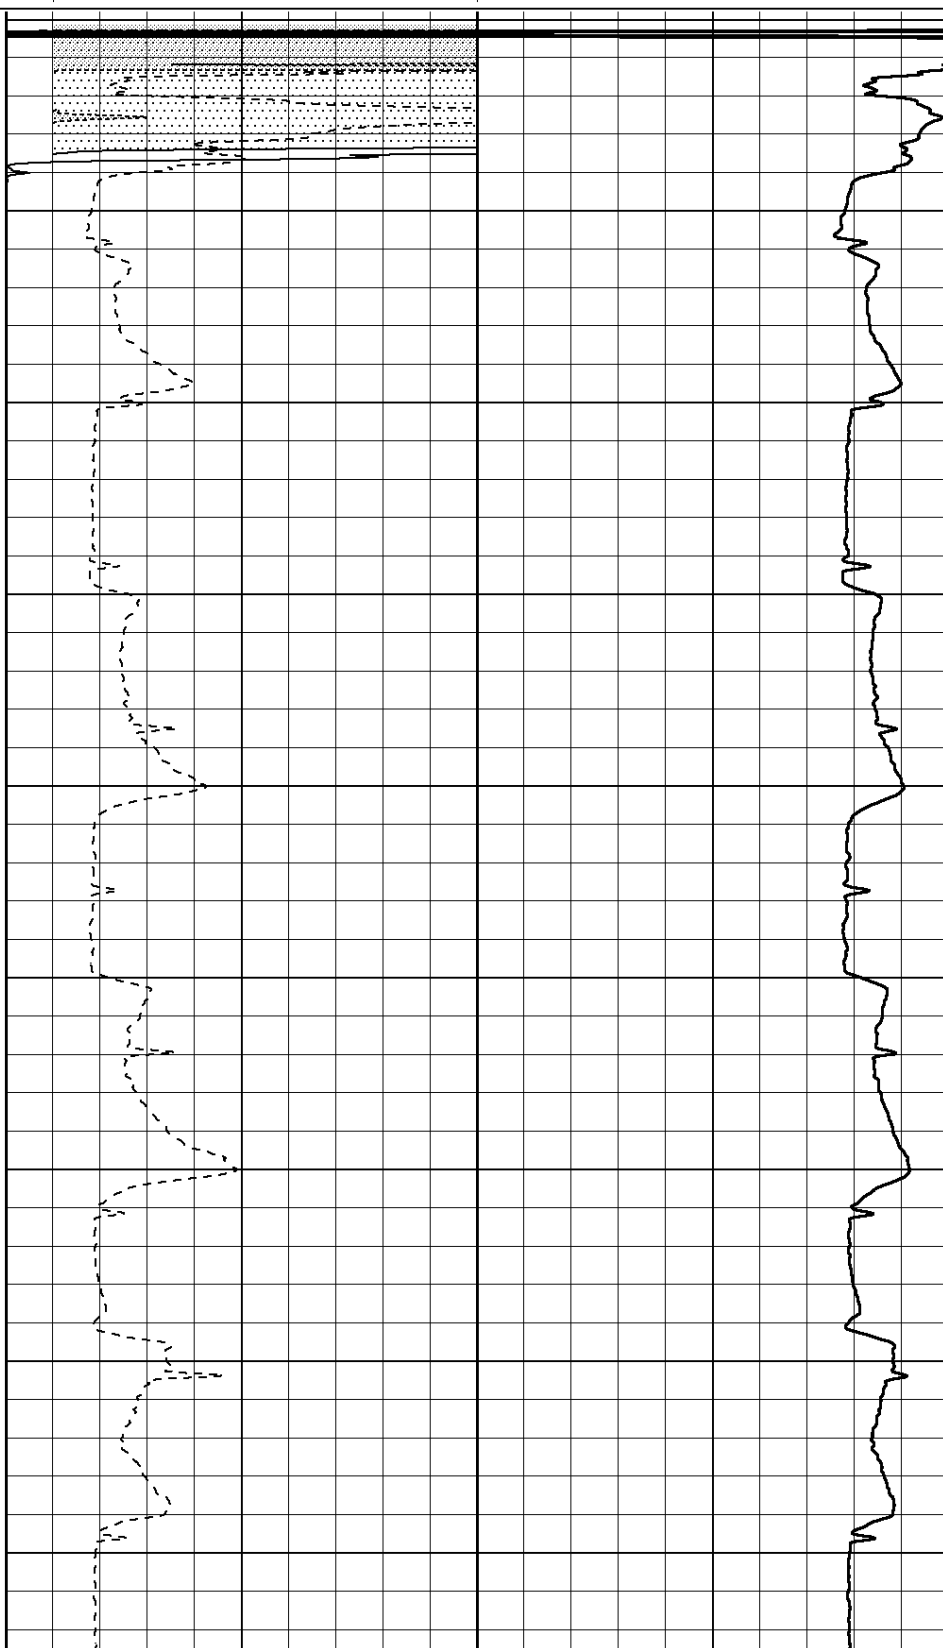

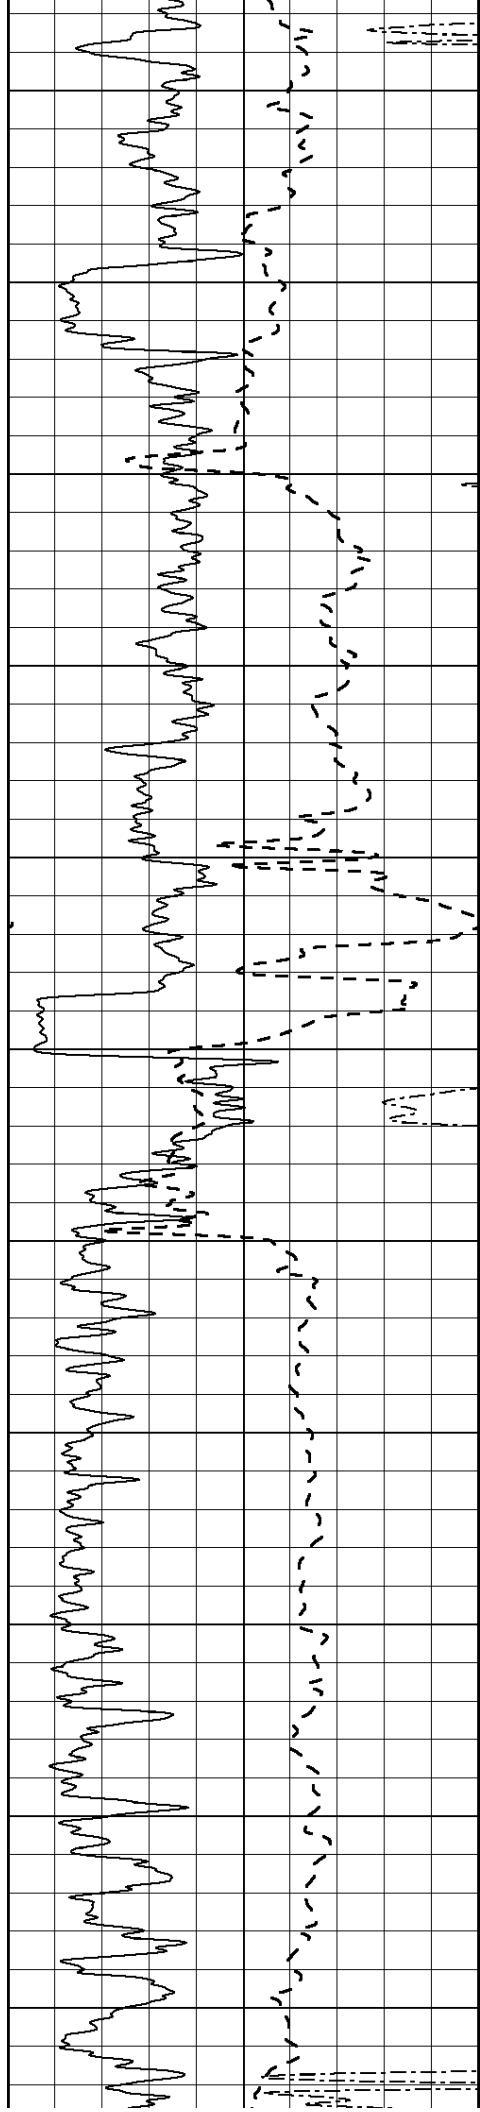

450

500

550

600

650

700


750



800



850


900

950

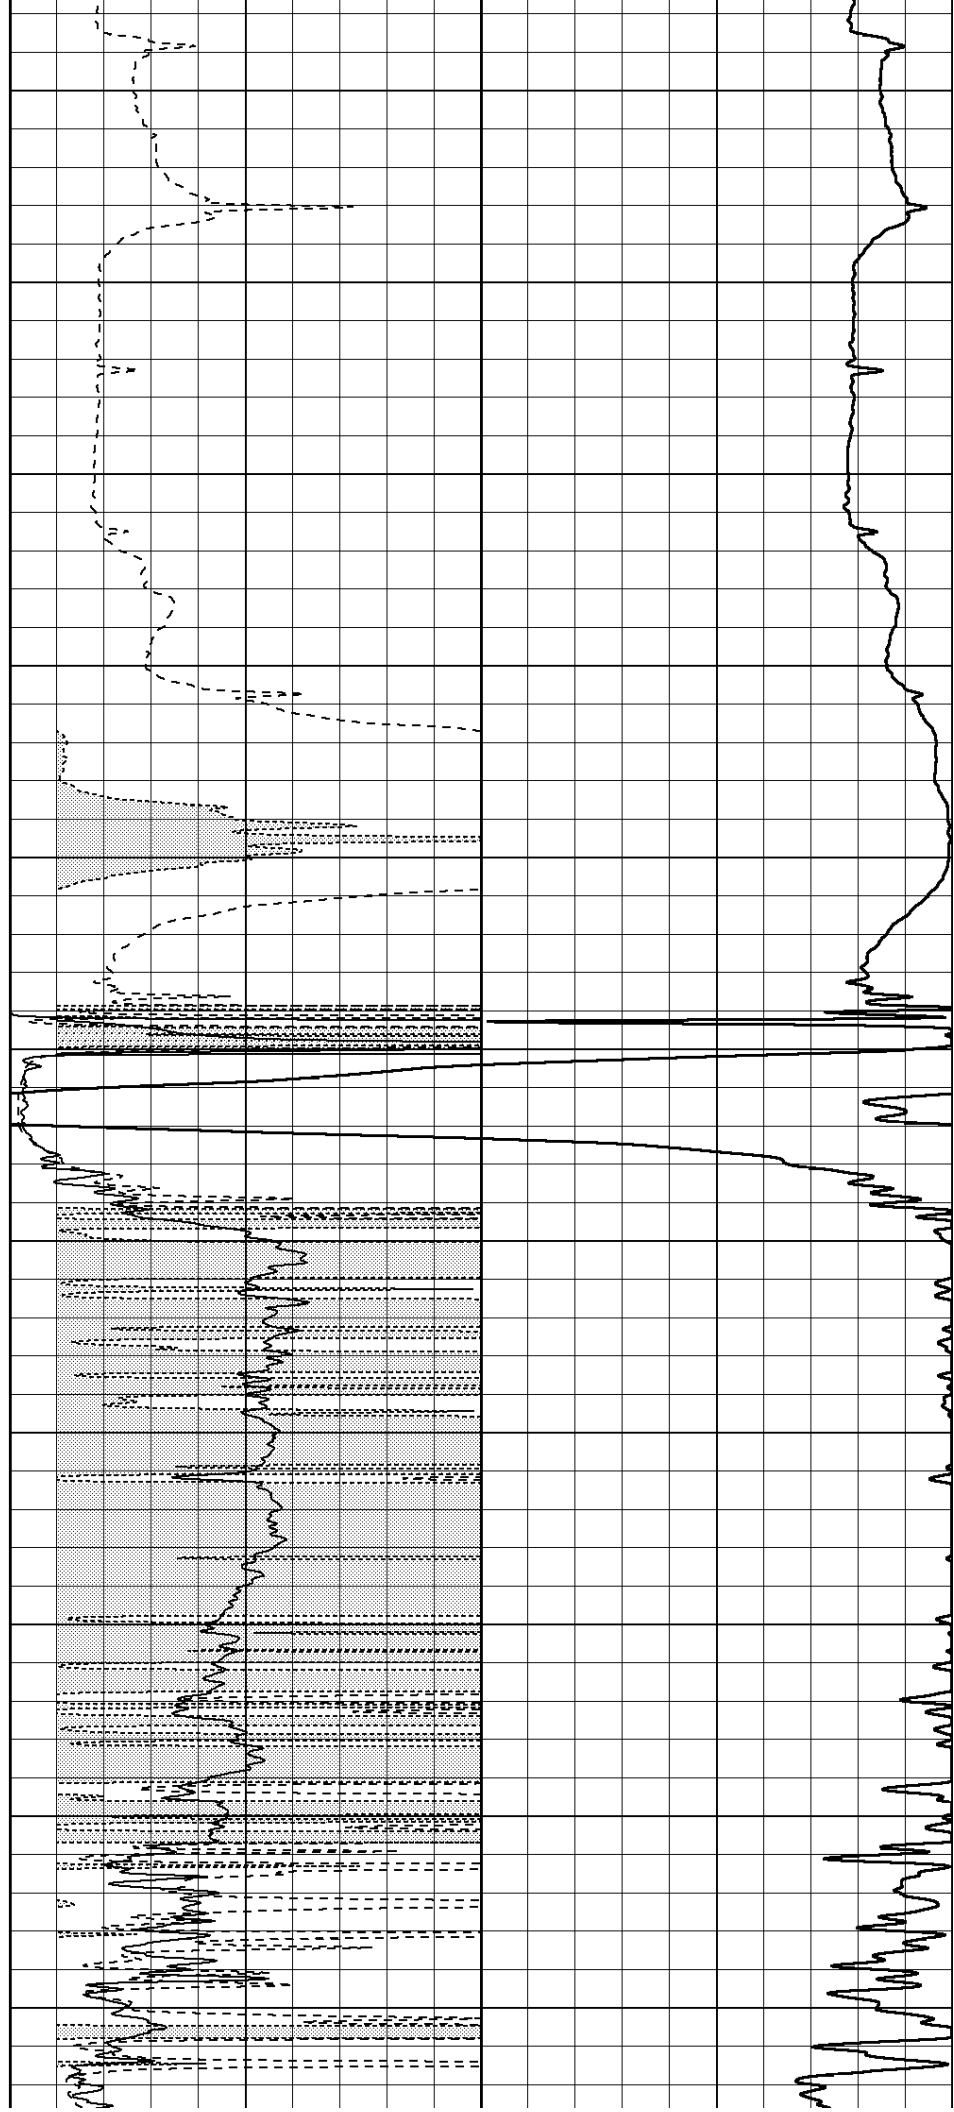

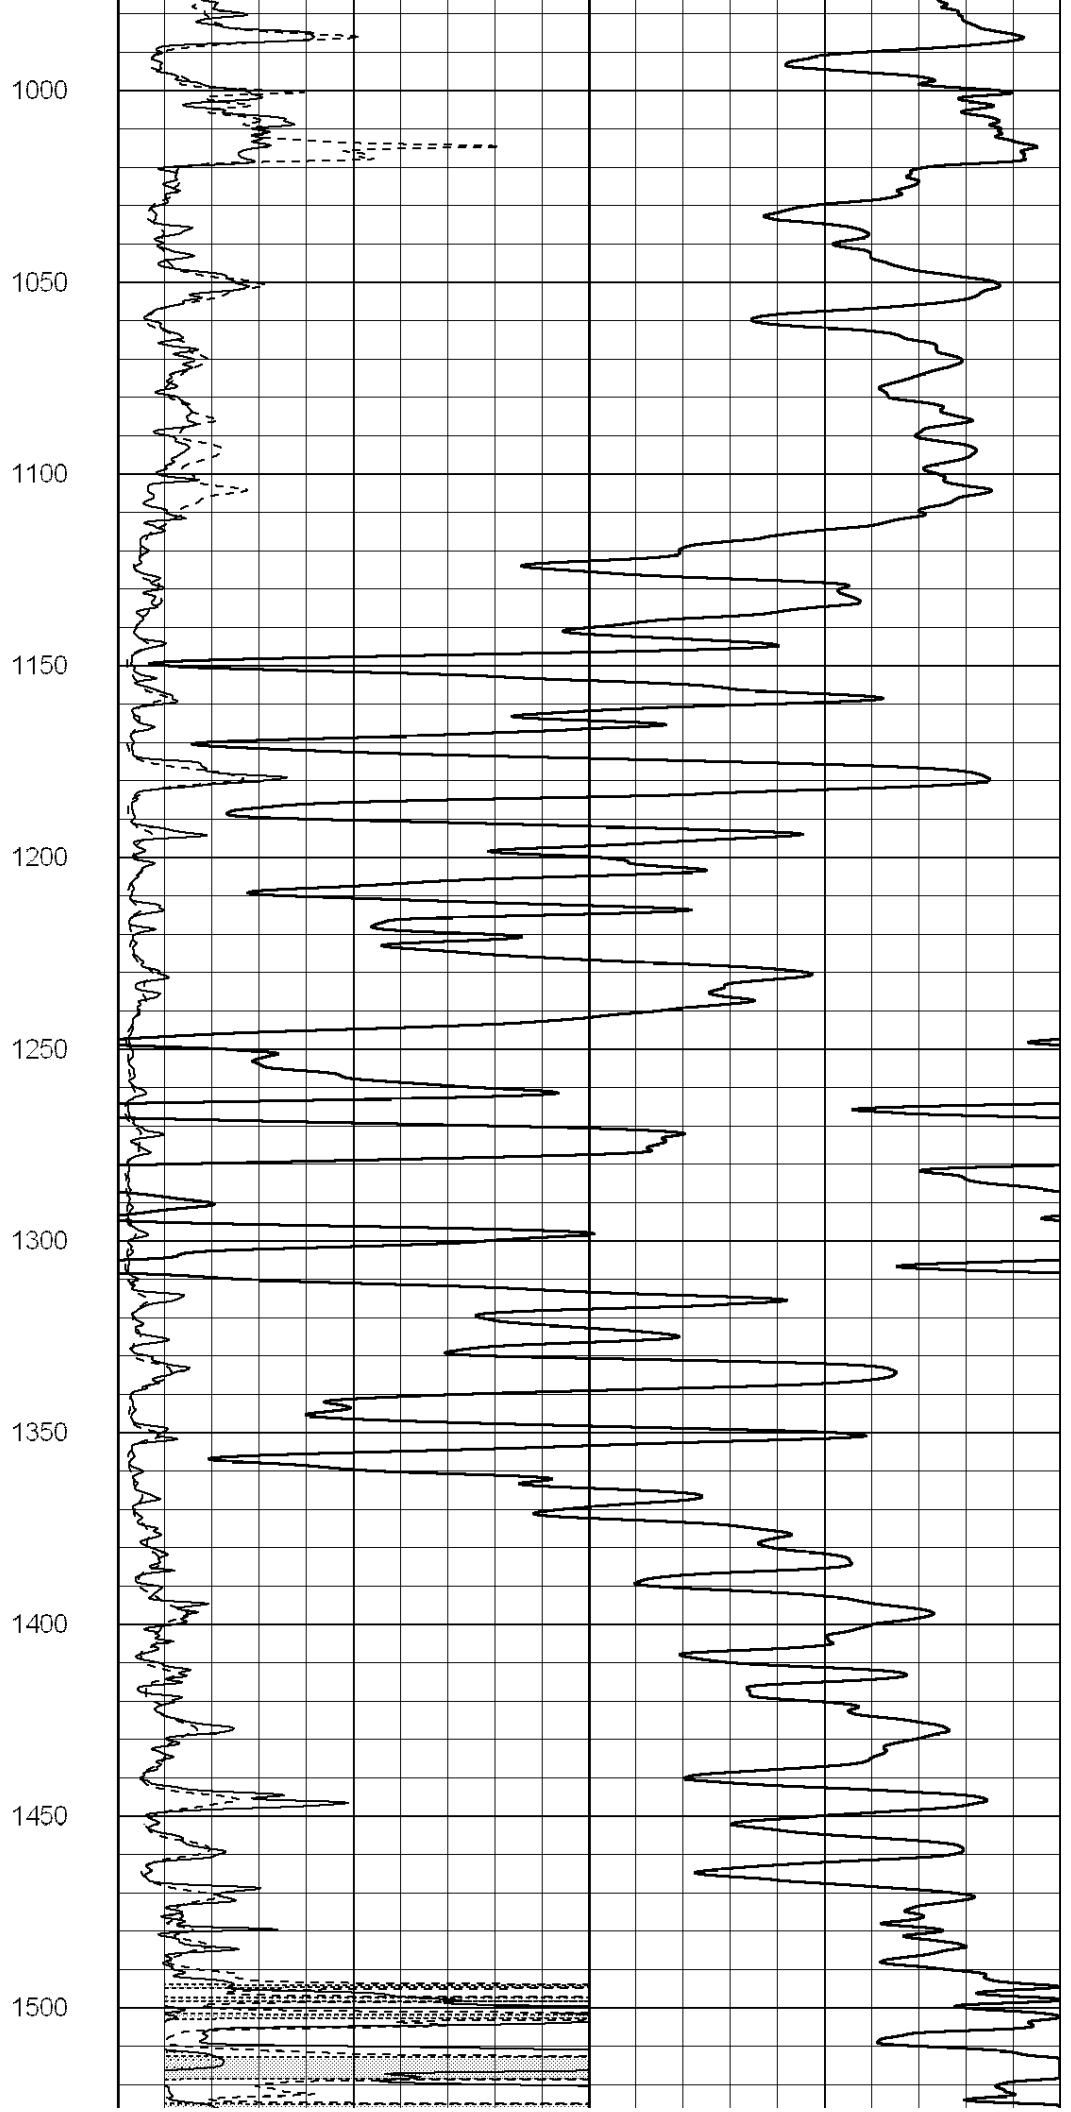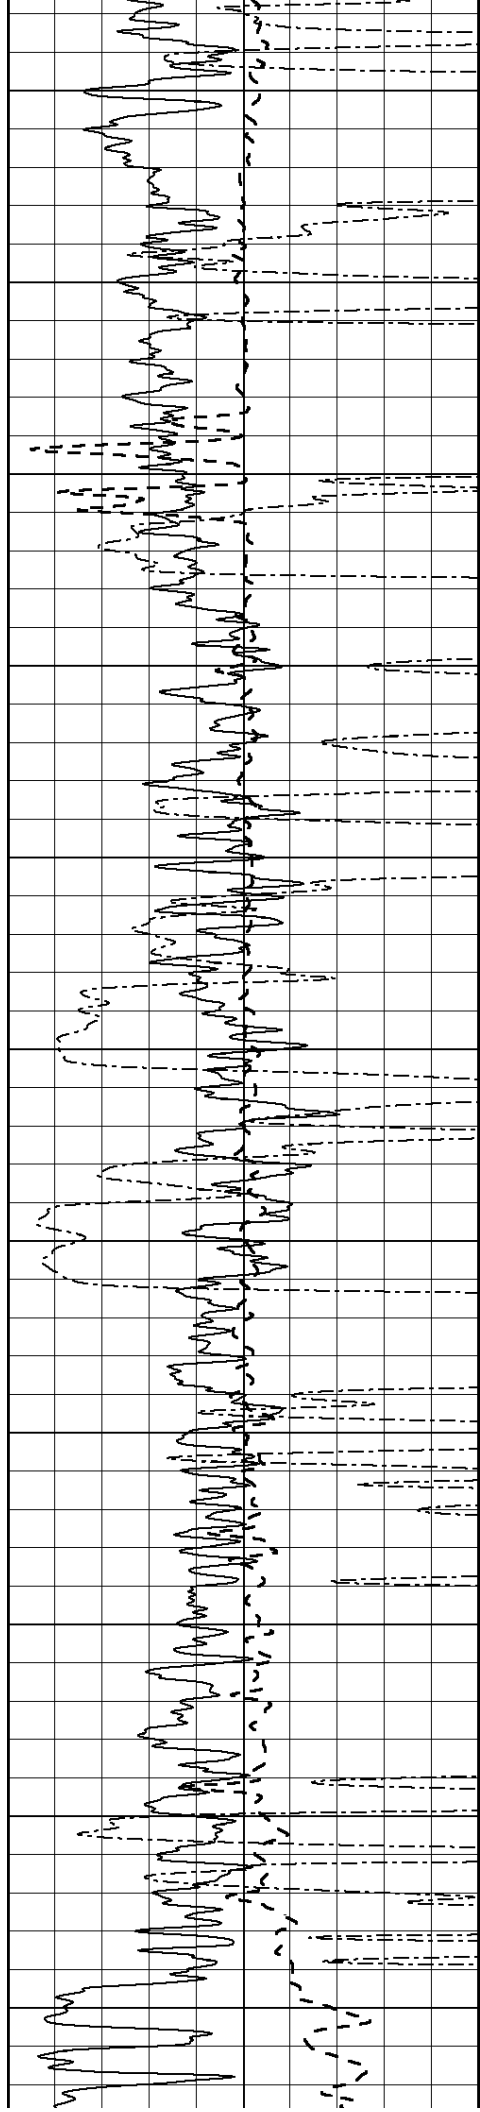

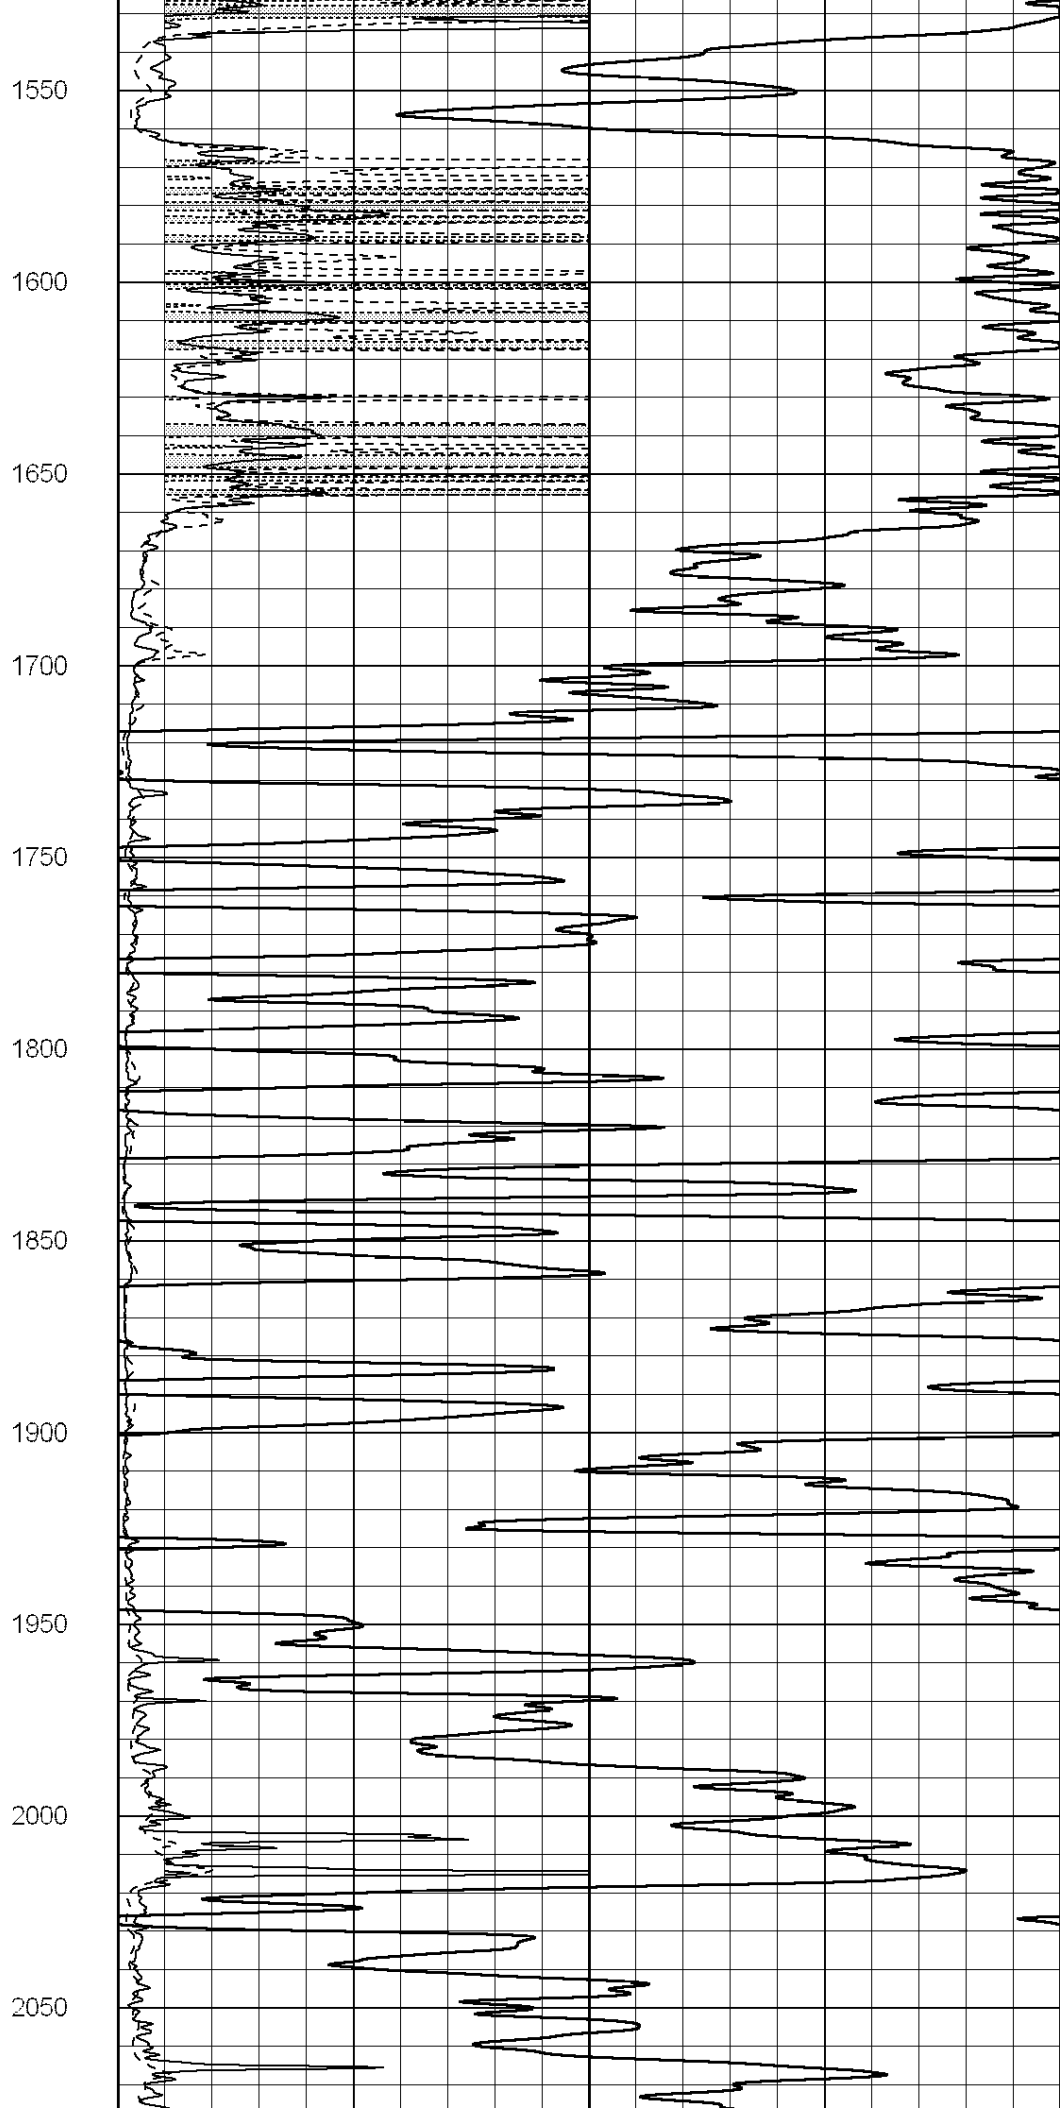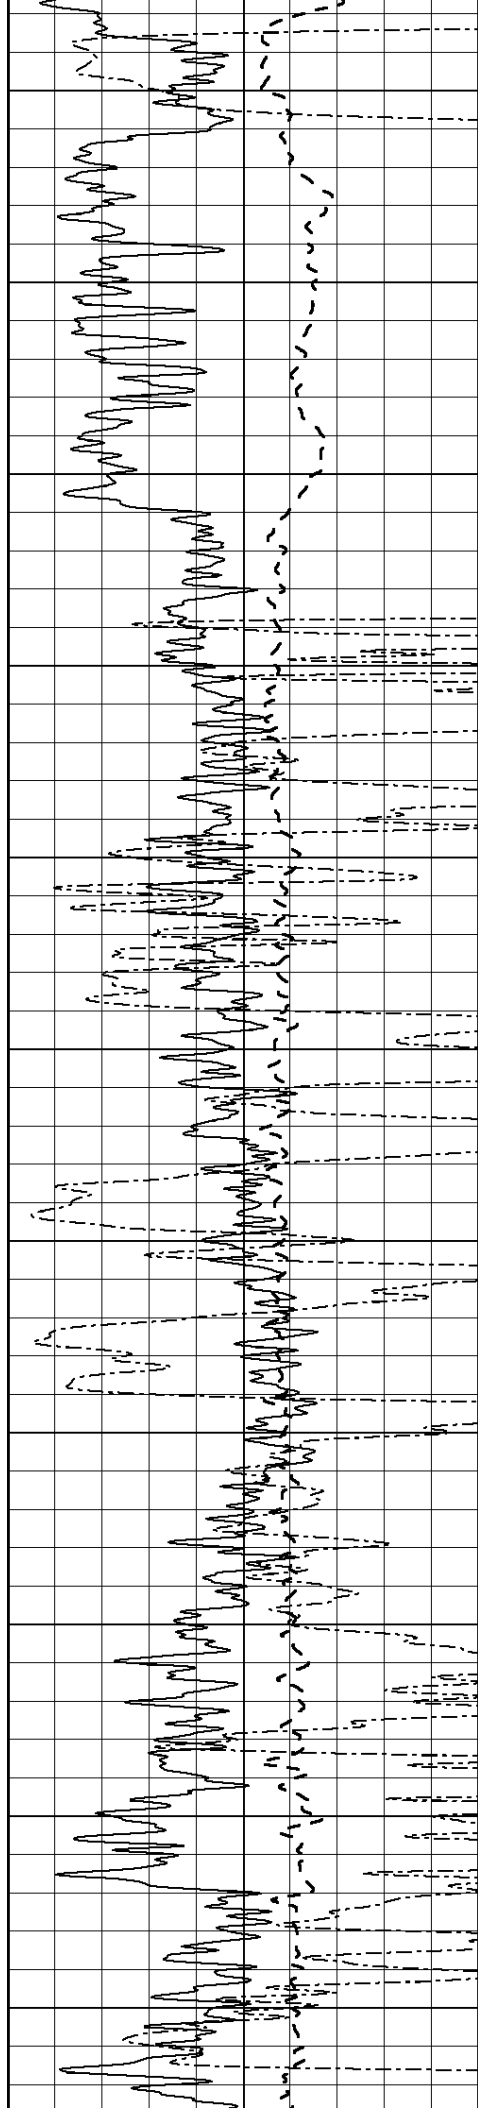

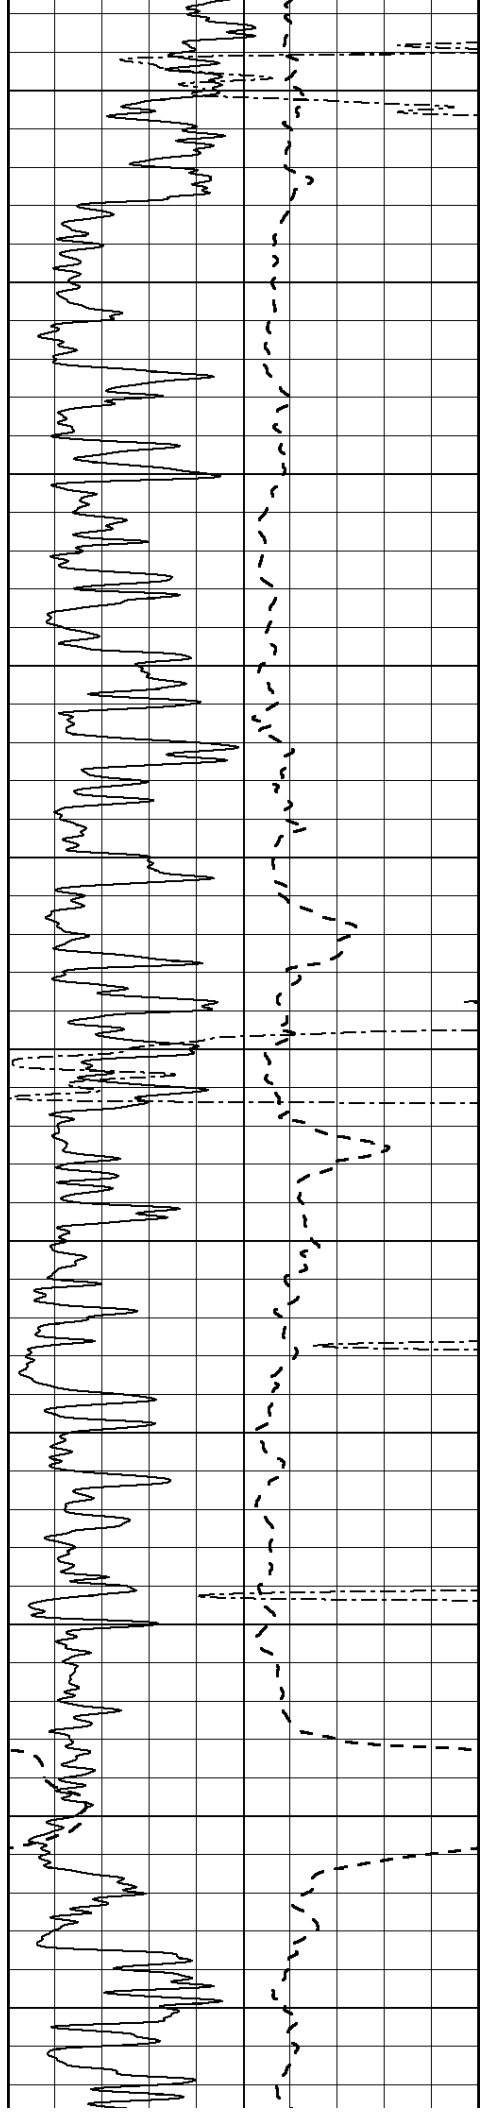

2100

2150

2200

2250

2300

2350



2400


2450

2500

2550

2600

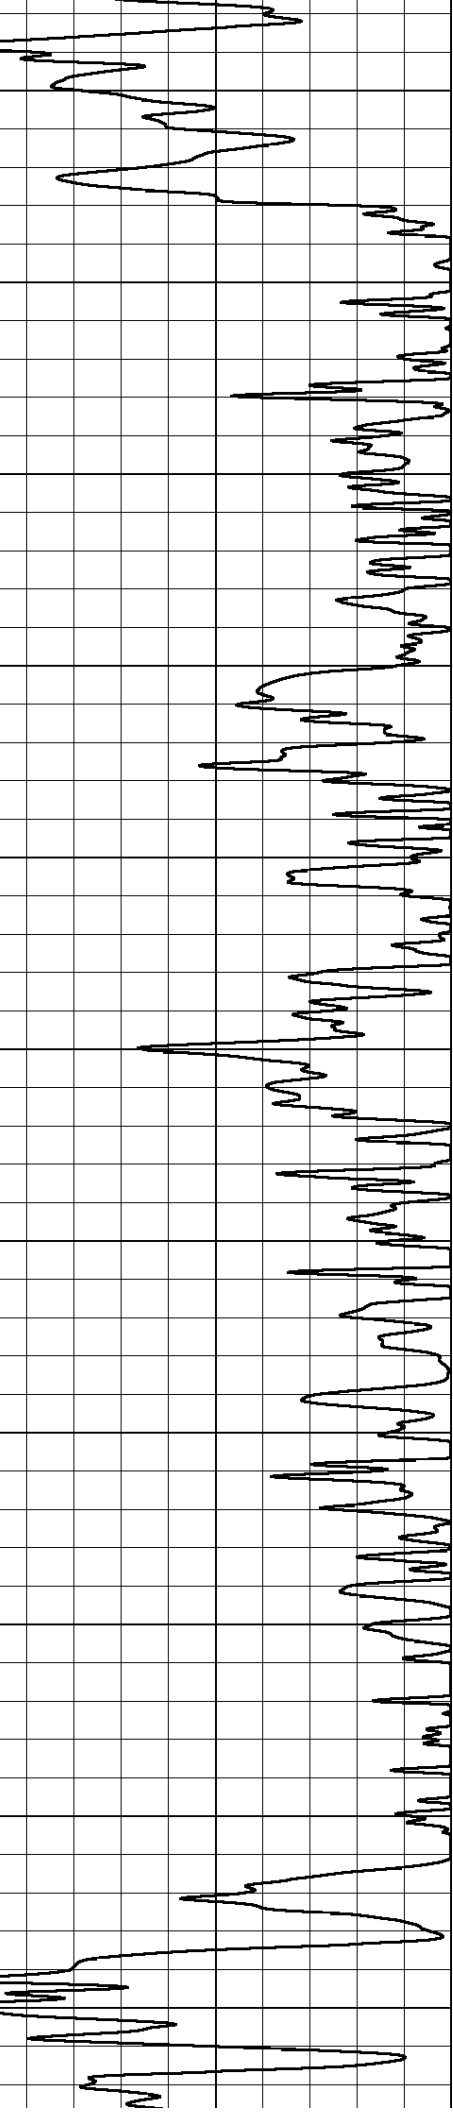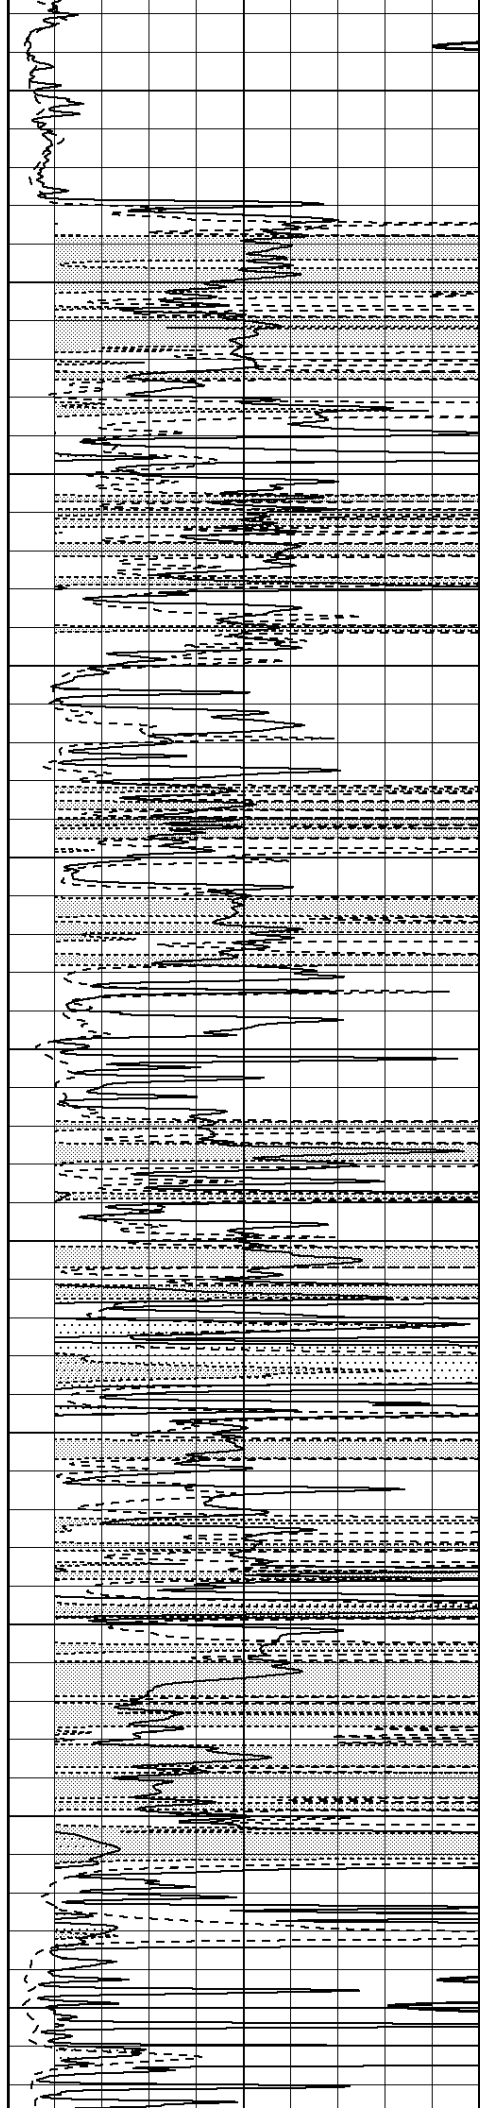

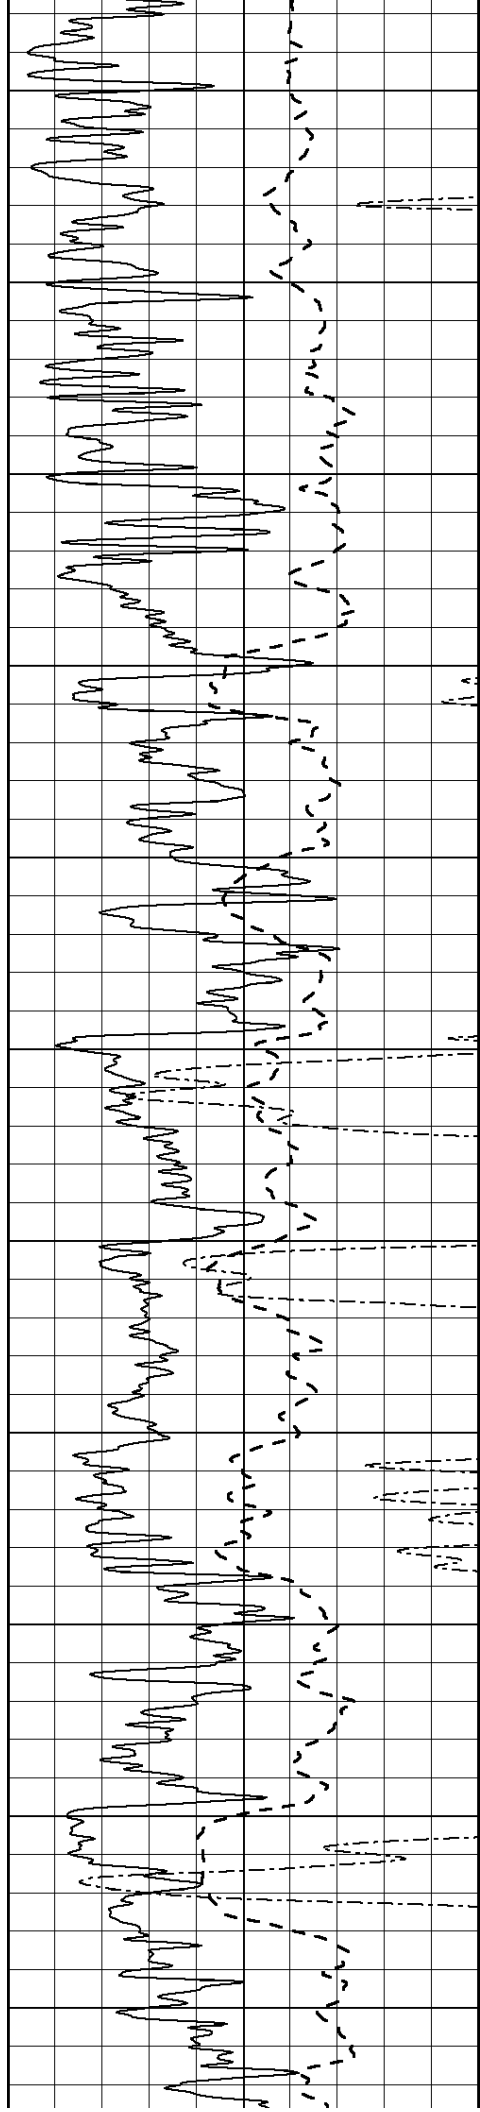

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

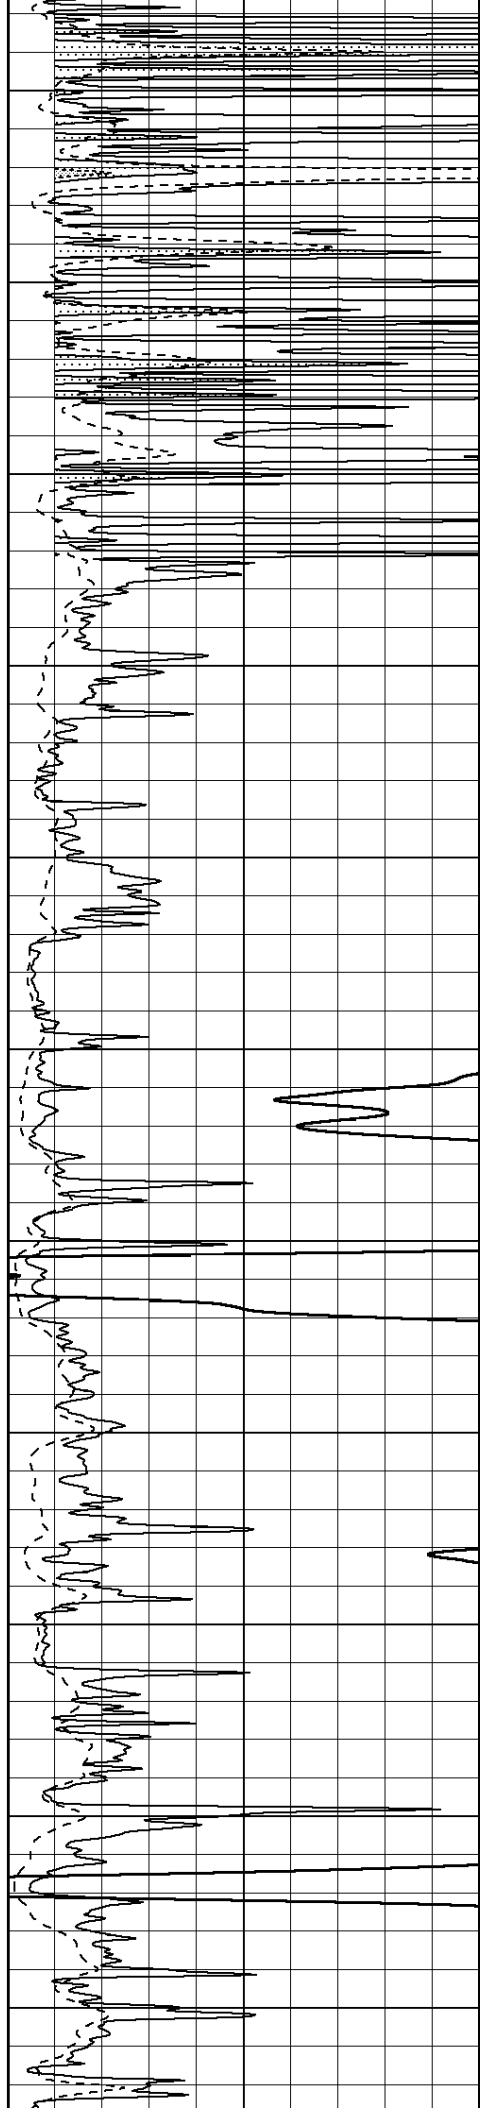

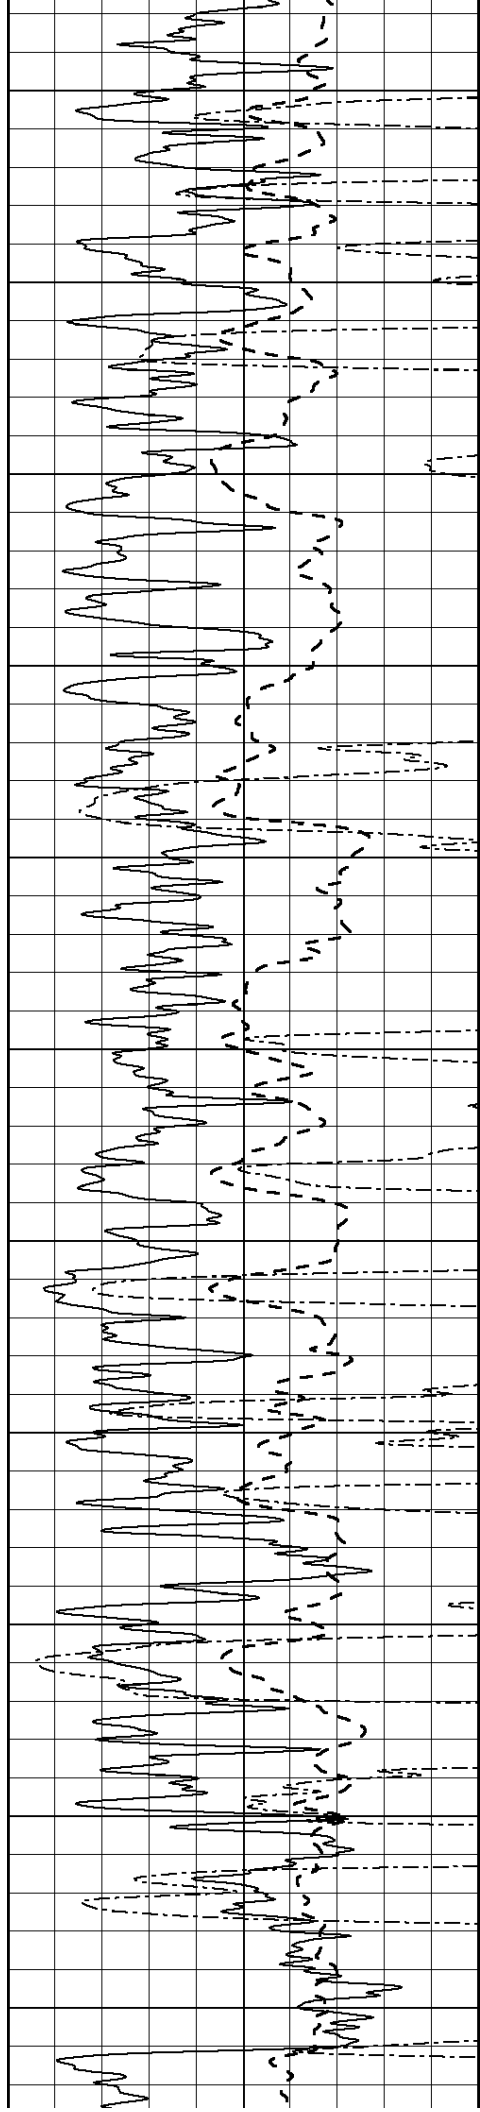

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

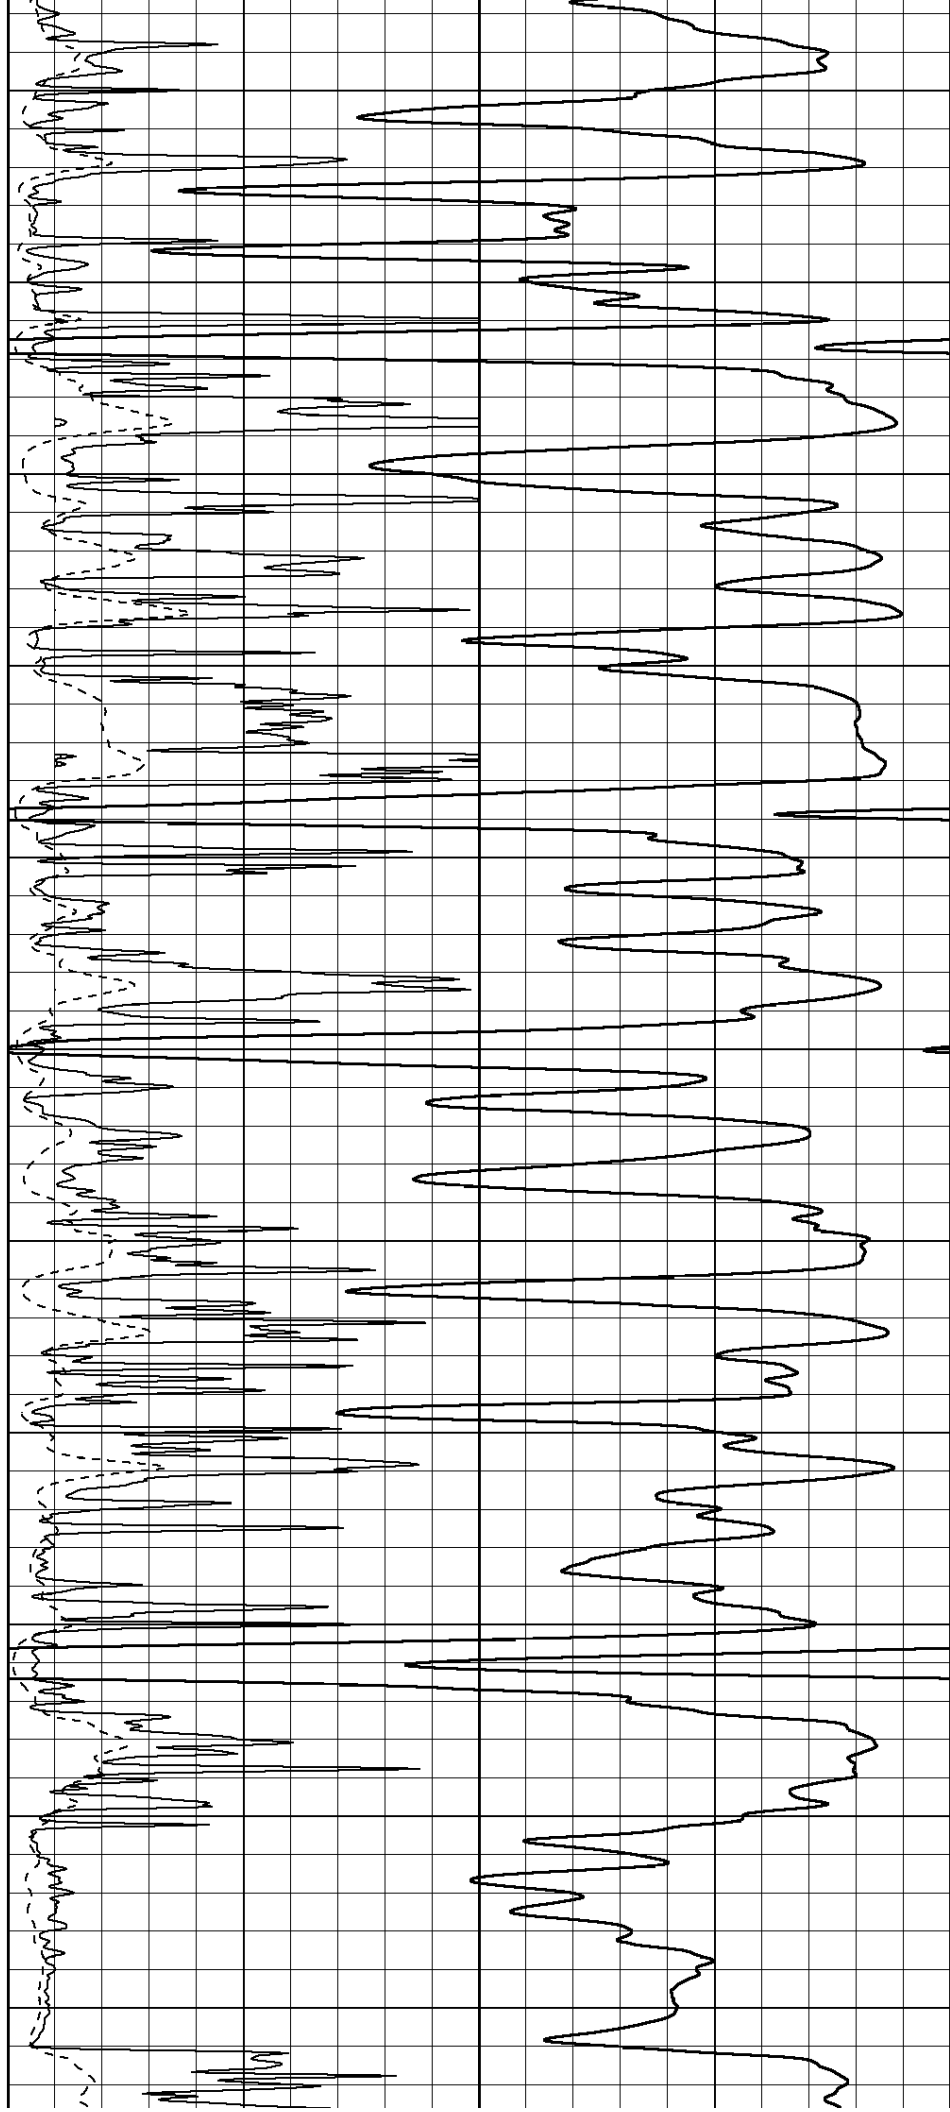

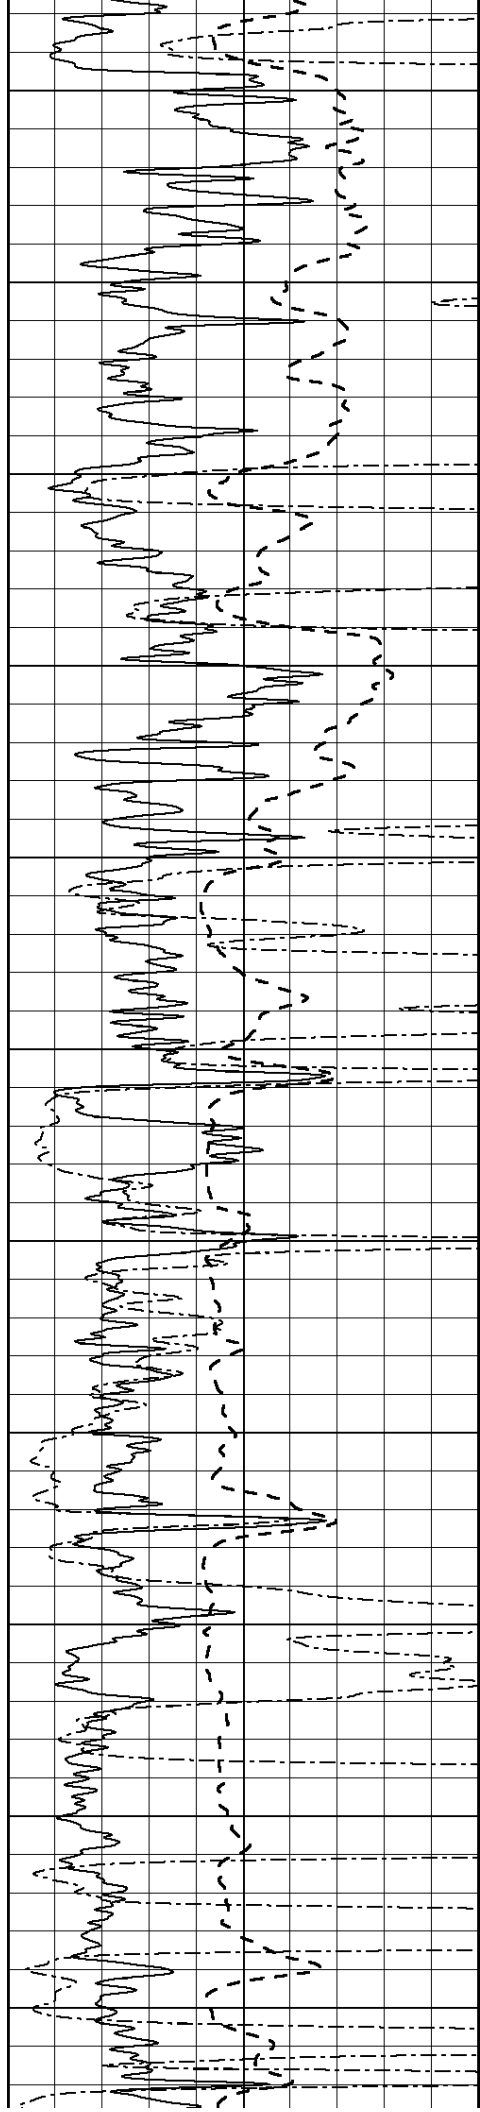

3750

3800

3850

3900

3950

4000


4050


4100

4150

4200

4250

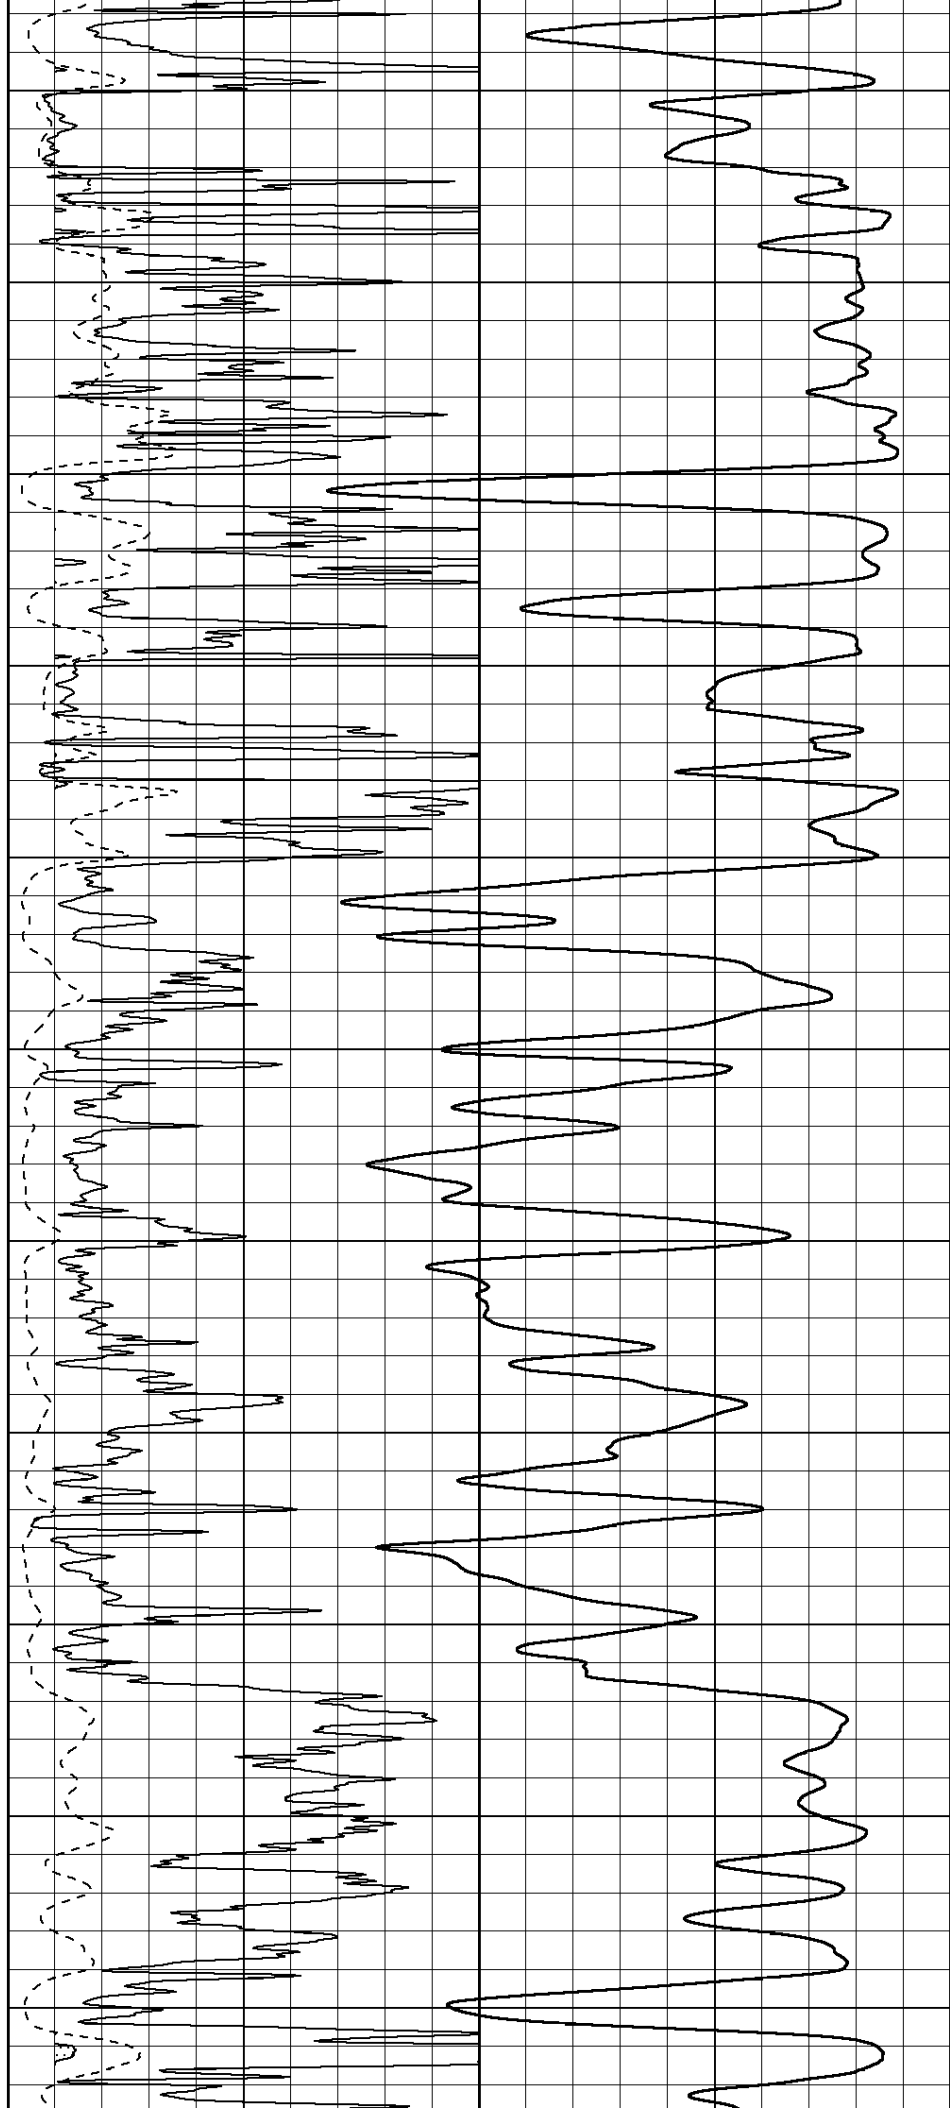

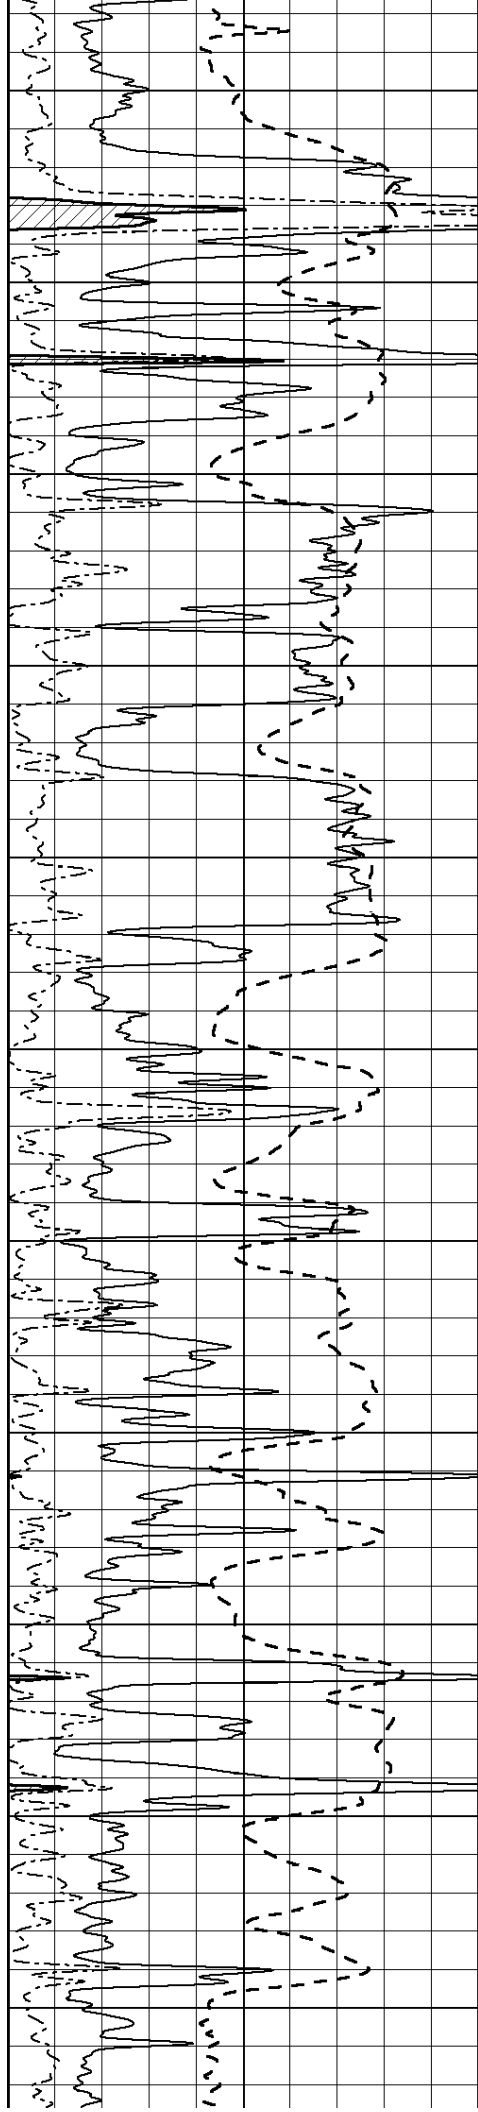

4300

4350

4400

4450

4500

4550



4600


4650

4700


4750

4800

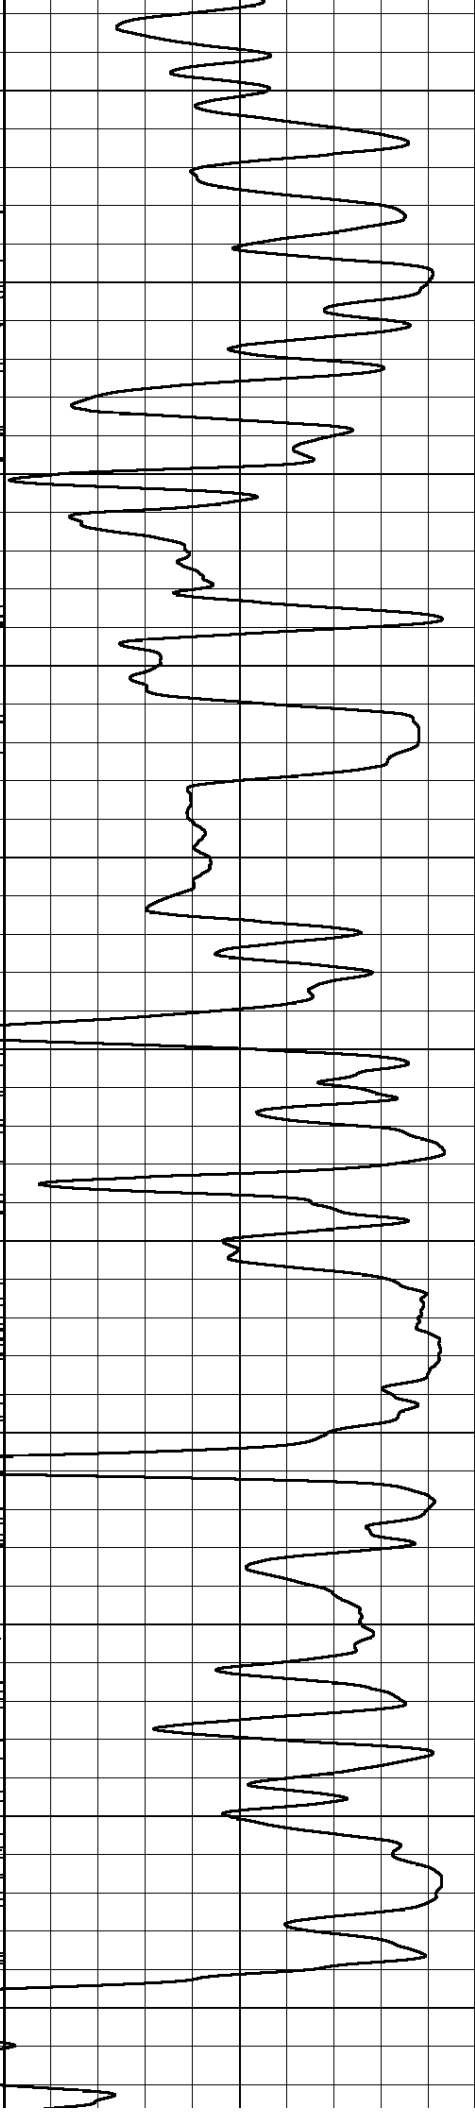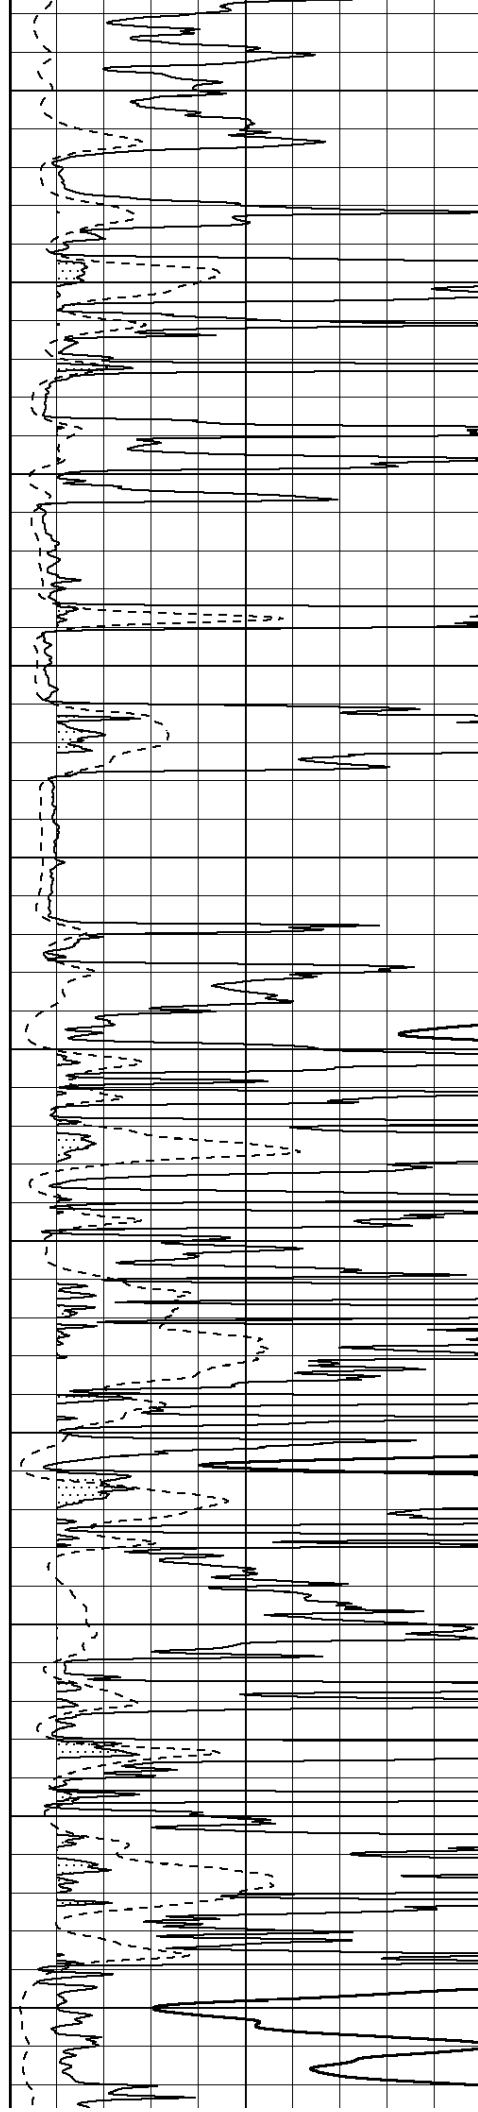

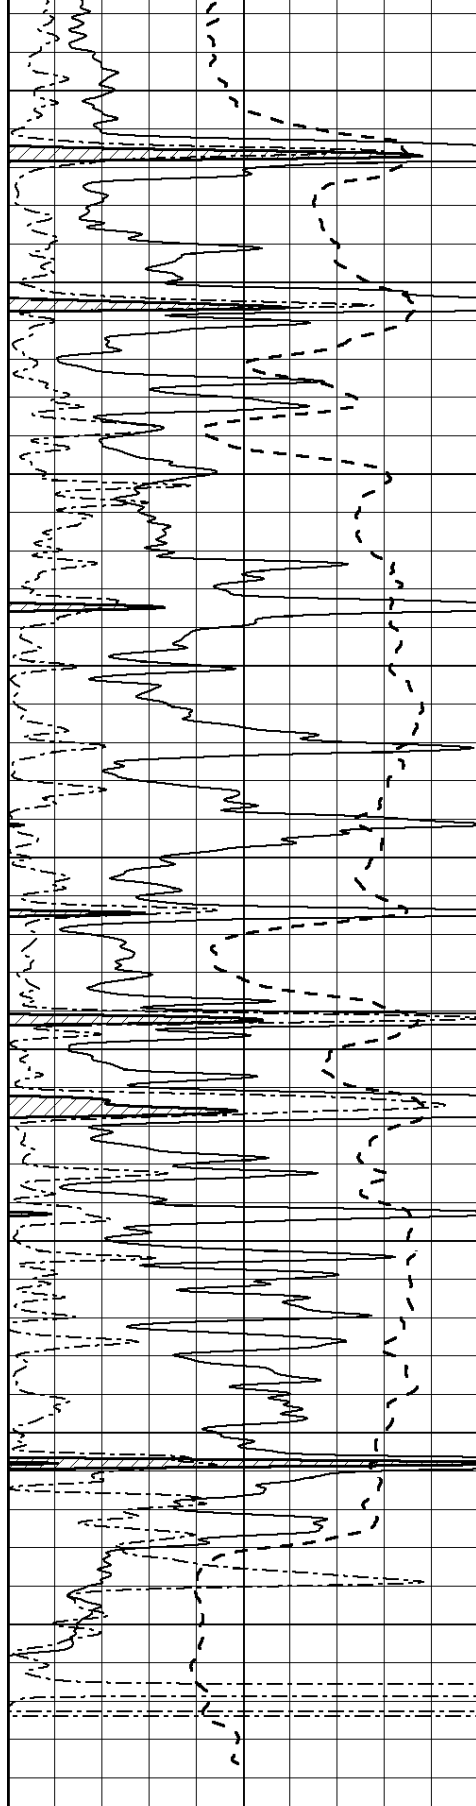

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

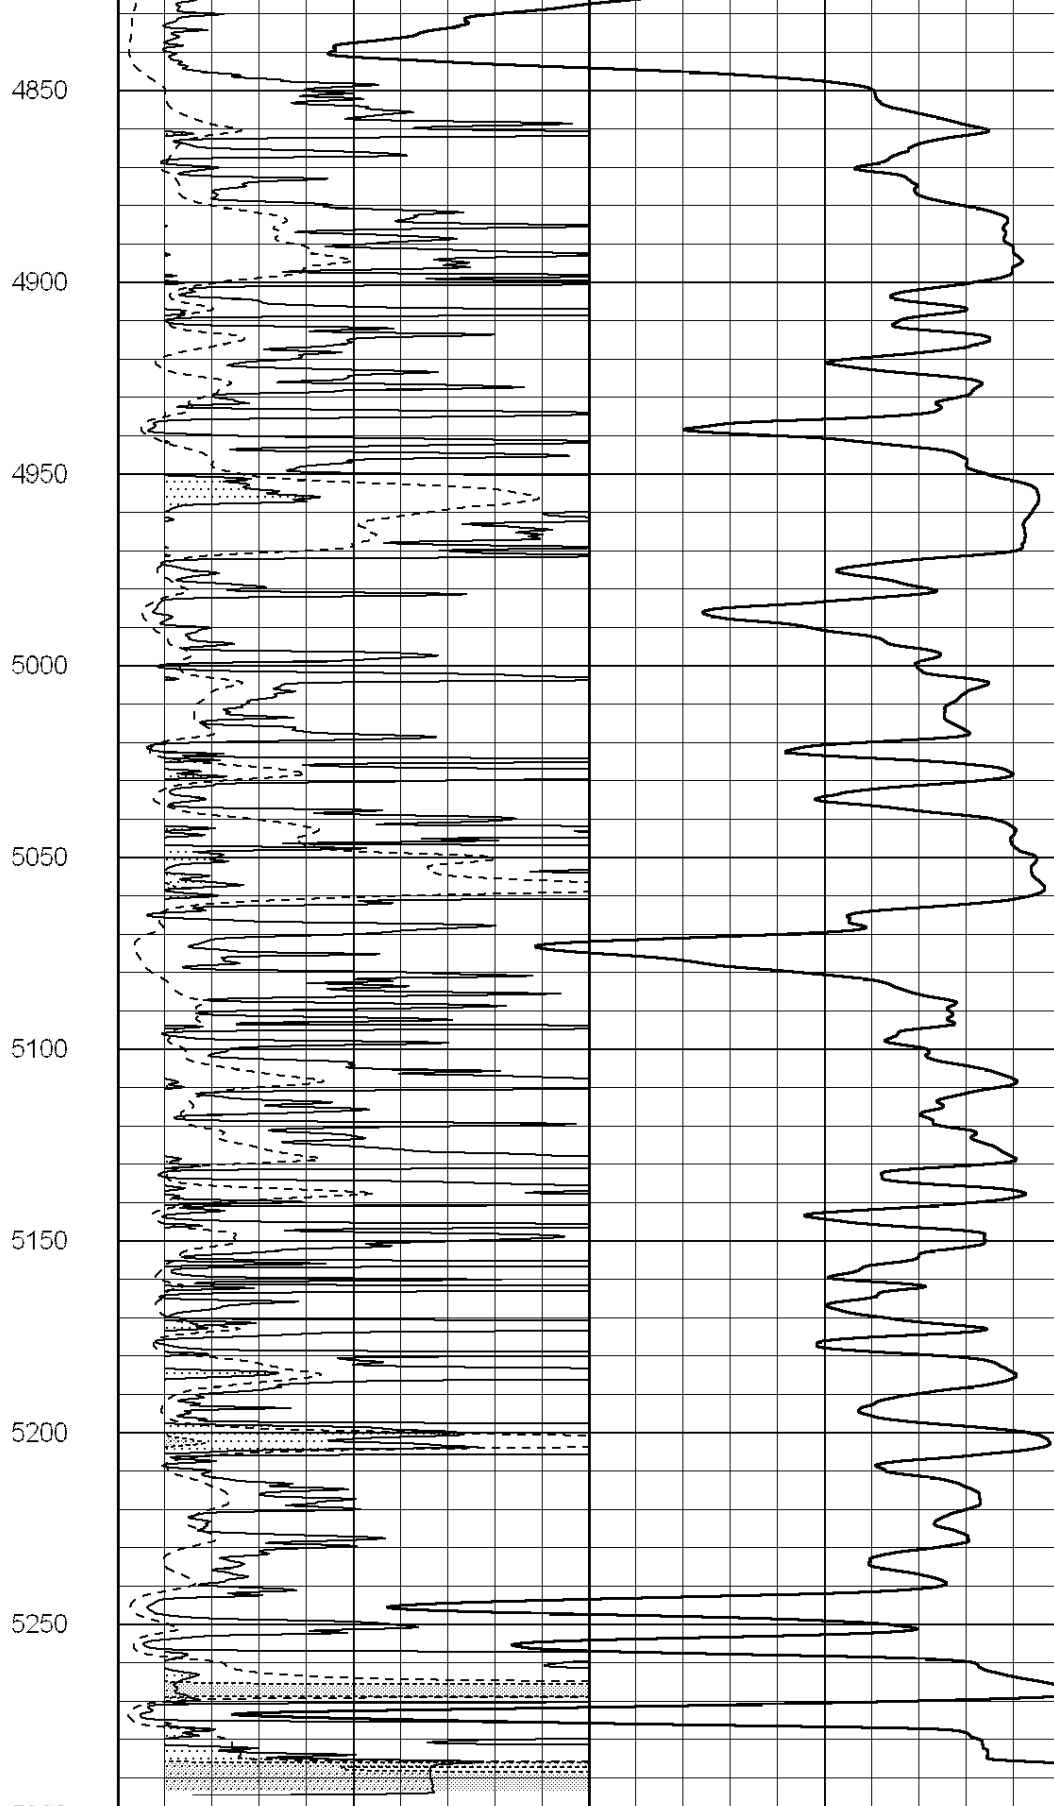

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500




MAIN SECTION

Database File: 3602pe.db
Dataset Pathname: pass4.8
Presentation Format: _dil
Dataset Creation: Mon Mar 11 20:53:47 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

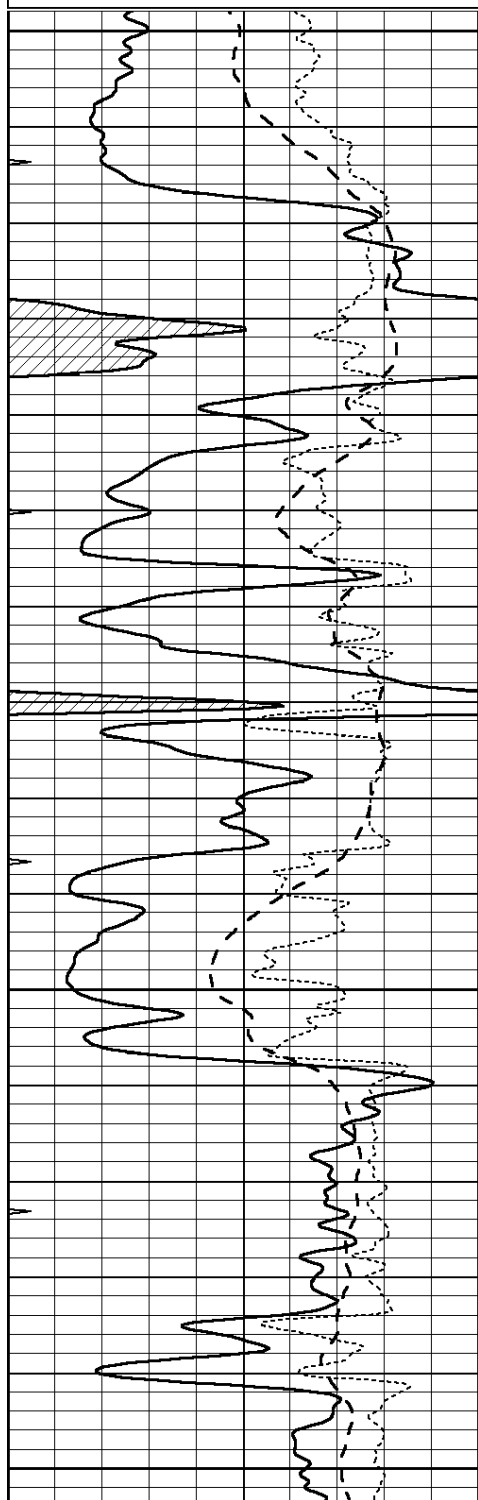



4300

4350

4400

4450

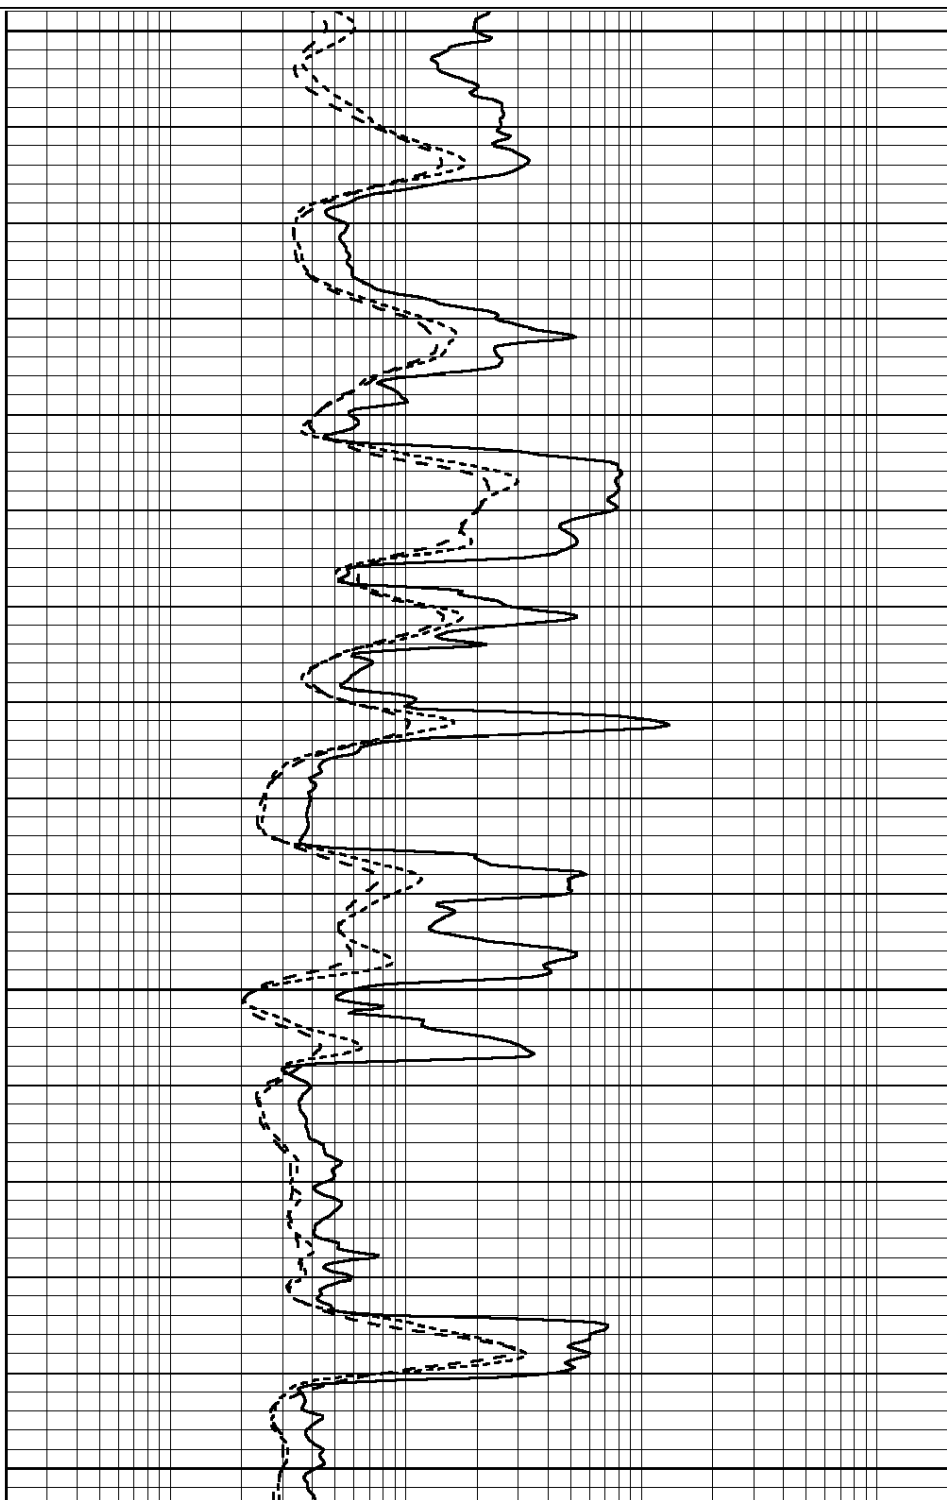

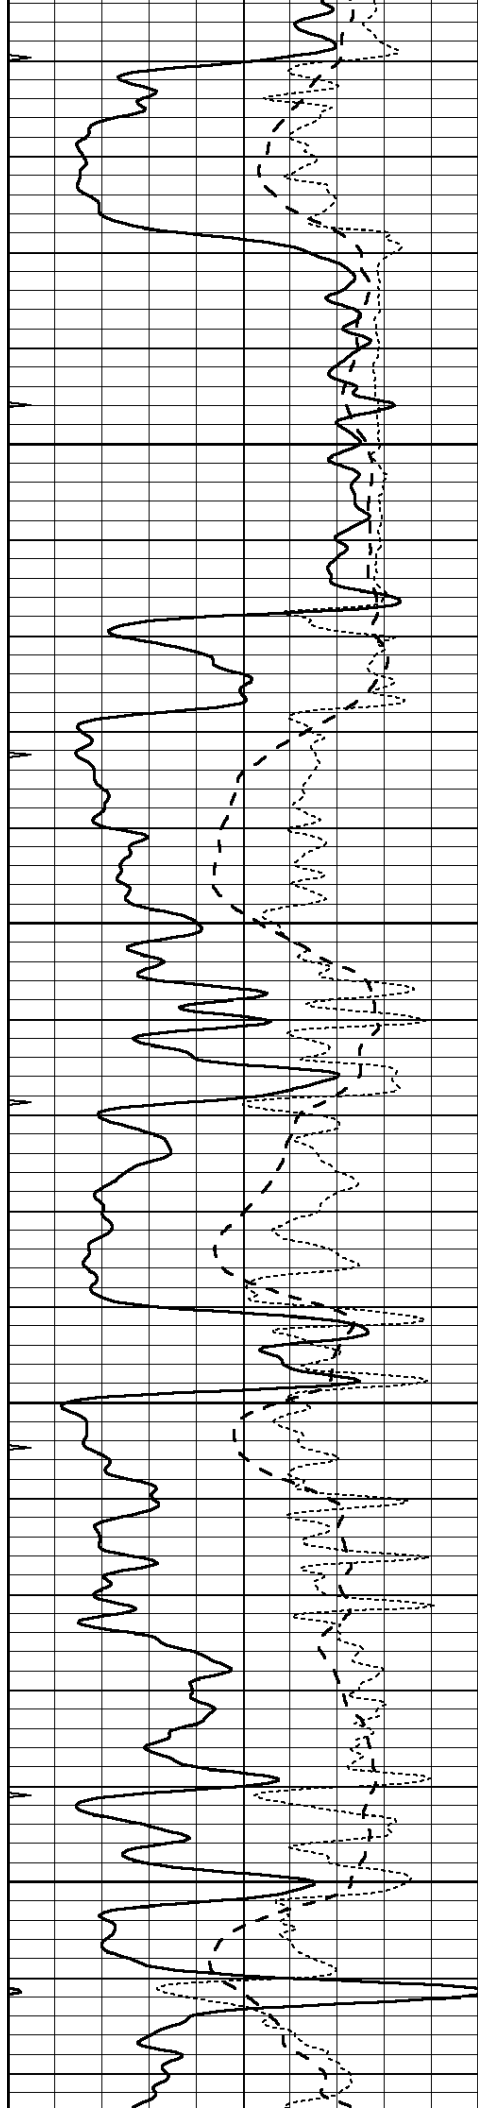



4500

4550

4600

4650

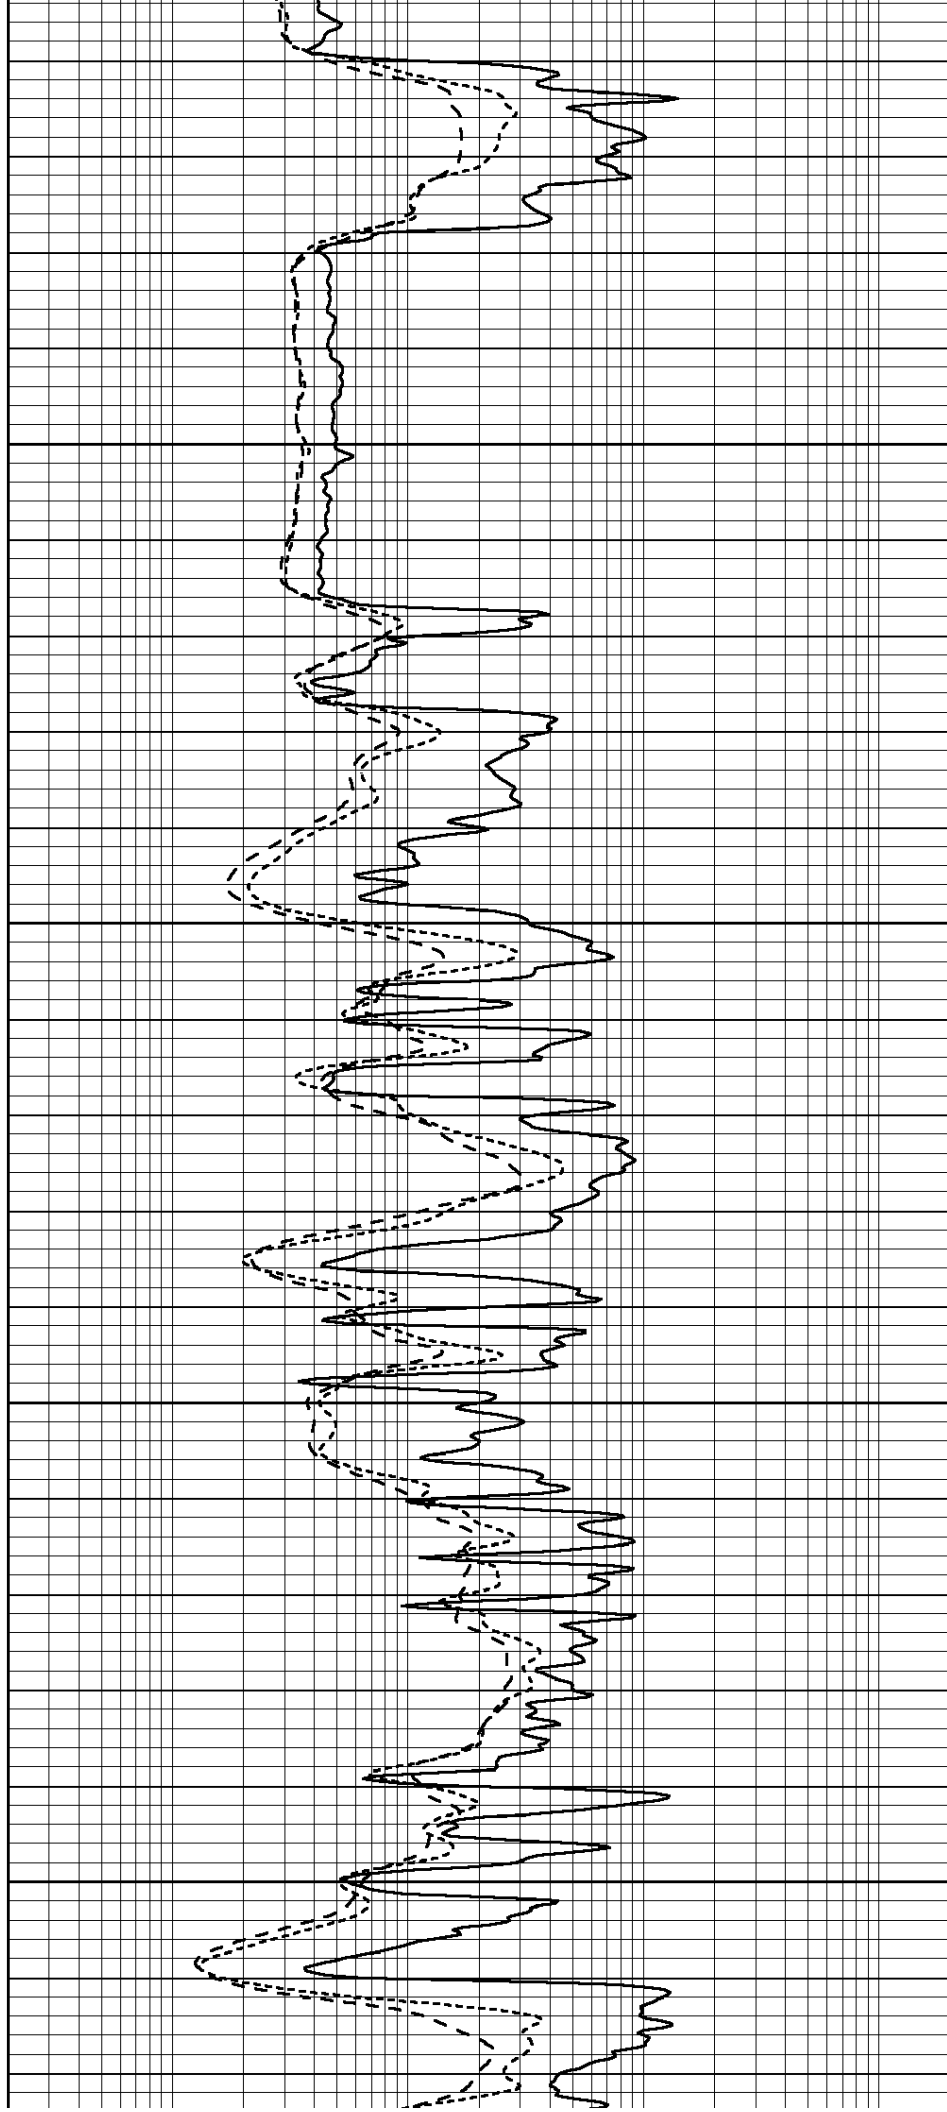

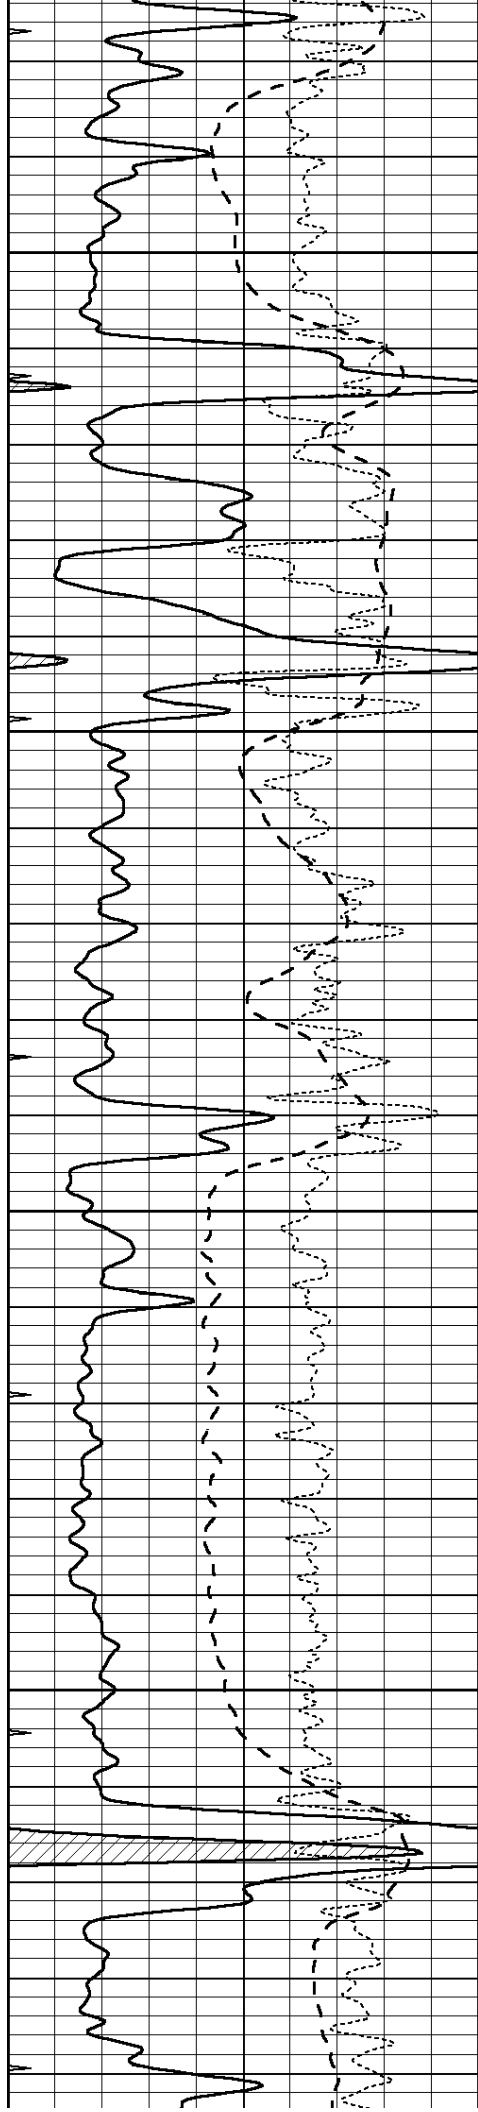



4700

4750

4800

4850

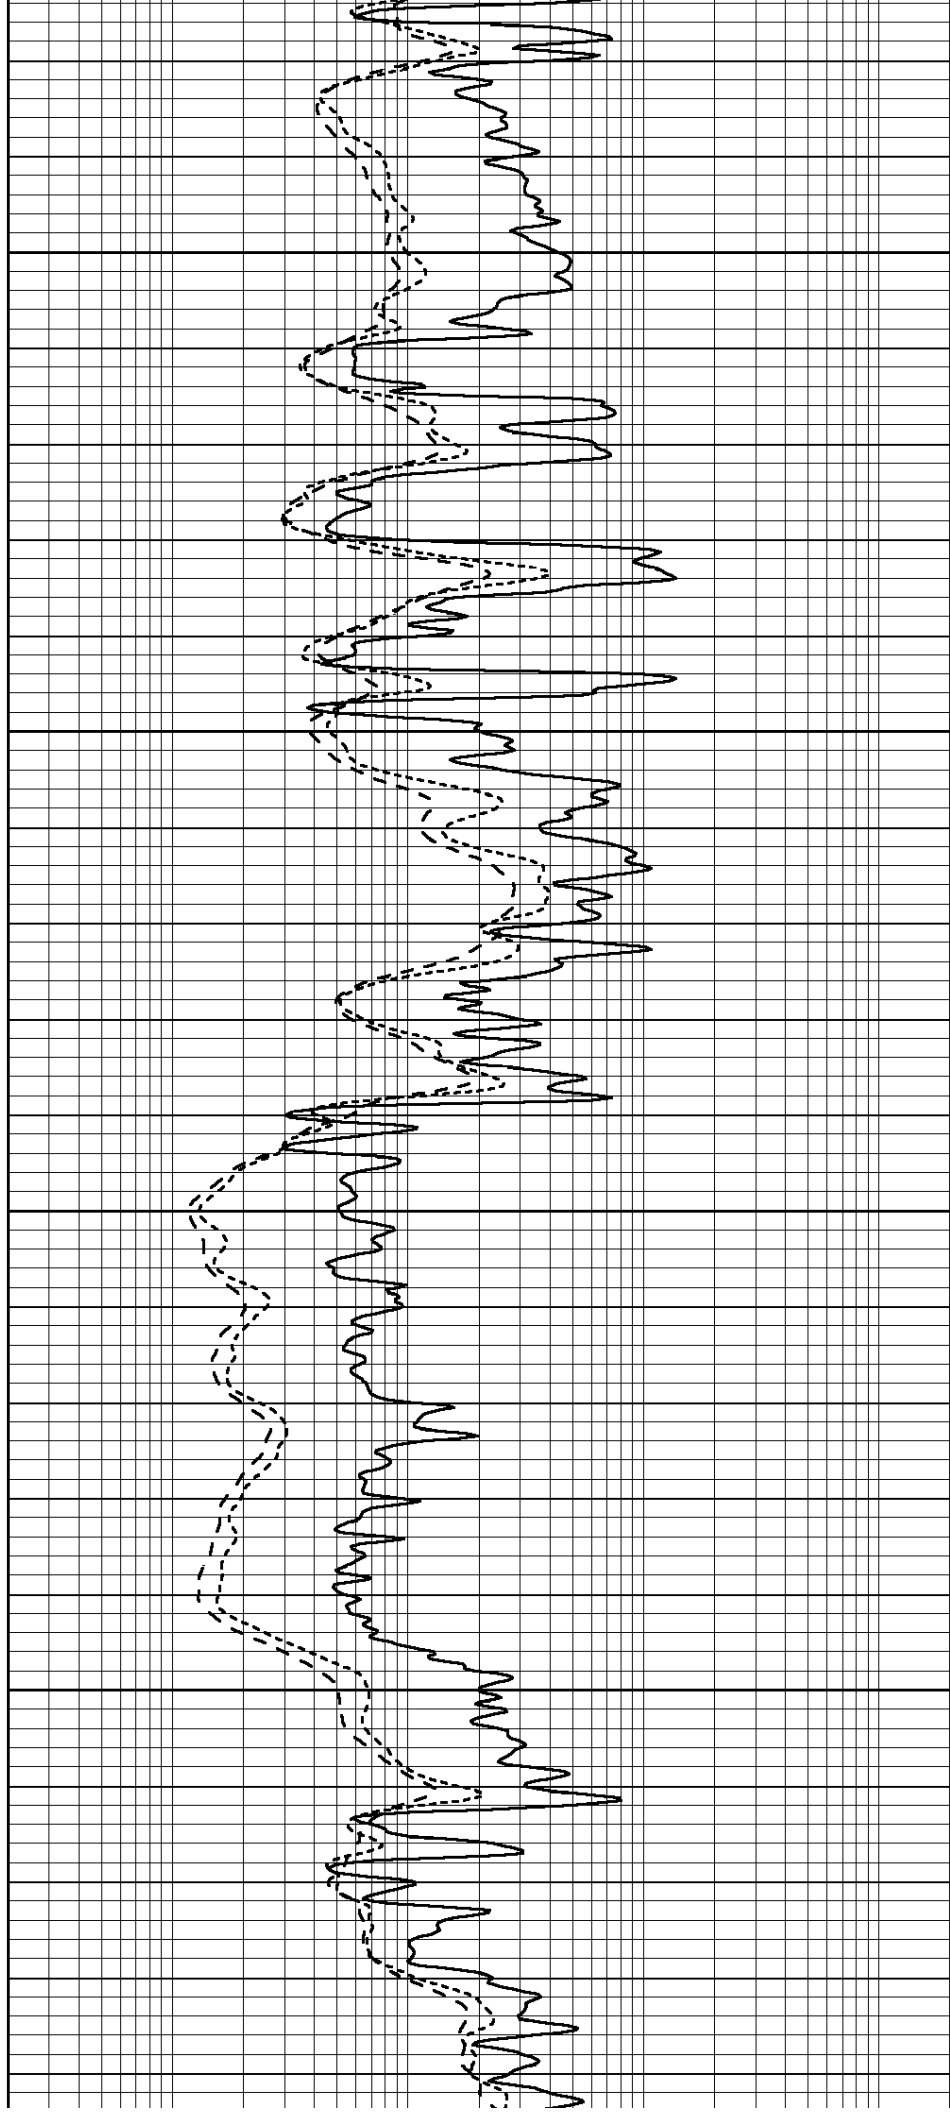

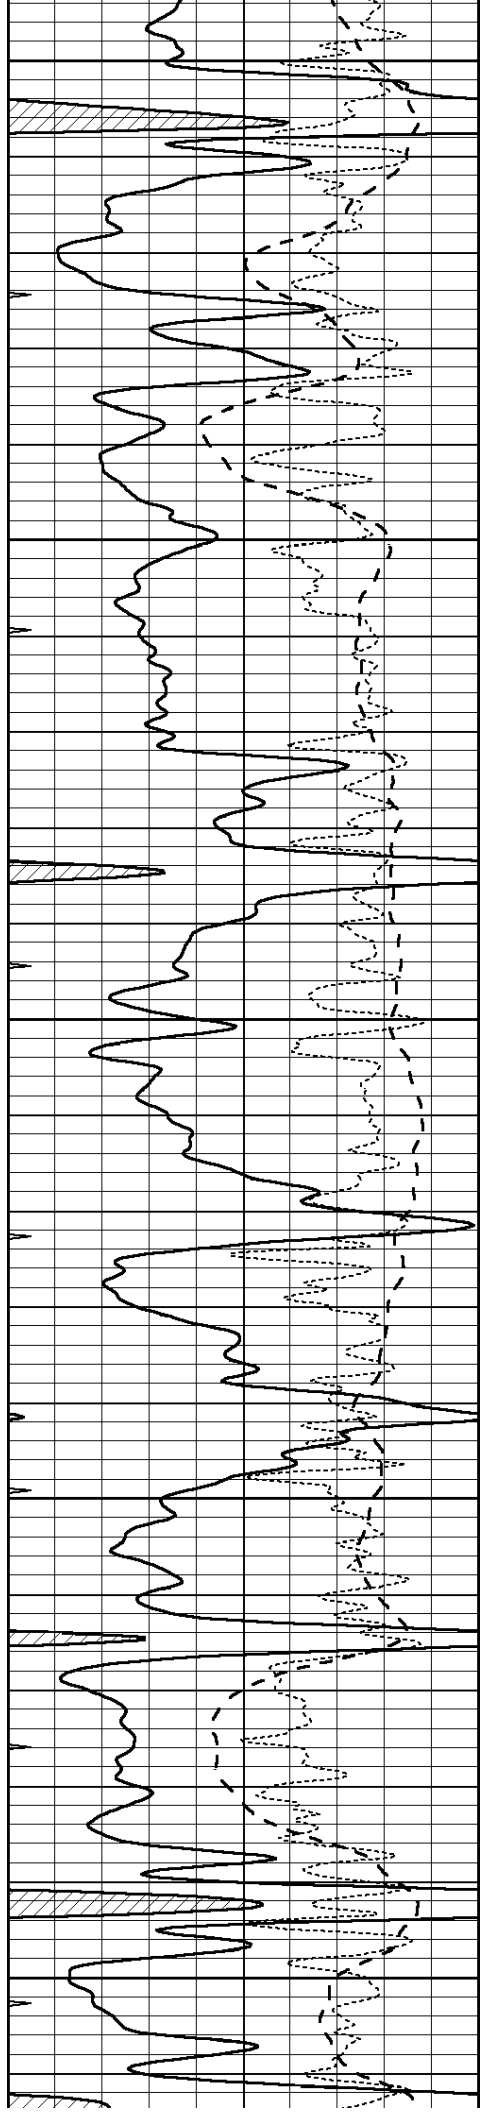


4900


4950

5000

5050

5100

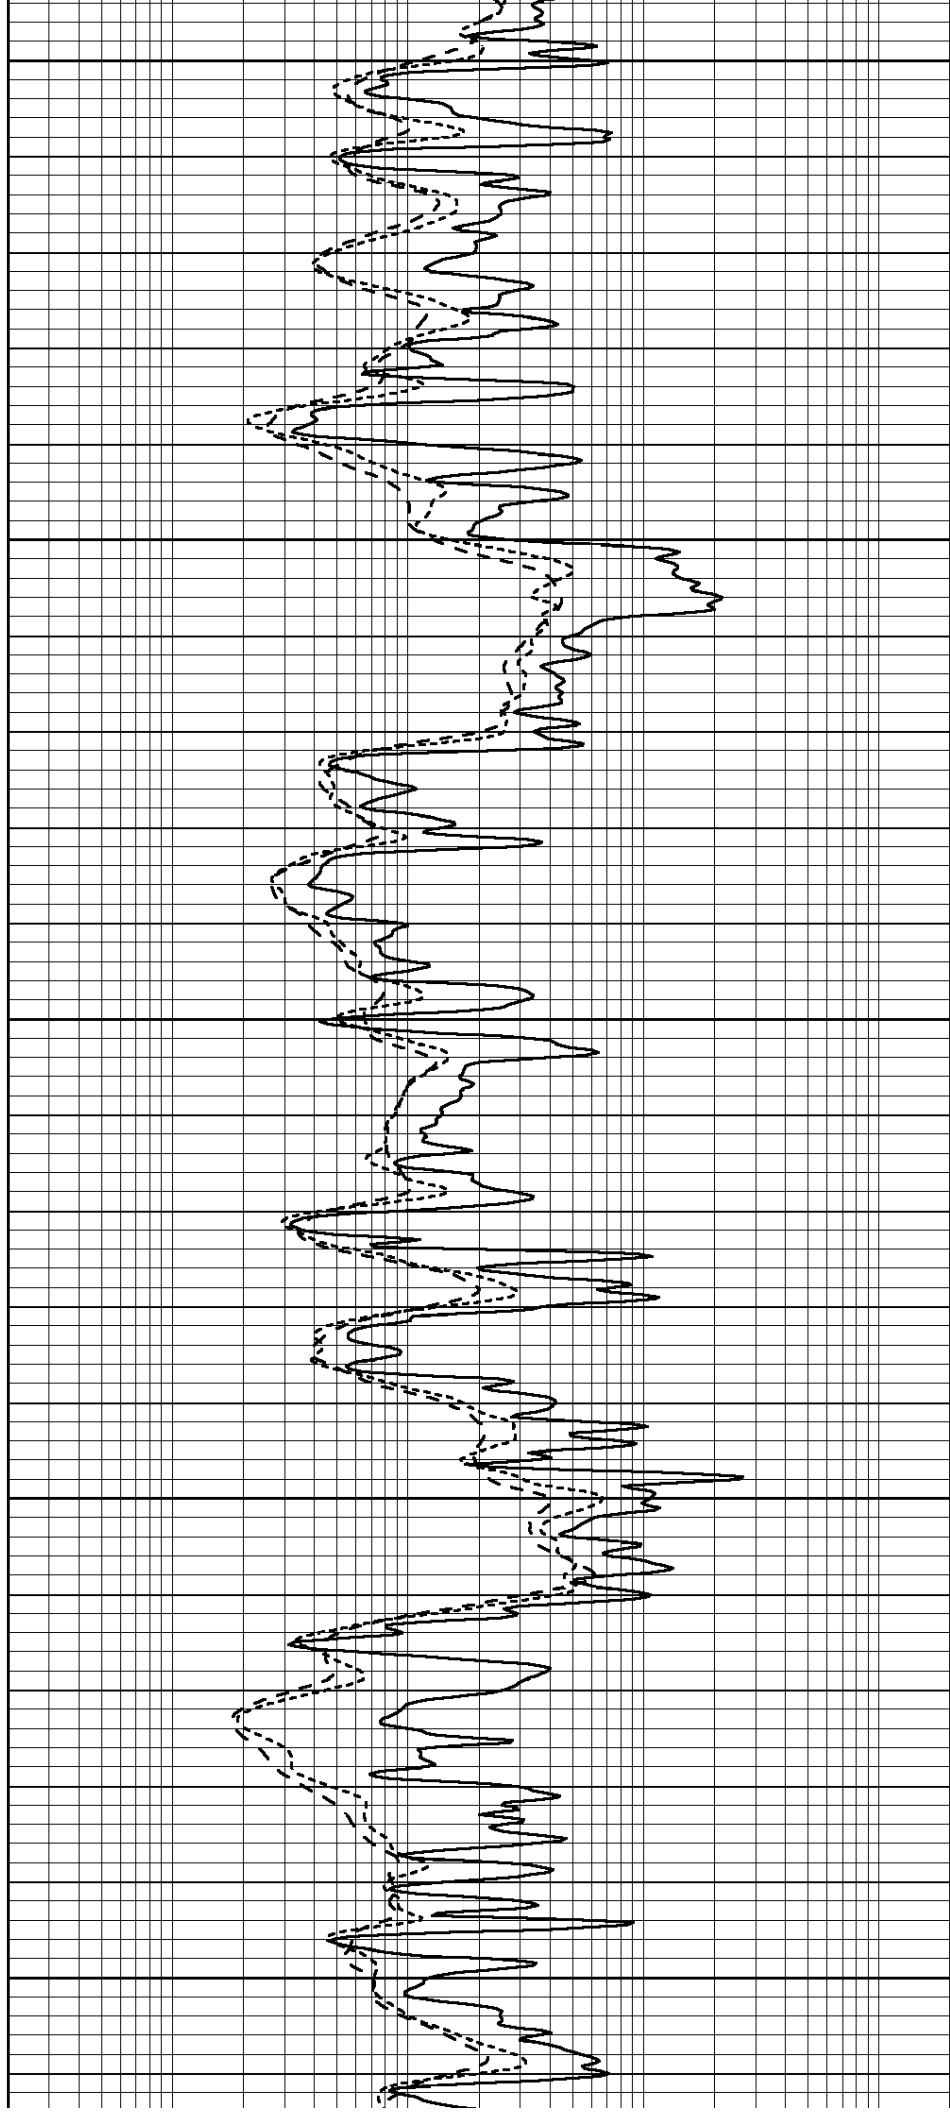

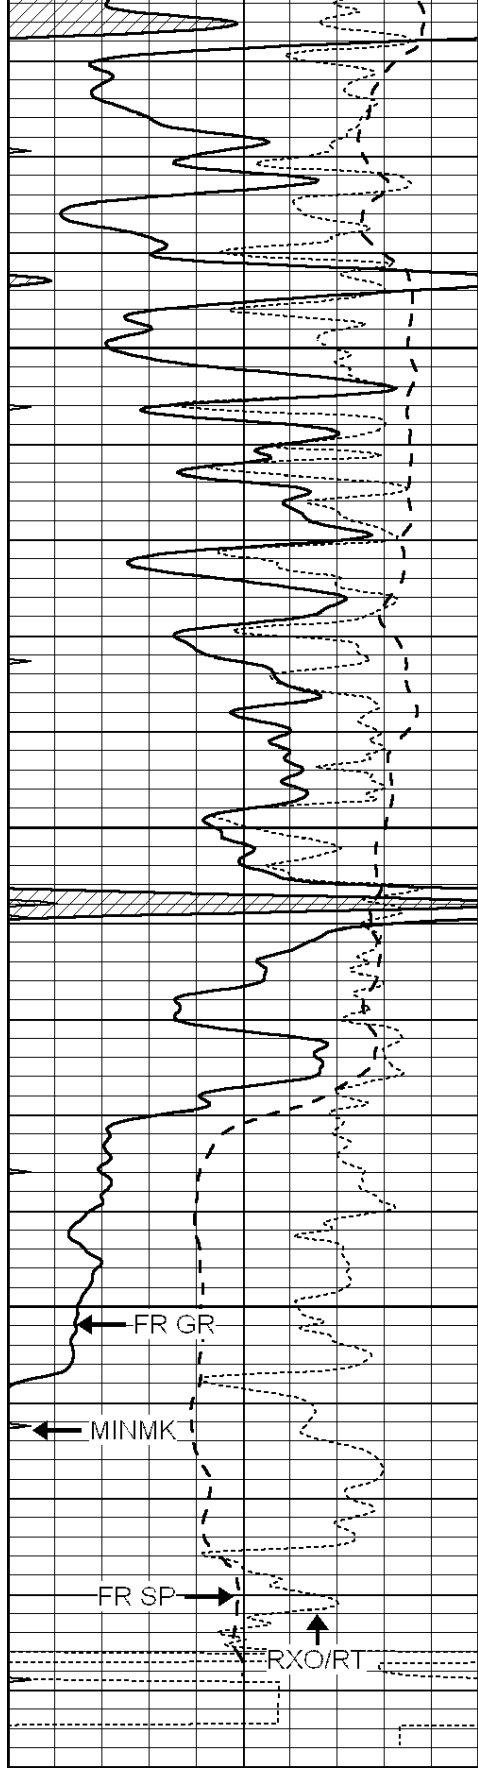


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

5150

5200


5250

LTD 5290

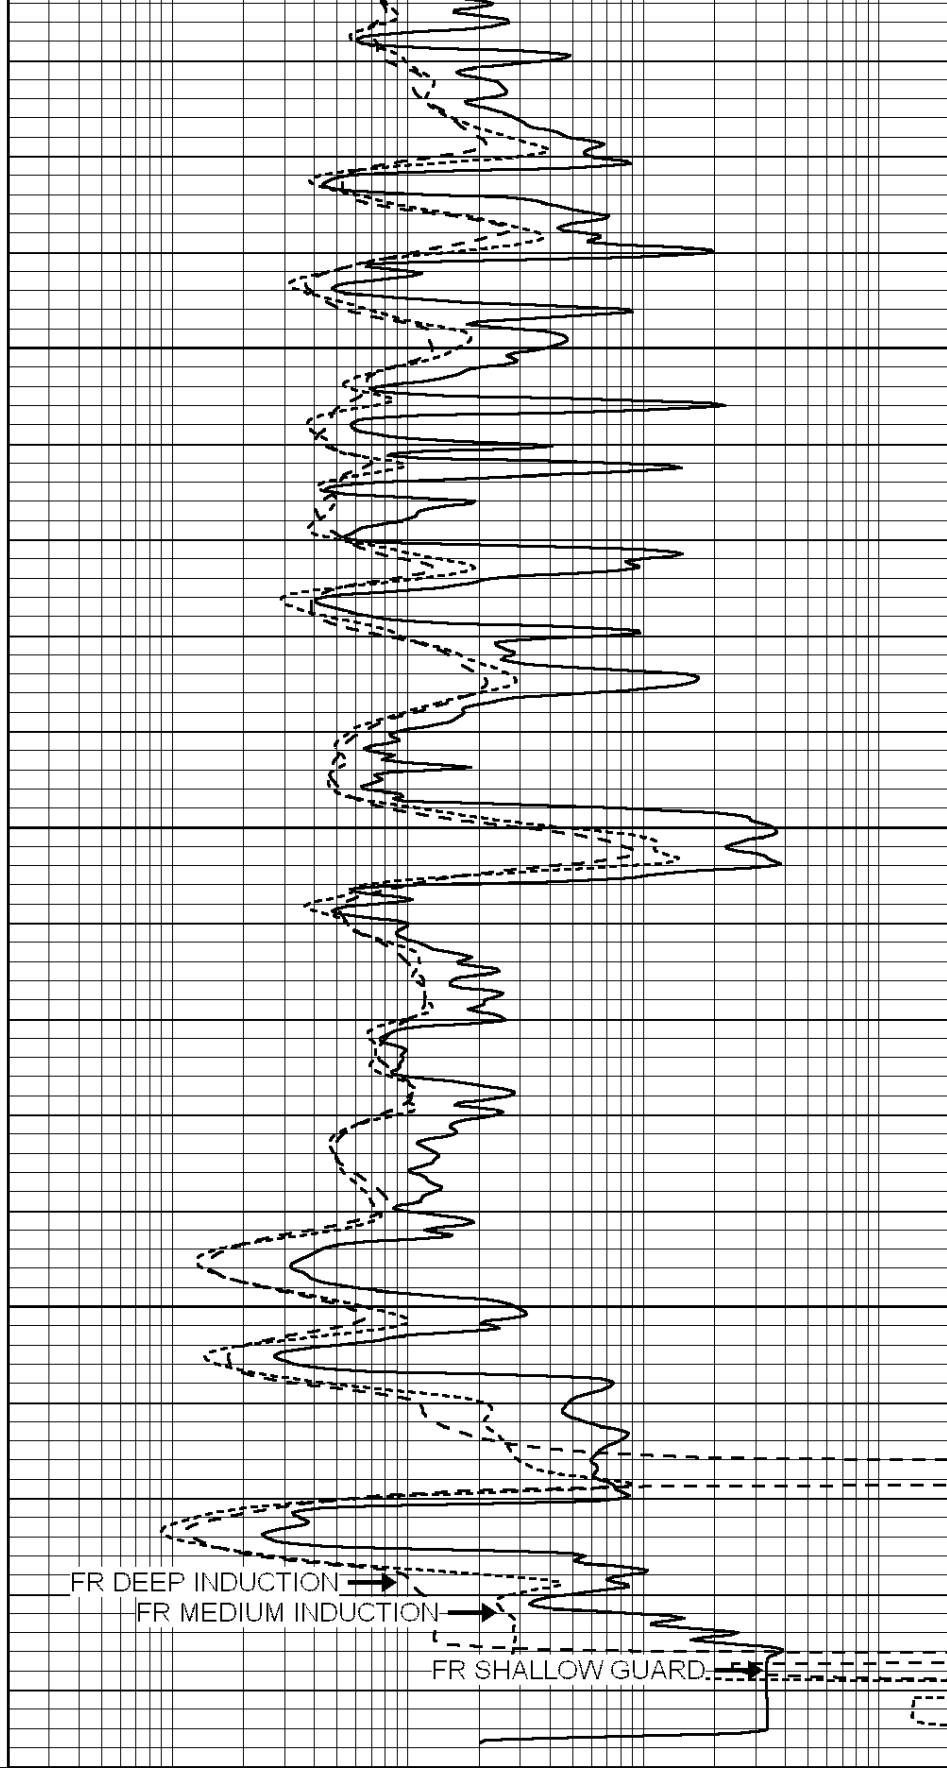

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000






REPEAT SECTION

Database File: 3602pe.db
Dataset Pathname: pass3.5
Presentation Format: _dil
Dataset Creation: Mon Mar 11 19:42:16 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

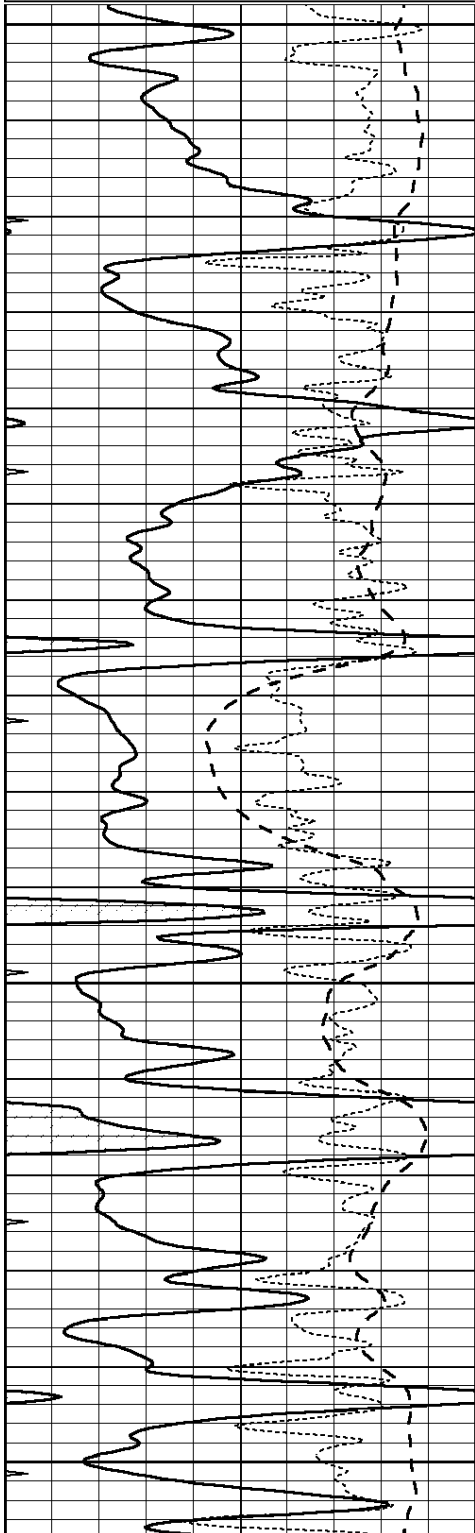



5000

5050

5100

5150

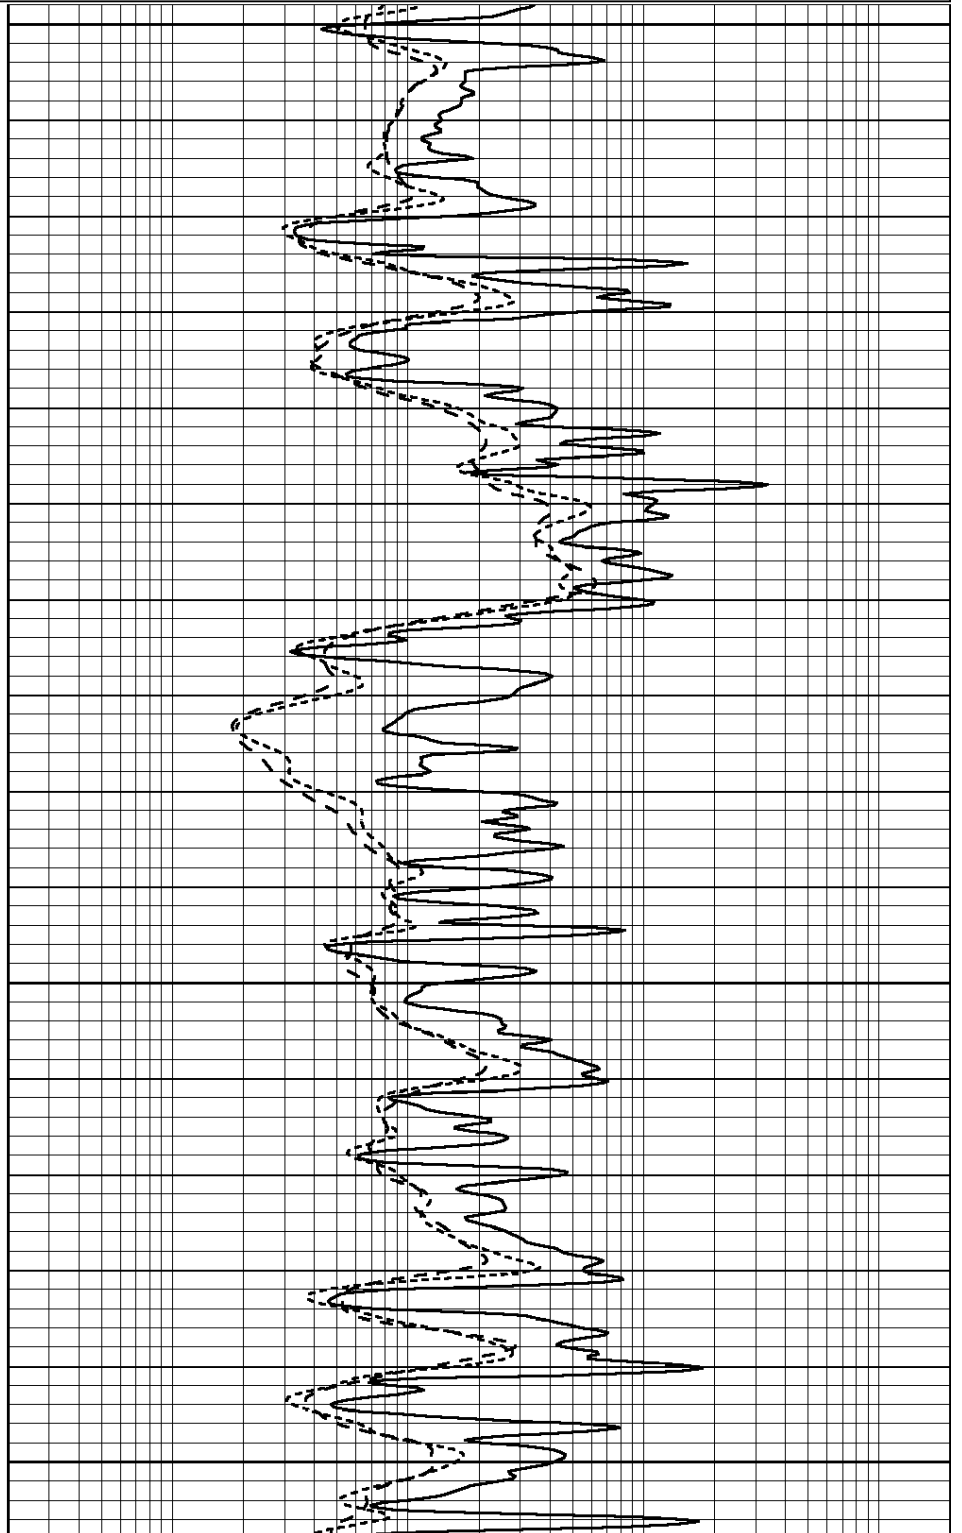


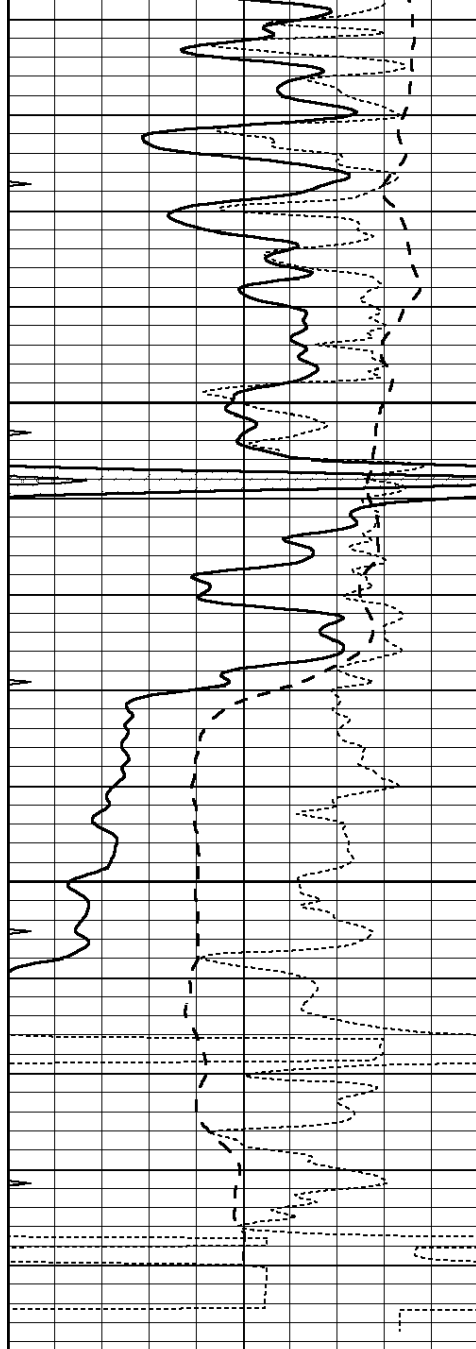

5200

5250

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

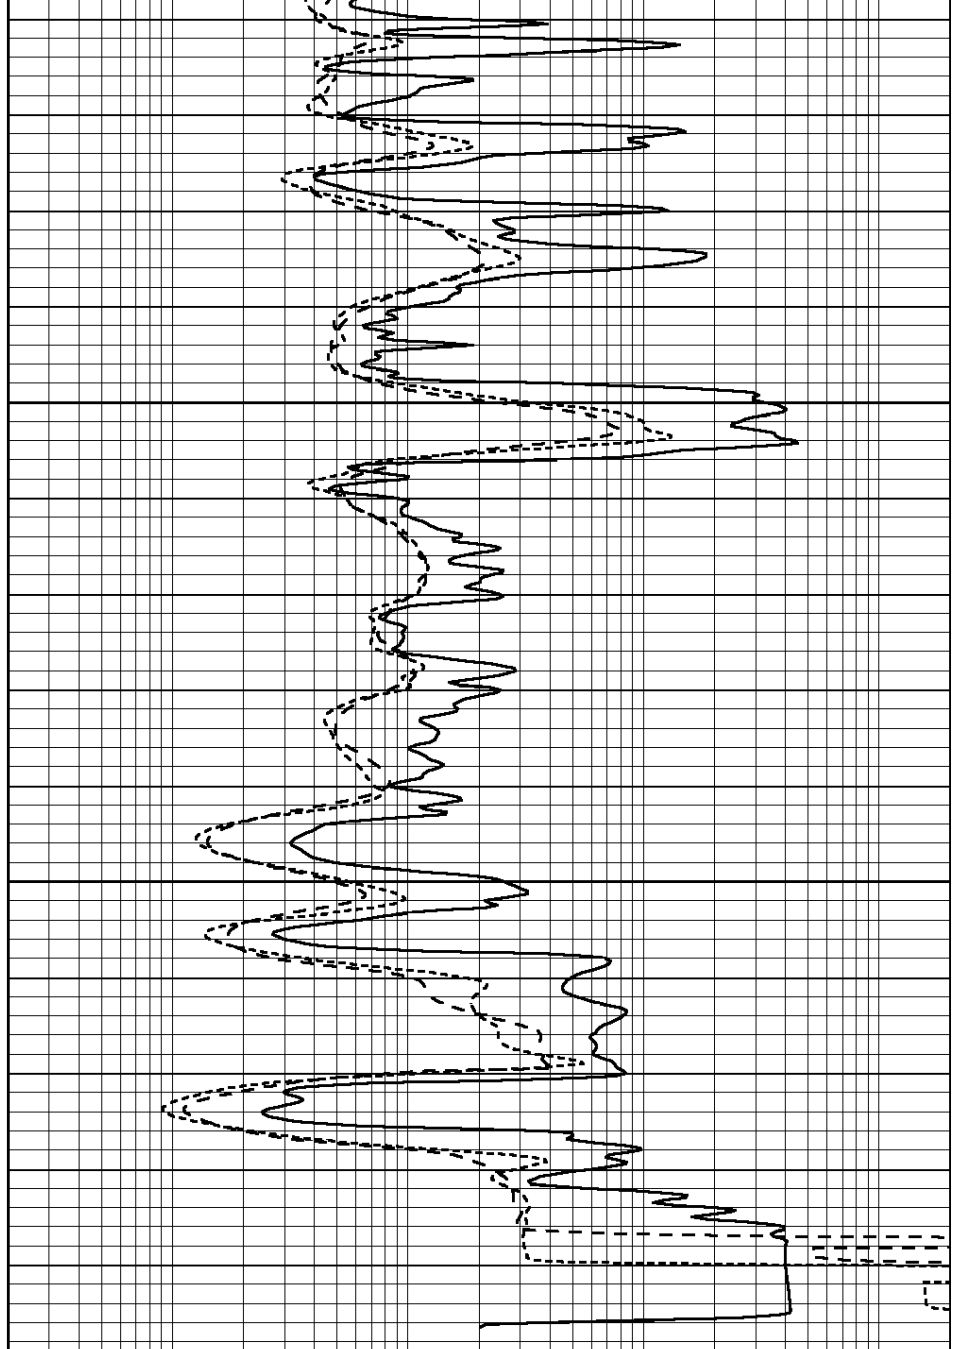

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 1598ddn.db
 Dataset Pathname: pass4
 Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model: PROBE7-DILG
 Surface Cal Performed: Wed Aug 30 00:06:33 2017
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings

References

Results

Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002				Model: PRB				

Master Calibration					Performed Mon Aug 21 11:27:42 2017			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	837.1	10632.5	2945.1	12110.1				cps
Window 2	772.0	9117.4	2570.1	10197.3				cps
Window 3	631.7	4669.0	1481.9	5042.9				cps
Window 4	187.0	187.5	185.9	189.9				cps
Long Space	0.0	8345.4	1798.1	9425.3				cps
Short Space	1.1	1927.9	1285.9	2050.2				cps
Rho		1.7100	2.5960	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio			: 0.558	
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept			: -19.6	

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification					Performed Wed Dec 31 18:00:00 1969			
---------------------------	--	--	--	--	------------------------------------	--	--	--

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Wed May 31 00:09:32 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps