



MICRO
LOG

Company VINCENT OIL CORPORATION		Company VINCENT OIL CORPORATION	
Well SMITH #3-6		Well SMITH #3-6	
Field KINGSDOWN NORTHWEST		Field KINGSDOWN NORTHWEST	
County FORD		County FORD	
State KANSAS		State KANSAS	
Location: 2310' FSL & 2037' FEL		API #: 15-057-21007-0000	
Permanent Datum SEC 6 TWP 29S RGE 22W		Other Services CDL/CNL/PE DIL/SON	
Log Measured From KELLY BUSHING 13' A.G.L.		Elevation K.B. 2514 D.F. 2512 G.L. 2501	
Drilling Measured From KELLY BUSHING			
Date 2/27/19	Run Number TWO		
Depth Driller	5330		
Depth Logger	5330		
Bottom Logged Interval	5312		
Top Log Interval	4200		
Casing Driller	8 5/8" @ 688'		
Casing Logger	687'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 9400 PPM	
Density / Viscosity	9.3/72		
pH / Fluid Loss	10.5/10.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.50 @ 60F		
Rmf @ Meas. Temp	.37 @ 60F		
Rmc @ Meas. Temp	.60 @ 60F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.23 @ 128F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	128F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPELLUCCI		
Witnessed By	KEN LeBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. - 1 1/2 NORTH - WEST INTO AT SOUTH SIDE OF TANK BATTERY




MAIN SECTION

Database File	3446pe8.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Wed Feb 27 07:24:20 2019
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3)	10		

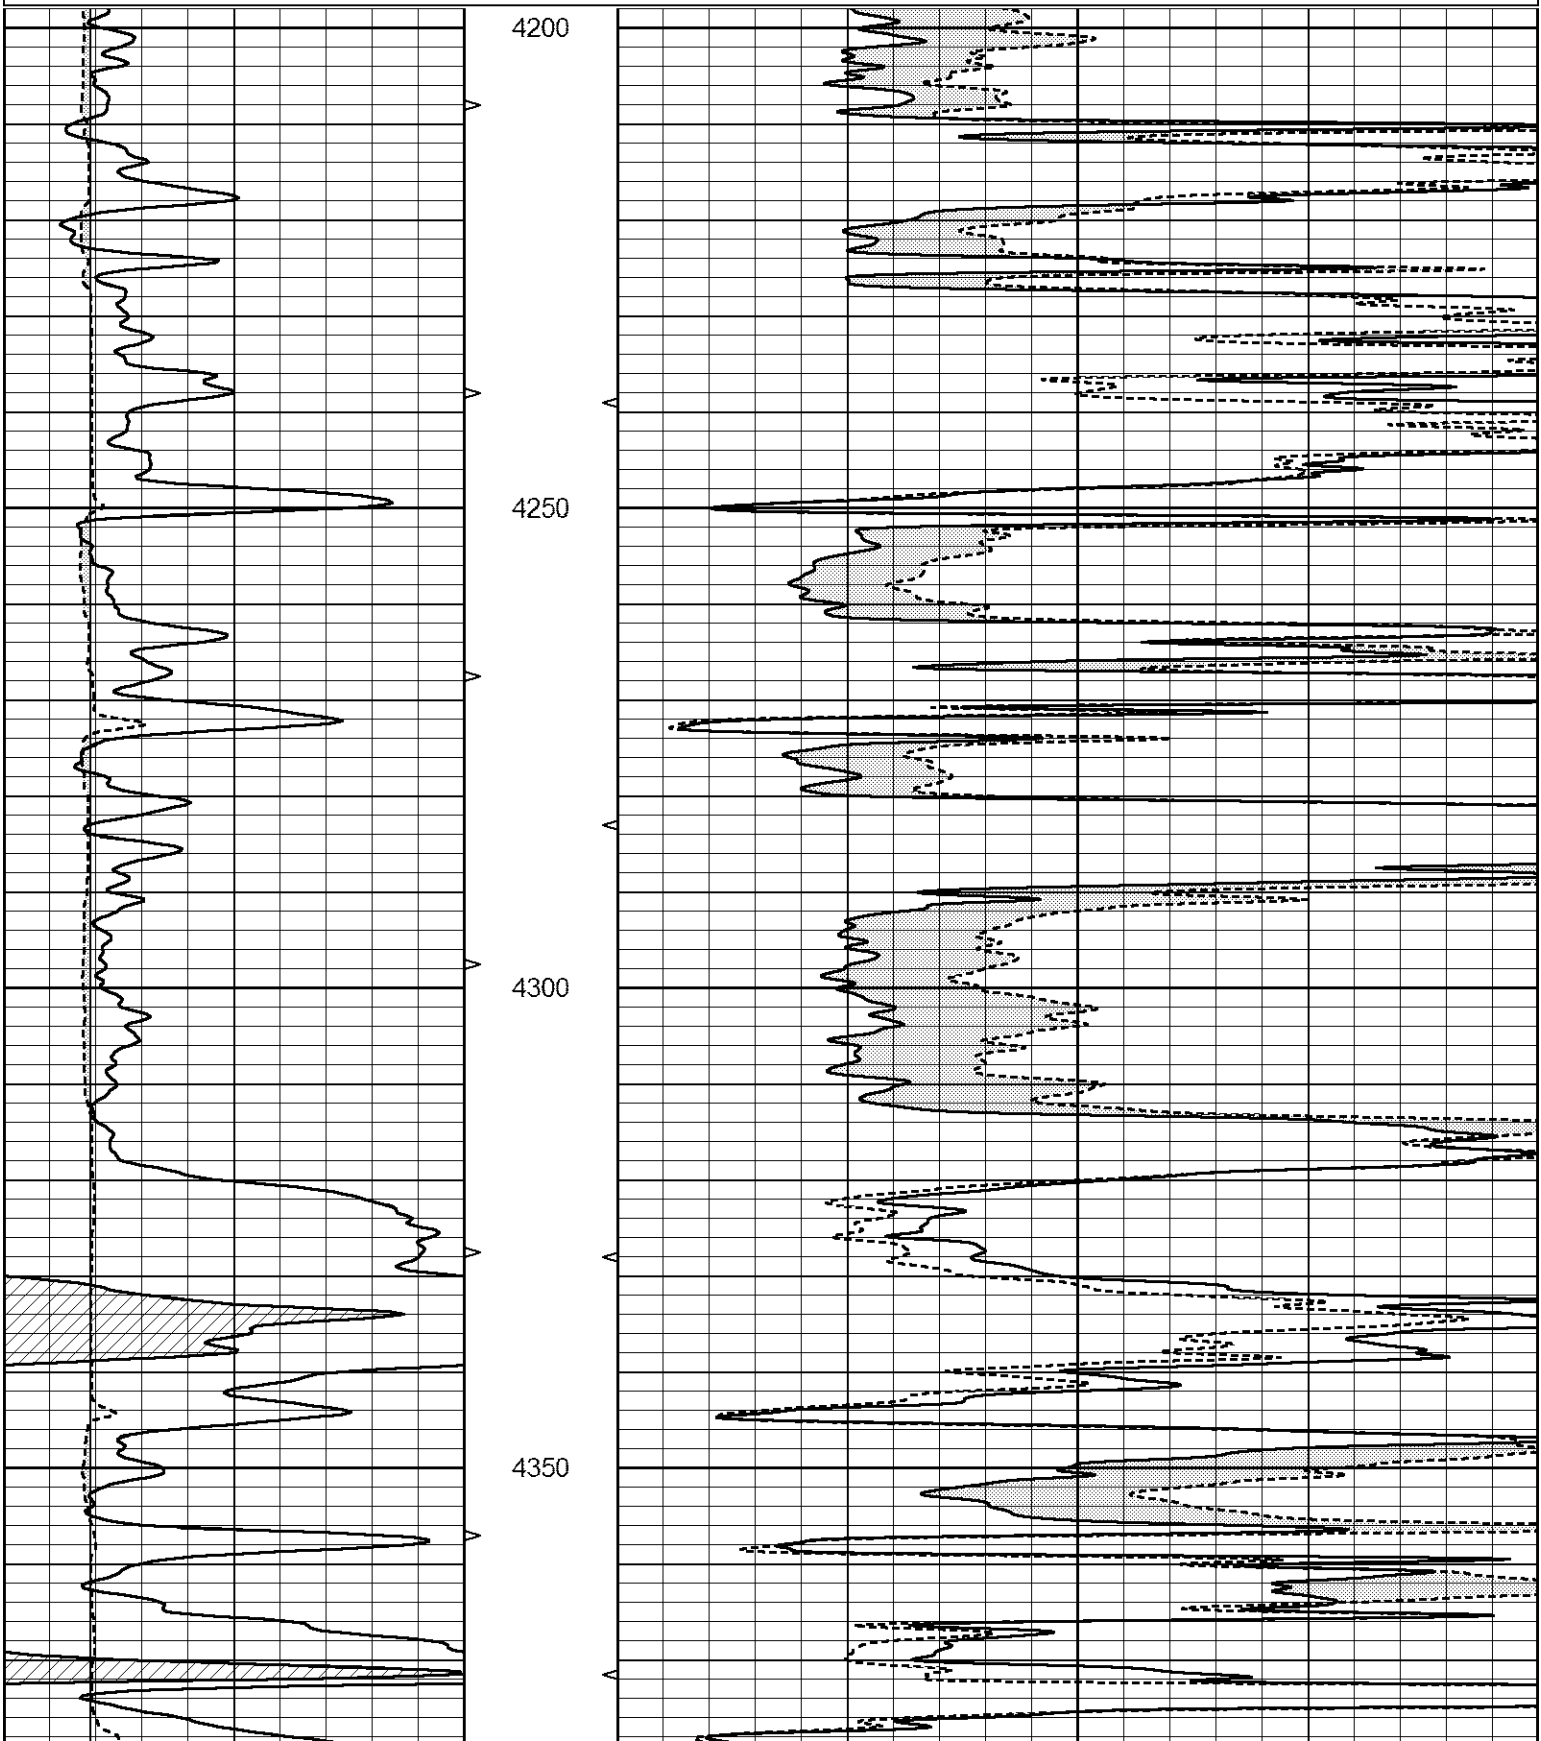

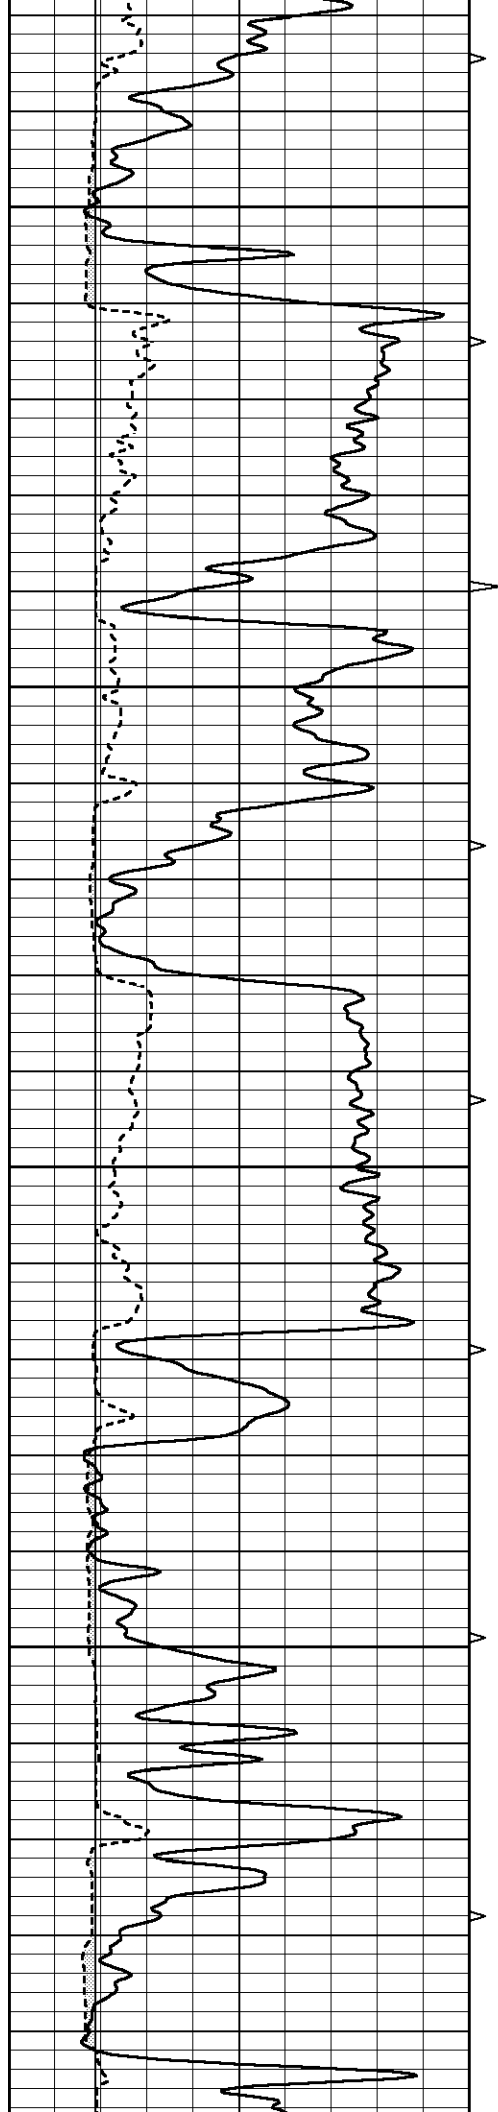



4400

4450

4500

4550

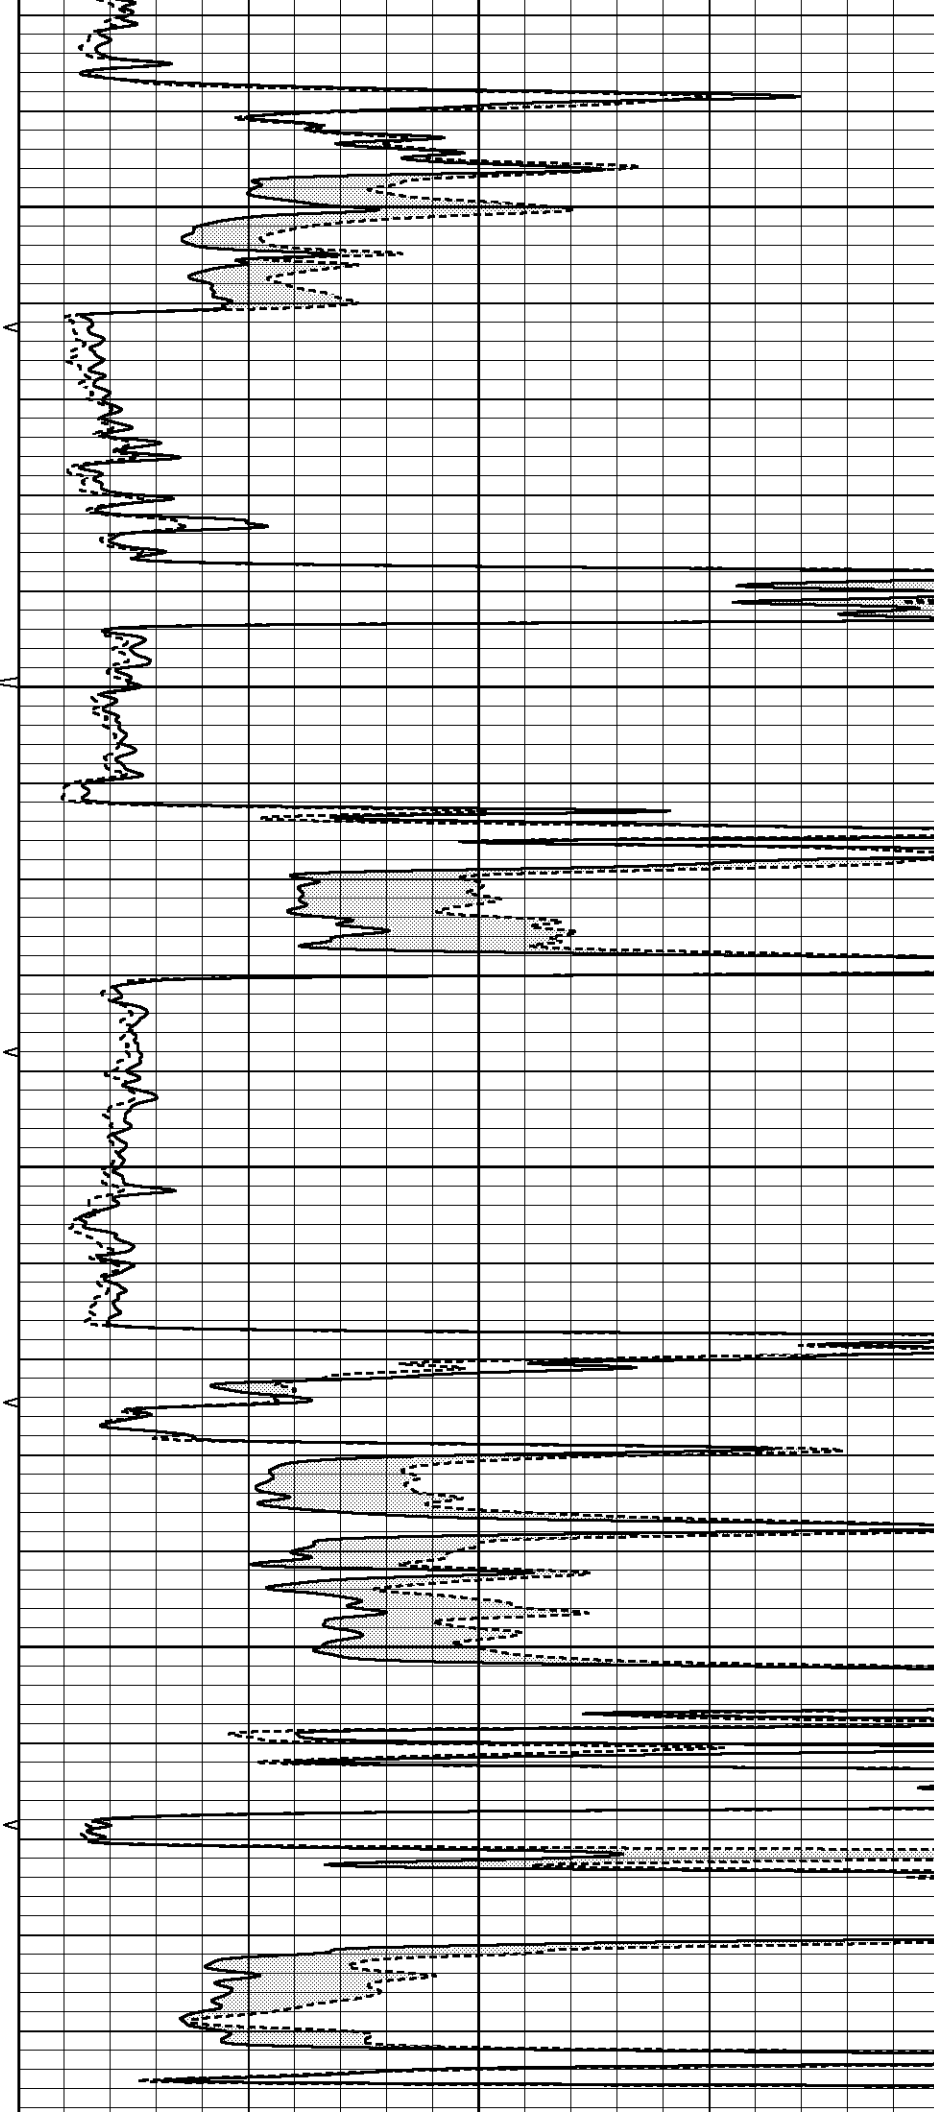

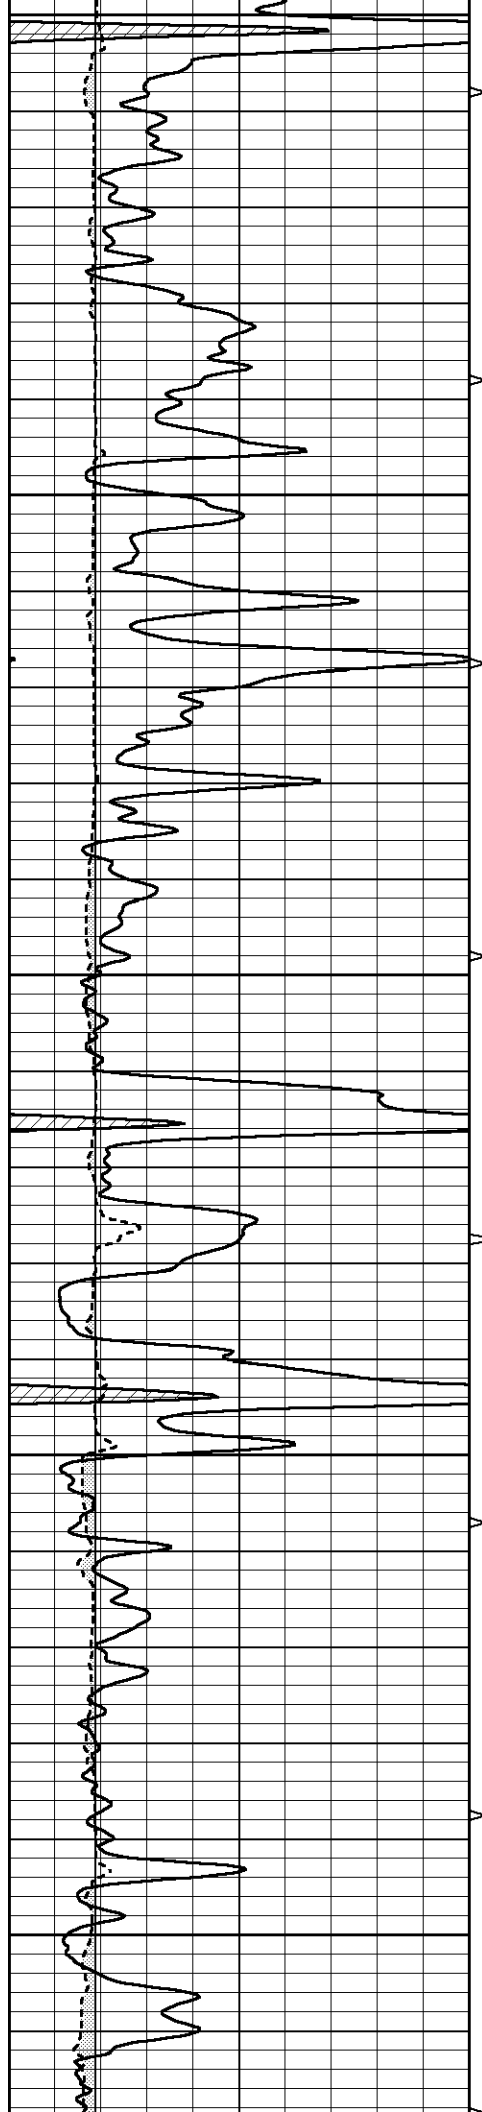


4600


4650

4700

4750

4800

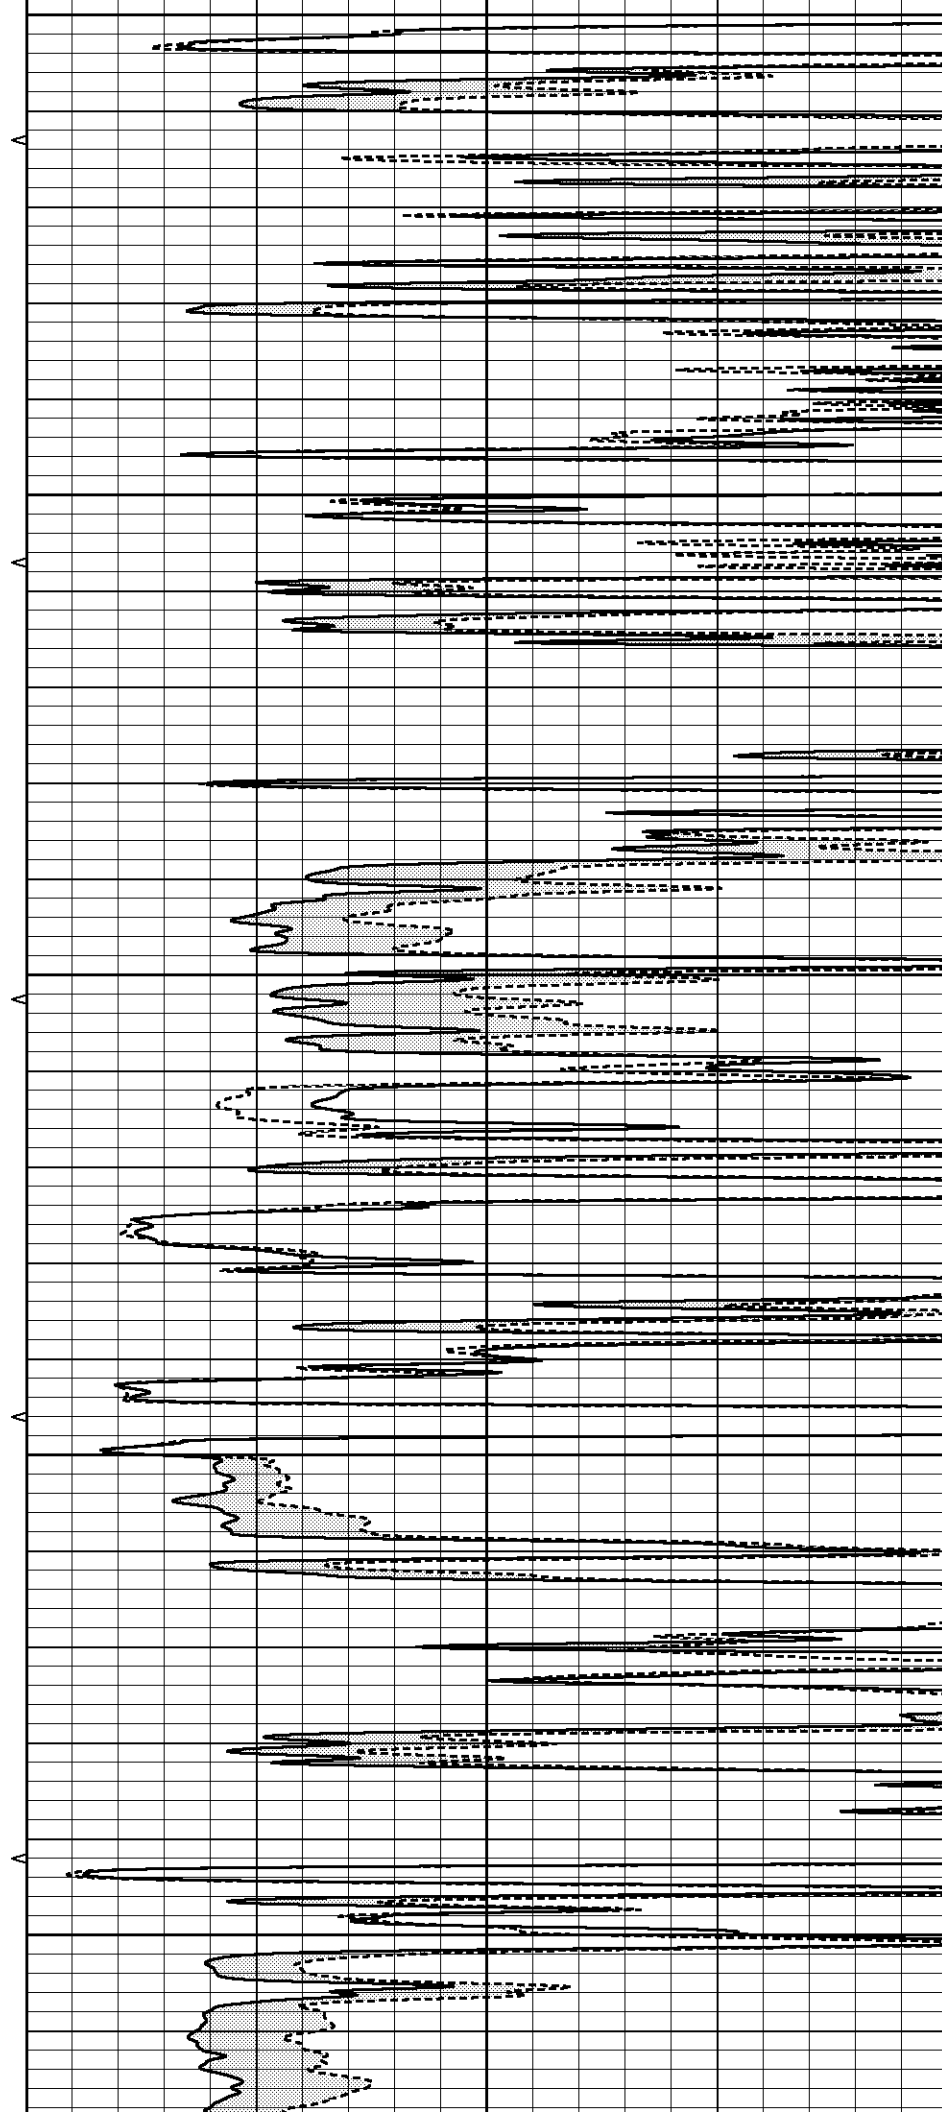

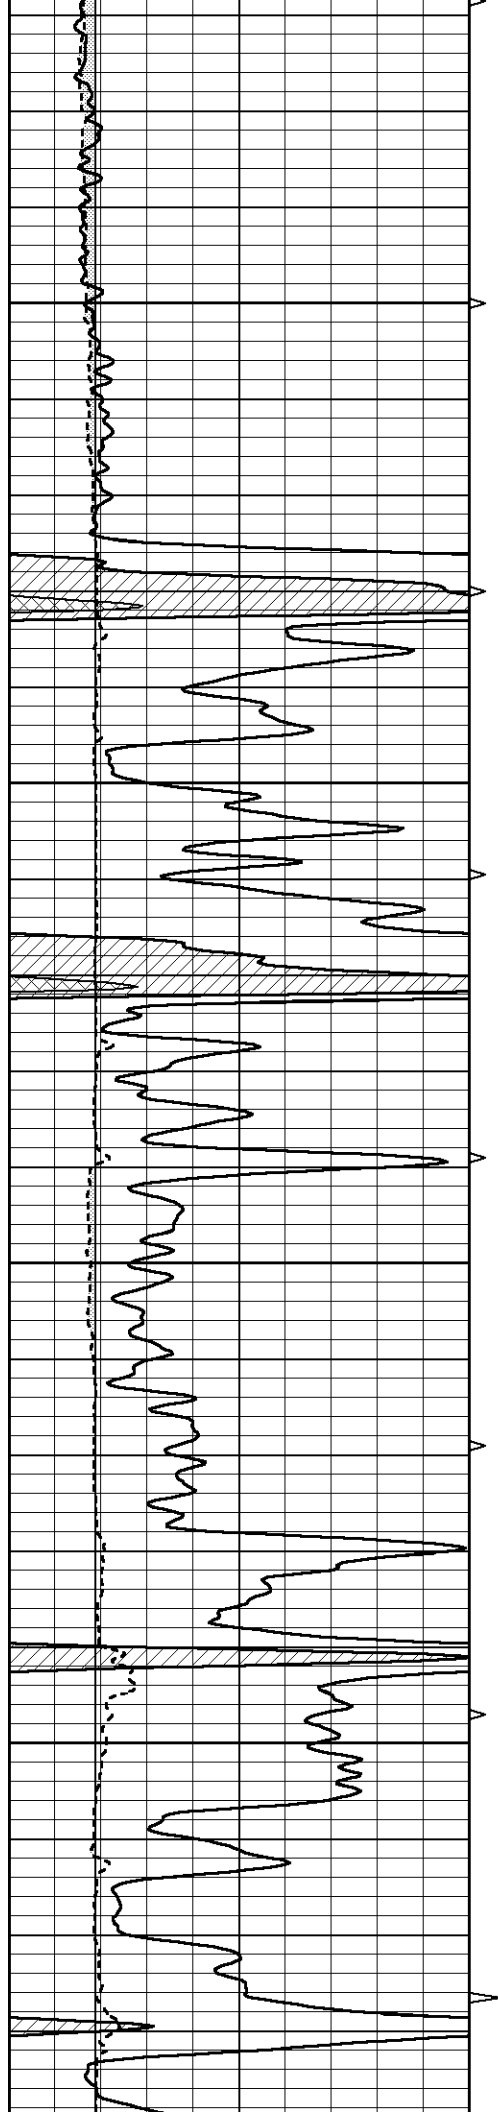



4850

4900

4950

5000

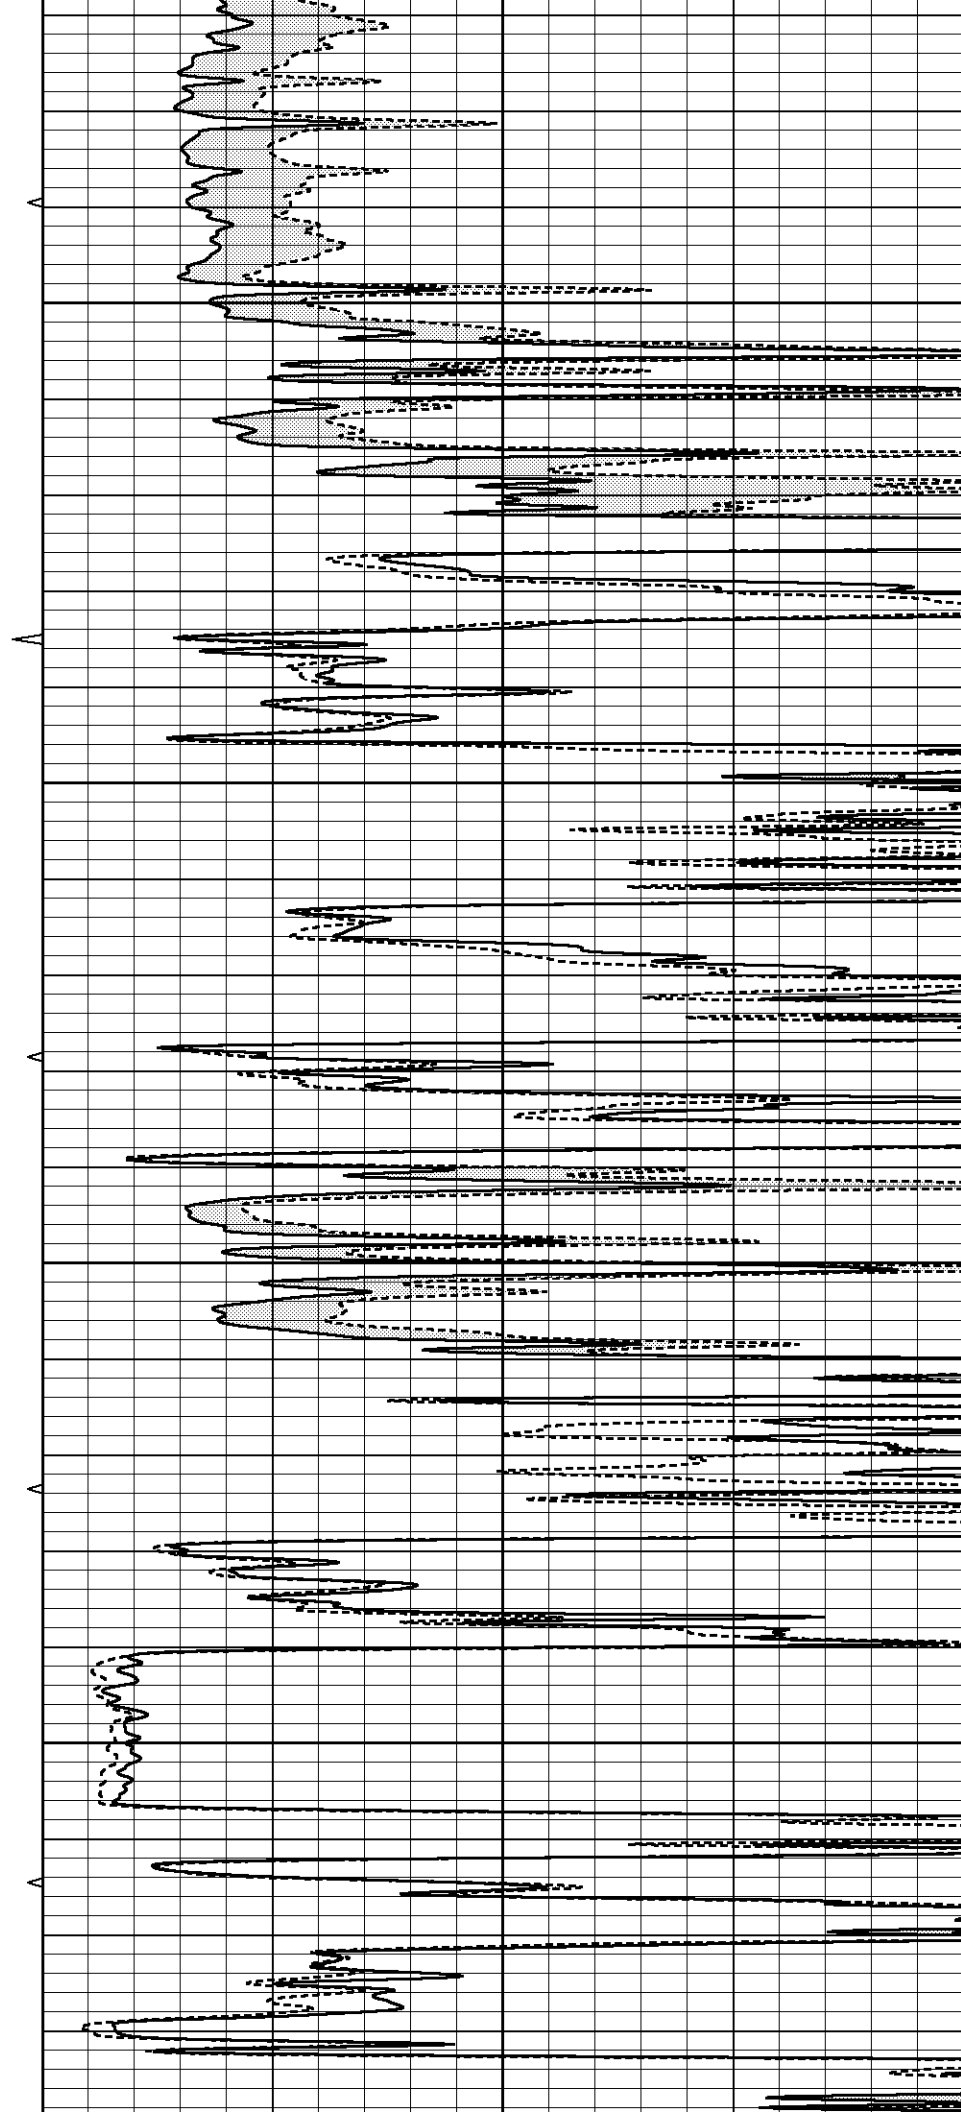

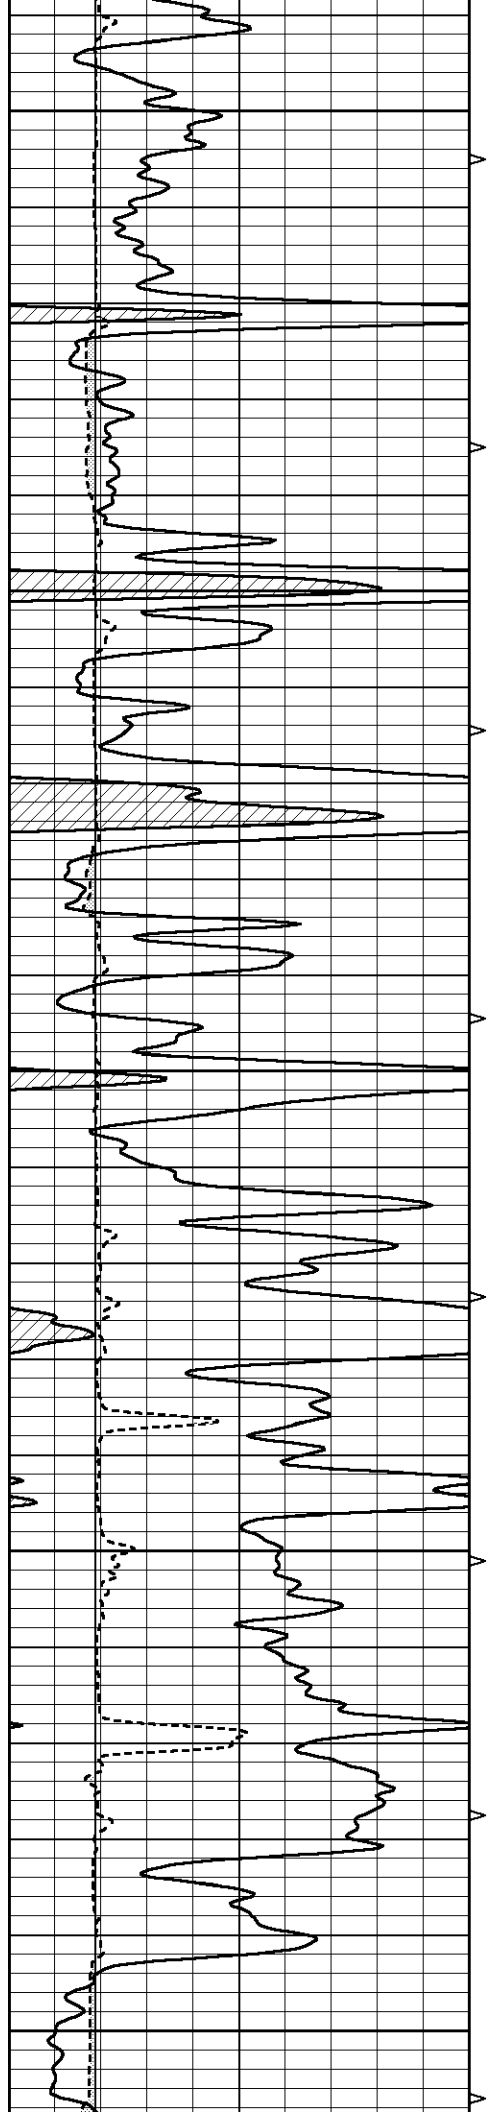


5050



5100

5150

5200



5250

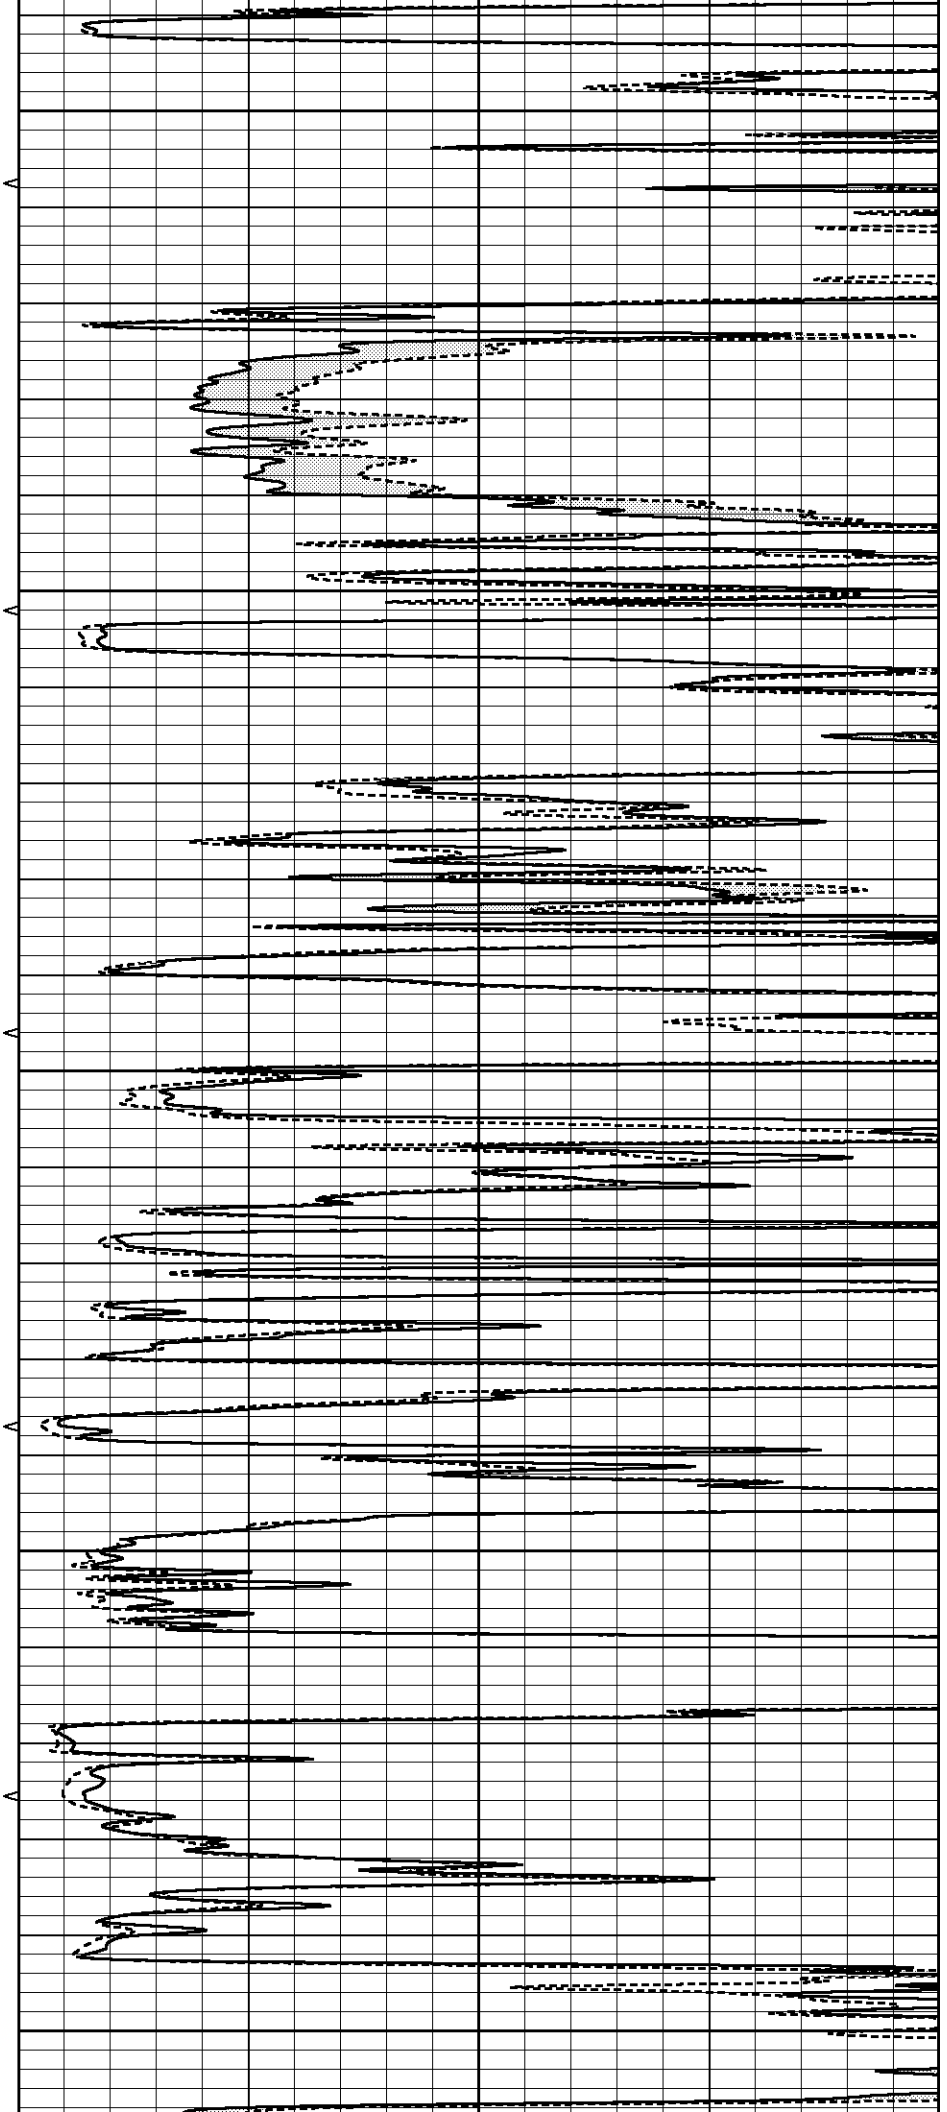


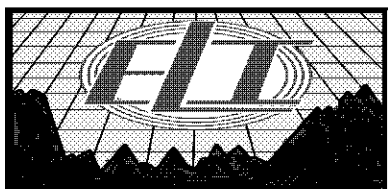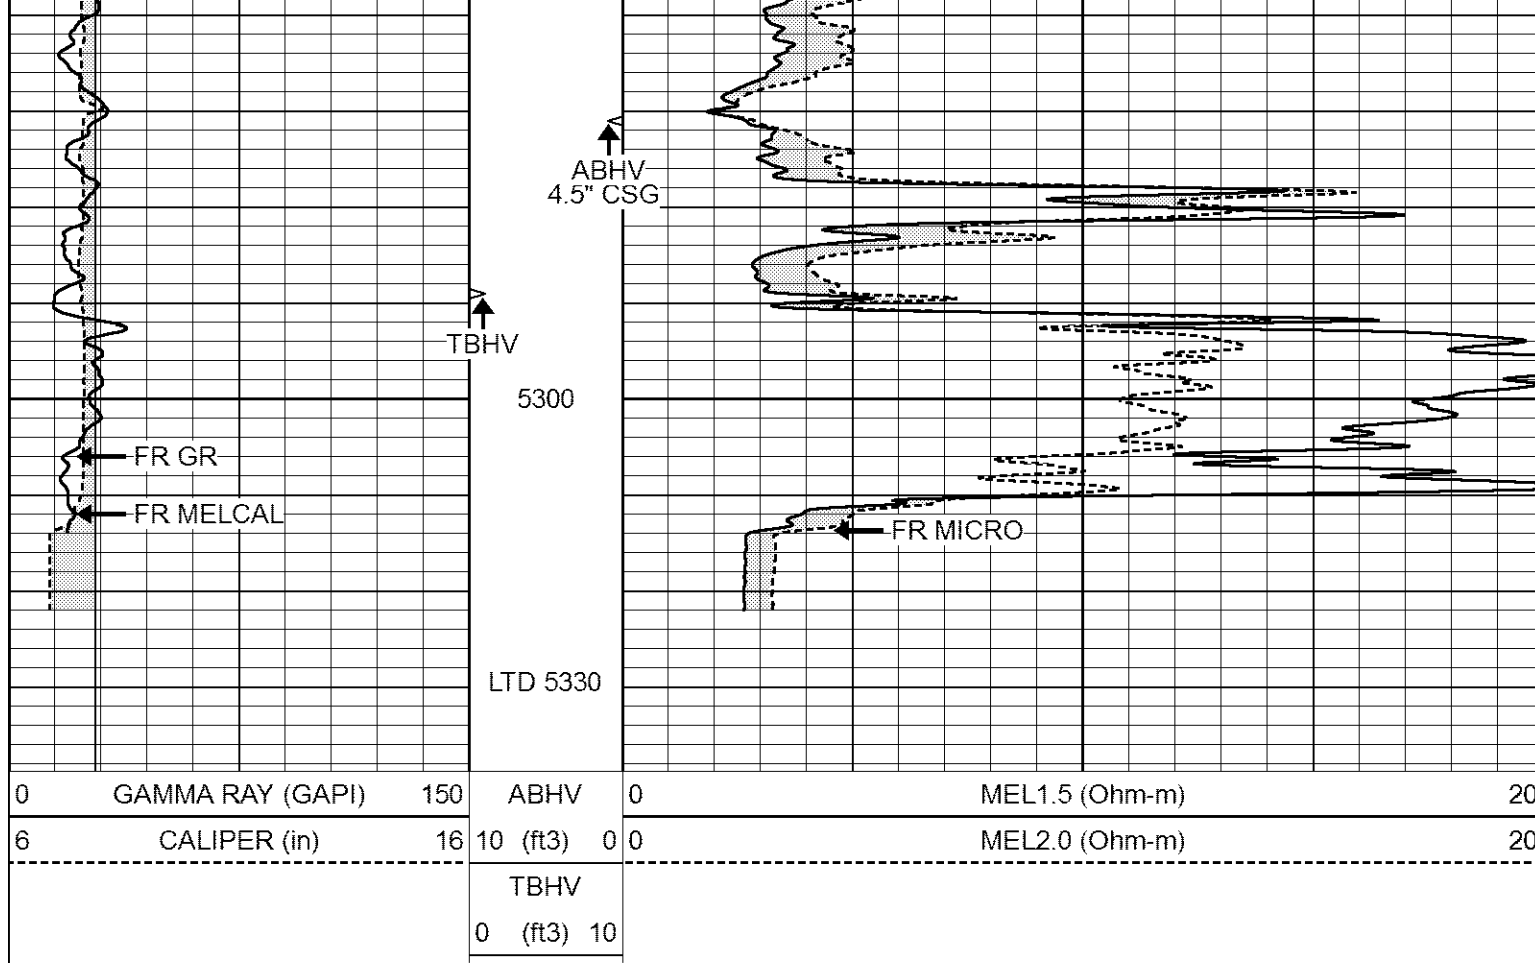

REPEAT SECTION

Database File 3446pe8.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Wed Feb 27 06:55:20 2019
 Charted by Depth in Feet scaled 1:240

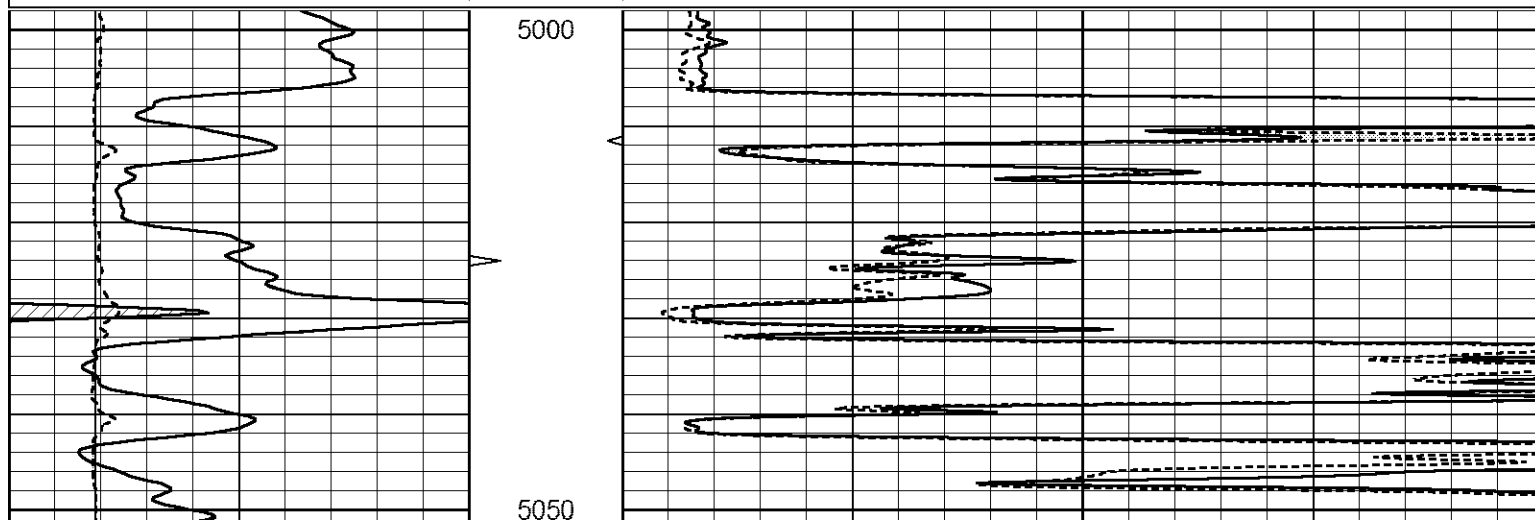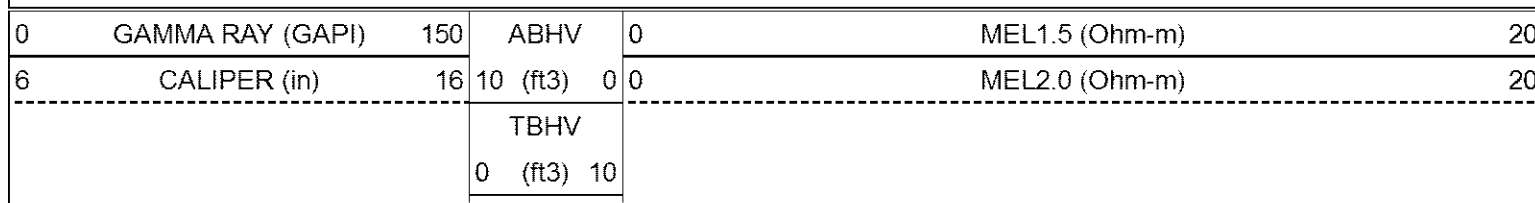

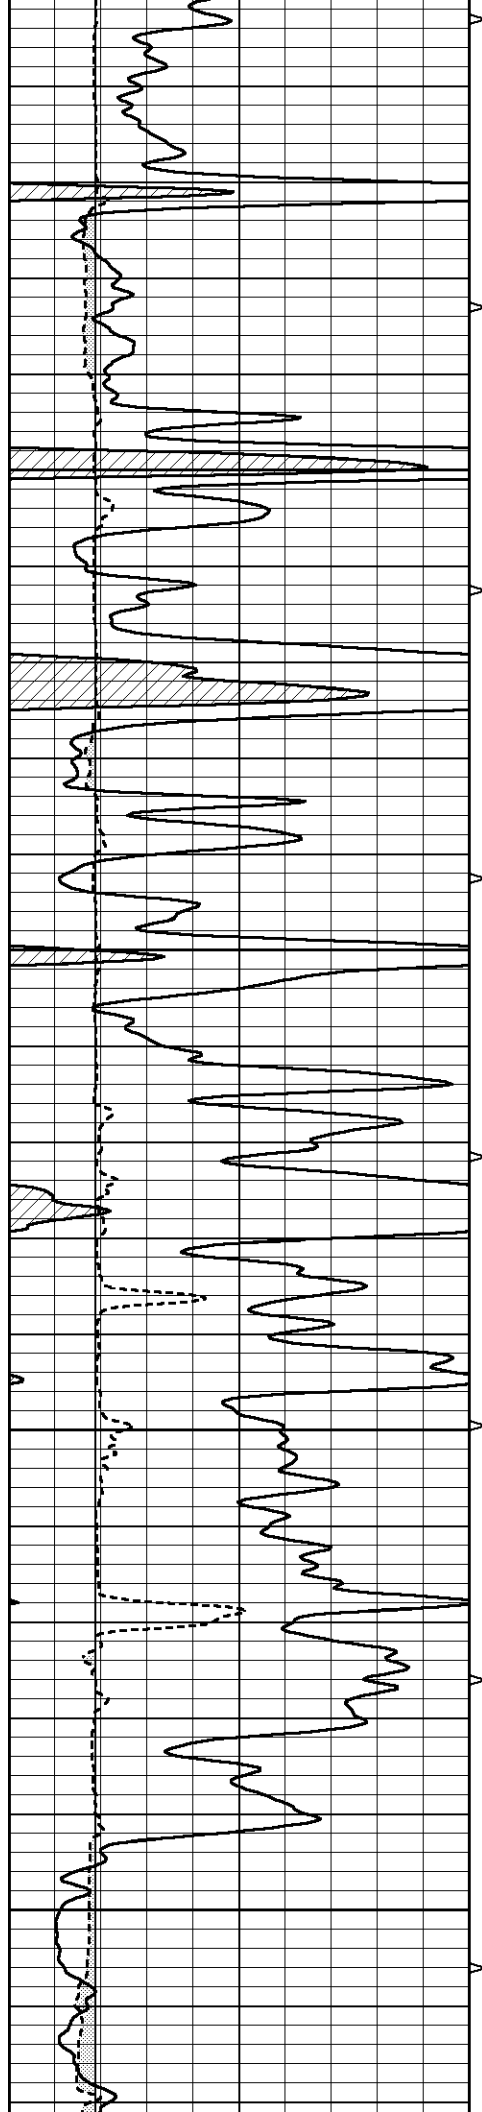



5100

5150

5200

5250

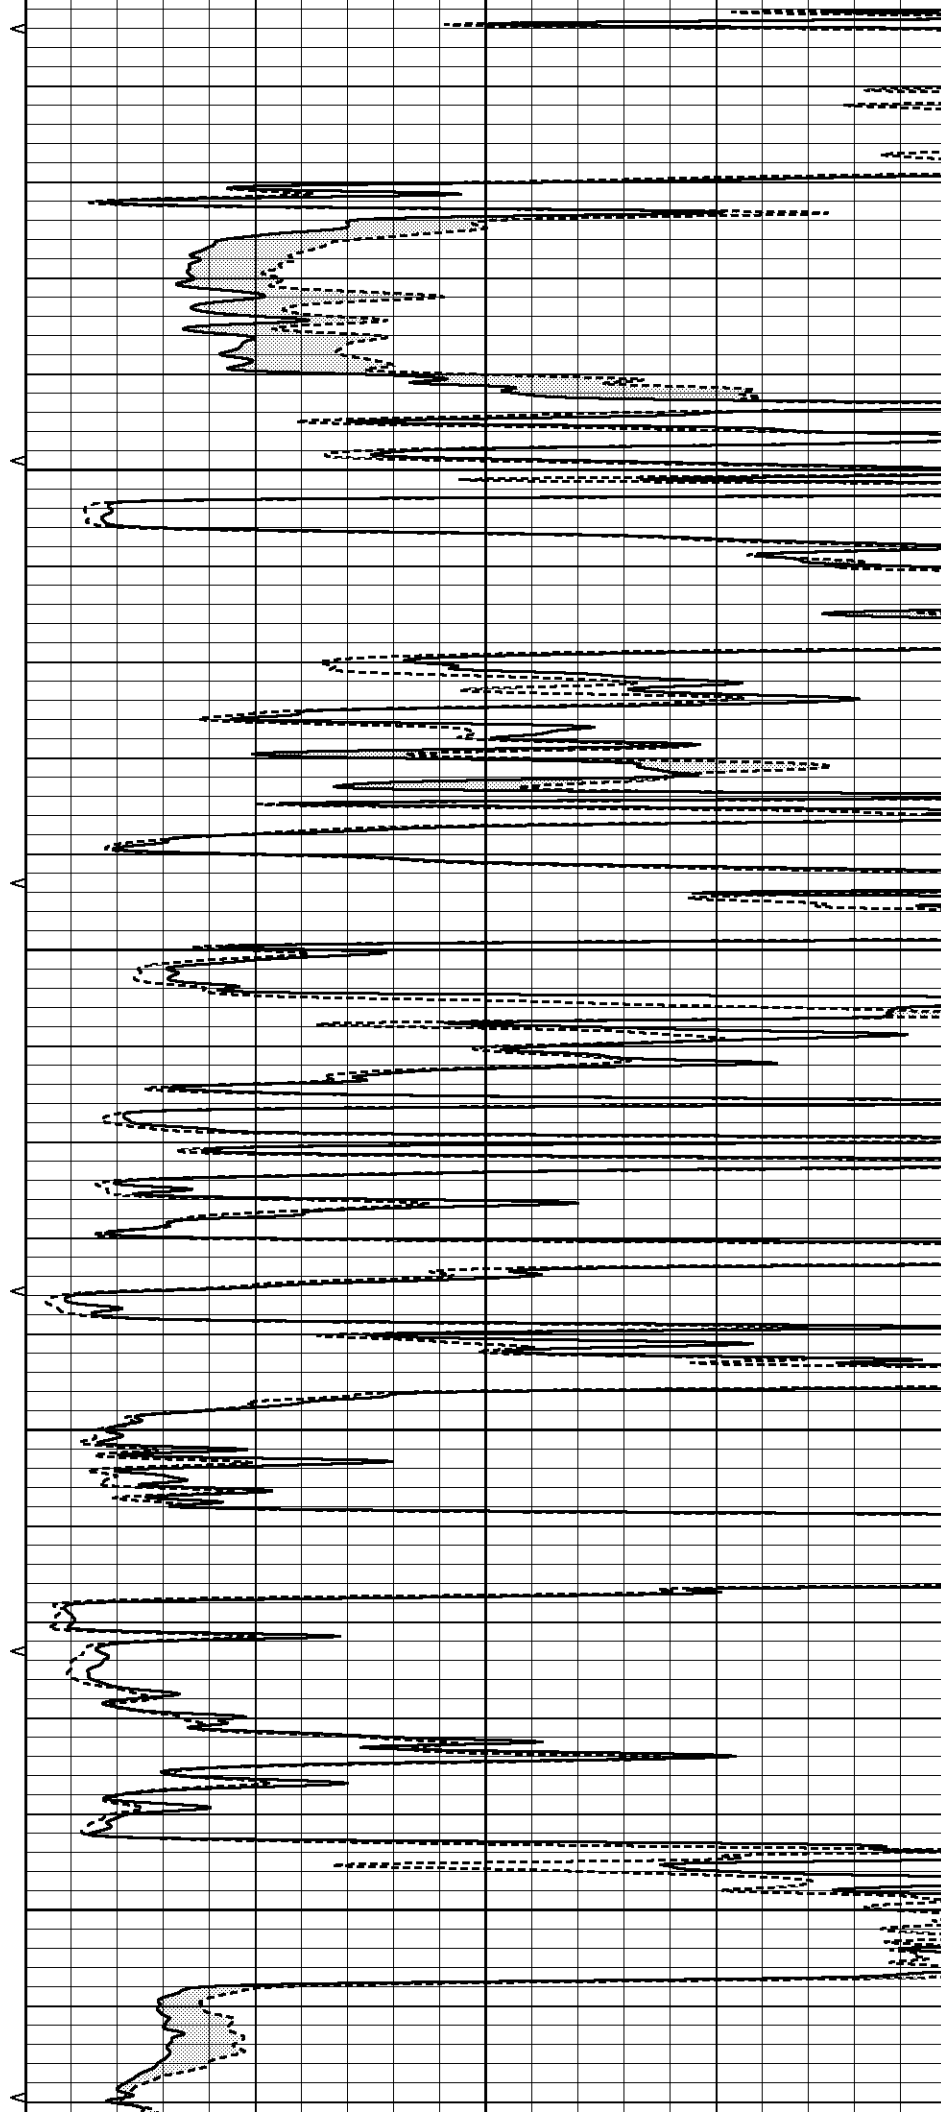

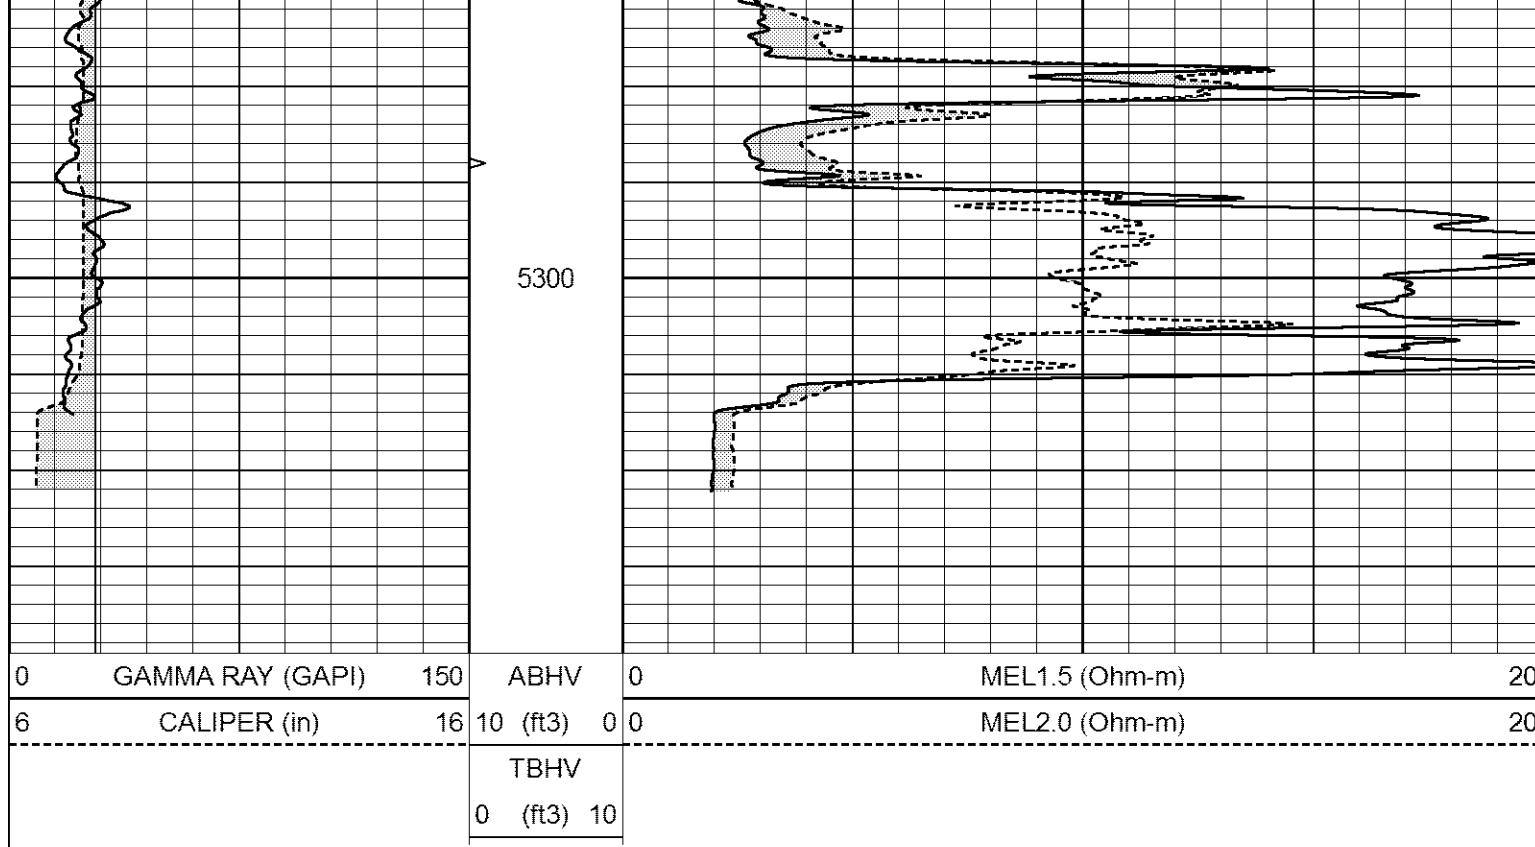

Calibration Report			
Database File	3446pe8.db		
Dataset Pathname	pass5.1		
Dataset Creation	Wed Feb 27 06:55:20 2019		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Mon Feb 18 18:01:45 2019		
Caliper Calibration:	Gain=3.755	Offset=2.650	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.451	3.049	
1.5" Calibration:	Gain=37.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=65.000	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.021	0.810	
Microlog Calibration Report			
Serial-Model:	070911-ProbeL		
Performed:	Sat Apr 11 01:13:01 2015		
	Readings		References
	Zero	Cal	Results
			m
			b
Normal	0.0002	0.4836	V
			0.0000
			10.0000
			Ohm-m
			20.6908
			0.0051

Normal:	0.0002	0.1000	V	0.0000	10.0000	Ohm-in	20.0000	0.0001
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Mon Jan 21 19:38:56 2019					
Calibrator Value:			1.0	GAPI				
Background Reading:			0.0	cps				
Calibrator Reading:			1.0	cps				
Sensitivity:			0.2500	GAPI/cps				