

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING RECORD
K.A.R. 82-3-117

RECEIVED

AUG 09 2006

KCC WICHITA

Form CP-4
December 2003
Type or Print on this Form
Form must be Signed
All blanks must be Filled

Lease Operator: Te-Pe Oil & Gas
Address: PO Box 522, Canton, KS 67428
Phone: (620) 628-4428 Operator License #: 5920
Type of Well: Oil Docket #: _____
(Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR)
The plugging proposal was approved on: 8-1-06 (Date)
by: Doug Louis (KCC District Agent's Name)
Is ACO-1 filed? Yes No If not, is well log attached? Yes No
Producing Formation(s): List All (If needed attach another sheet)
Mississippian Depth to Top: 1920 Bottom: 1990 T.D. 1995

Depth to Top: _____ Bottom: _____ T.D. _____

API Number: 15-027-20035-00, 00
Lease Name: Weller
Well Number: 1
Spot Location (QQQQ): _____ - C - NE - SW
1980 Feet from North / South Section Line
1980 Feet from East / West Section Line
Sec. 03 Twp. 09 S. R. 04 East West
County: Clay
Date Well Completed: SPUD 5-18-05
Plugging Commenced: 8-3-06
Plugging Completed: 8-4-06

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface Conductor & Production)				
Formation	Content	From	To	Size	Put In	Pulled Out
<u>Mississippian</u>	<u>water</u>	<u>1920</u>	<u>1943</u>	<u>8 5/8</u>	<u>217</u>	<u>0</u>
				<u>5 1/2</u>	<u>1990</u>	<u>1250</u>

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Sand at 1870', bailed 5 sacks cement with baler, had 12 inches stretch, ripped casing at 1250', came free, swedge in, pulled casing to 310', pumped 118 sacks, circulated to surface, pulled rest of casing

Name of Plugging Contractor: Quality Well Service, Inc. License #: 31925
Address: 401 W Main, Lyons, KS 67554

Name of Party Responsible for Plugging Fees: Te-Pe Oil & Gas
State of Kansas County, McPherson, ss.


Dery P. Baudex (Employee of Operator) or (Operator) on above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

(Signature) Dery P. Baudex

(Address) P.O. Box 522, Canton, KS 67428

SUBSCRIBED and SWORN TO before me this 8th day of August, 2006

Cynthia G. Beneke My Commission Expires: May 15, 2010
Notary Public

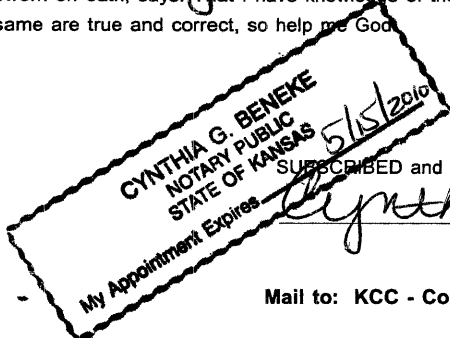

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

PLG