

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21796-00-00
Spot: NWNWSW Sec/Twnshp/Rge: 30-18S-17W
2310 feet from S Section Line, 330 feet from W Section Line
Lease Name: OBORNY FARMS ZIMMER Well #: 2
County: RUSH Total Vertical Depth: 2213 feet

Operator License No.: 30420

Op Name: INNONE, VINCENT DBA V.J.I. NATURA

Address: 30-38 48TH STREET
ASTORIA, NY 11103

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	1090		

\$ 71.92

Well Type: DLH *Per Intent KCC plug 8/9/06* UIC Docket No:

Date/Time to Plug: 07/23/2006 8:00 AM

Plug Co. License No.: 33549

Plug Co. Name: LANDMARK DRILLING, LLC

Proposal Rcvd. from: LARRY HINDERLITER

Company: LANDMARK DRILLING, LLC

Phone: (620) 930-2036

Proposed Plugging Method: 1ST PLUG AT 1100' WITH 50 SX CMT. 2ND PLUG AT 500' WITH 40 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: MICHAEL MAIER

WitnessType: NONE

Date/Time Plugging Completed: 07/23/2006 11:30 AM

KCC Agent: MICHAEL MAIER

Actual Plugging Report:

Perfs:

LEFT COLLAR & JOINT OF DRILL PIPE AT 1656'. LEFT 26' OF 8 5/8" CASING IN HOLE. 1ST PLUG AT 1100' WITH 50 SX CMT. 2ND PLUG AT 500' WITH 40 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.


INVOICED
DATE 8-10-06
20070600358

RECEIVED
AUG 09 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: DP

District: 01

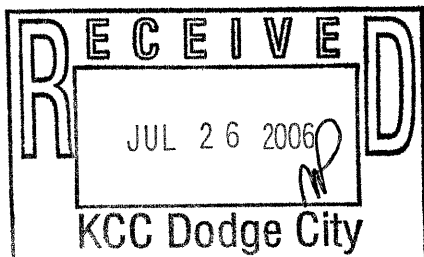

Signed

Michael Maier

(TECHNICIAN)

Form CP-2/2

PLT