

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-00373-00-01
Spot: NWSWSE Sec/Twnshp/Rge: 7-24S-13W
990 feet from S Section Line, 2310 feet from E Section Line
Lease Name: HENDERSON Well #: 2
County: STAFFORD Total Vertical Depth: 4193 feet

Operator License No.: 7202
Op Name: PARTEN, KENNETH N.
Address: 112 S. BROADWAY
ST. JOHN, KS 67576

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3960	0	
SURF	8.625	229		

\$ 136.27

Well Type: EOR UIC Docket No: E18179.1 Date/Time to Plug: 08/04/2006 8:00 AM
Plug Co. License No.: 6901 Plug Co. Name: D S & W WELL SERVICING, INC.
Proposal Rcvd. from: KENNETH PARTEN Company: KENNETH N. PARTEN Phone: (620) 549-3973

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/04/2006 10:20 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

2 1/16" TUBING STUCK IN HOLE 1120-3553'. COULDN'T GET ANYTHING BIGGER THAN 2 1/16" PAST 320'. RAN TUBING TO 1120'. PUMPED 300 SX CMT DOWN TUBING, CIRCULATING CMT TO SURFACE UP 5 1/2". NO CIRCULATION UP 8 5/8" X 5 1/2" ANNULUS. PULLED TUBING & TOPPED OFF 5 1/2" CASING WITH 75 SX CMT. PUMPED 100 SX CMT DOWN 8 5/8" X 5 1/2" ANNULUS. MAXIMUM PRESSURE 300 PSIG. SHUT IN PRESSURE 200 PSIG.

Perfs:

Top	Bot	Thru	Comments
3643	3772		

INVOICED

DATE 8-23-06

TR. NO. 2007060431

RECEIVED


AUG 21 2006

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.

Plugged through: TBG

District: 01

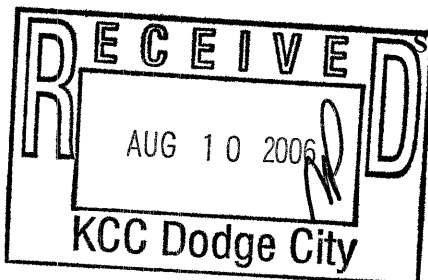

Signed Richard M. Lacey
(TECHNICIAN)

Form CP 2
[Handwritten Signature]
PKT