

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15 - 175-00464 -00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

Indicate original spud or completion date 11/01/1950

Well Operator: Exxon Mobil Corporation KCC License #: 5208  
(Owner / Company Name) (Operator's)

Address: PO Box 4358 City: Houston,

State: Texas Zip Code: 77210 Contact Phone: (281) 364 - 5073

Lease: Hopkins Estate Unit Well #: 1 Sec. 3 Twp. 31 S. R. 33  East  West

- NW - NW - SE Spot Location / QQQQ County: Seward

2640 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

2640 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 10 3/4" Set at: 705' Cemented with: 400 Sacks

Production Casing Size: 6 5/8" Set at: 2775' Cemented with: 1000 Sacks

List (ALL) Perforations and Bridgeplug Sets: Please see attached wellbore sketch

Elevation: 2909' ( G.L. /  K.B.) T.D.: 2810' PBTD: 2775' Anhydrite Depth: \_\_\_\_\_  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Please see attached / Will be plugged in accordance to the rules and regulations of the KCC

RECEIVED

AUG 21 2006

KCC WICHITA

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? Copy of Log not available

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: \_\_\_\_\_

Richard Lewis Phone: (316) 544 - 5534

Address: 200 W. 4th Street City / State: Hugoton, KS 67951

Plugging Contractor: Sargent & Horton KCC License #: 31151  
(Company Name) (Contractor's)

Address: Rt. 1, Box 49BA, Tyrone, KS 73951 Phone: (580) 854 - 6515

Proposed Date and Hour of Plugging (if known?): ASAP

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 8/15/06 Authorized Operator / Agent: Colleen Proctor  
(Signature)


Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

**PRELIMINARY B&A SKETCH-PLUGS WILL CHANGE PER THE DIRECTIONS OF THE KCC DISTRICT REPRESENTATIVE**

COMPANY: Exxon Mobil Corporation  
 WELL NAME: Hopkins Estate  
 WELL #: 1  
 API#: 15-175-00464  
 COUNTY: Seward

| SURFACE CASING    |         |       |        |
|-------------------|---------|-------|--------|
| OD                | WT / FT | GRADE | SET AT |
| 10 3/4"           | 40.5    | K-55  | 705'   |
| PRODUCTION CASING |         |       |        |
| OD                | WT / FT | GRADE | SET AT |
| 6 5/8"            | 20      | K-55  | 2775'  |
| TUBING            |         |       |        |
| OD                | WT / FT | GRADE | SET AT |
| 2 3/8"            | 4.7     | J-55  | 2500'  |

| CAPACITIES (BBL/FT) |         |
|---------------------|---------|
| 2 3/8" TBG          | 0.00387 |
| 6 5/8" CSG          | 0.0355  |
| 2 3/8" x 6 5/8"     | 0.0301  |
| 10 3/4" CSG         | 0.1009  |
| 2 3/8"x10 3/4"      | 0.0954  |

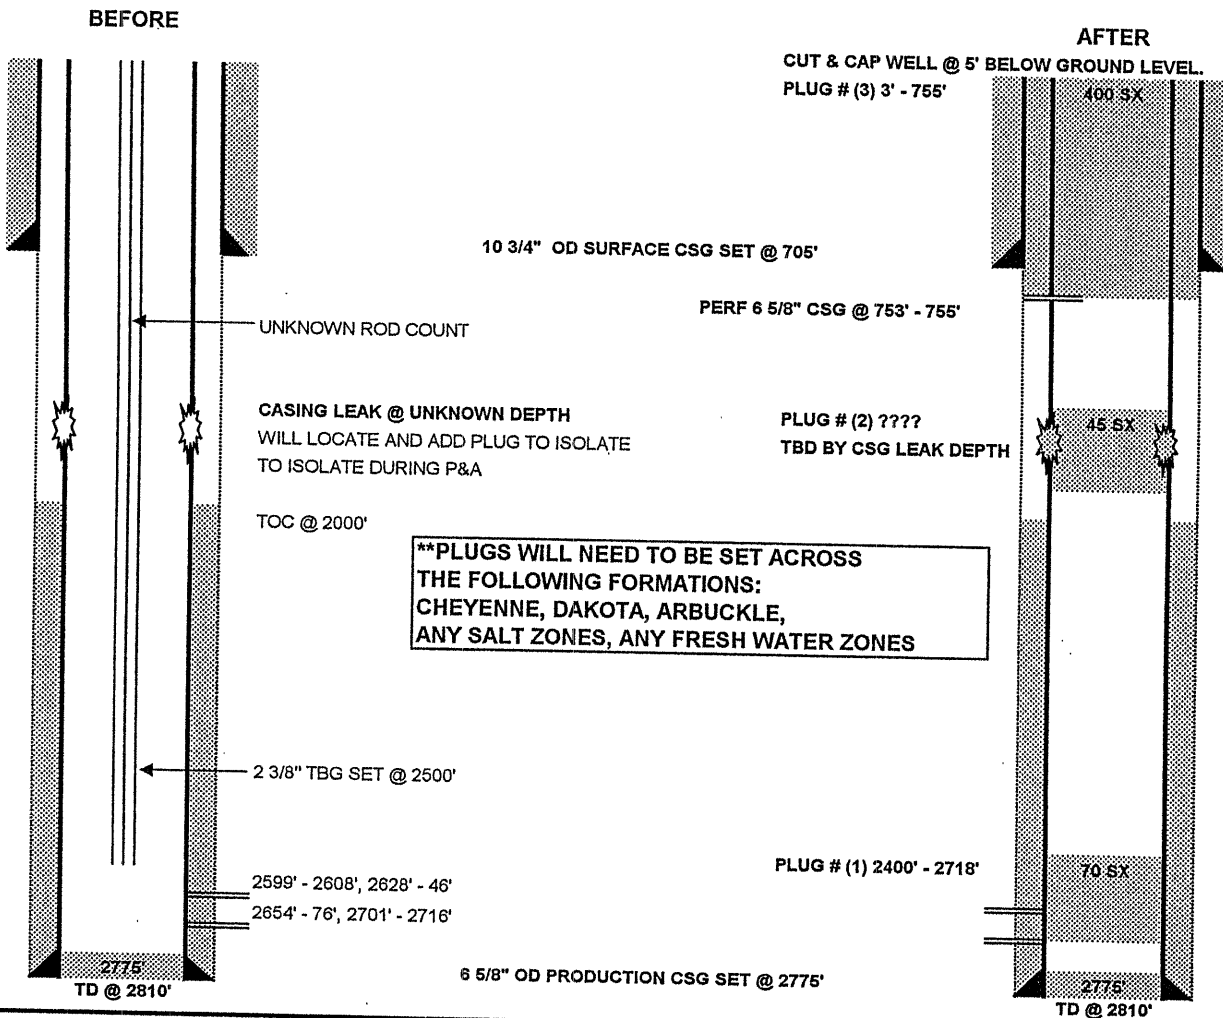

RECEIVED

AUG 21 2006

KCC WICHITA

PROPOSED PLUGGING PROCEDURE FOR EXXON MOBIL CORPORATION



WELL: HOPKINS ESTATE # 1  
FIELD: HUGOTON  
COUNTY: SEWARD

**THIS IS A CATEGORY III WORKOVER.**

**NOTE: A CASING LEAK WAS DISCOVERED. WILL NEED TO LOCATE DEPTH AND ADD A 45 SX CEMENT BALANCED PLUG TO ISOLATE LEAK DURING P&A. ENSURE ALL APPROVALS ARE OBTAINED, INCLUDING THE KCC'S APPROVAL.**

**NOTE: PERFORM ALL WELL WORK OPERATIONS IN ACCORDANCE WITH THE HPO WORKOVER OPERATIONS MANUAL.**

**NOTE: USE CLASS 'H', 16.4 PPG, 1.06 YIELD CEMENT FOR ALL PLUGS.**

**NOTE: PUMP 9.5 PPG MUD LADEN FLUID BETWEEN CEMENT PLUGS.**

**NOTE: NOTIFY KCC DISTRICT OFFICE IN DODGE CITY, KS PRIOR TO COMMENCEMENT OF WORK & WITHIN SUFFICIENT TIME TO WITNESS PLUGGING OPERATIONS.**

**NOTE: ENSURE PLUGGING FORMS HAVE APPROPRIATE INFORMATION NEEDED TO FILE APPROPRIATE PAPERWORK W/ THE KCC TO CONCLUDE PLUGGING OPERATIONS.**

**Check pressures on all casing strings daily and document on morning reports. Discuss safe blow down/well kill procedures with Exxon Mobil Workover Supervisor.**

1. INSPECT JOBSITE FOR POTENTIAL HAZARDS & LOCATION CHARACTERISTICS THAT MAY IMPACT THE PLANNED WELLWORK AND/OR REQUIRE MODIFICATION OF THE PROCEDURE. INITIATE MOC PROCESS IF NEEDED.
2. SET & TEST RIG ANCHORS AS NEEDED.
3. **PLUG WELL AS DIRECTED BY KCC DISTRICT REPRESENTATIVE.** A GENERAL PLAN IS AS FOLLOWS, BUT SHOULD BE REVISED TO ENSURE ALL FORMATIONS (INCLUDING THE CHEYENNE FORMATION, DAKOTA FORMATION, ARBUCKLE FORMATION, ANY SALT FORMATIONS & ANY FRESH & USABLE WATER ZONES) ARE ISOLATED AS PER THE SPECIFICATIONS OF THE KCC.
4. MIRU. LOAD WELL W/ FSW.
5. REMOVE TREE. INSTALL BOP'S & TEST.
6. POH W/ TUBING & COMPLETION ASSEMBLY.
7. RIH W/ WORKSTRING OPENENDED TO 2718'.
8. CIRCULATE 9.5 PPG MUD.
9. SET 70 SX CEMENT PLUG @ 2400' - 2718.
10. POH W/ WORKSTRING TO 2000'. REVERSE OUT.
11. WOC. LOWER WORKSTRING & TAG TOC TO VERIFY PLUG.
12. POH W/ WORKSTRING TO DEPTH OF CASING LEAK. (SEE NOTE ABOVE.)
13. SET 45 SX CEMENT PLUG ACROSS CSG LEAK.
14. POH W/ TBG. REVERSE OUT.

RECEIVED  
AUG 21 2006  
KCC WICHITA

15. WOC. TEST 6 5/8" CSG TO 500 PSI.
16. RU WL UNIT W/ CLASS II LUBRICATOR & TEST. PERFORATE 6 5/8" CSG @ 753' - 755' W/ 4 SPF. RD WL UNIT.
17. ESTABLISH CIRCULATION TO SURFACE BETWEEN 6 5/8" X 10 3/4" ANNULUS.
18. MIX 400 SX CEMENT, CIRCULATE 240 SX TO SURFACE BETWEEN 6 5/8" X 10 3/4" ANNULUS, LEAVE 160 SX INSIDE 6 5/8" CSG FROM 3' - 755'.
19. REMOVE BOP'S.
20. CUT & CAP WELL 3' BELOW GROUND LEVEL.
21. RD/MO.

10/1/05

RECEIVED  
AUG 21 2006  
KCC WICHITA



KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

EXXONMOBIL Oil Corp  
14950 Heathrow Forrest Parkway  
PO Box 4358  
Houston, TX 77210-4358

August 23, 2006

Re: HOPKINS ESTATE UNIT #1  
API 15-175-00464-00-00  
NWNWSE 3-31S-33W, 2640 FNL 2640 FWL  
SEWARD COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888

Sincerely



David P. Williams  
Production Supervisor