

DUAL INDUCTION LOG

Company	CHARLES N. GRIFFIN	Company	CHARLES N. GRIFFIN
Well	ADDIE #4	Well	ADDIE #4
Field	CROFT	Field	CROFT
County	PRATT	County	PRATT
State	KANSAS	State	KANSAS
Location:		API # : 15-151-22489-0000	Other Services CDL/CNL/MEL SON
Permanent Datum Log Measured From Drilling Measured From		SEC 28 TWP 29S RGE 15W 530' FSL & 330' FWL GROUND LEVEL KELLY BUSHING 11' A.G.L. KELLY BUSHING	Elevation K.B. 2014 D.F. 2012 G.L. 2003
Date	4/24/19		
Run Number	ONE		
Depth Driller	4825		
Depth Logger	4829		
Bottom Logged Interval	4828		
Top Log Interval	00		
Casing Driller	8 5/8" @ 267		
Casing Logger	267		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.1/48		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.7 @ 58F		
Rmt @ Meas. Temp	.53 @ 58F		
Rmc @ Meas. Temp	.84 @ 58F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.34 @ 123F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	123F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	BRUCE REED		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS

WEST OF PRATT TO CROFT BLACK TOP, SOUTH TO 90 RD
1 EAST, 2 SOUTH, EAST INTO. @ TANK BATTERY

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

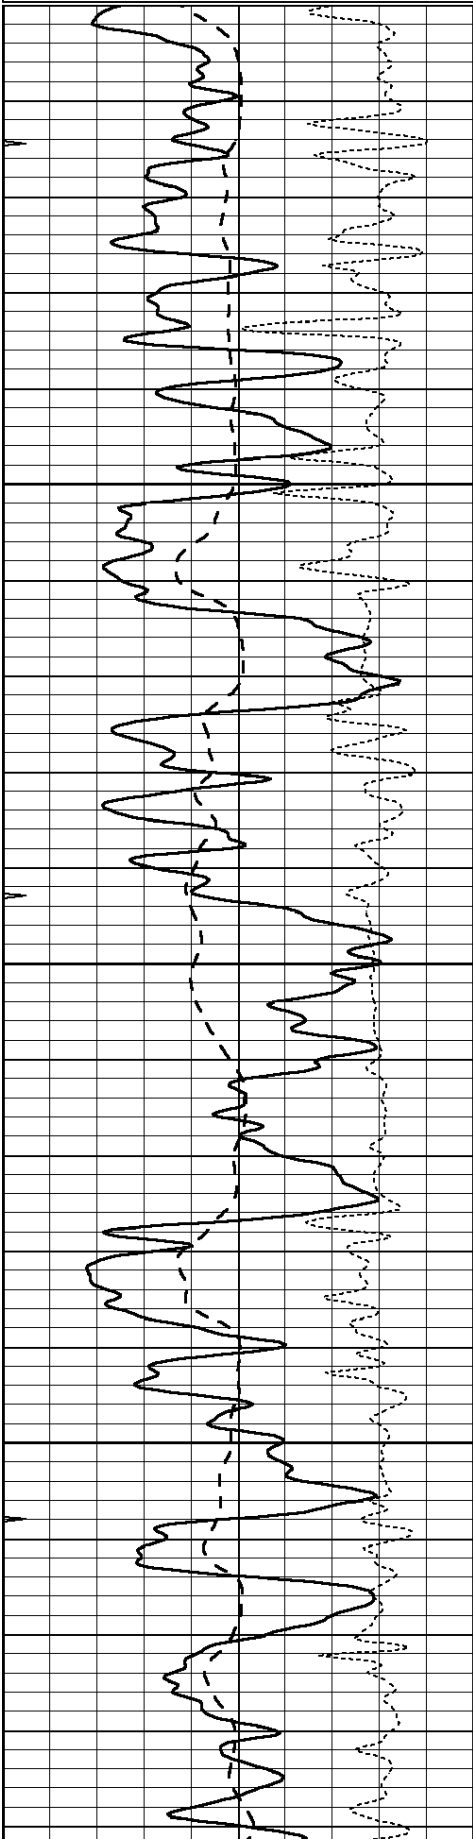



3000

3050

3100

3150

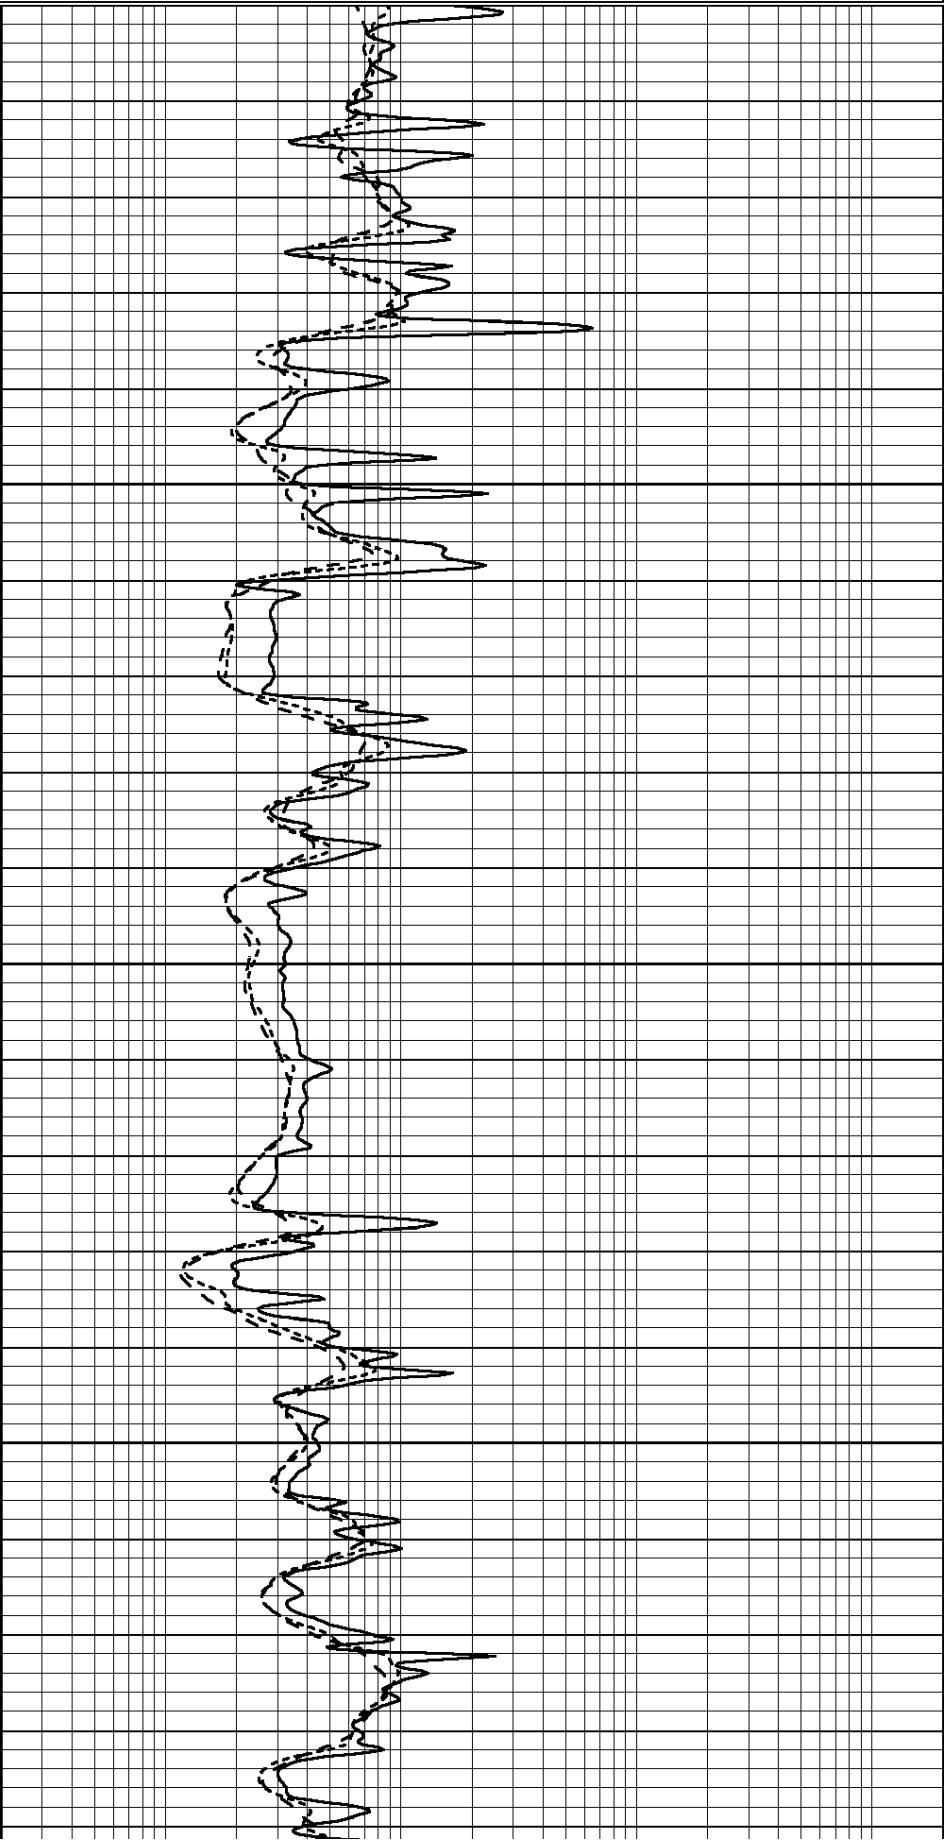

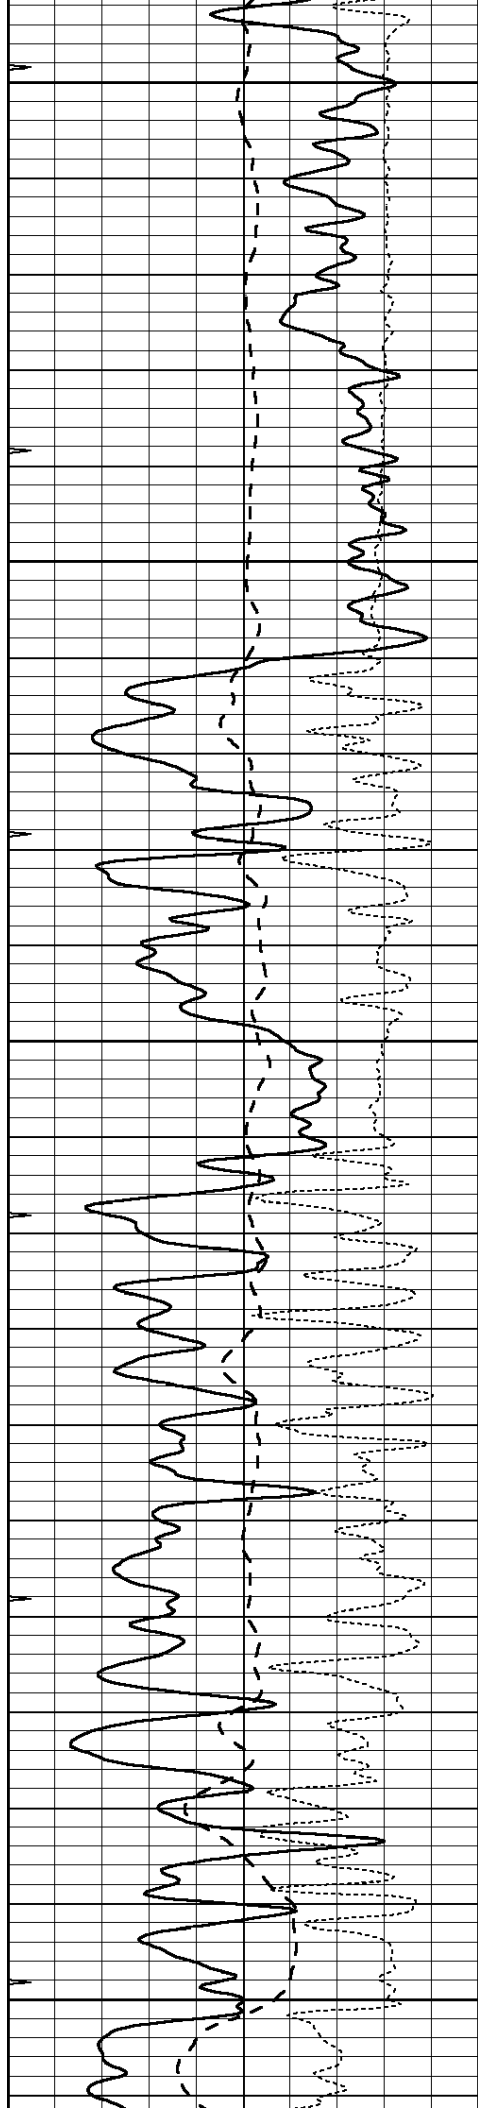


3200


3250

3300

3350

3400

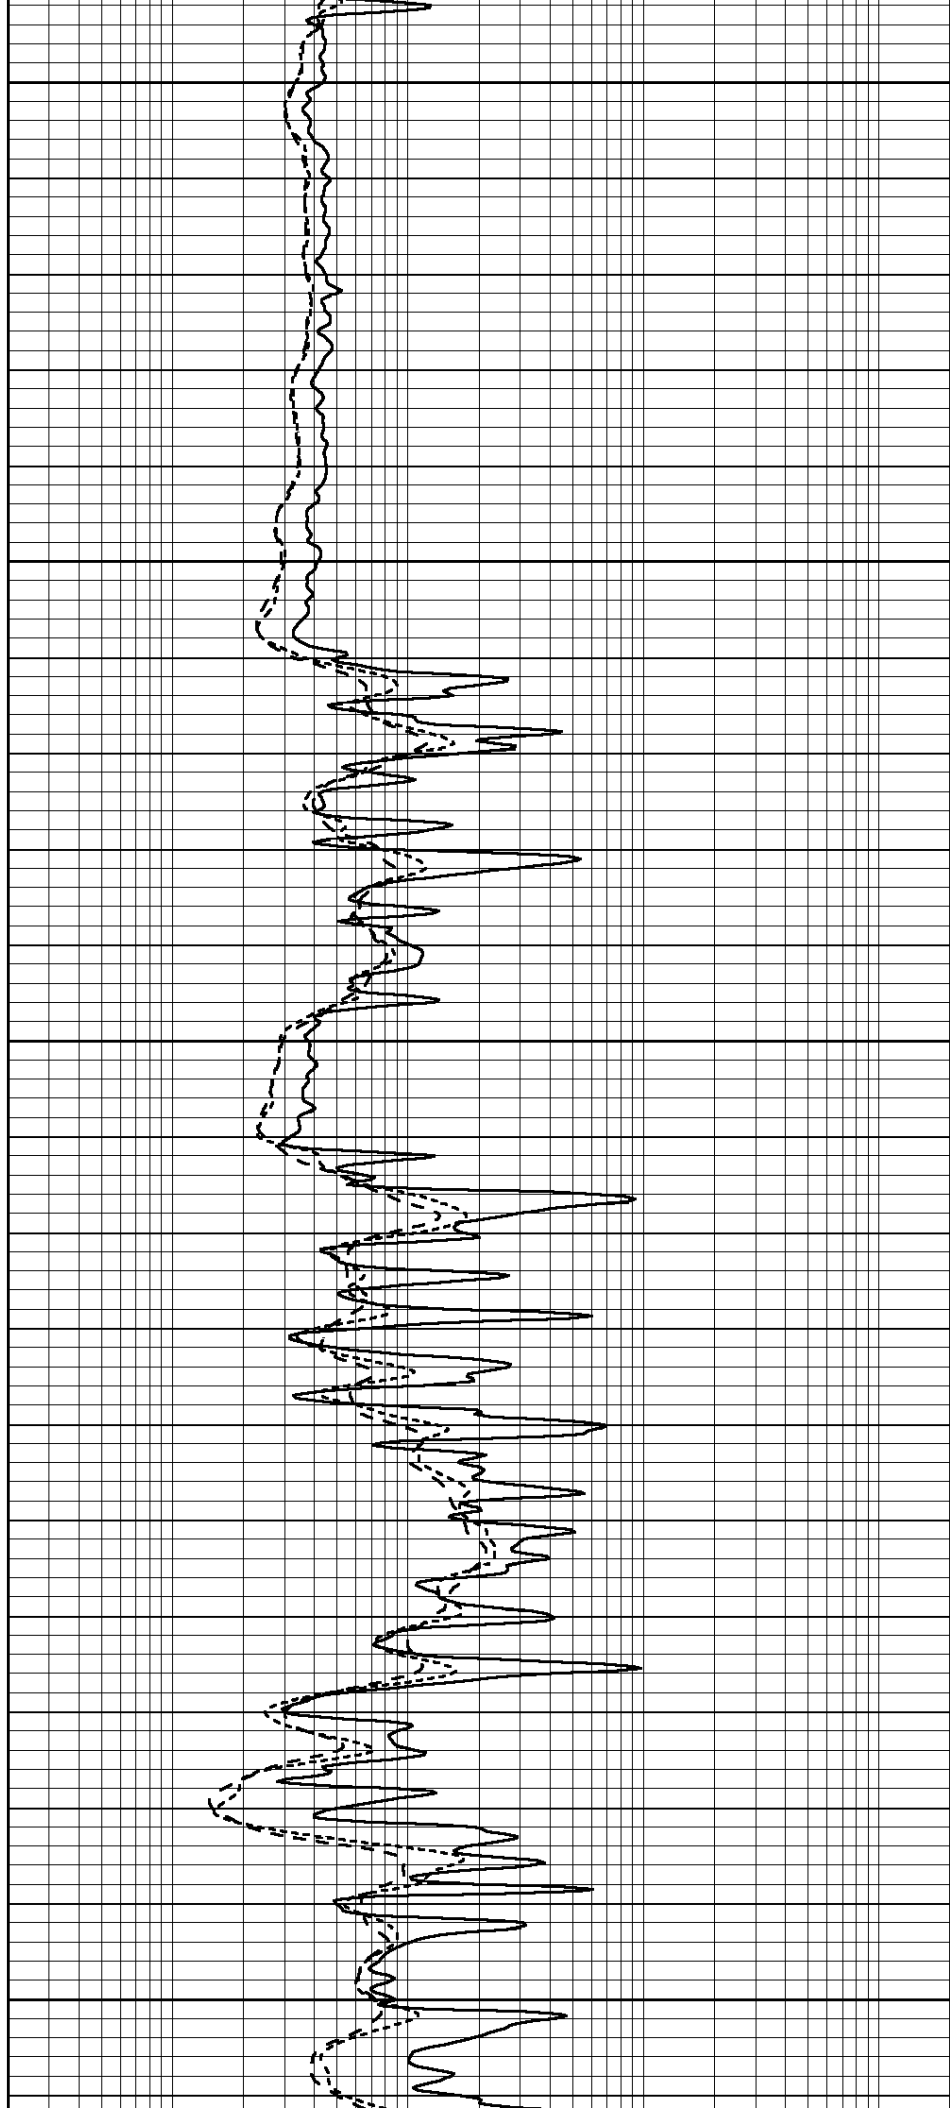

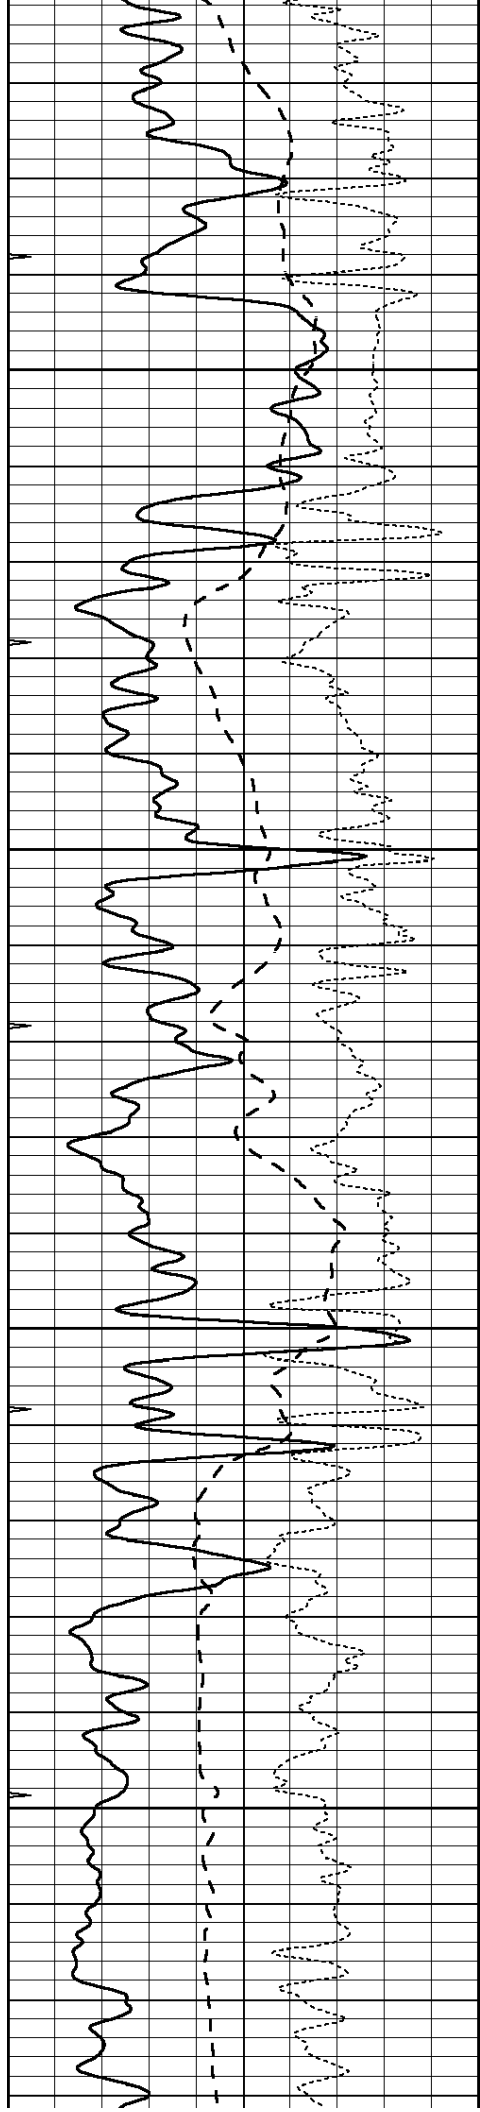



3450

3500

3550

3600

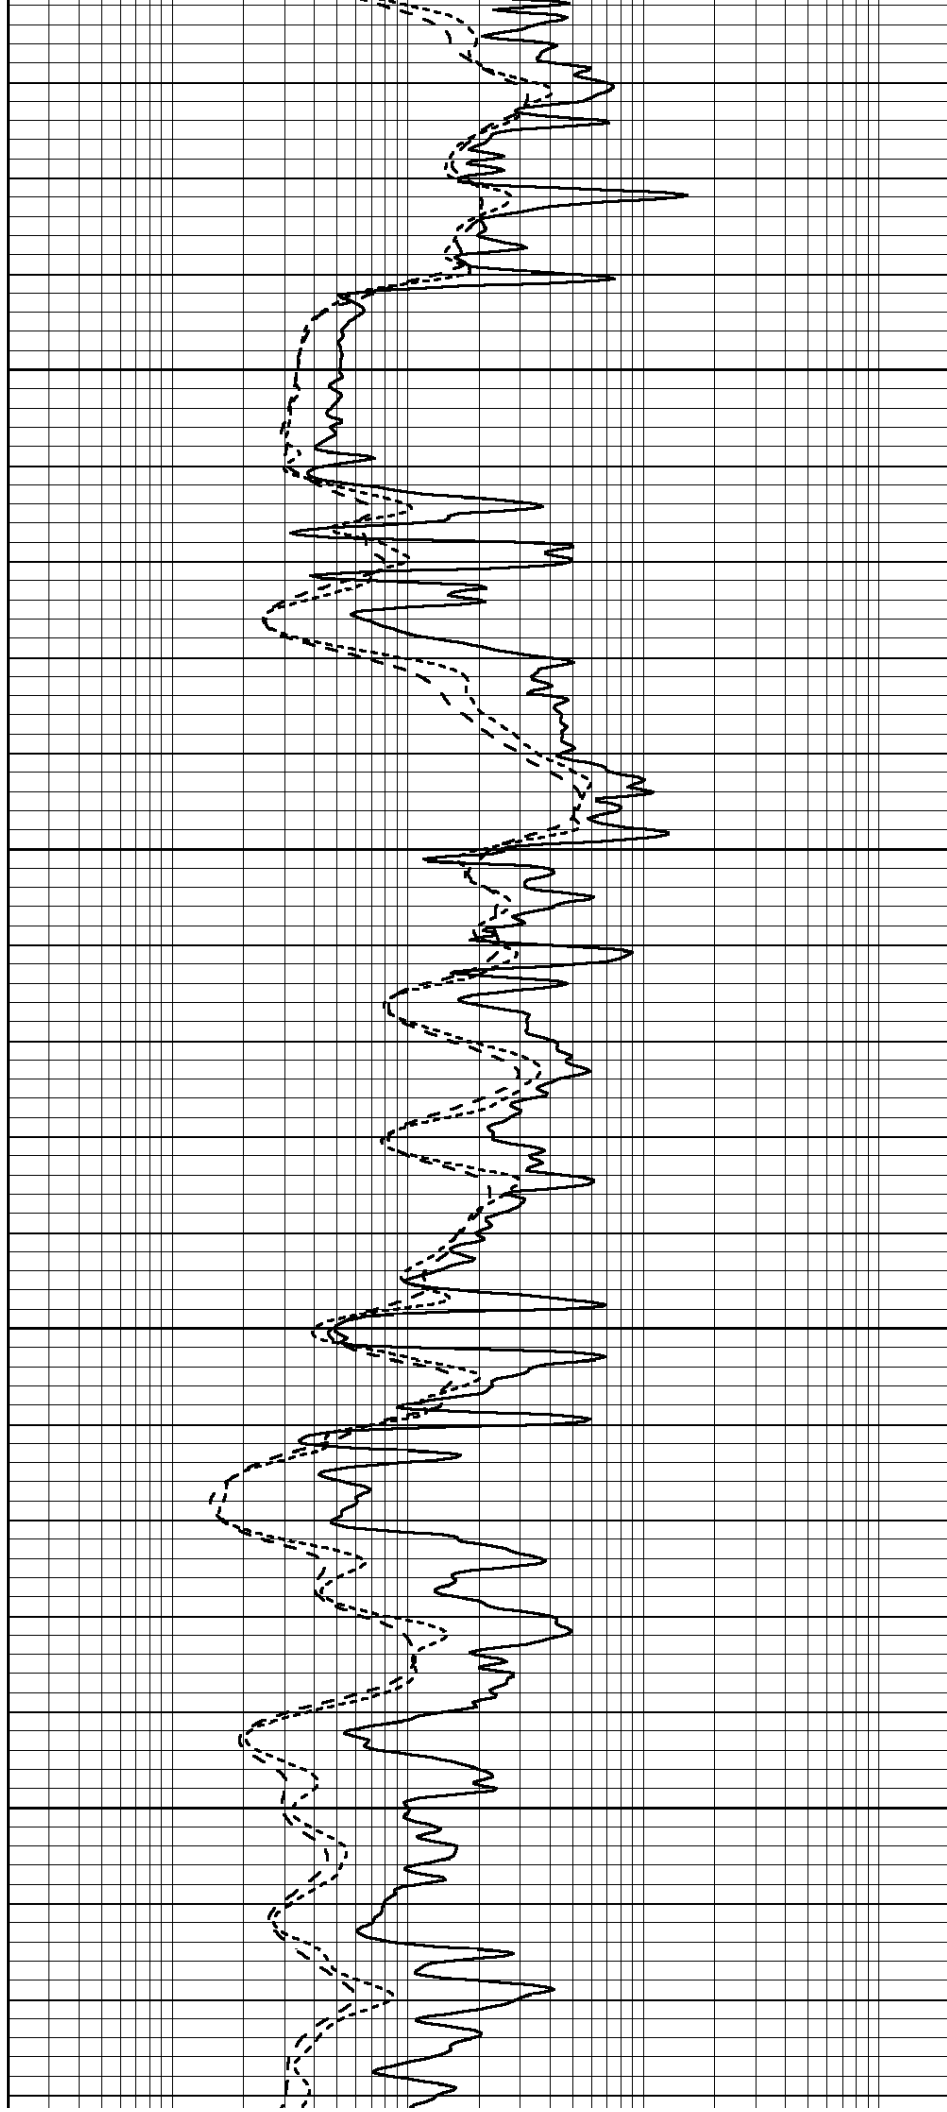

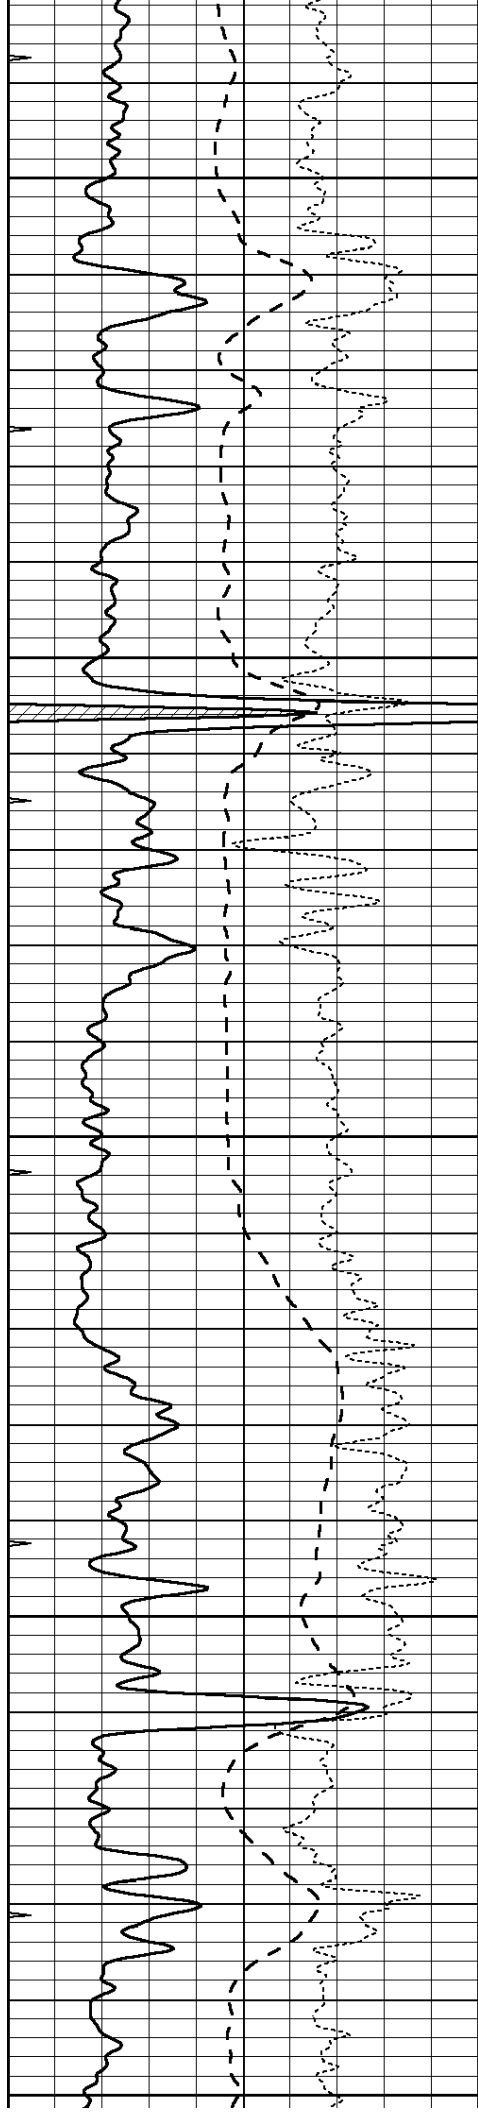


3650


3700

3750

3800

3850

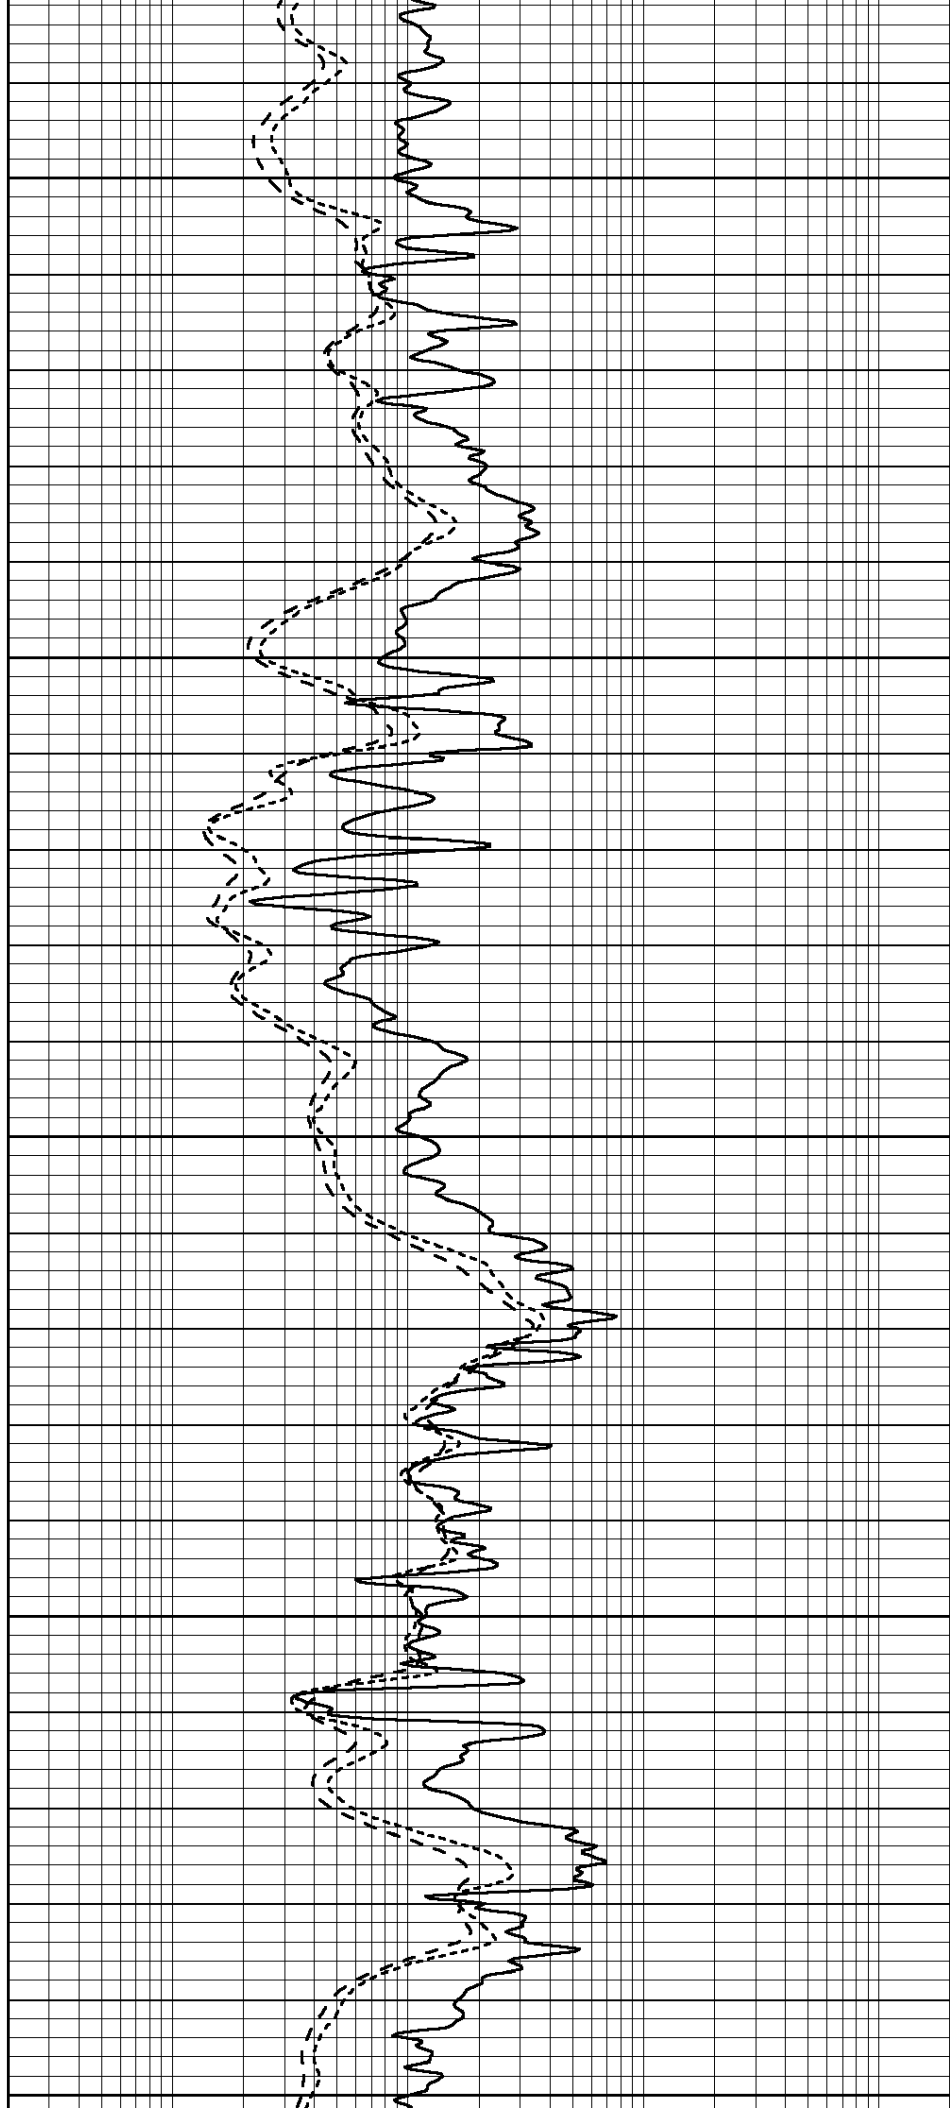

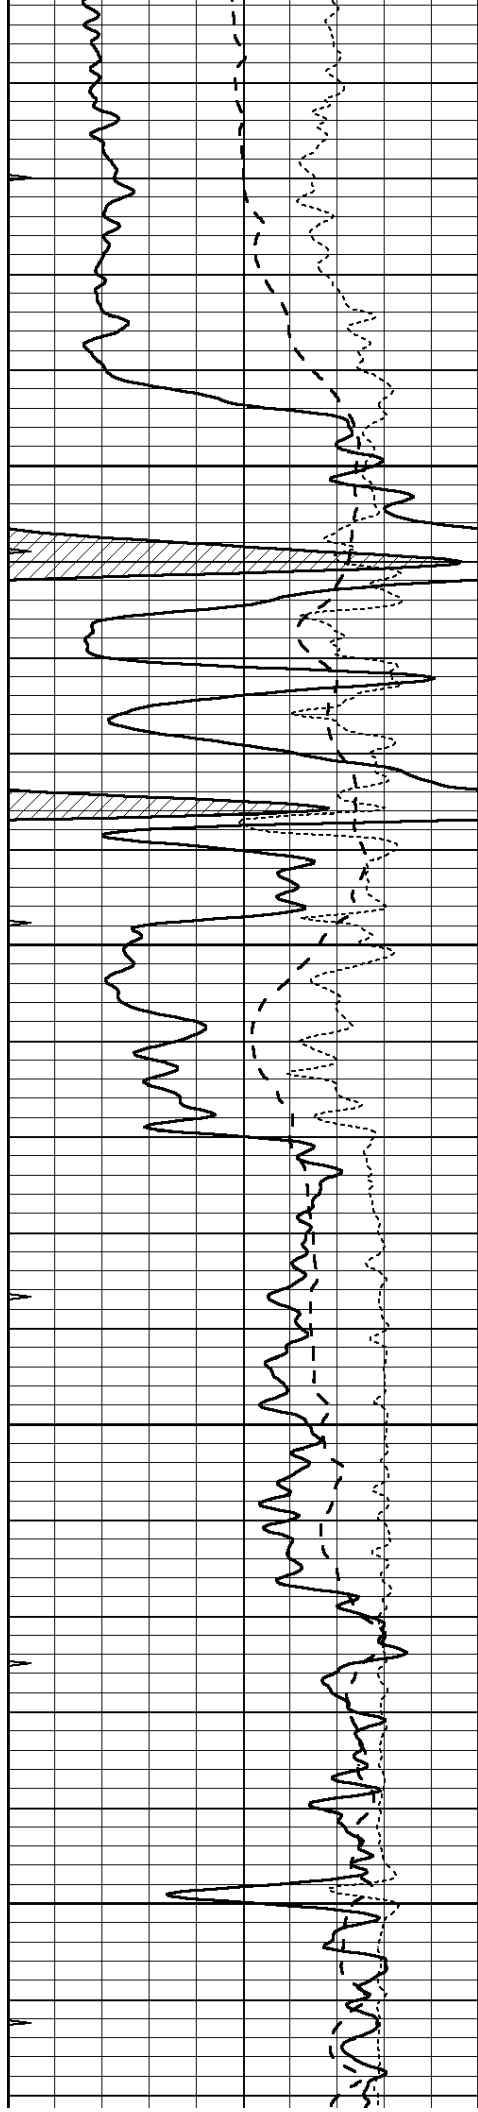



3900

3950

4000

4050

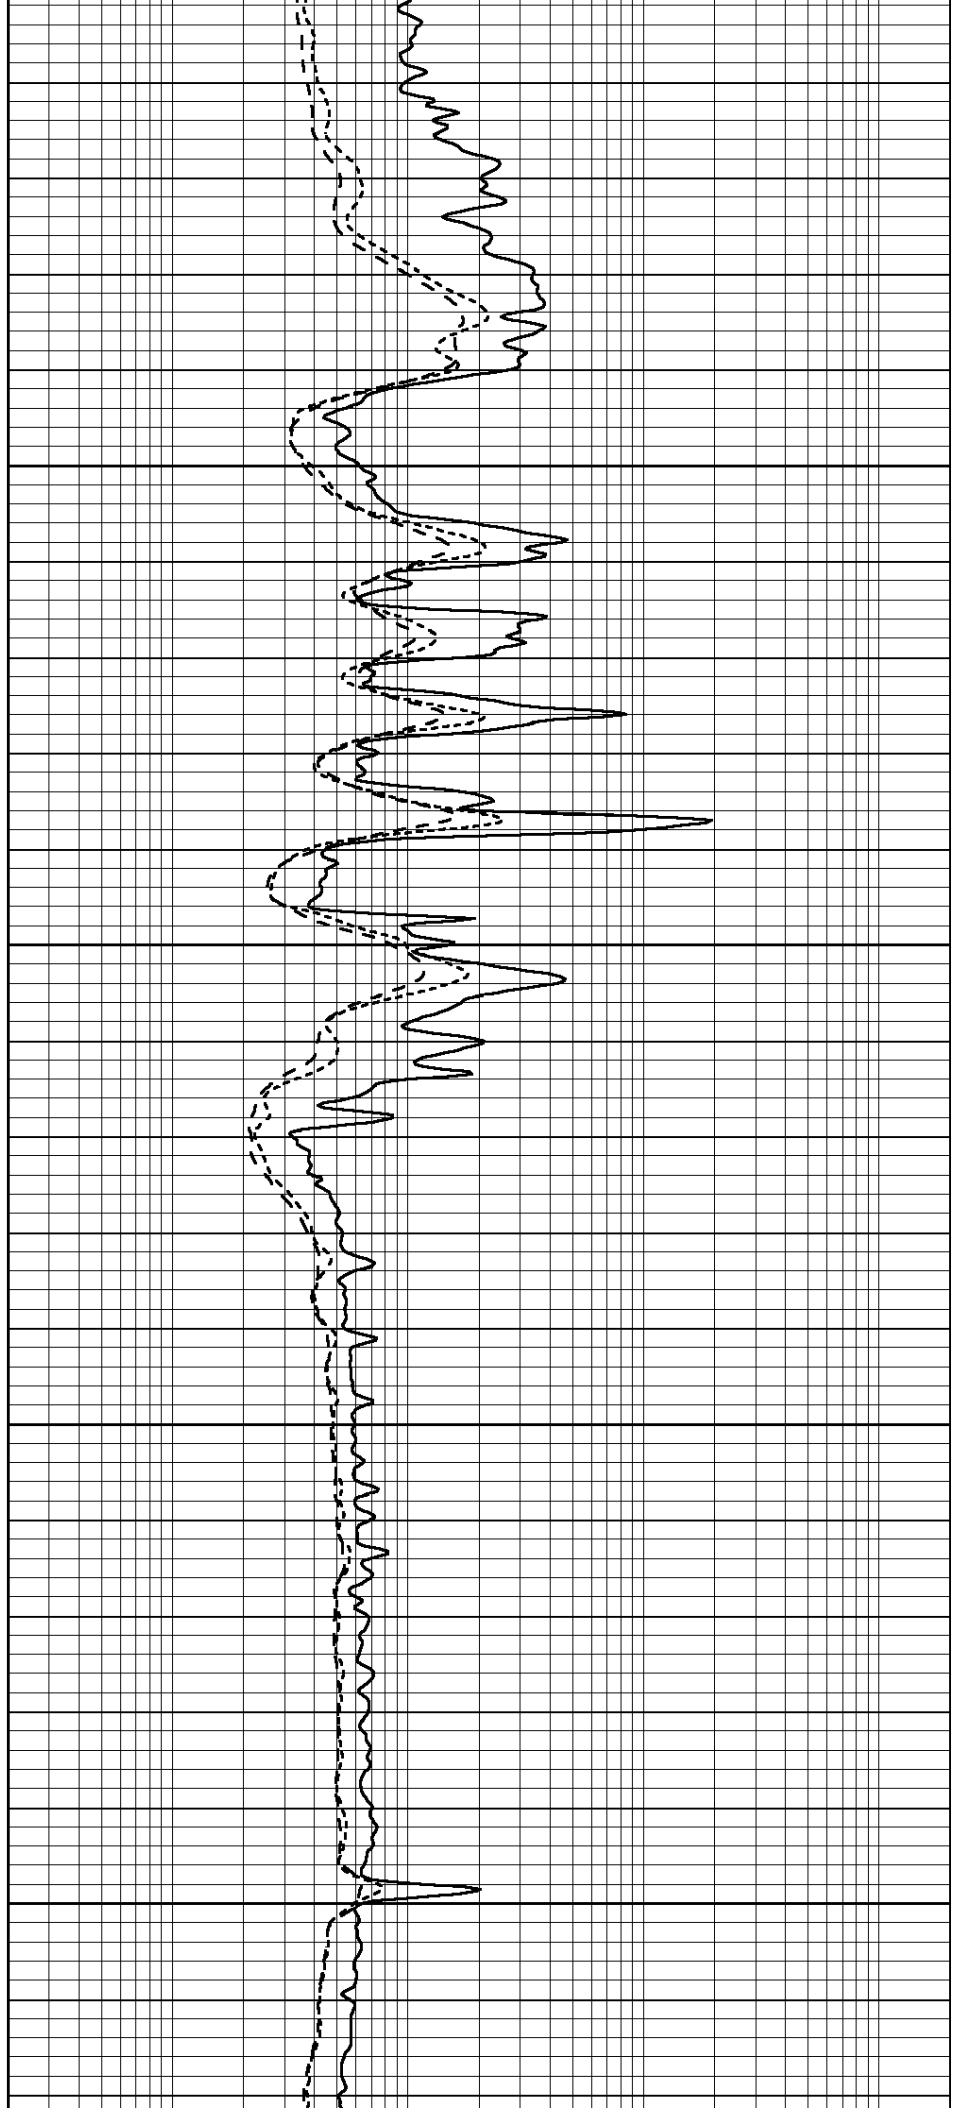

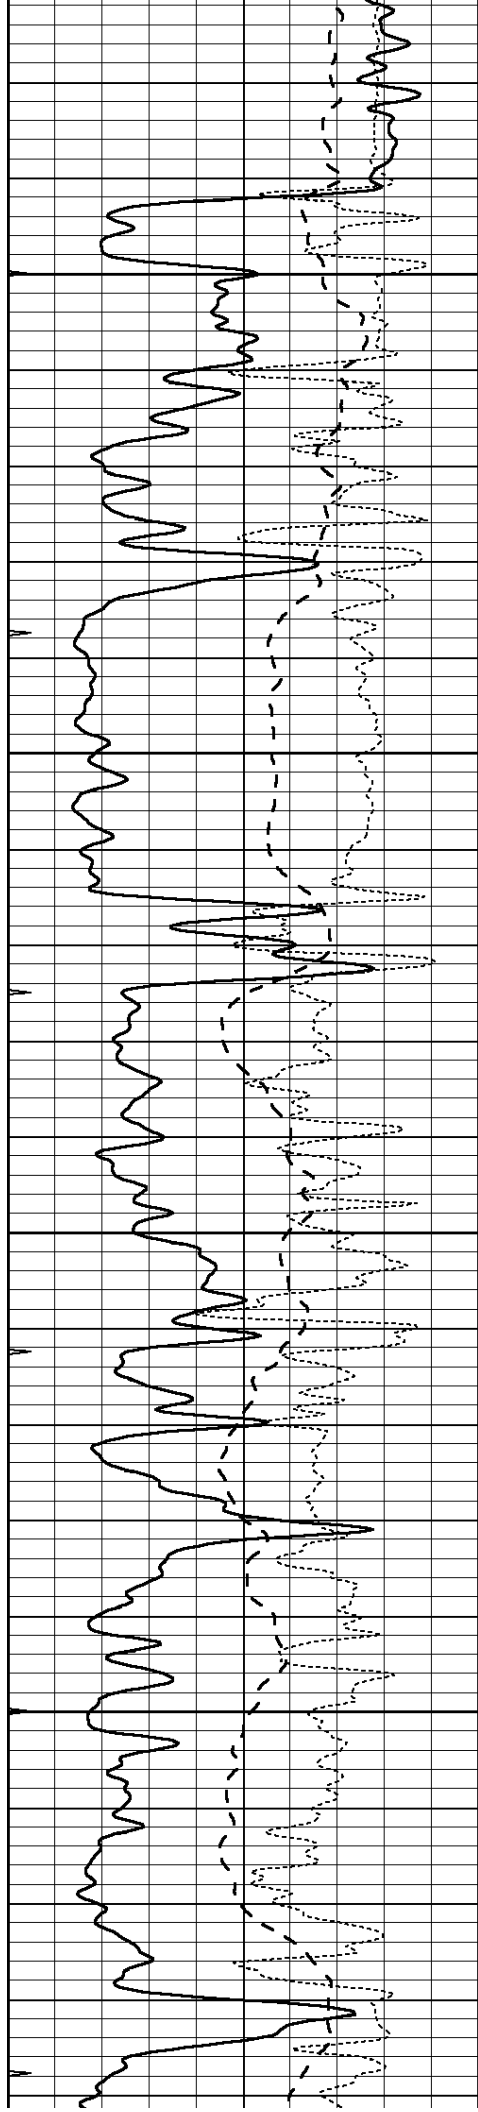



4100

4150

4200

4250

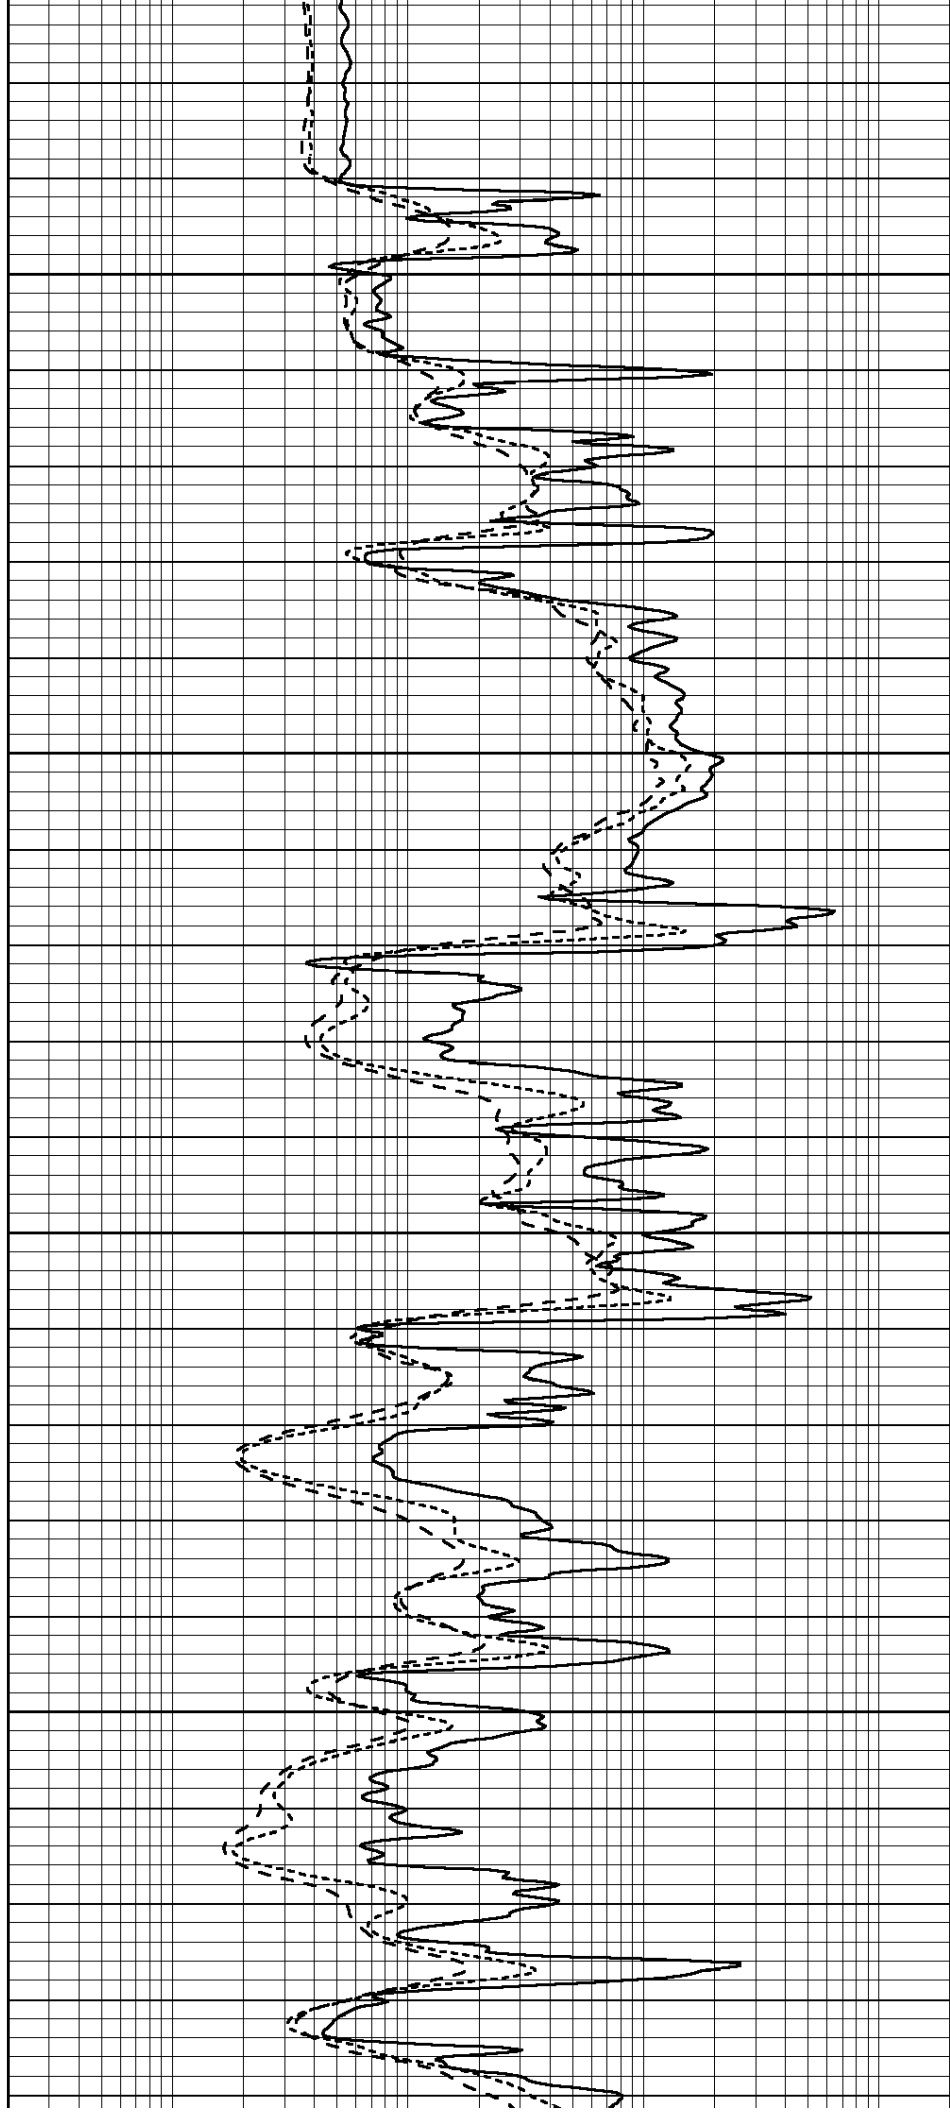

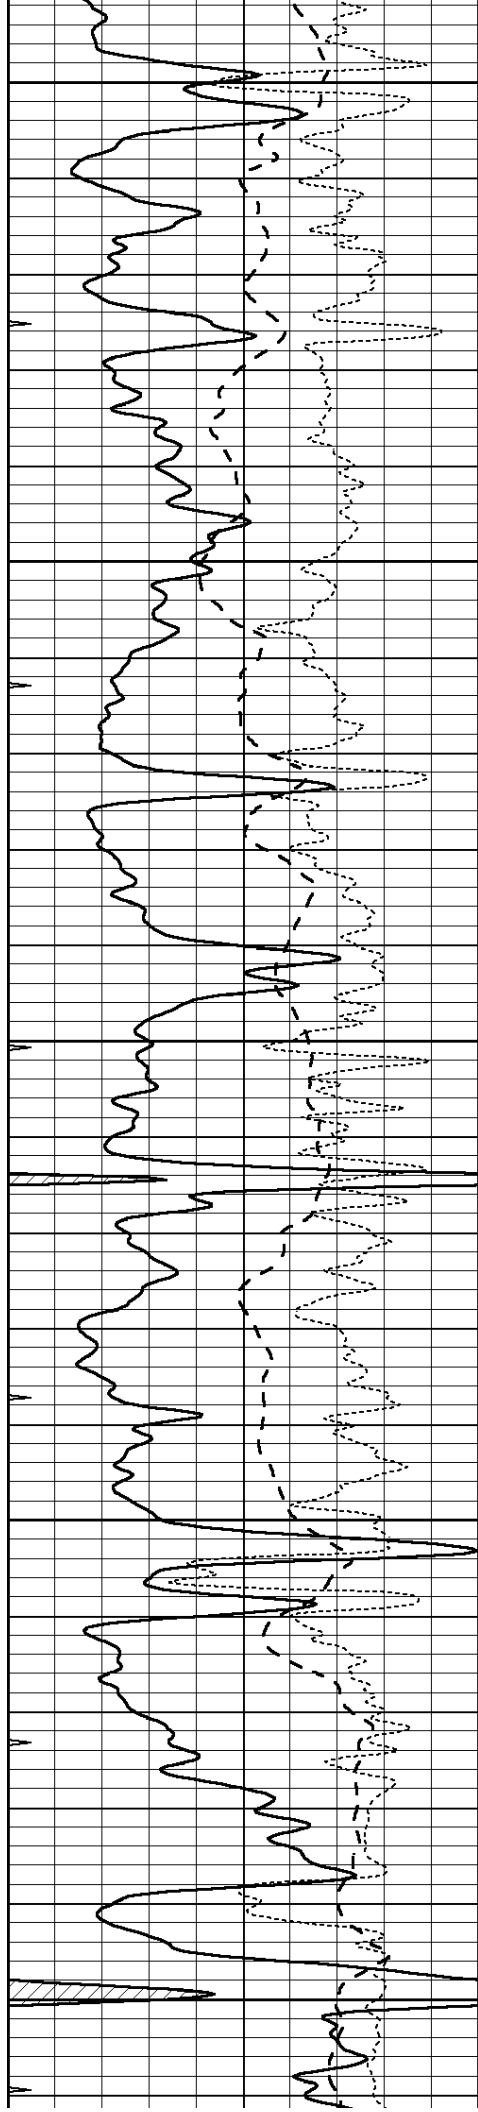


4300


4350

4400

4450

4500

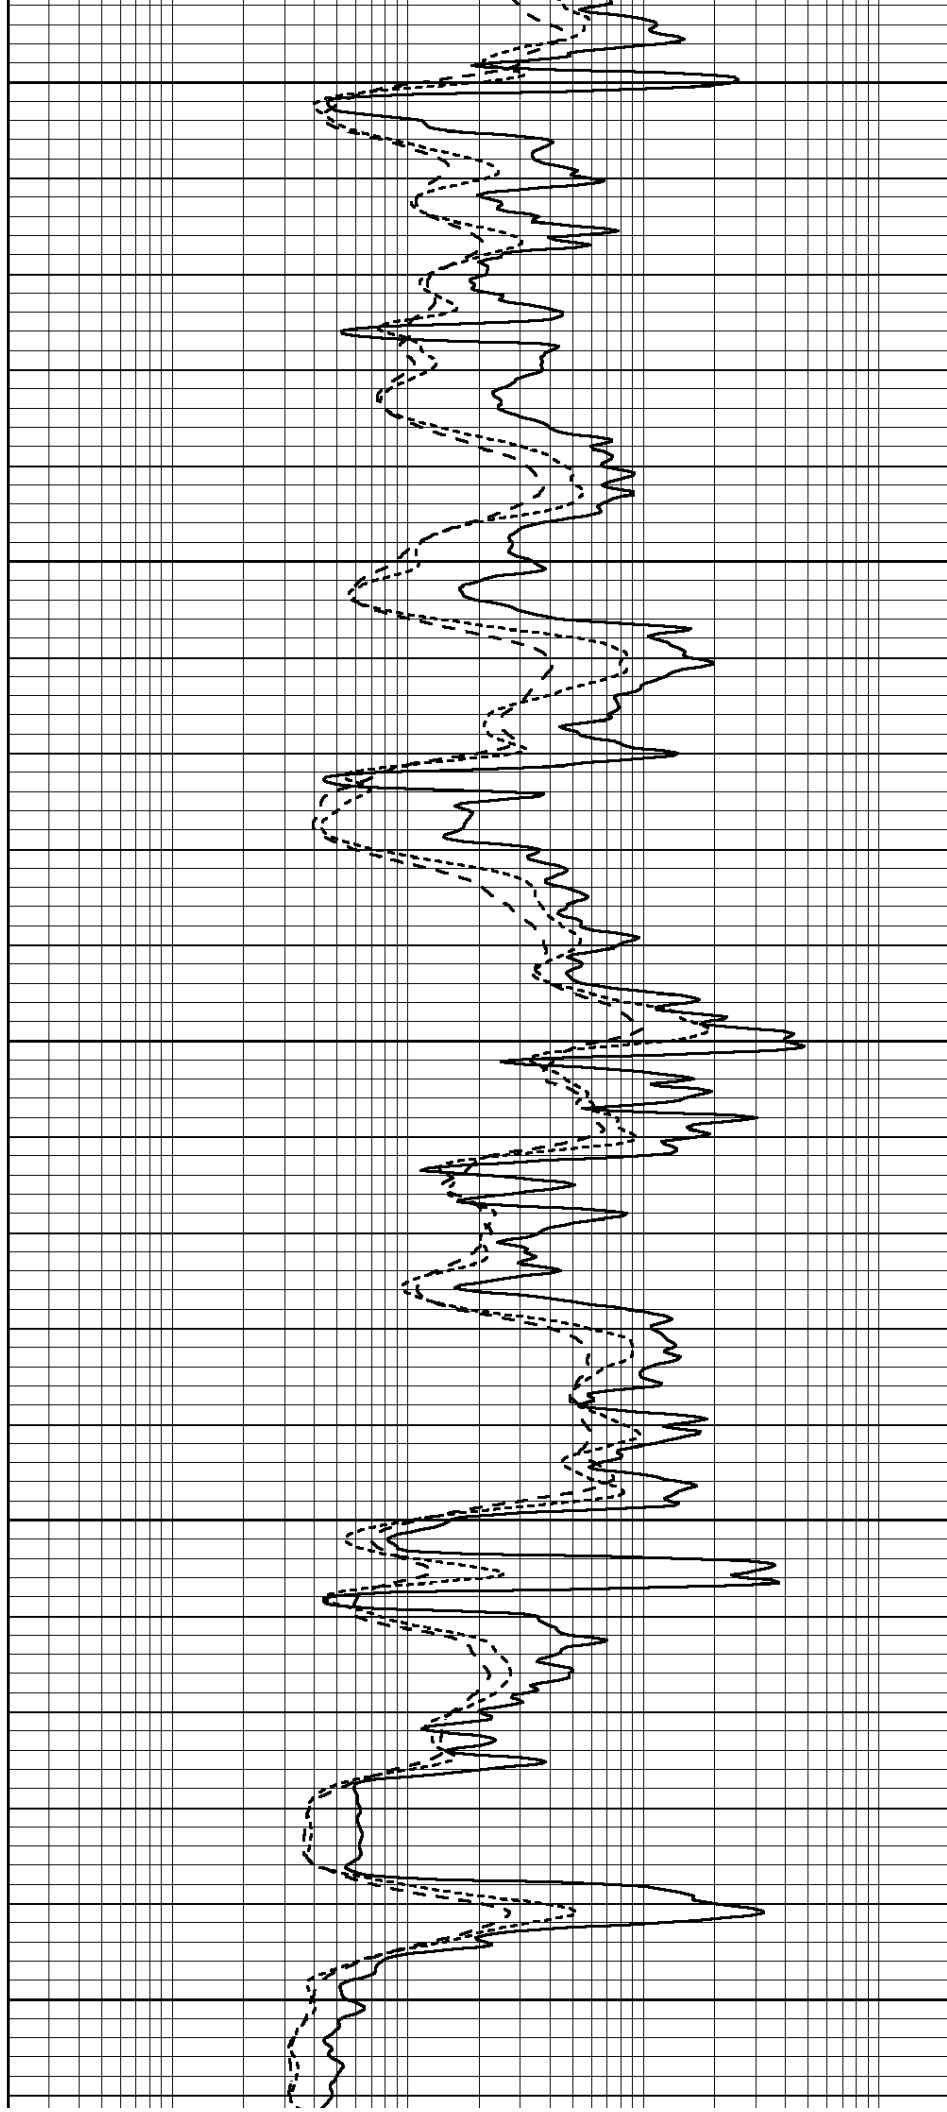

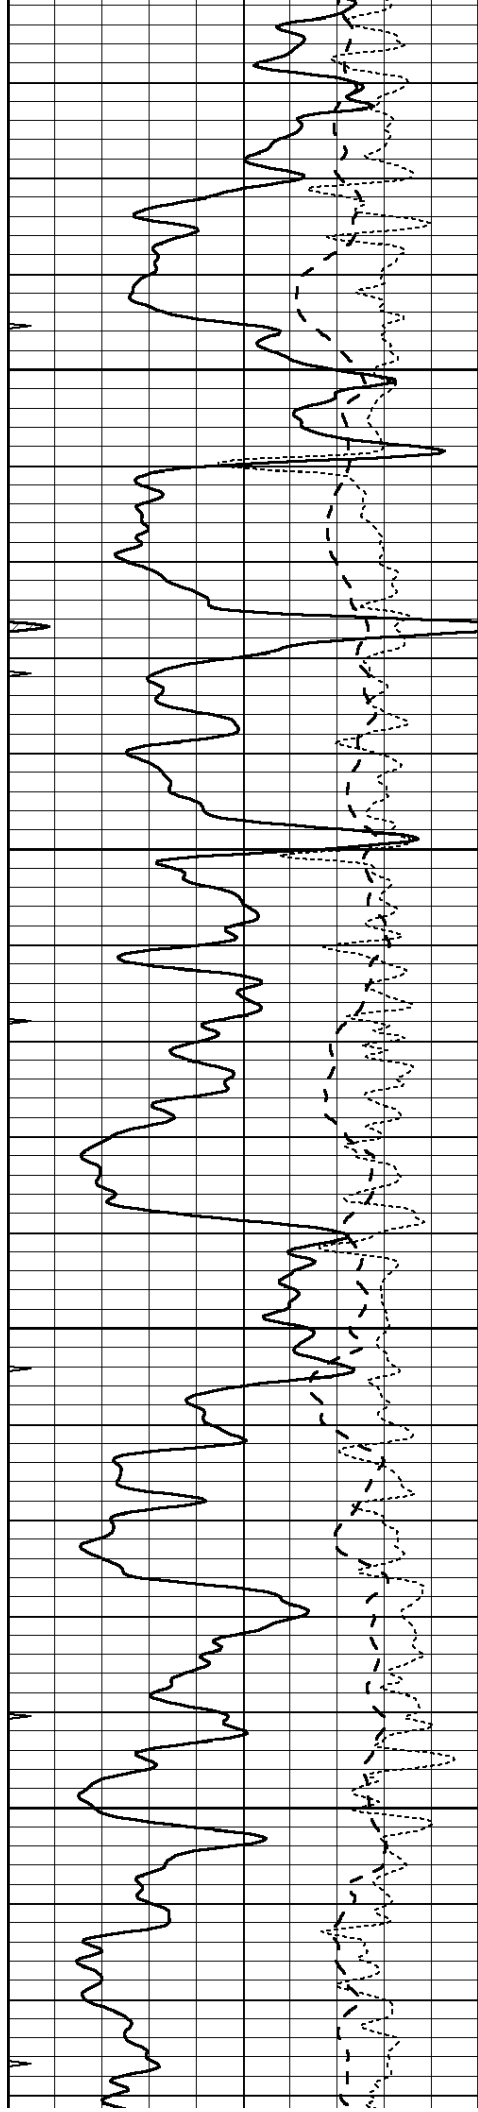



4550

4600

4650

4700

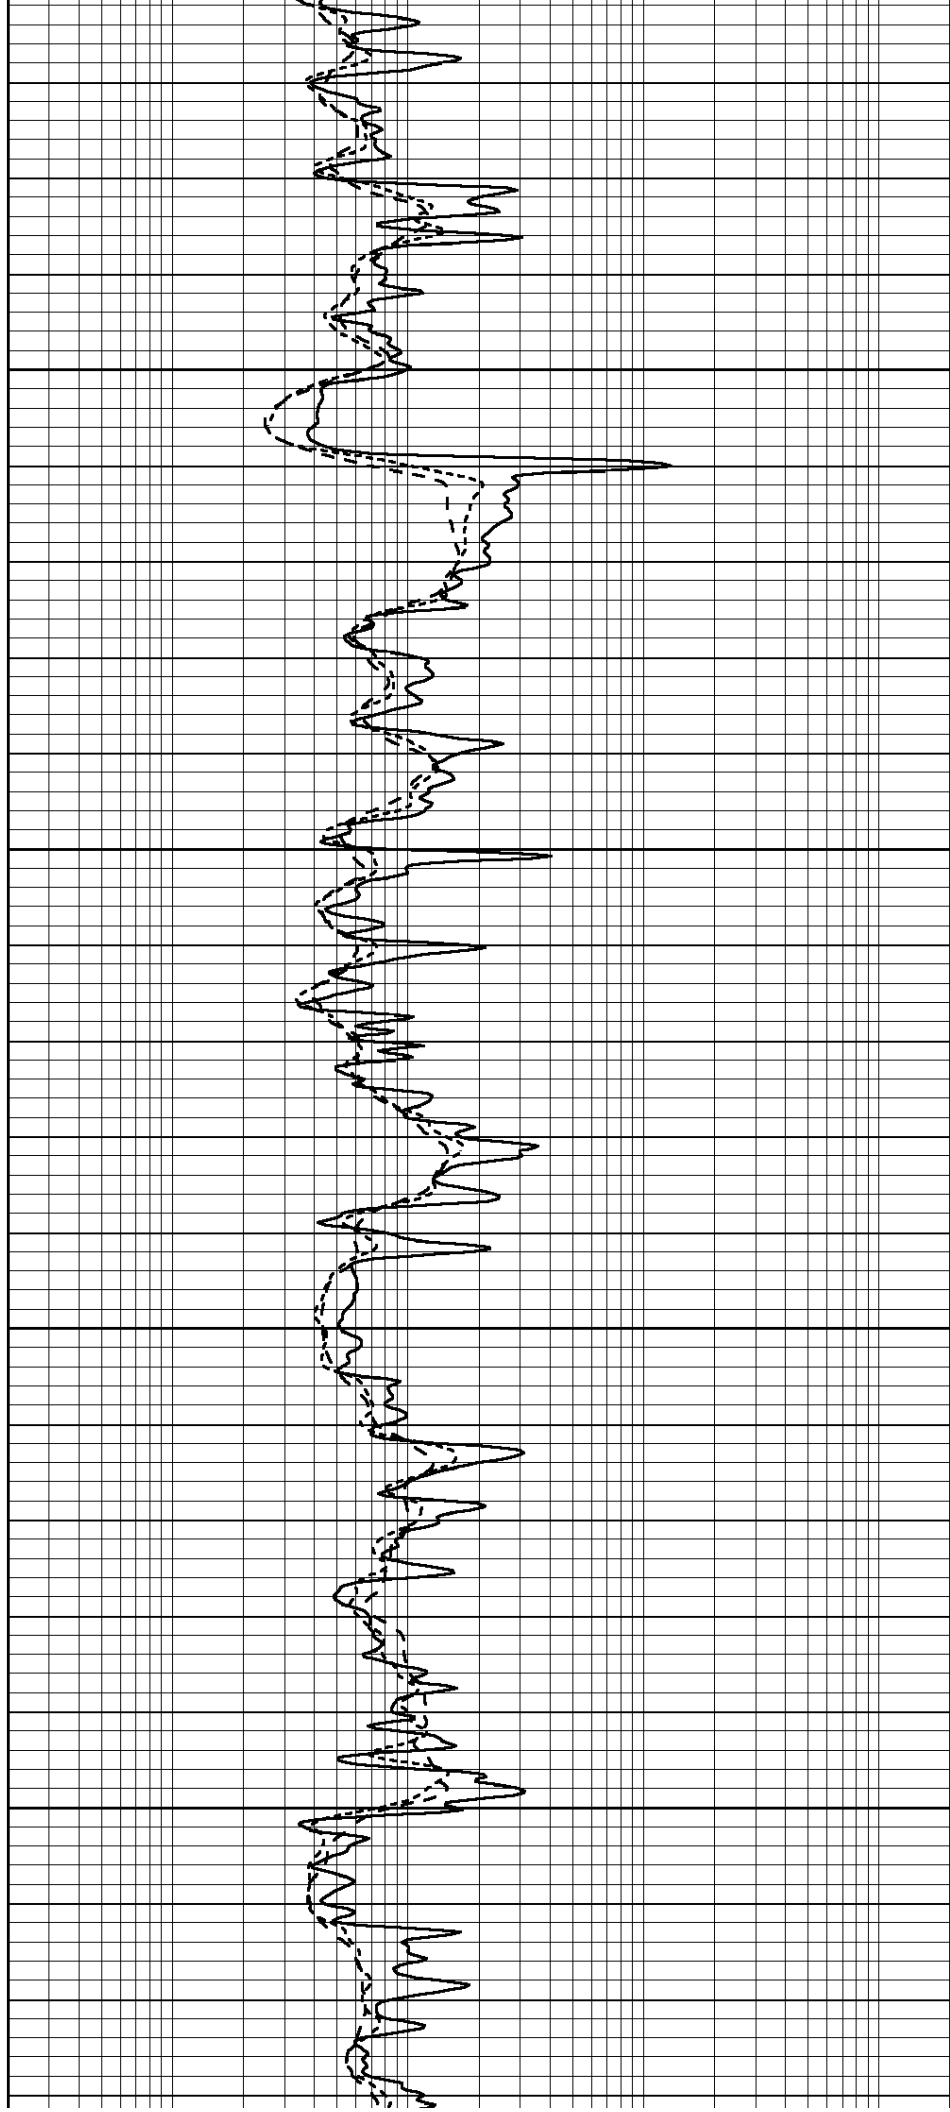


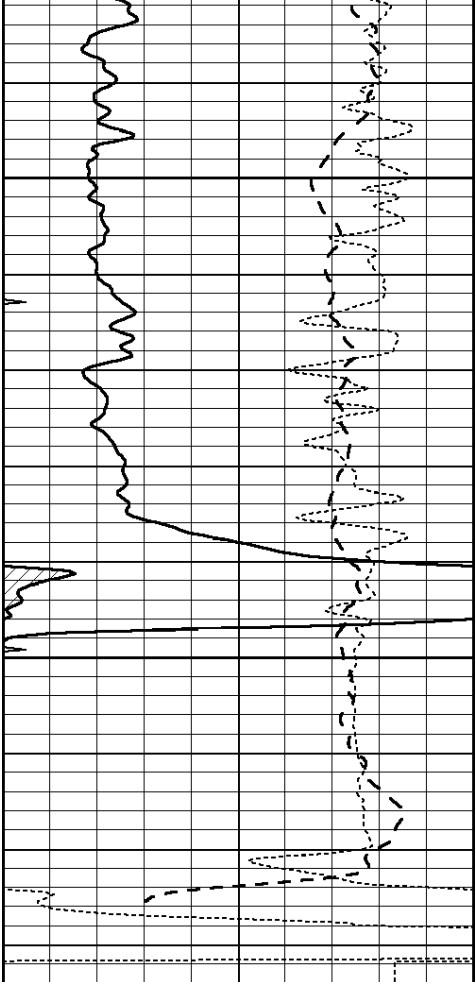

4750

4800

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

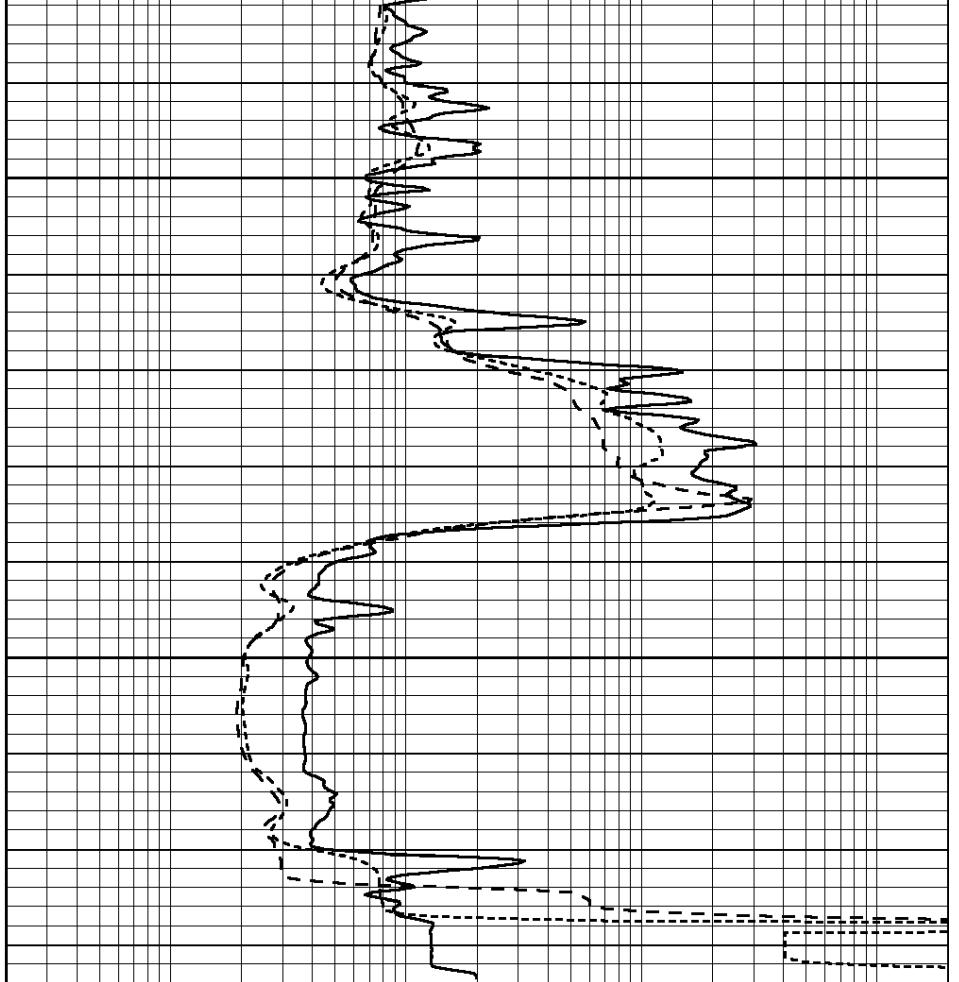


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000


Database File: 3676ddn.db
Dataset Pathname: pass20
Presentation Format: _dil
Dataset Creation: Wed May 01 10:28:08 2019 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

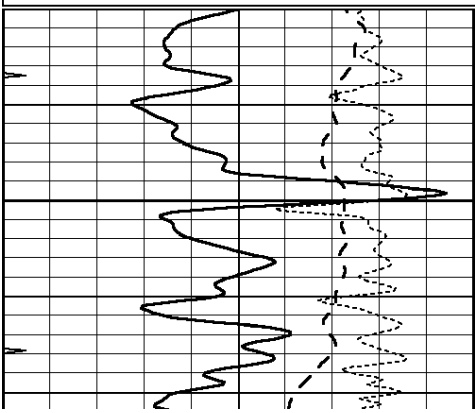

4600

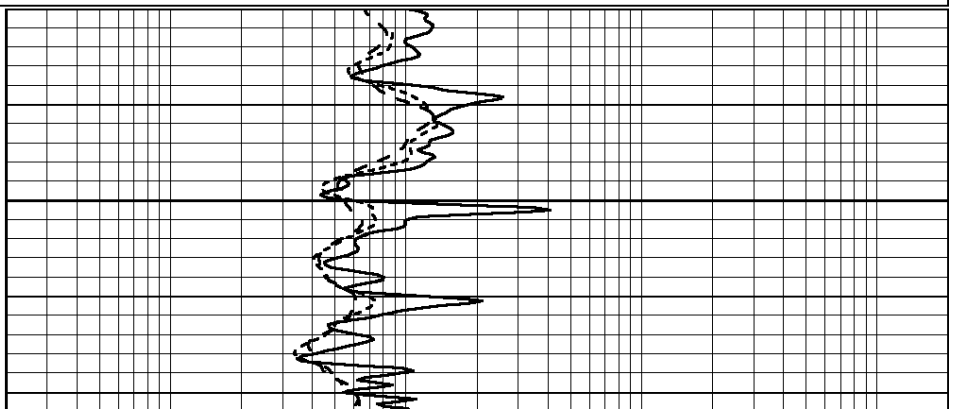

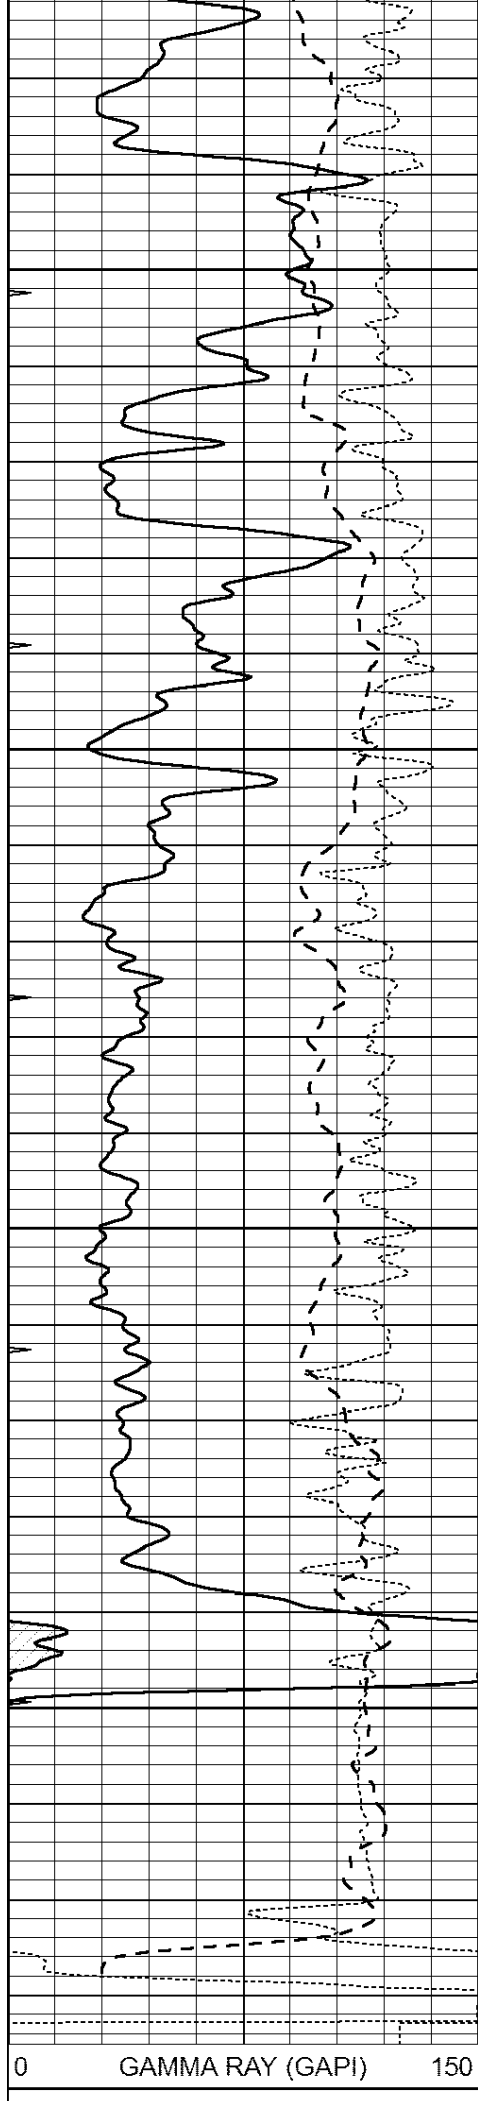


4650

4700

4750

4800

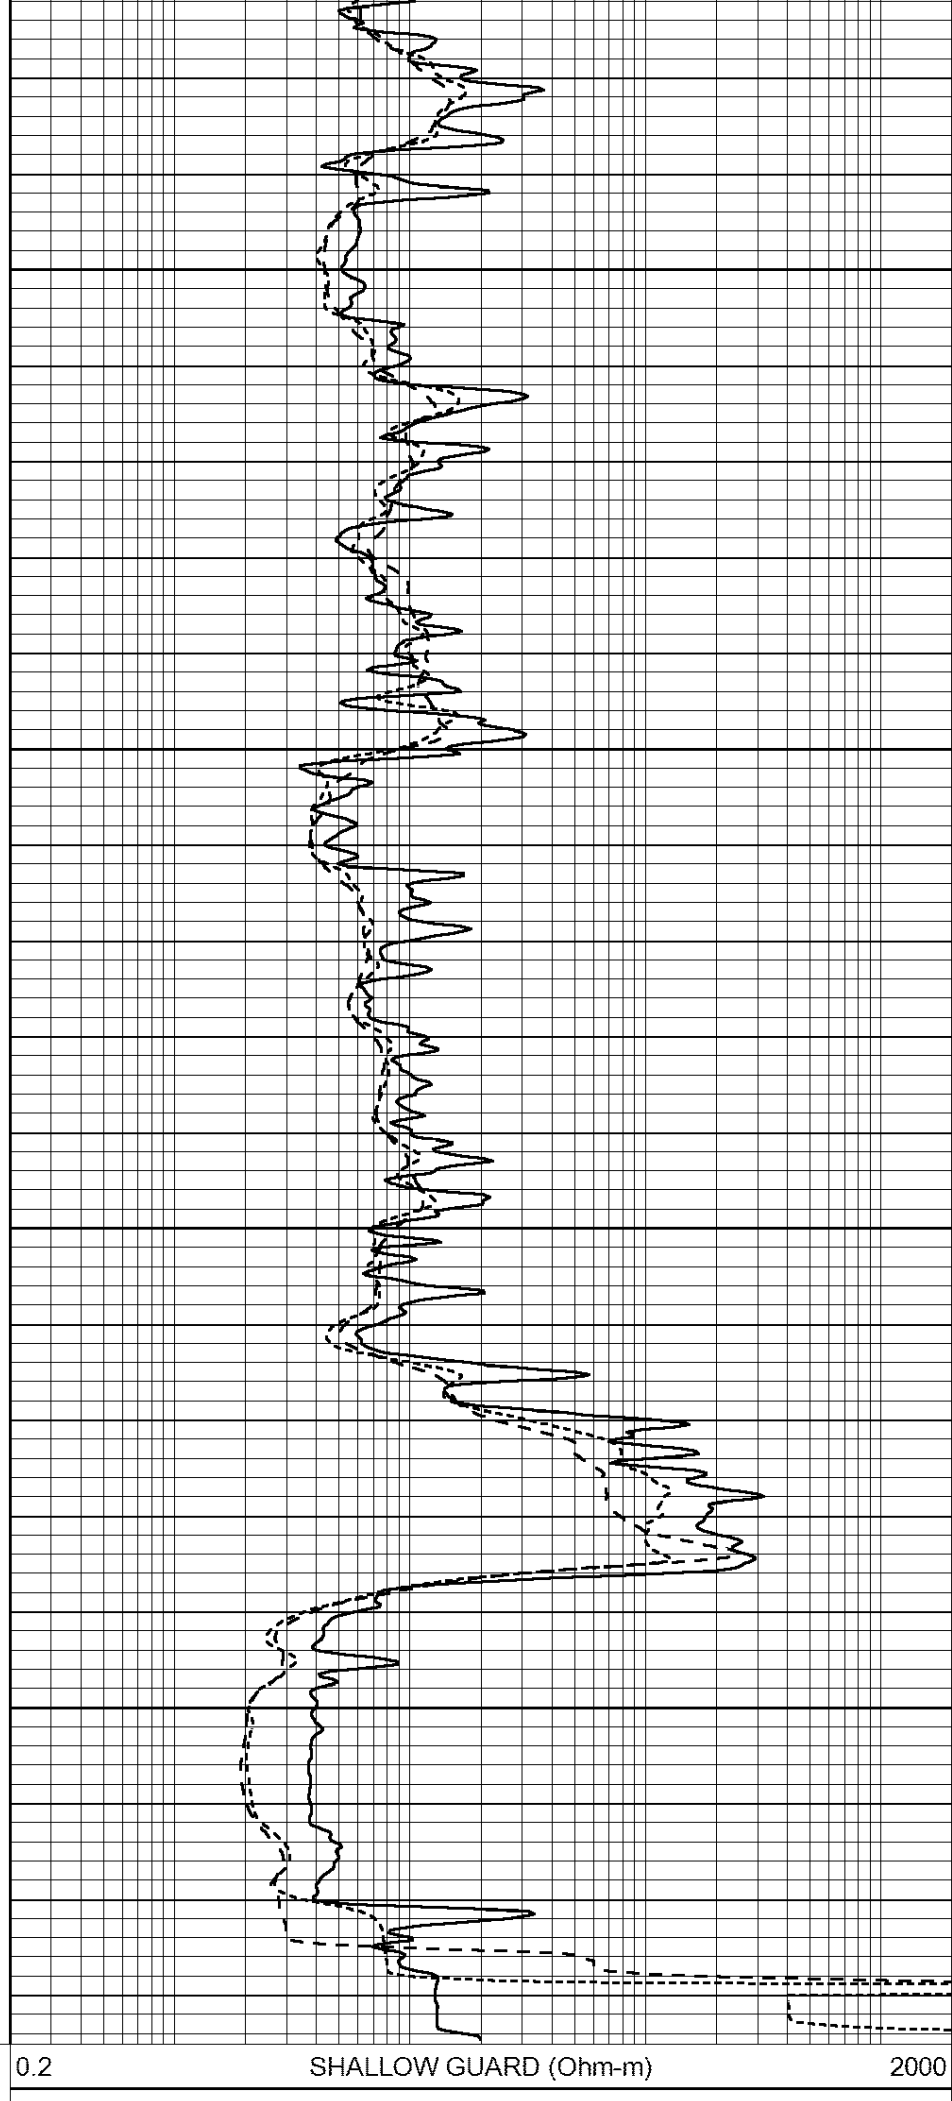

-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000