

DUAL INDUCTION LOG

Company	CHARLES N. GRIFFIN	Company	CHARLES N. GRIFFIN
Well	ADDIE #2	Well	ADDIE #2
Field	CROFT	Field	CROFT
County	PRATT	County	PRATT
State	KANSAS	State	KANSAS
Location:	API # : 15-151-22487-0000	Other Services	CDL/CNL/MEL SON
Permanent Datum	1190' FSL & 790' FWL	Elevation	
Log Measured From	GROUND LEVEL	K.B. 1991	
Drilling Measured From	KELLY BUSHING 11' A.G.L.	D.F. 1989	
	KELLY BUSHING	G.L. 1980	
SEC 28	TWP 29S	RGE 15W	
Run Number	ONE		
Depth Driller	4806		
Depth Logger	4811		
Bottom Logged Interval	4810		
Top Log Interval	50		
Casing Driller	8 5/8" @ 267		
Casing Logger	267		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.149		
pH / Fluid Loss	9.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.8 @ 70F		
Rmt @ Meas. Temp	.6 @ 70F		
Rmc @ Meas. Temp	.96 @ 70F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.46 @ 123F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	123F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	BRUCE REED		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS


WEST OF PRATT TO CROFT BLACK TOP, SOUTH TO 90 RD
1 EAST, 2 SOUTH, EAST INTO.


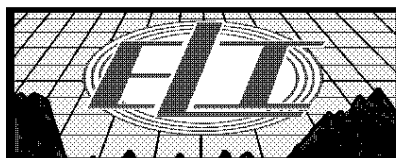




MAIN PASS


Database File: 3497ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil2
Dataset Creation: Thu Apr 18 04:37:46 2019
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
-----			CILD (mmho/m)		
			1000		0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

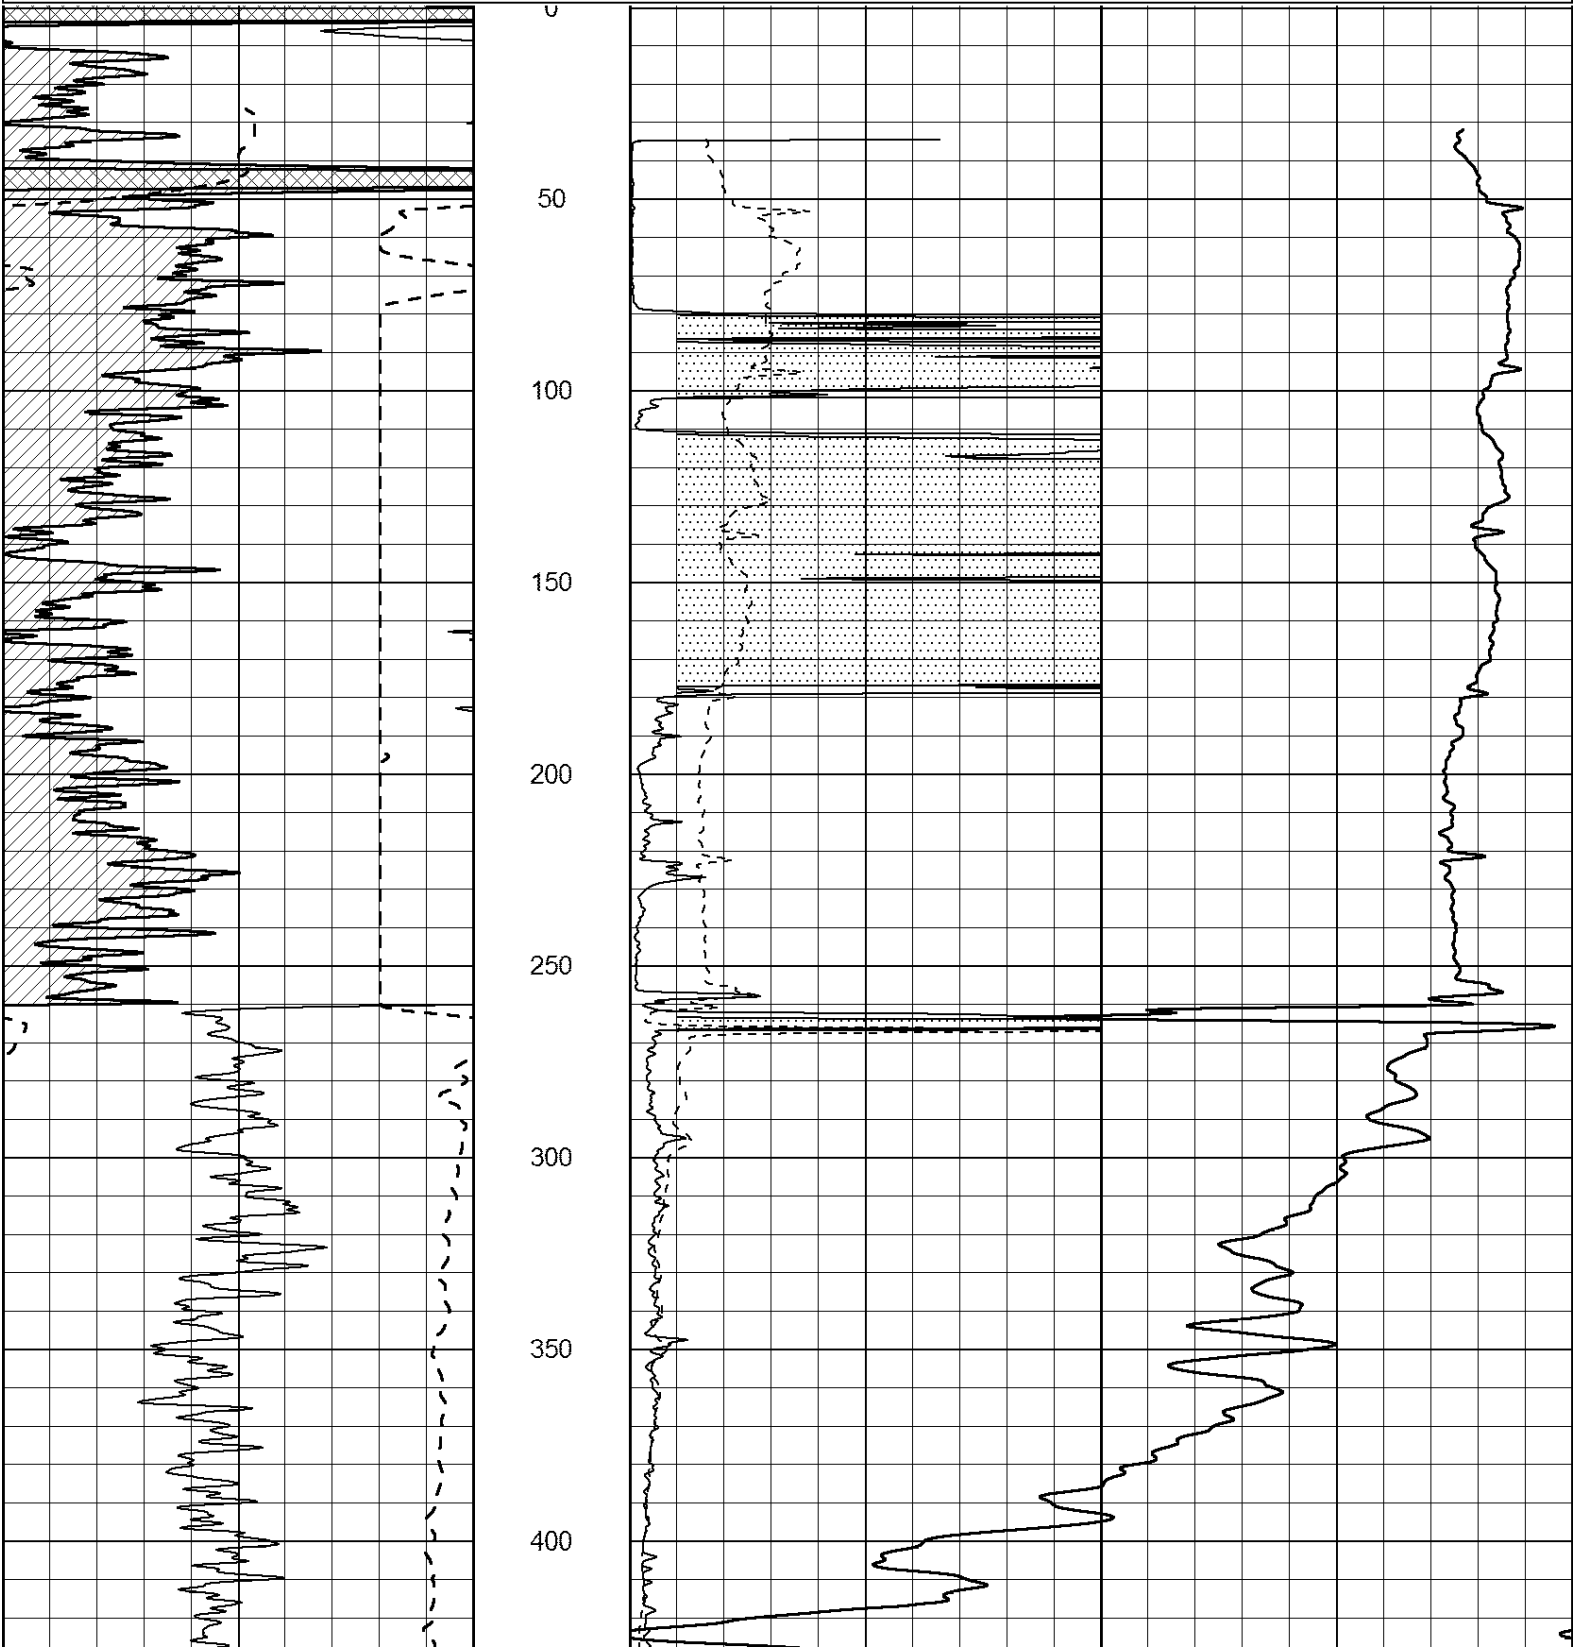

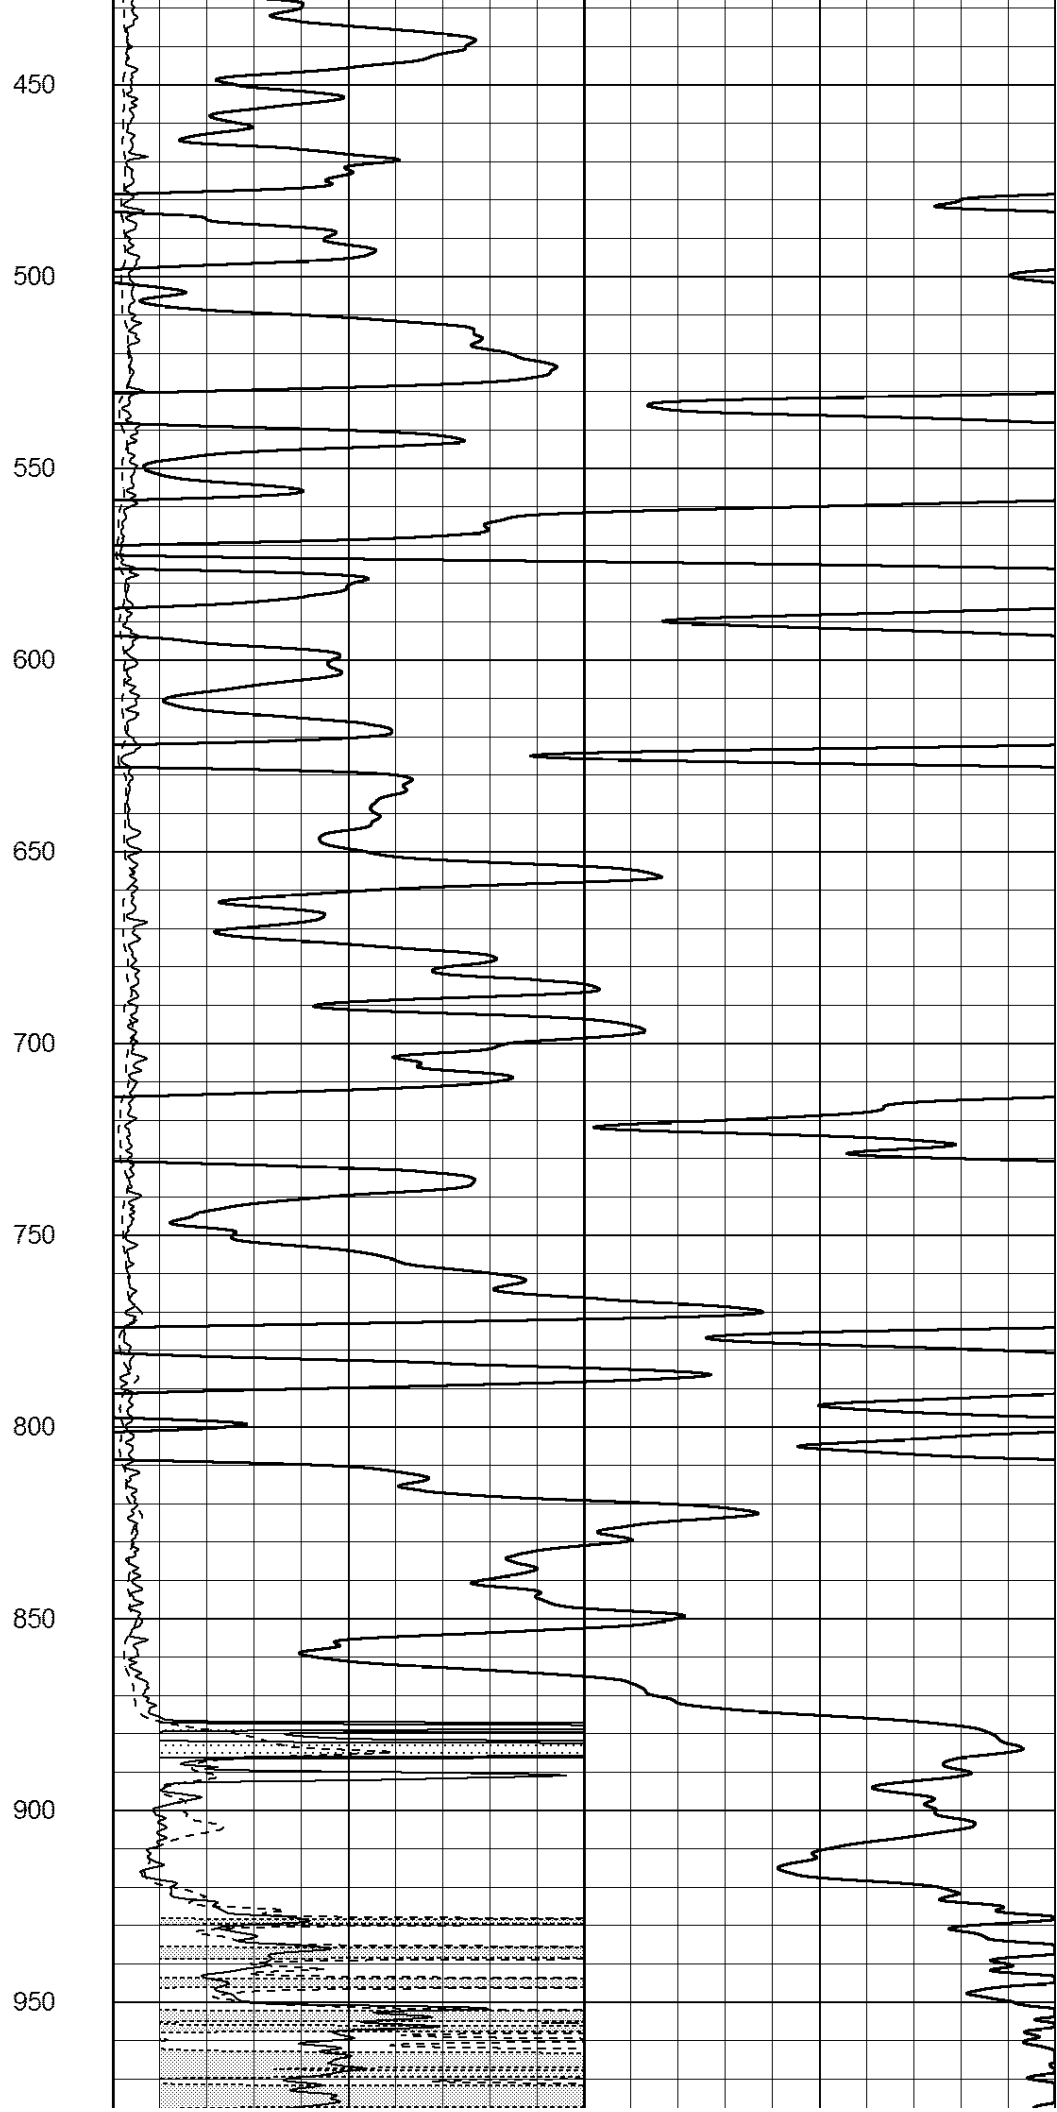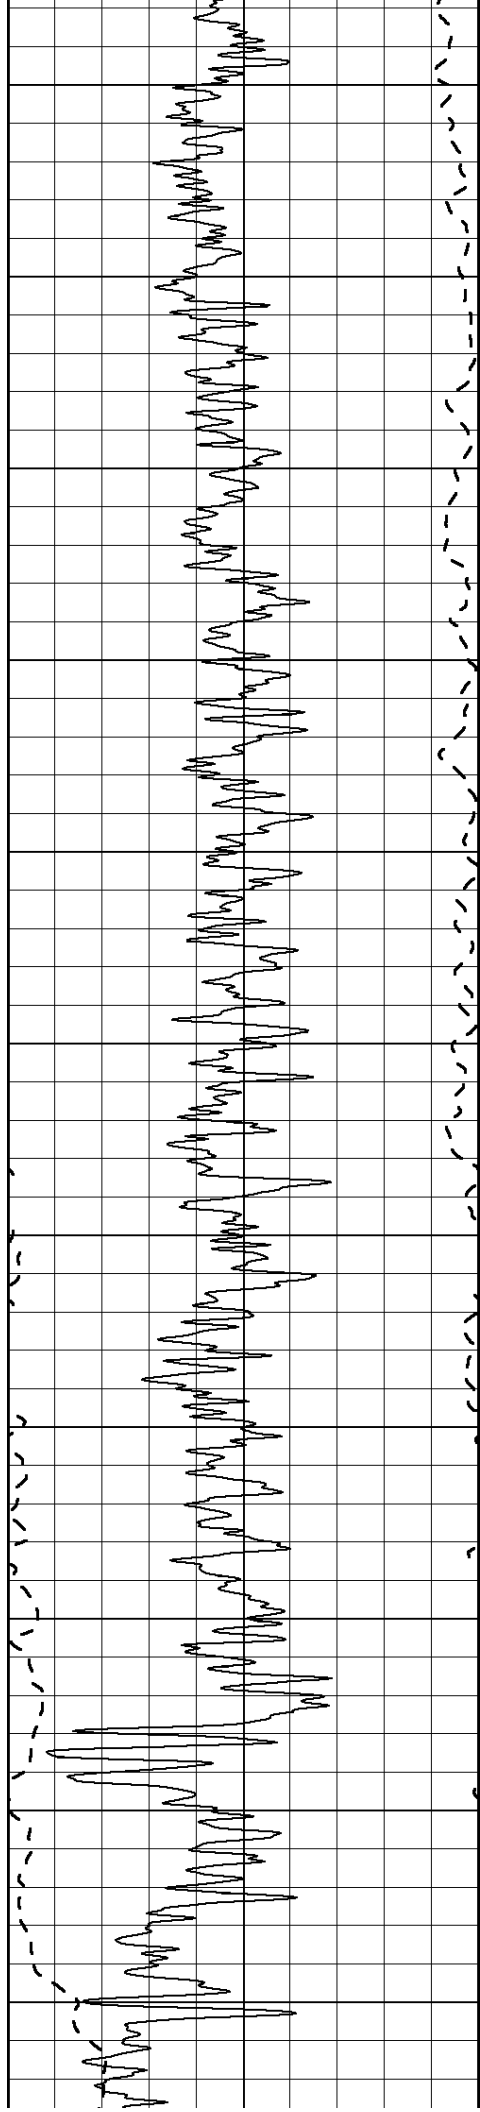

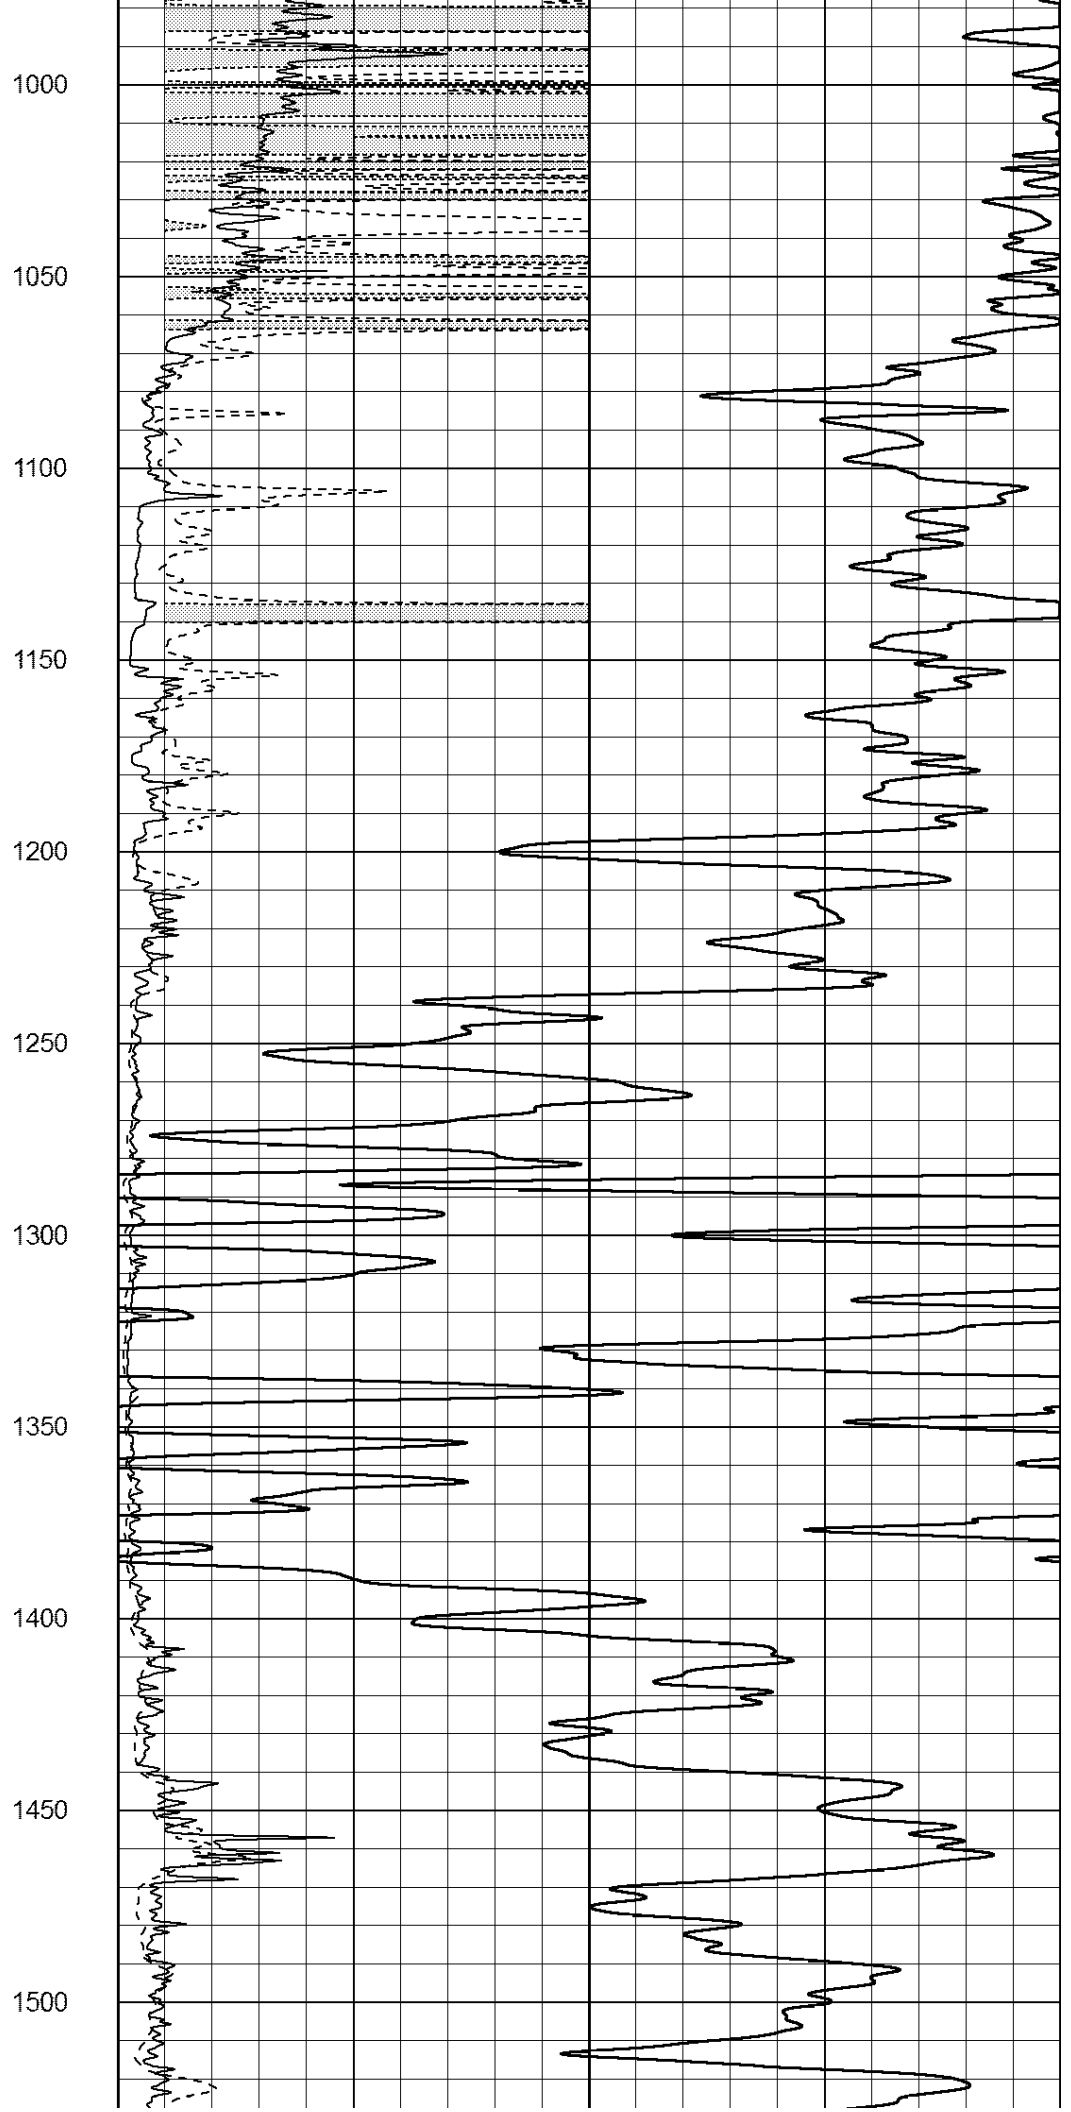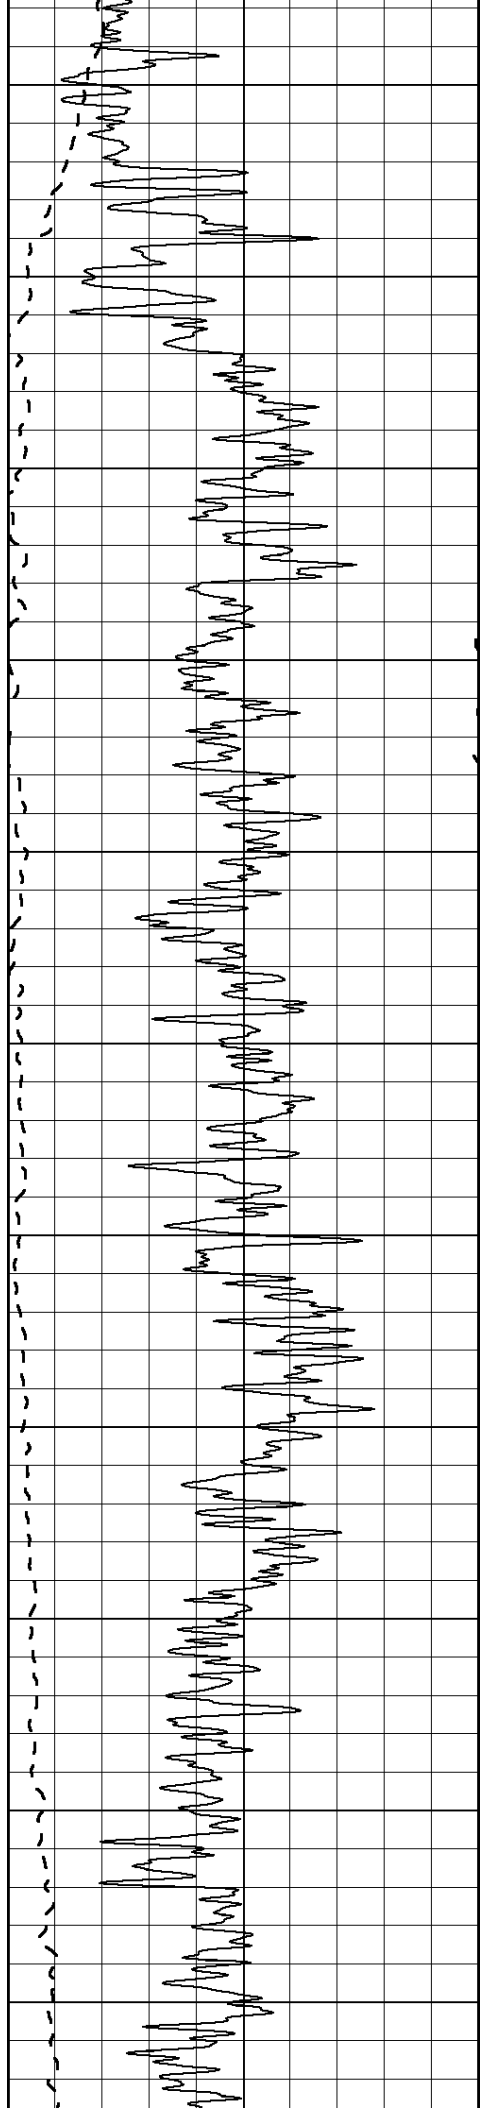

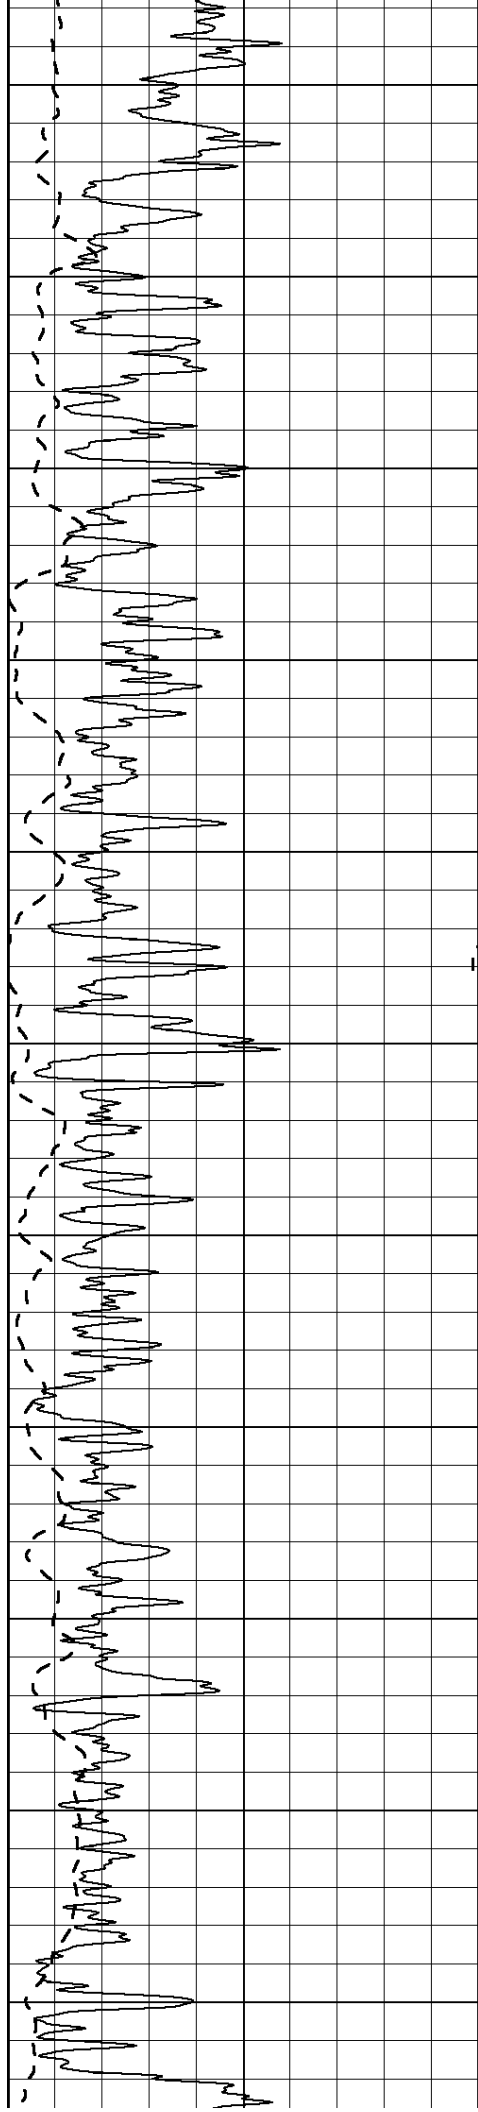

1550

1600

1650

1700

1750

1800


1850



1900



1950


2000

2050

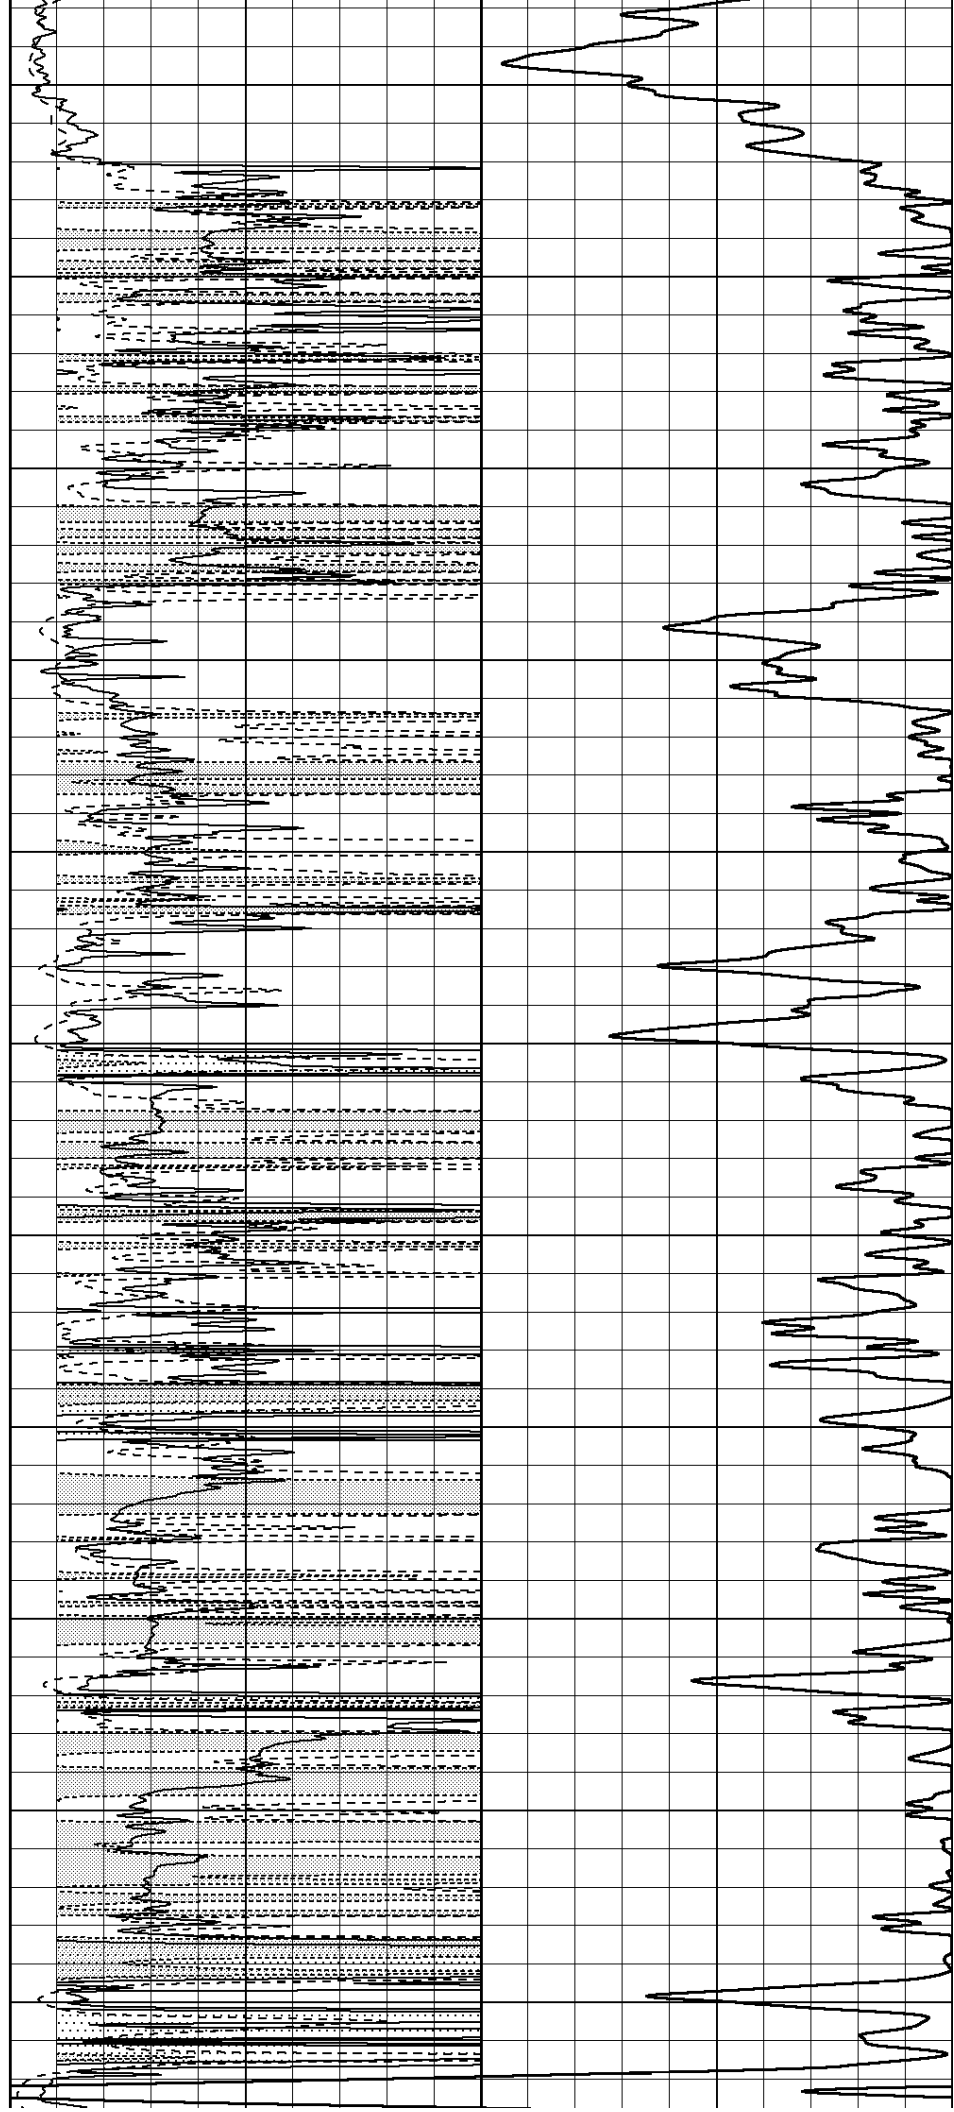

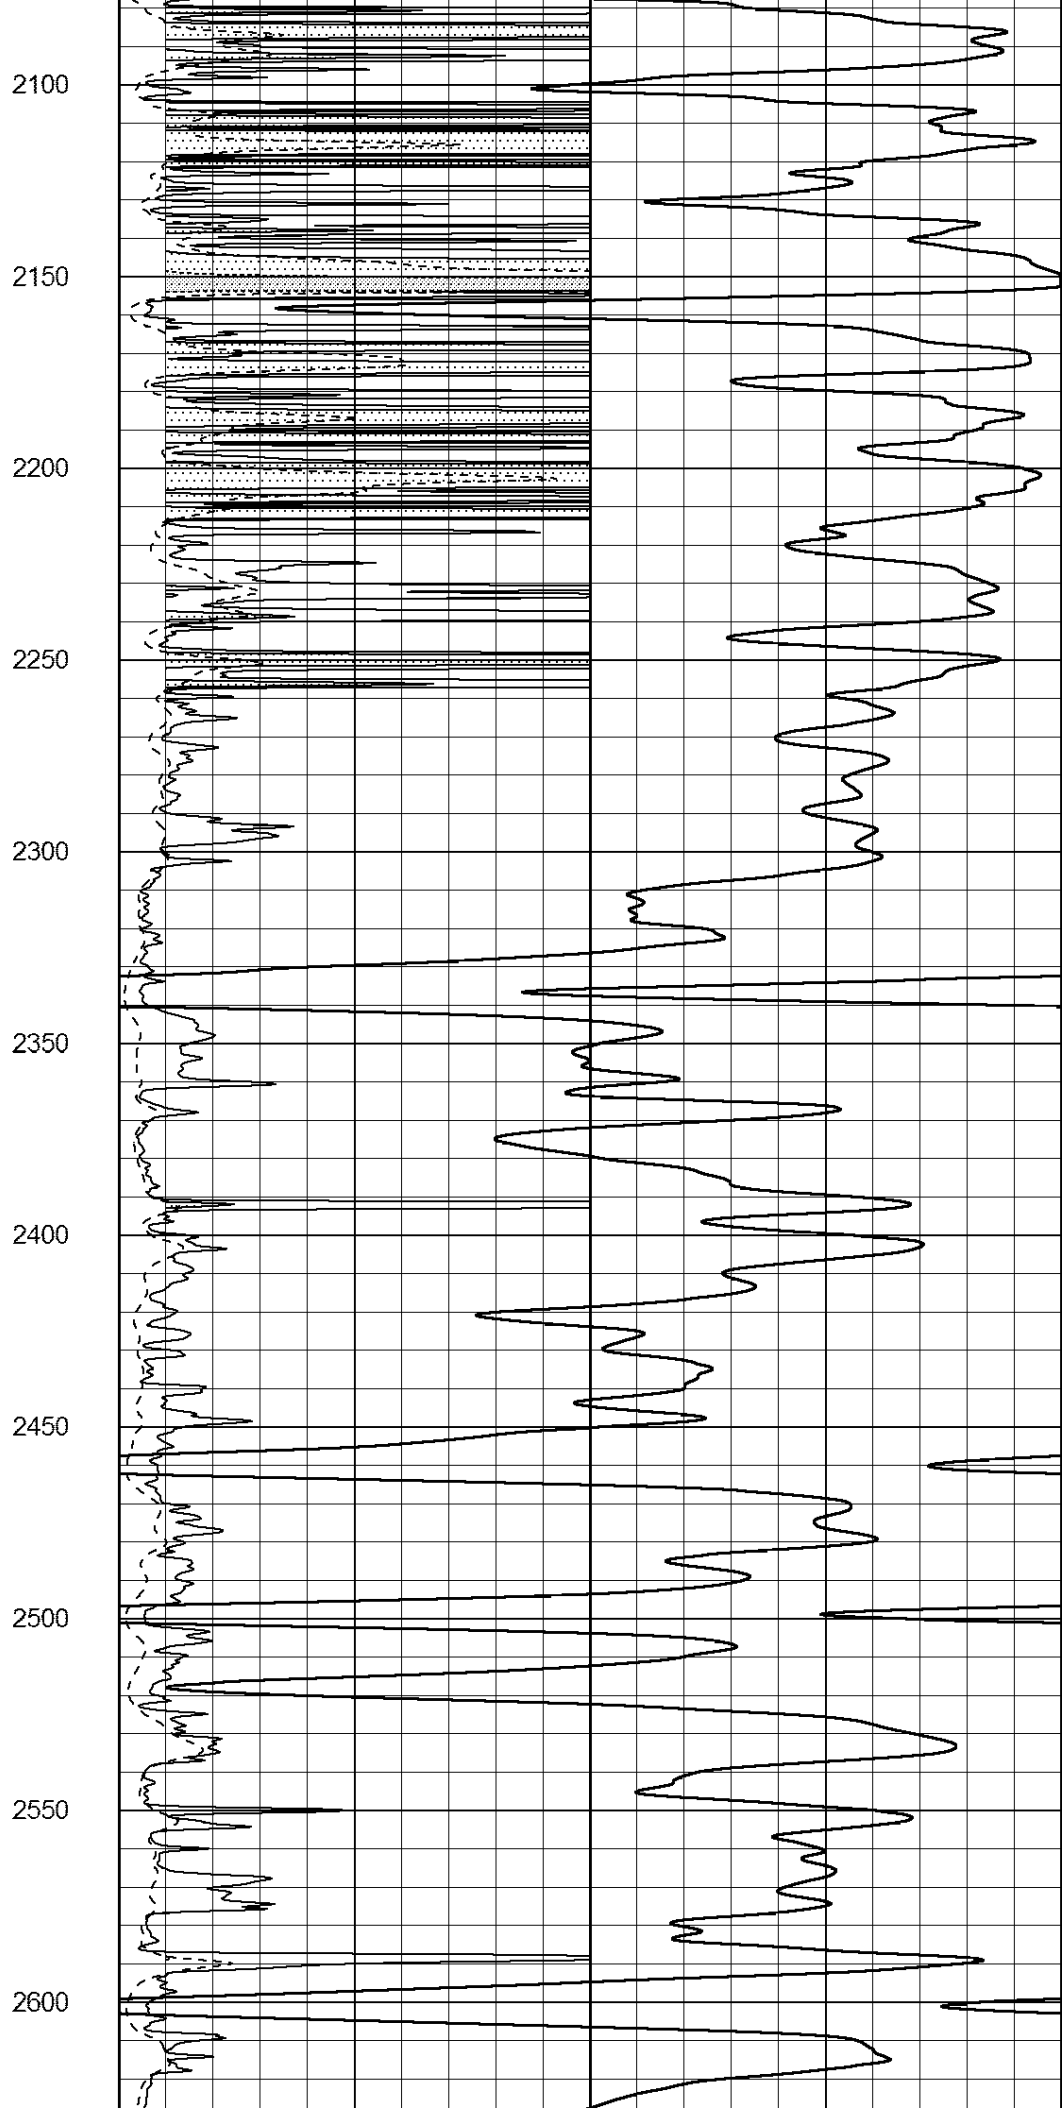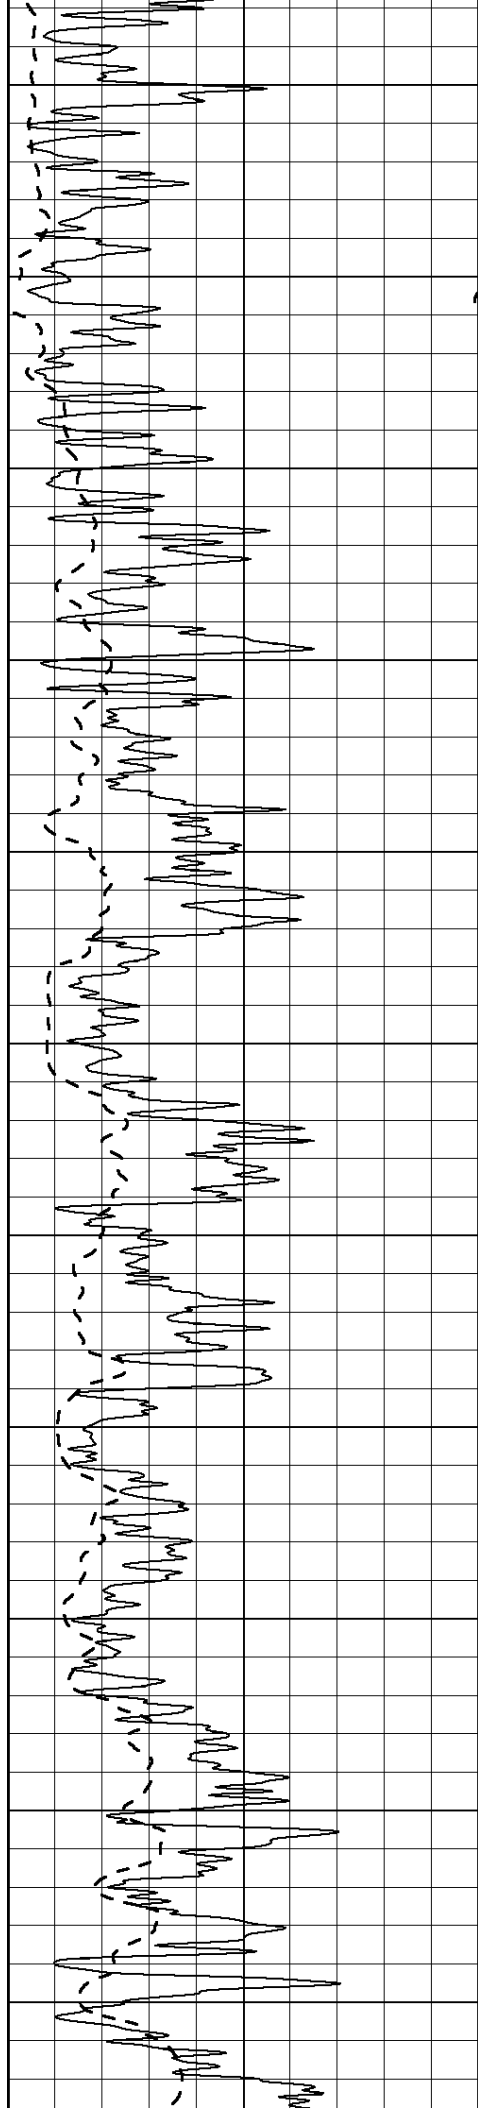

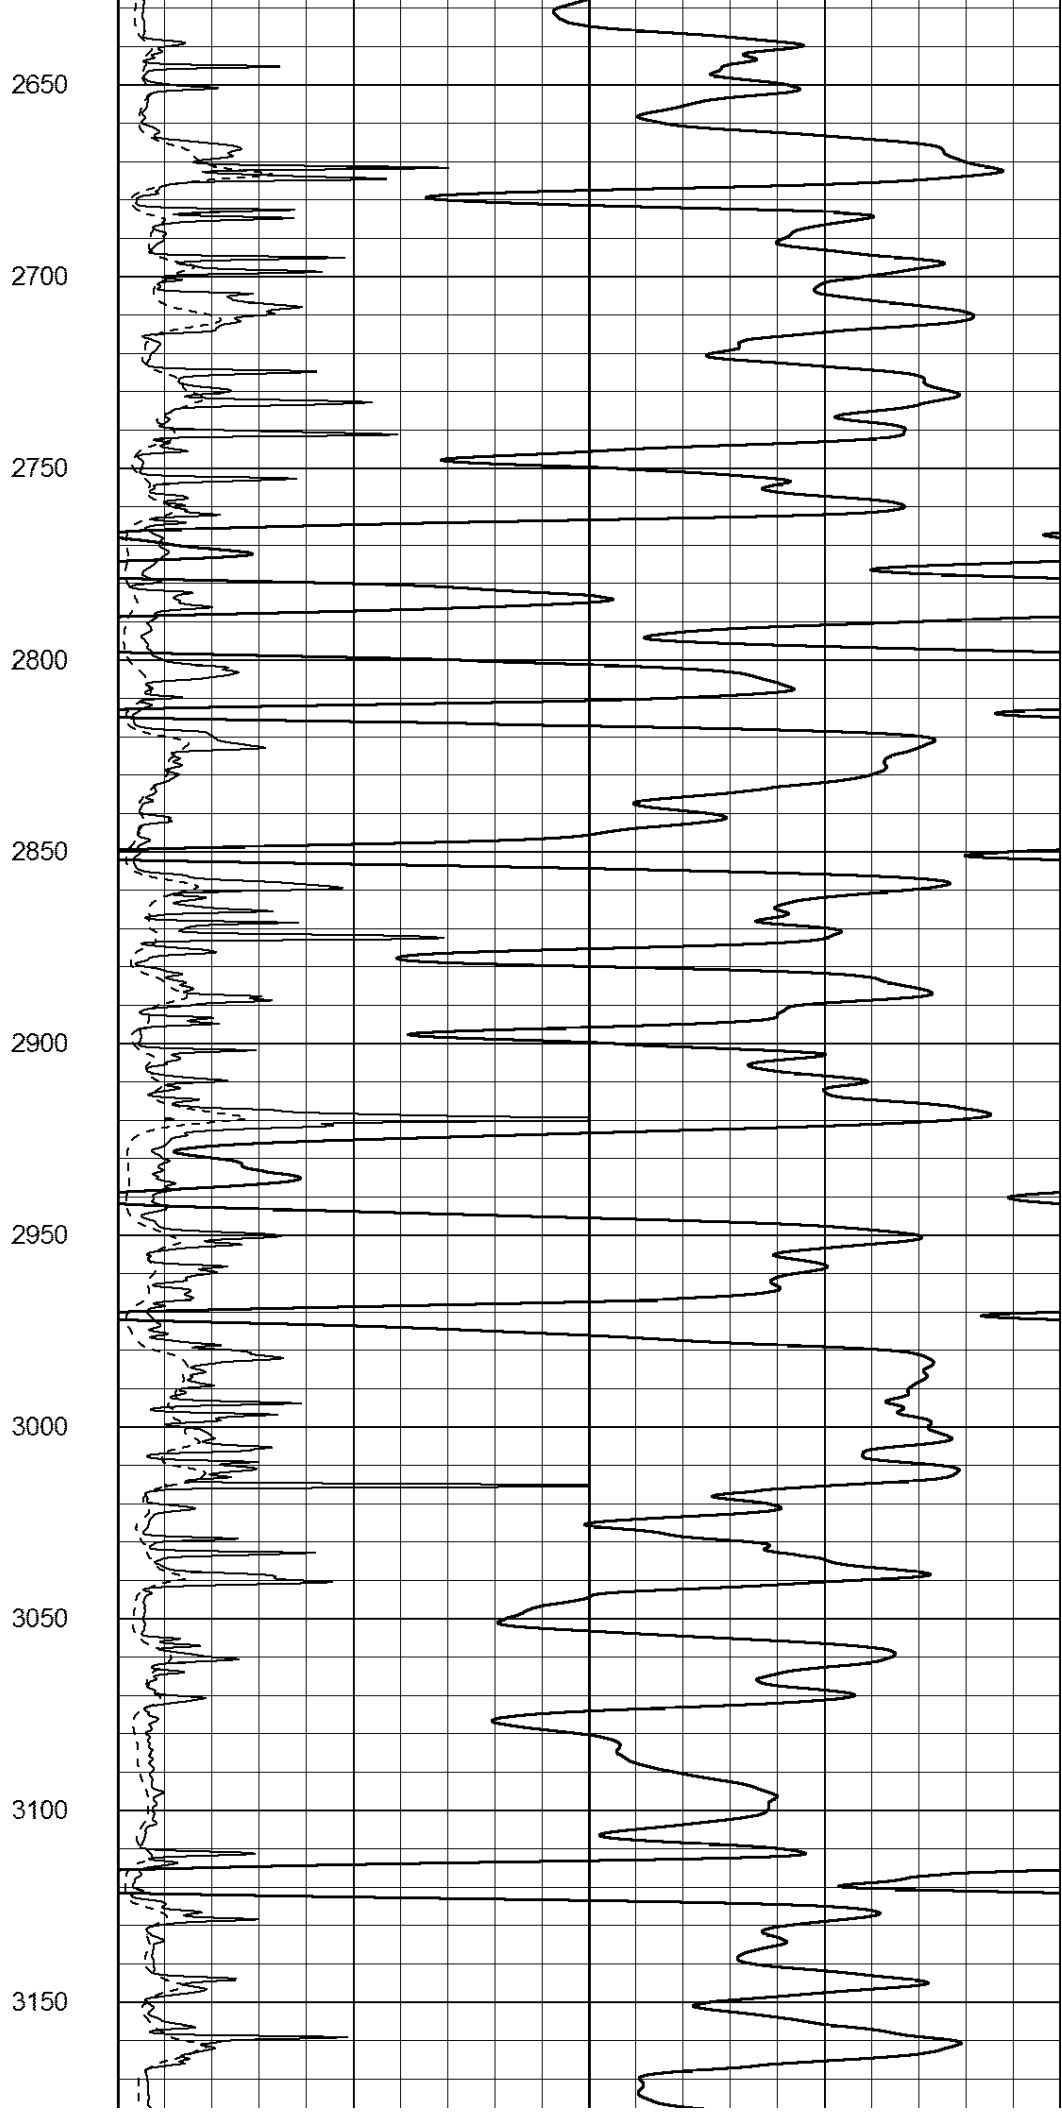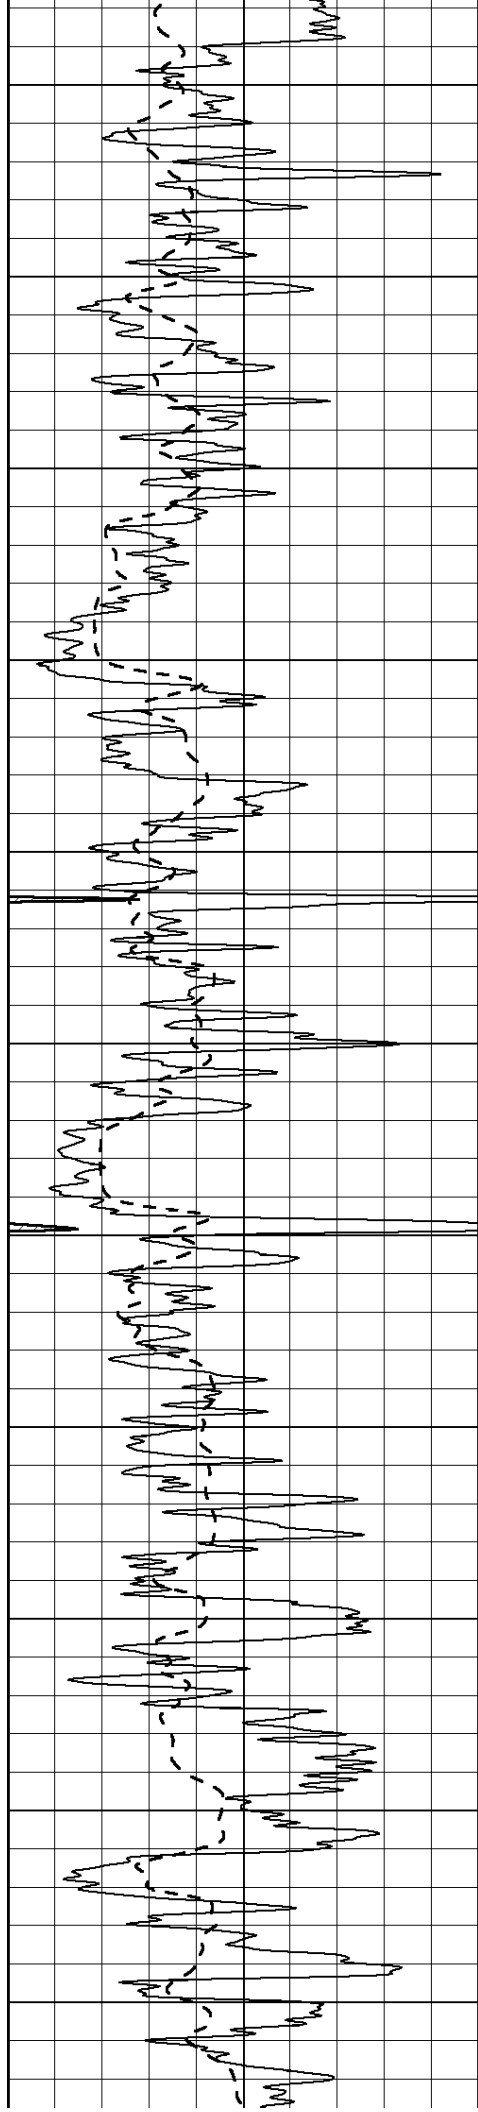

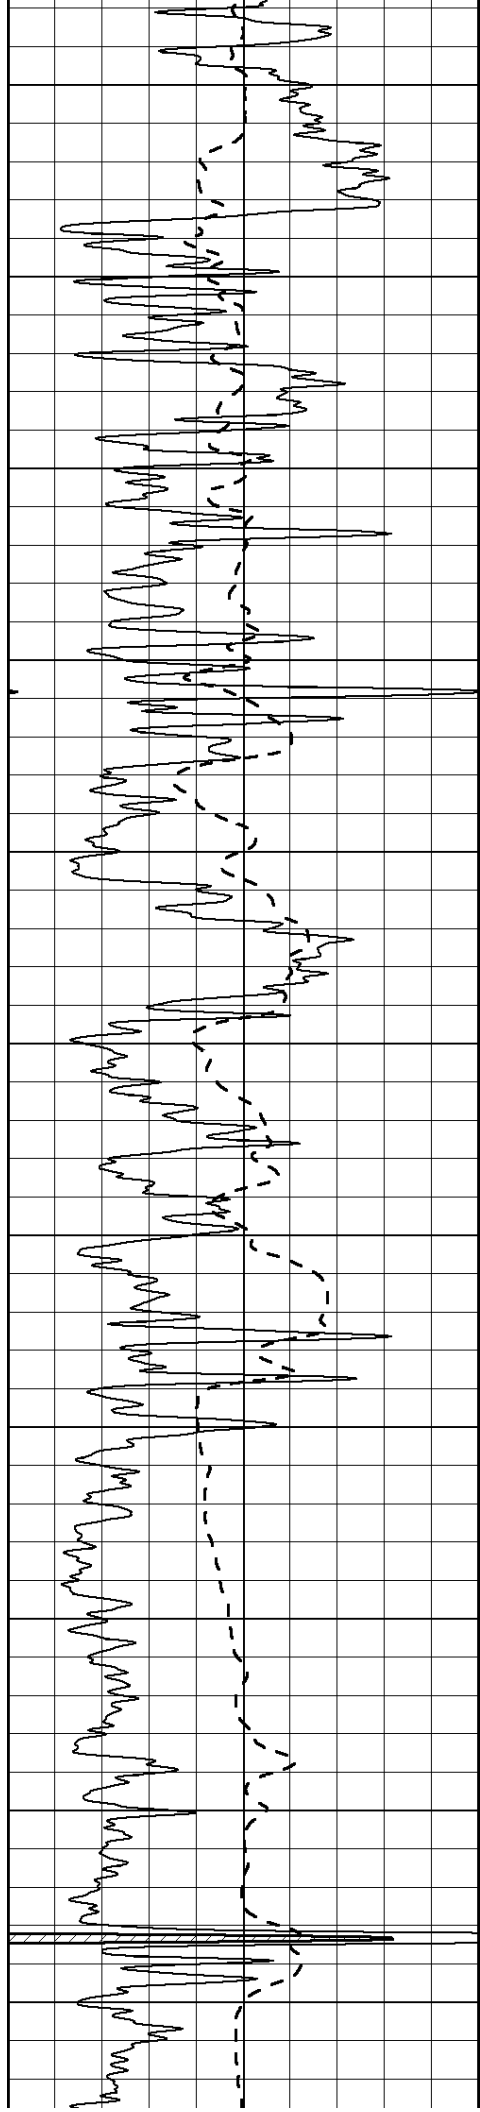

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

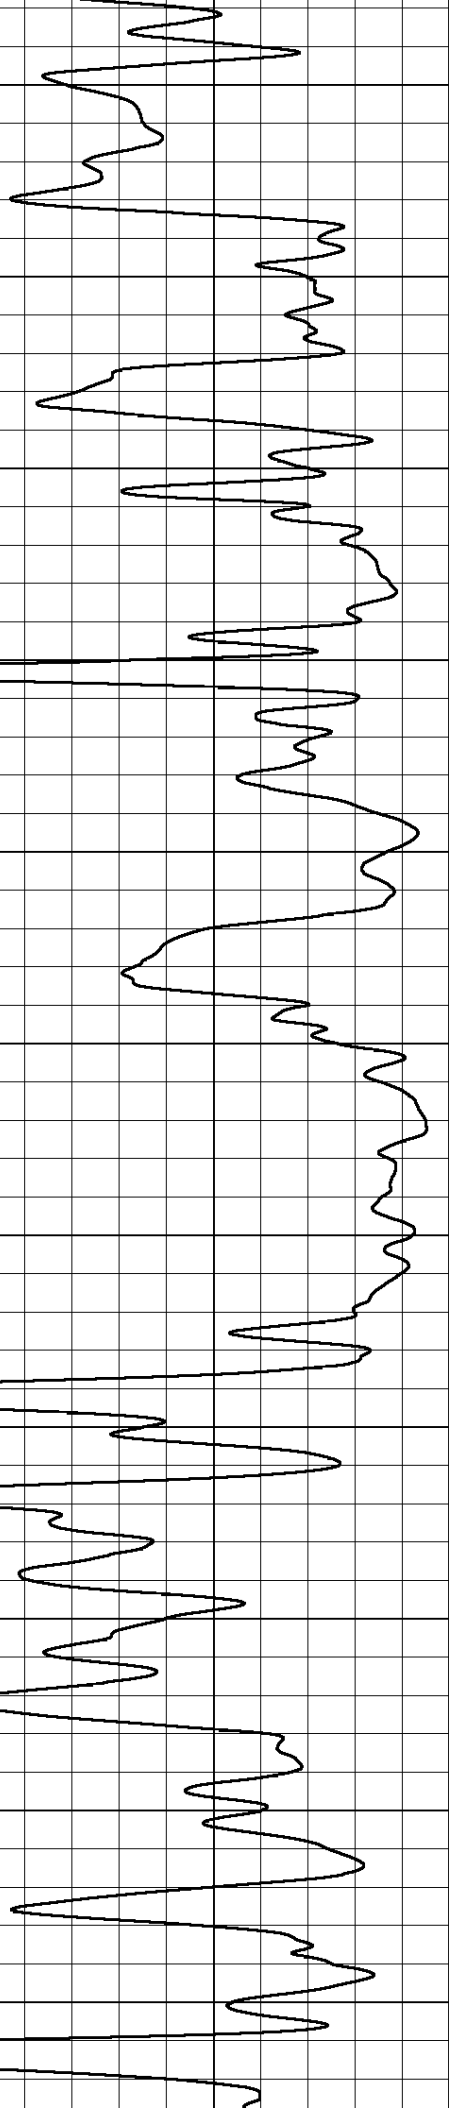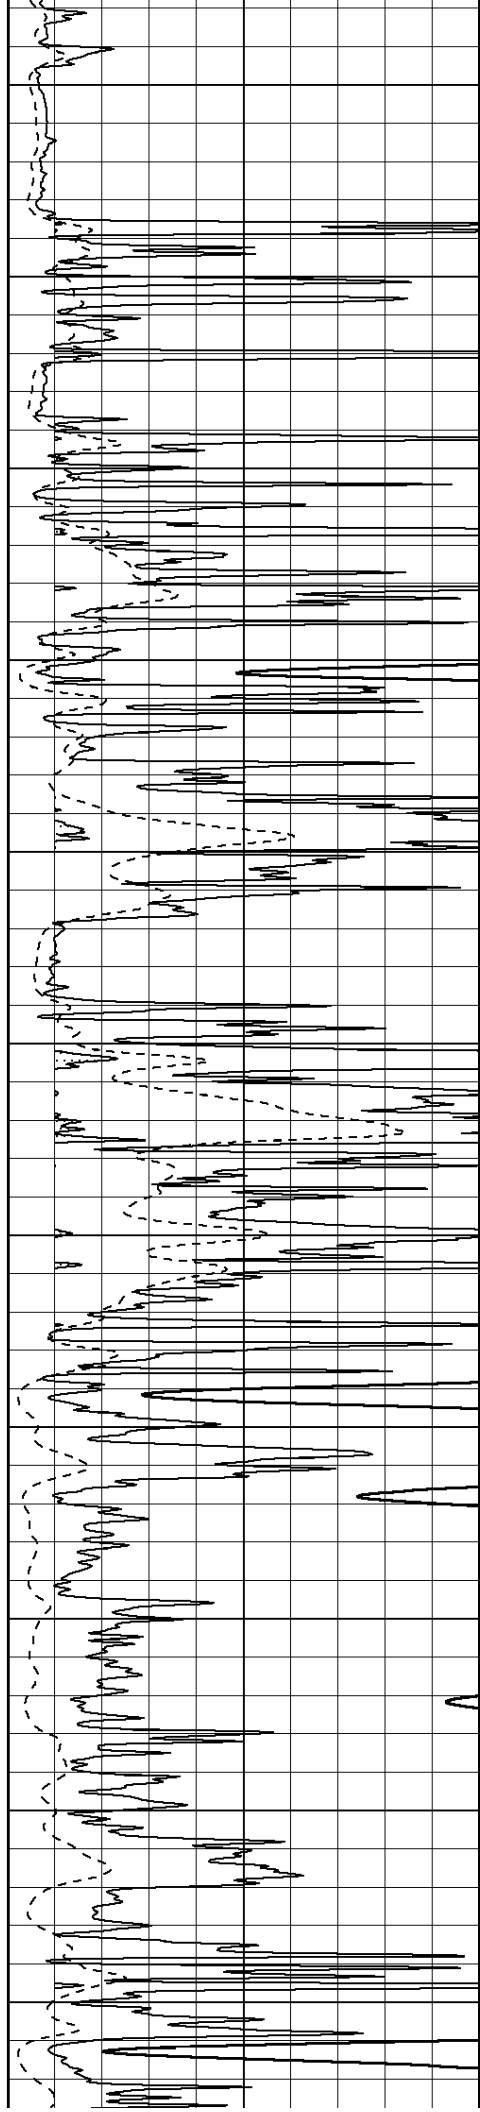

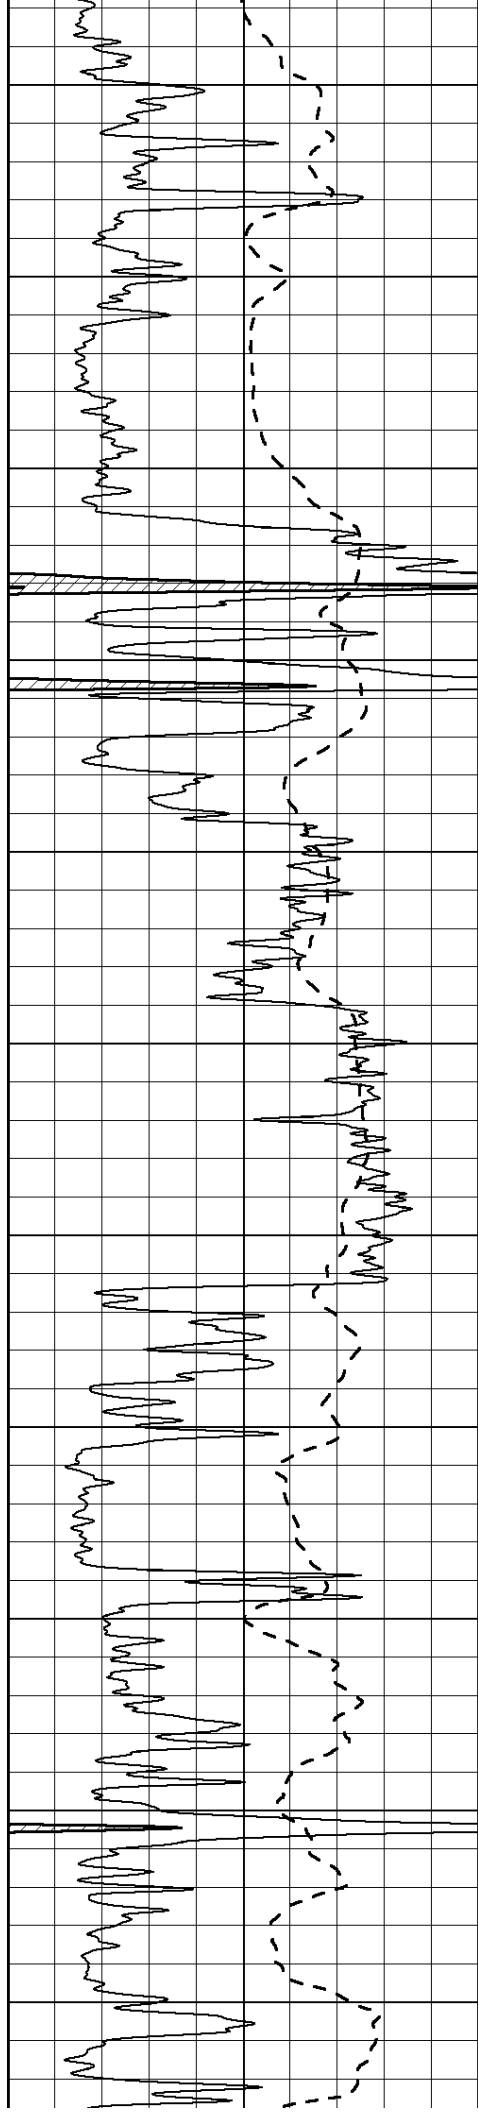

3750

3800

3850

3900

3950

4000


4050



4100

4150

4200

4250

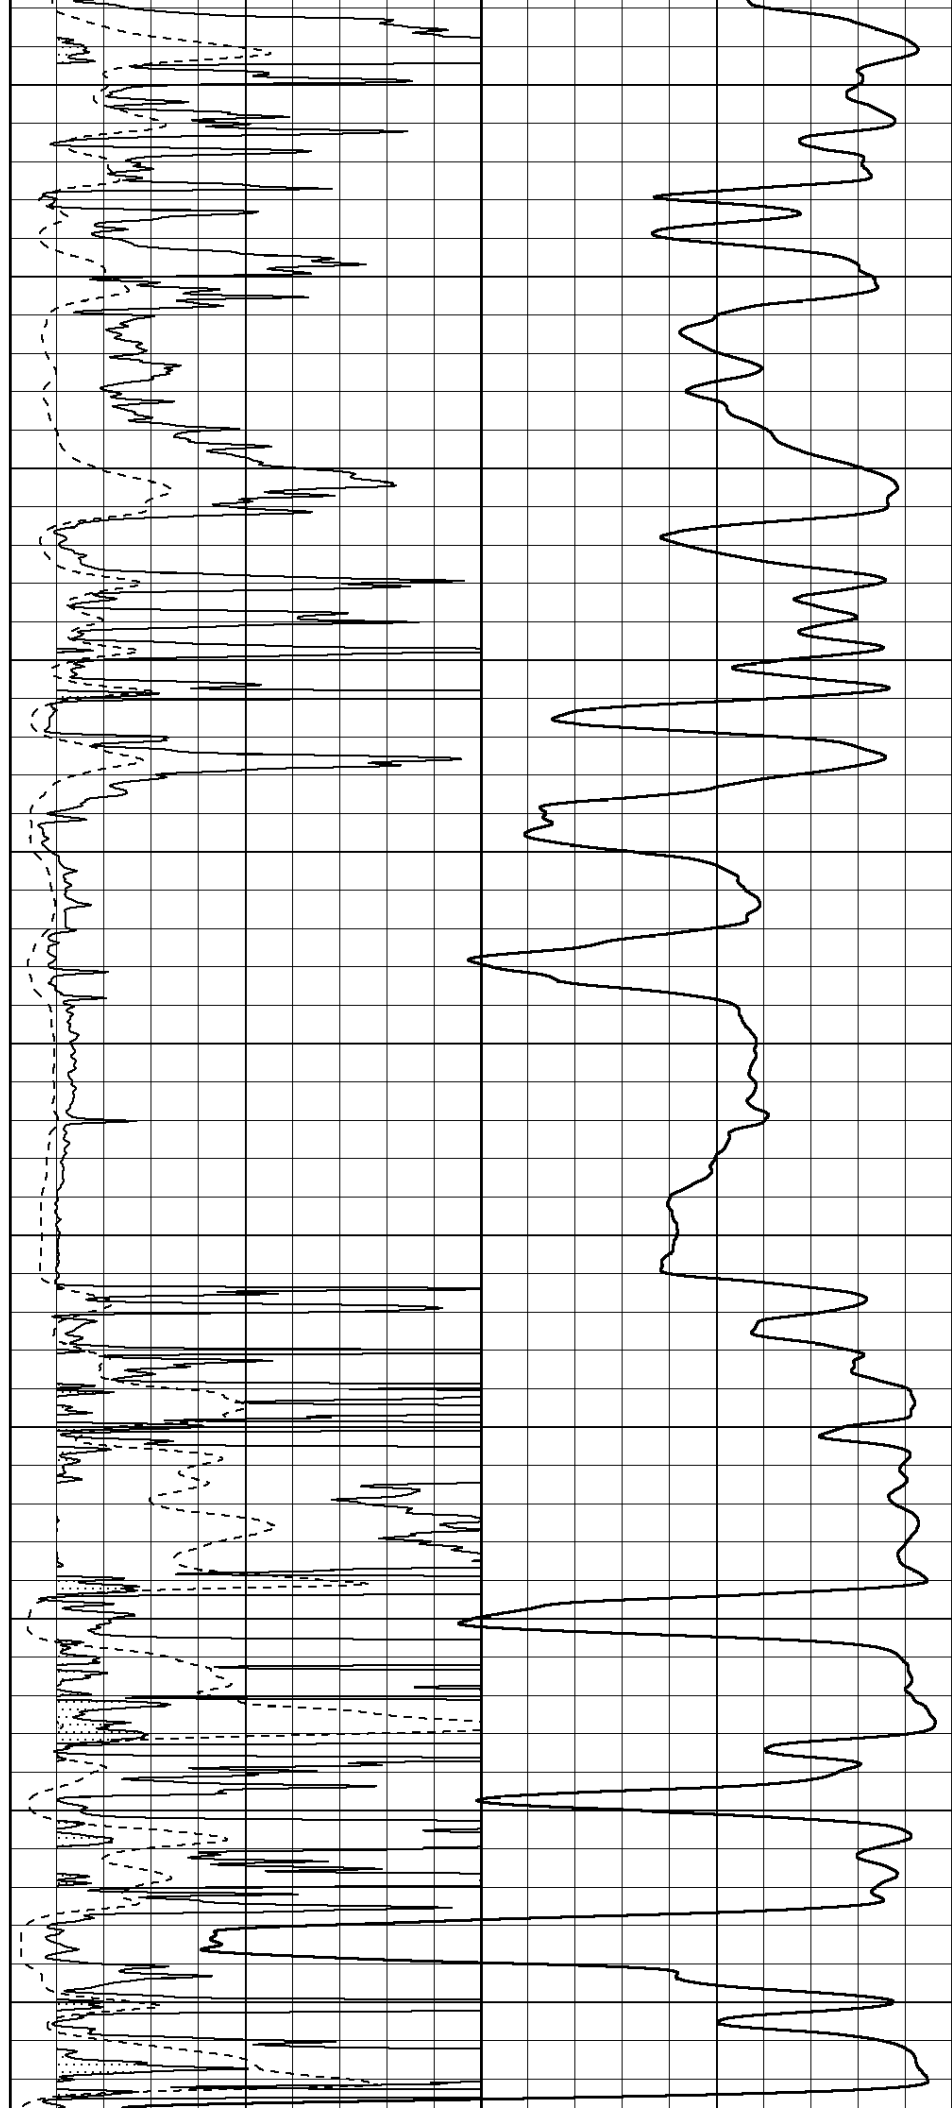

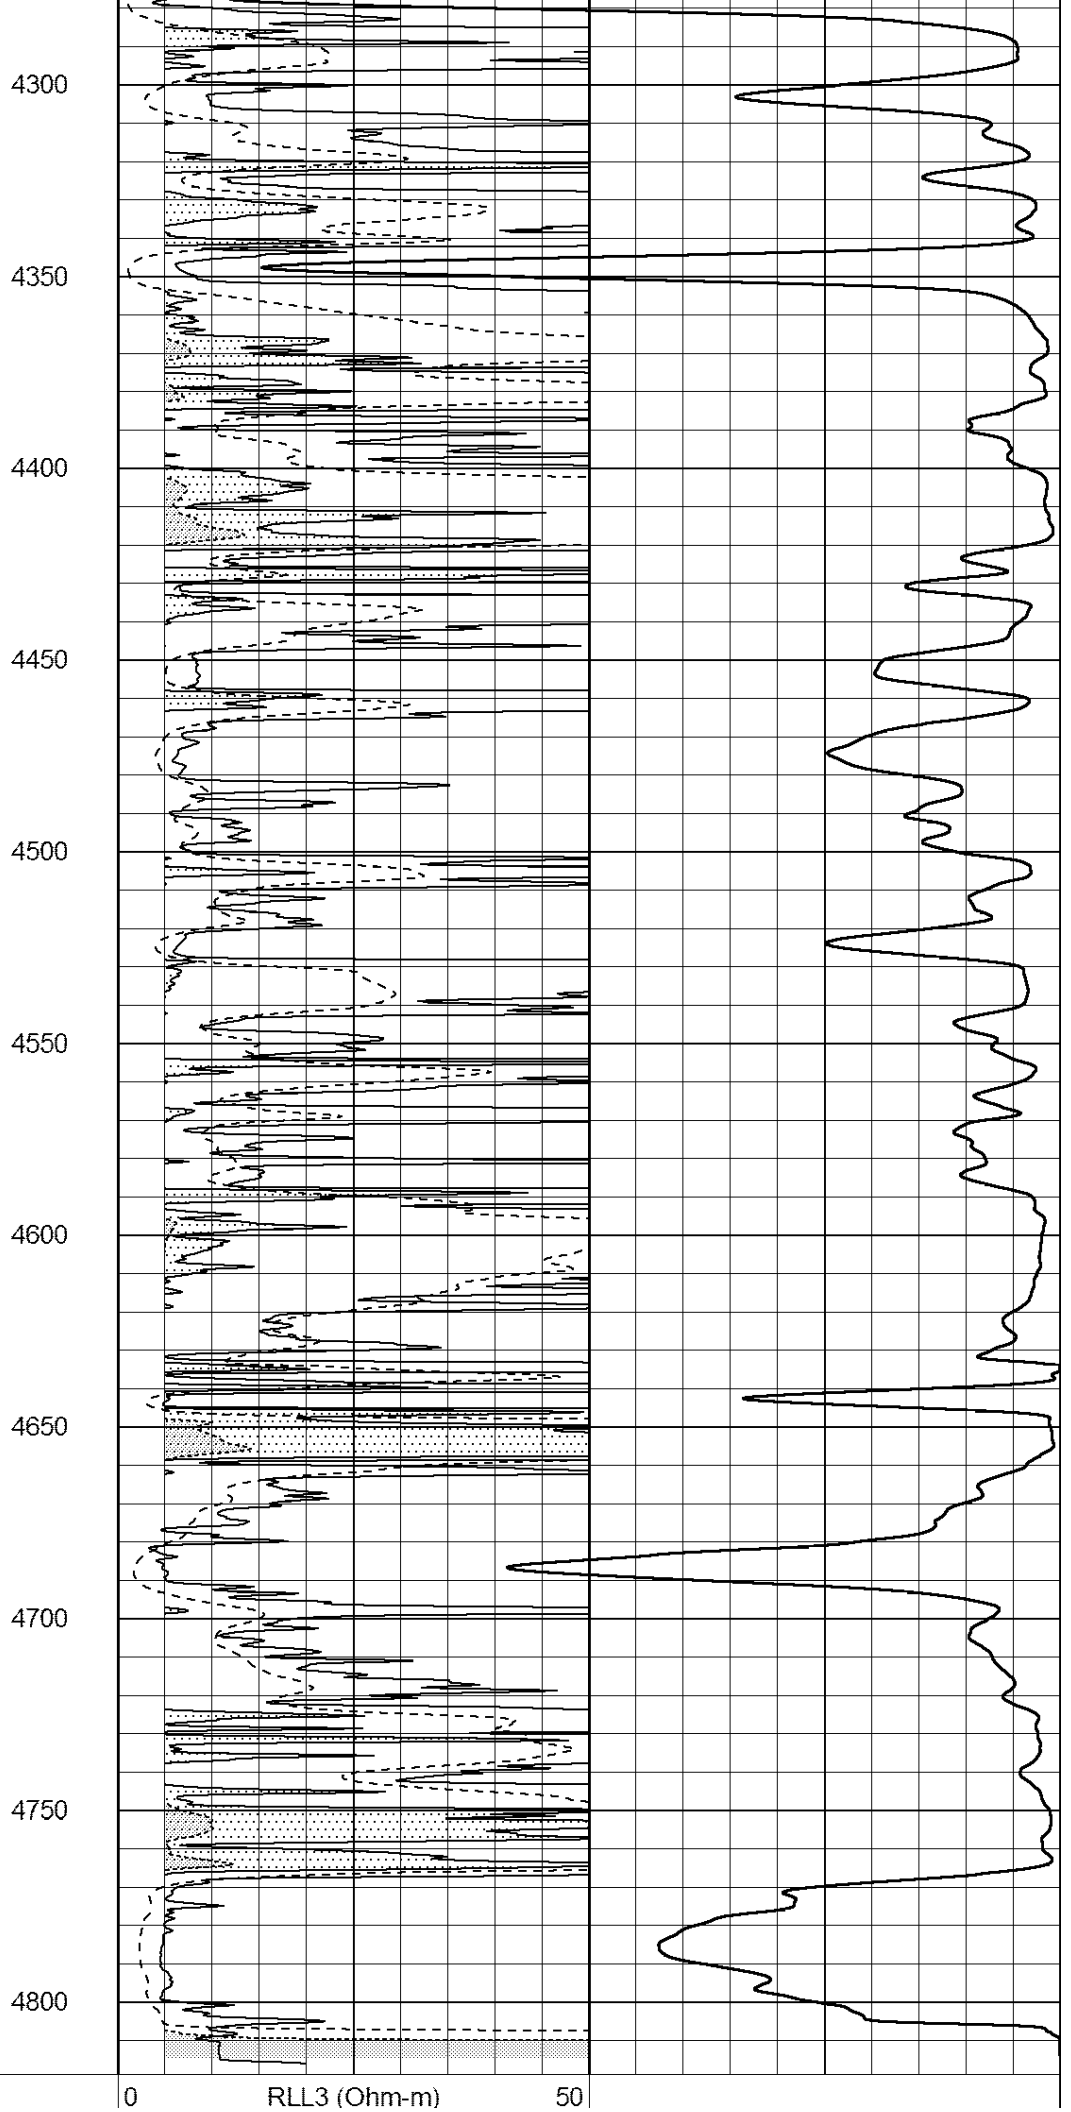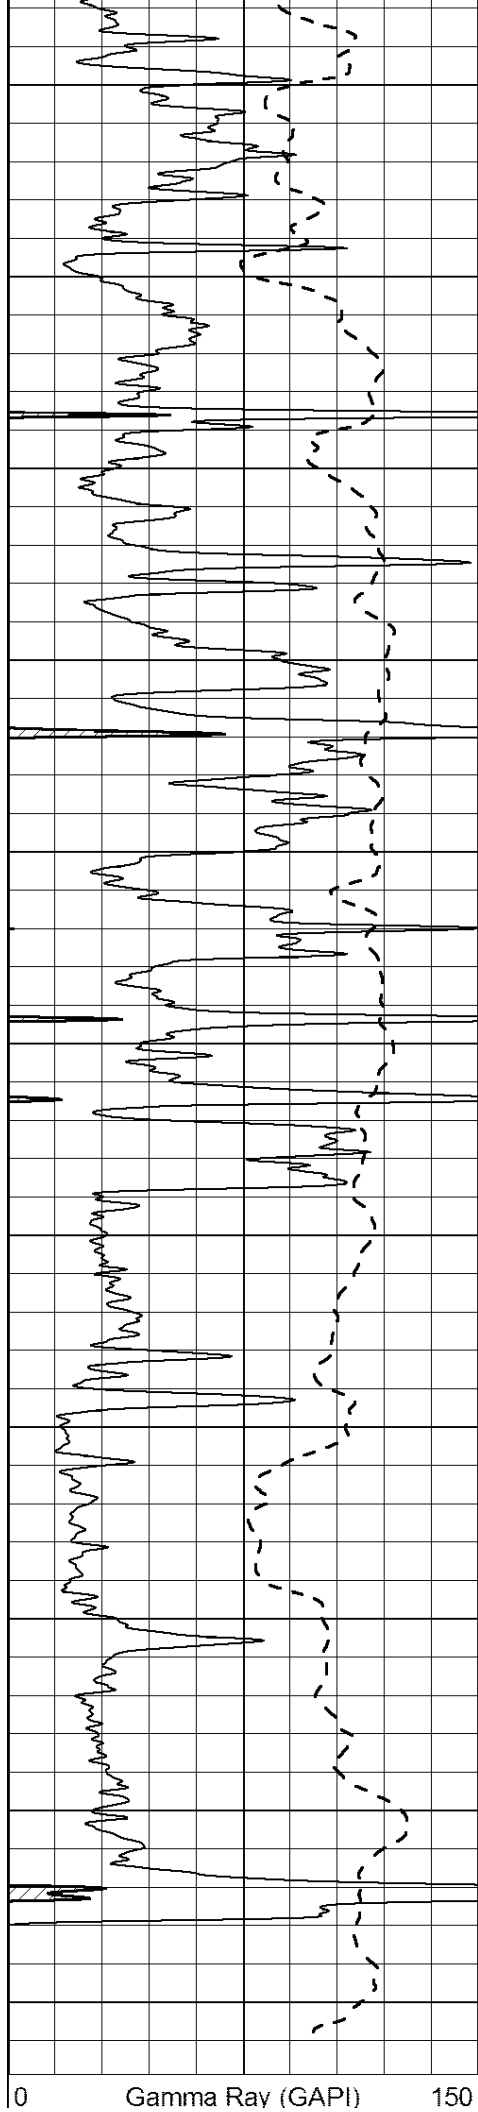


-100	SP (mV)	100
------	---------	-----

0	RILD (Ohm-m)	50
---	--------------	----

1000	CILD (mmho/m)	0
------	---------------	---

50	RILD X10 (Ohm-m)	500
----	------------------	-----

50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

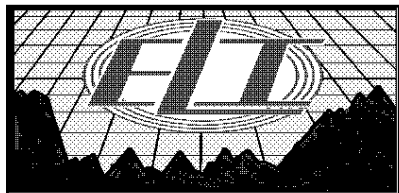


MAIN PASS

Database File: 3497ddn.db
Dataset Pathname: pass3.1
Presentation Format: _dil
Dataset Creation: Thu Apr 18 04:37:46 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

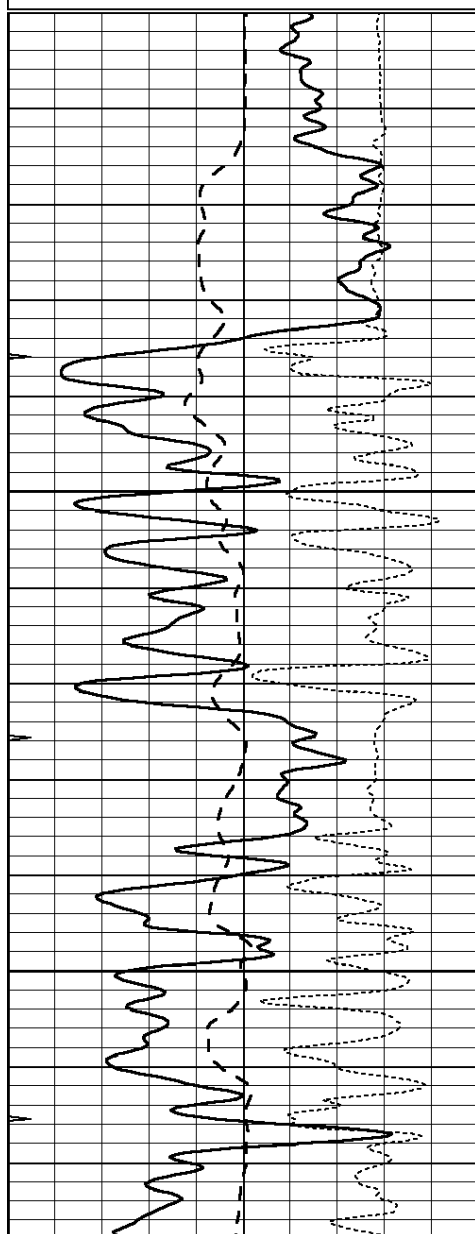


3200

3250

3300

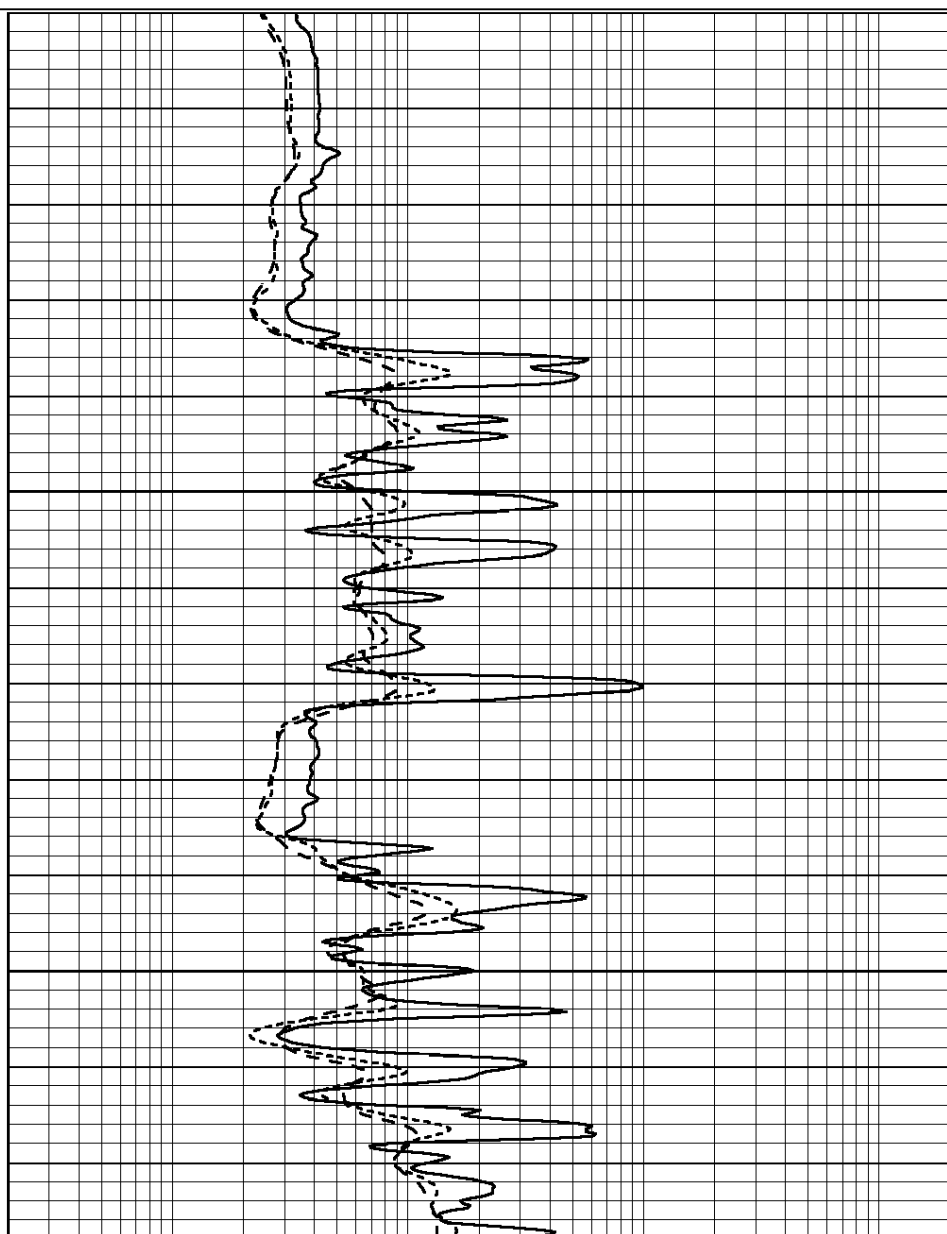

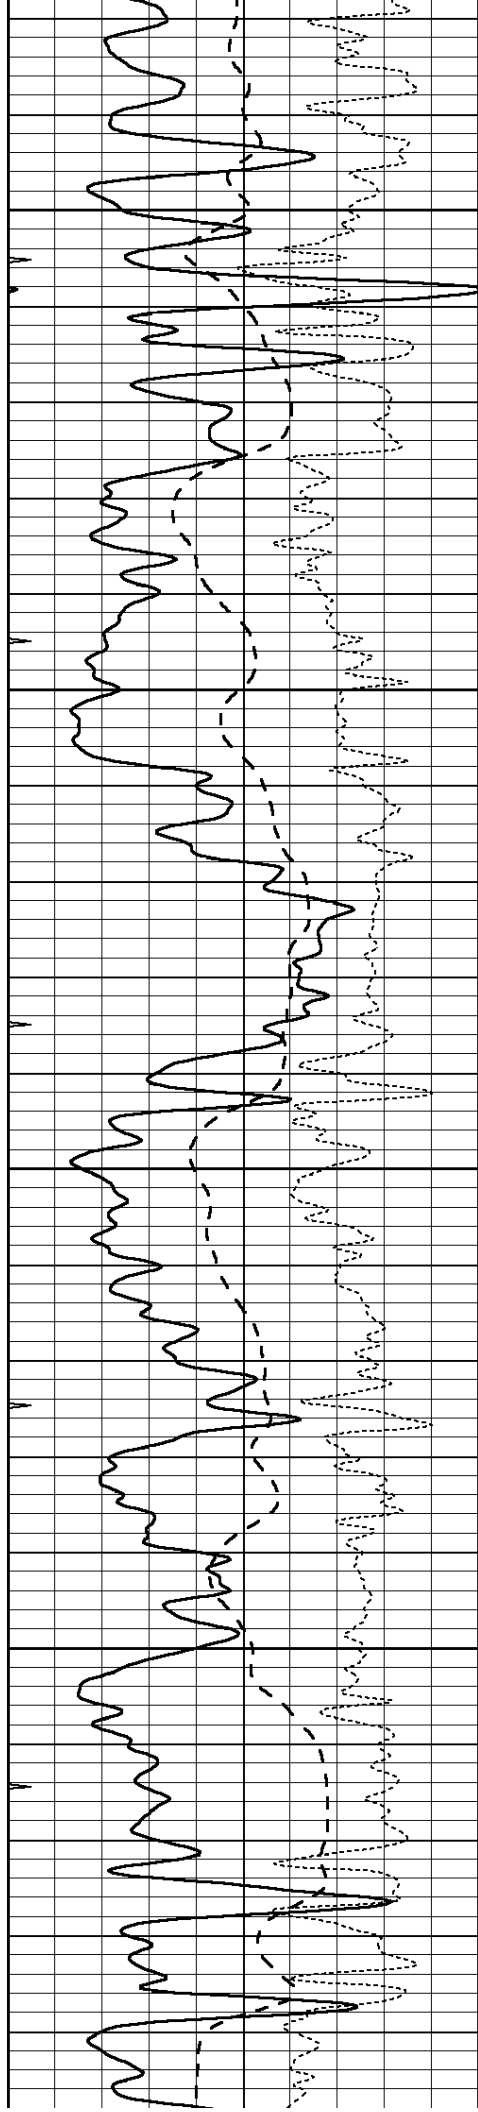



3350

3400

3450

3500

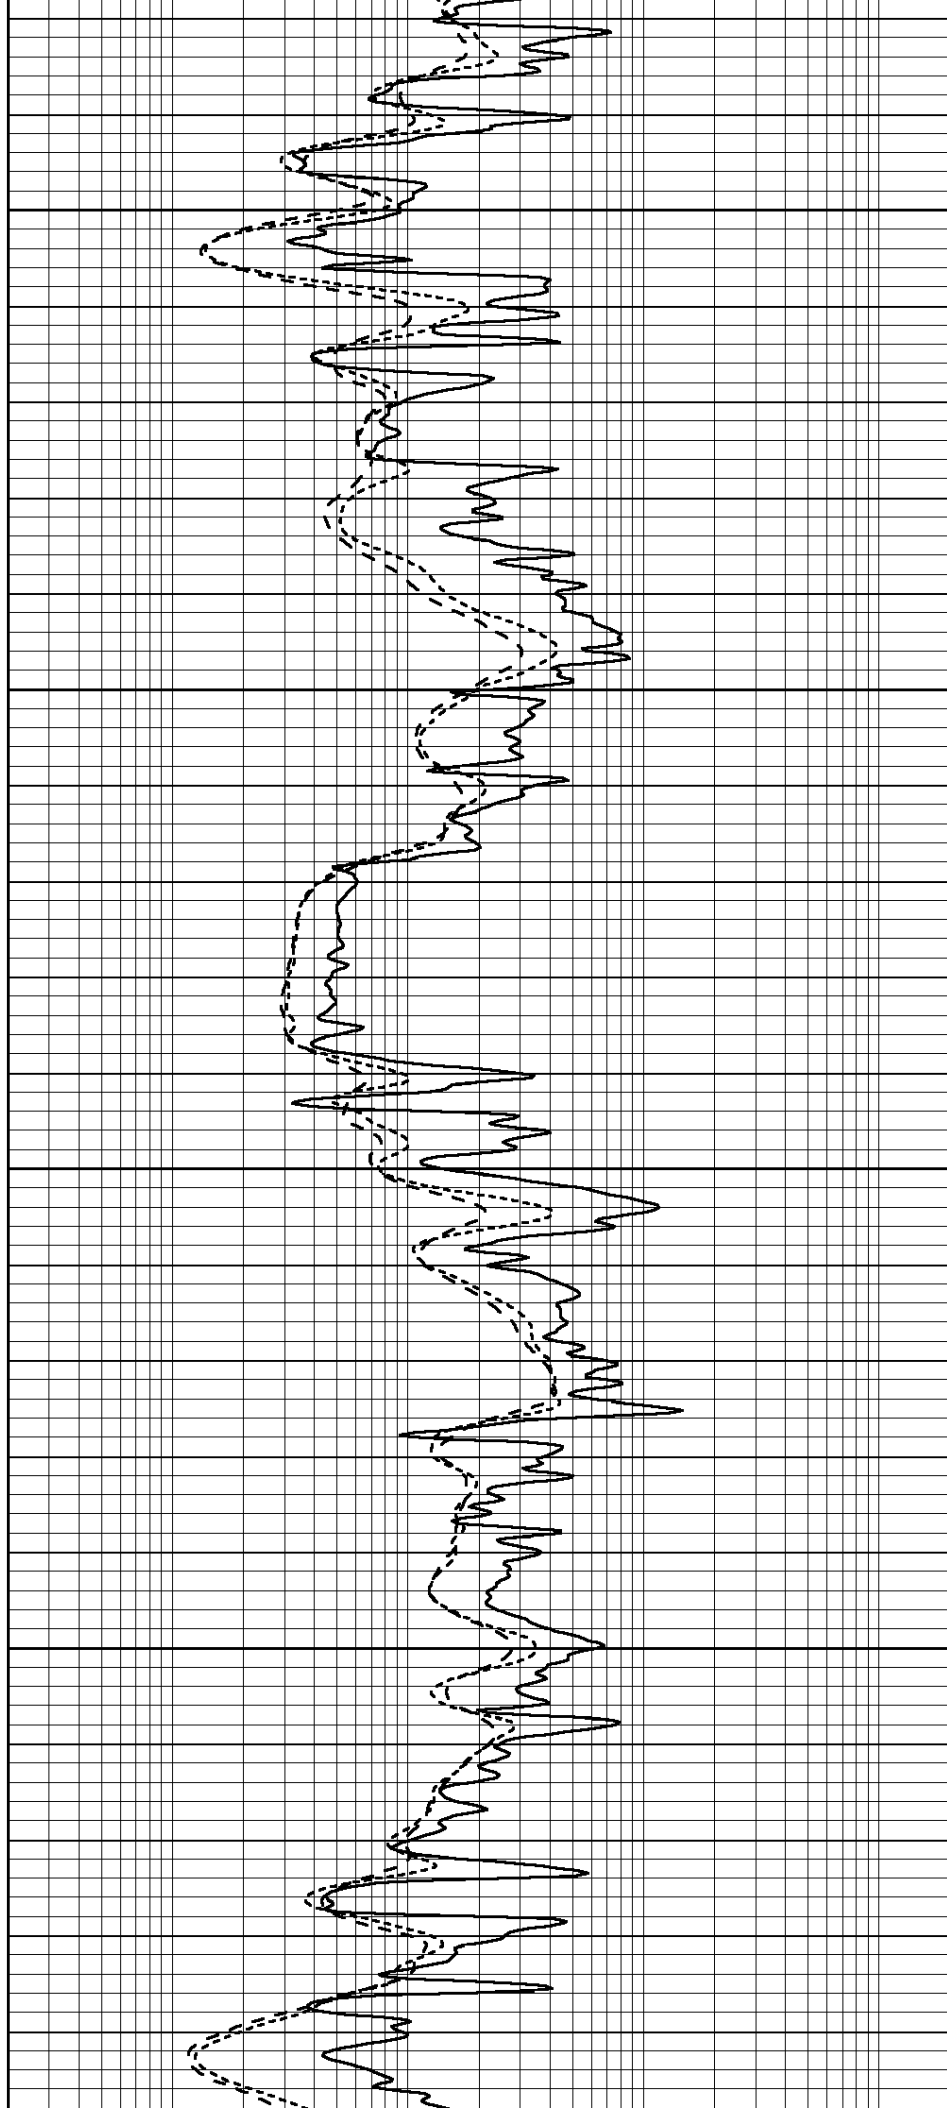

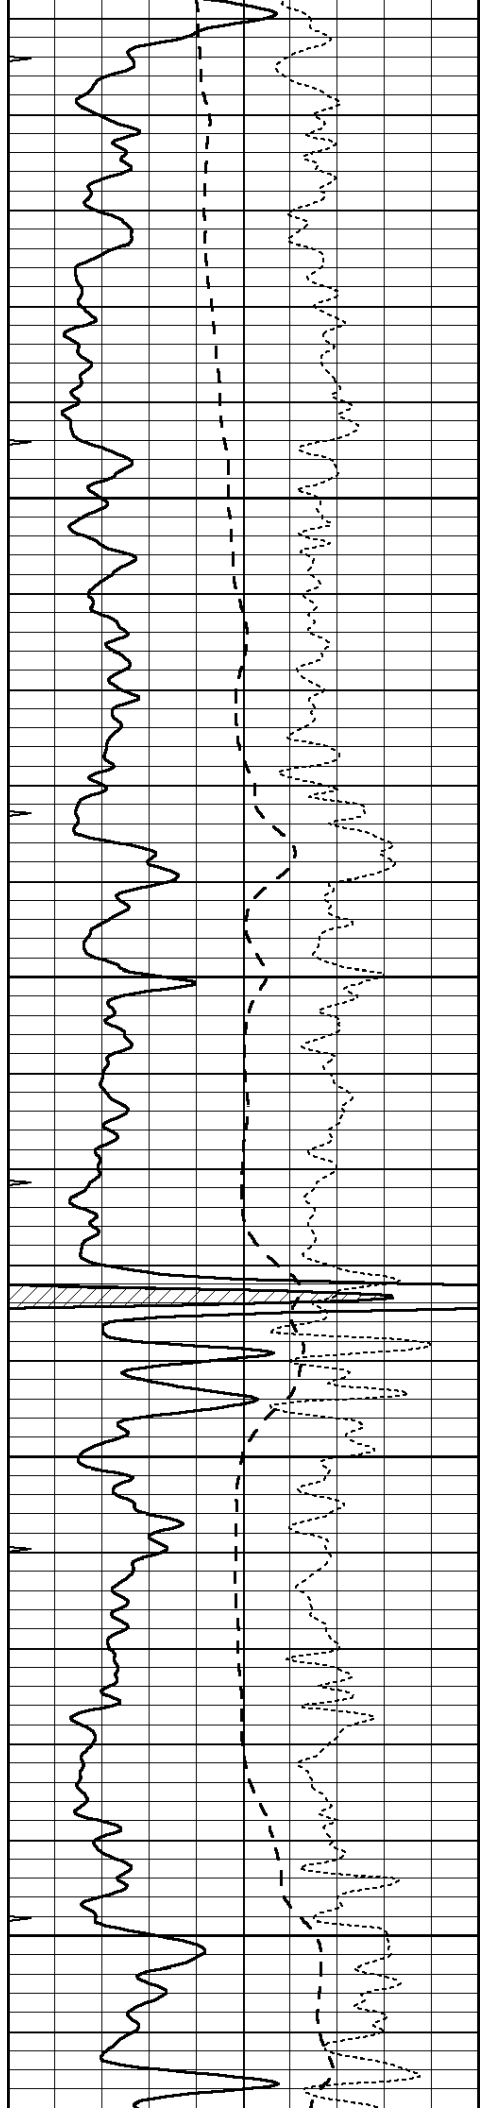


3550


3600

3650

3700

3750

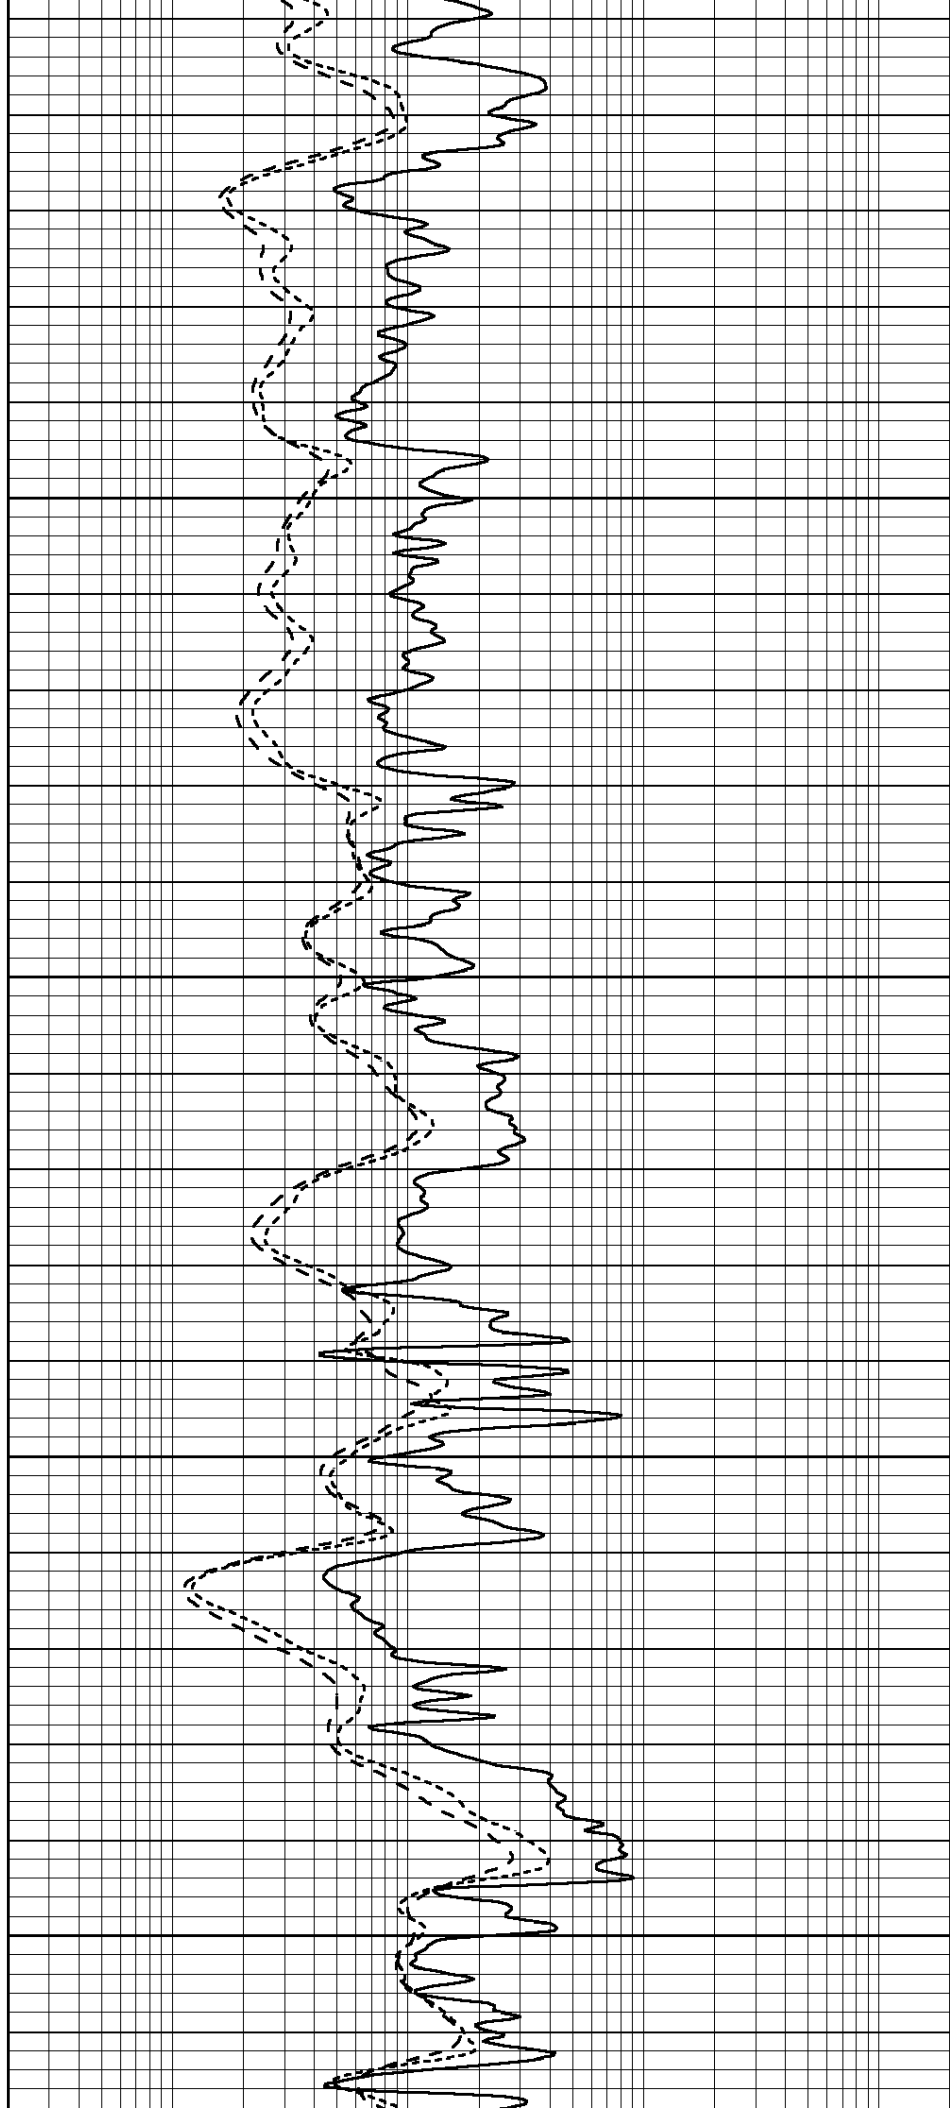

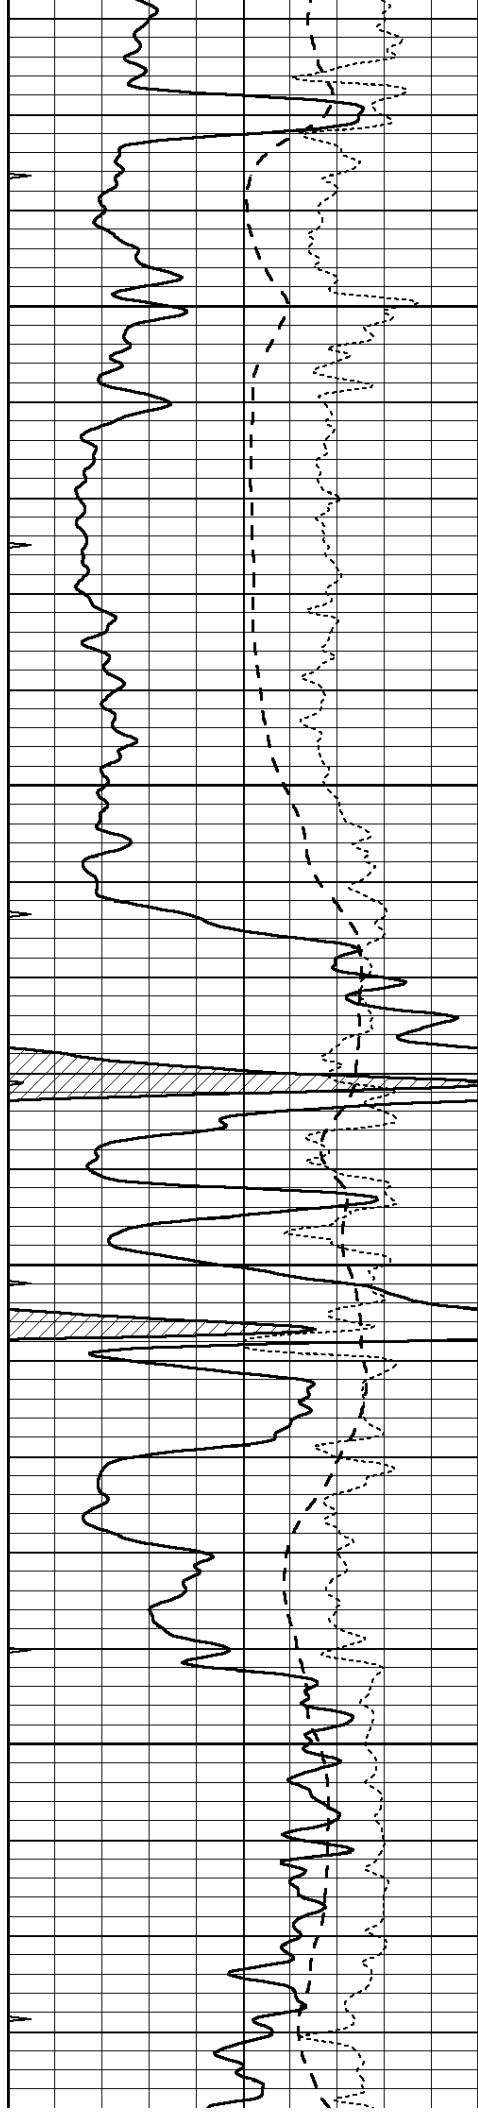



3800

3850

3900

3950

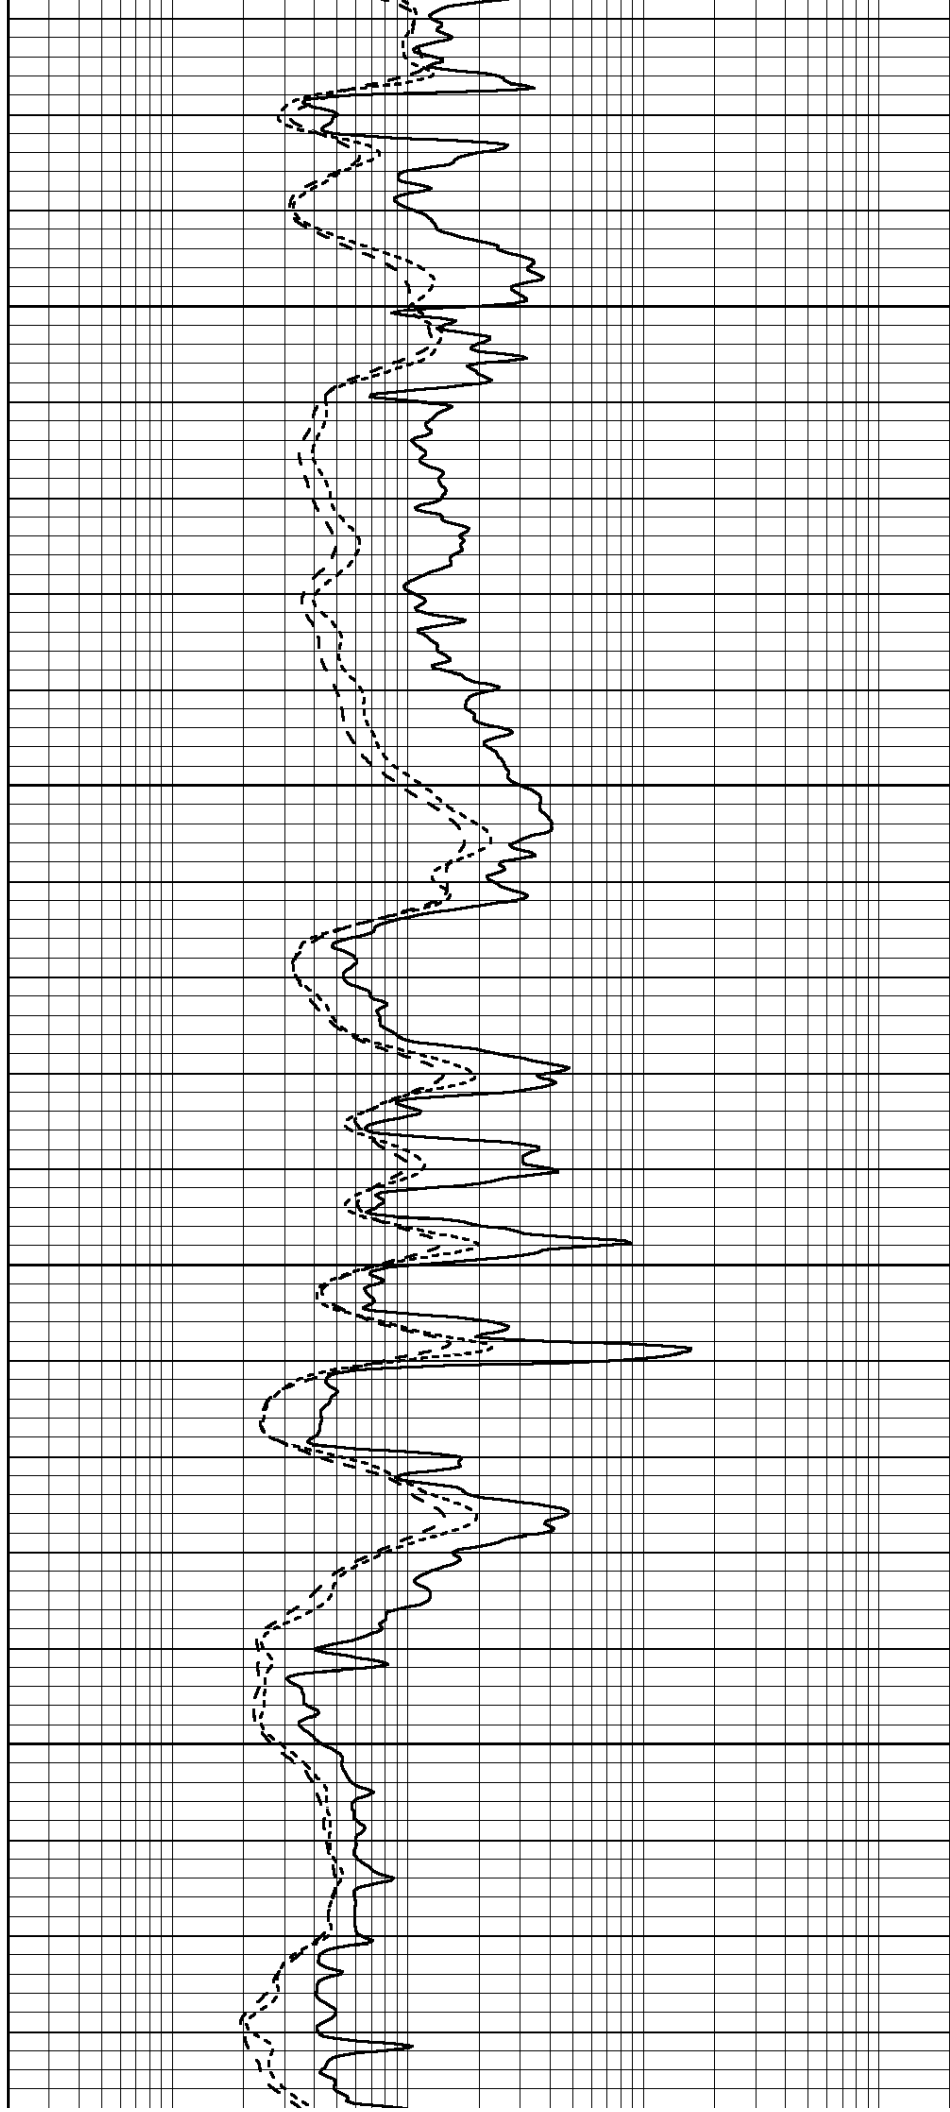

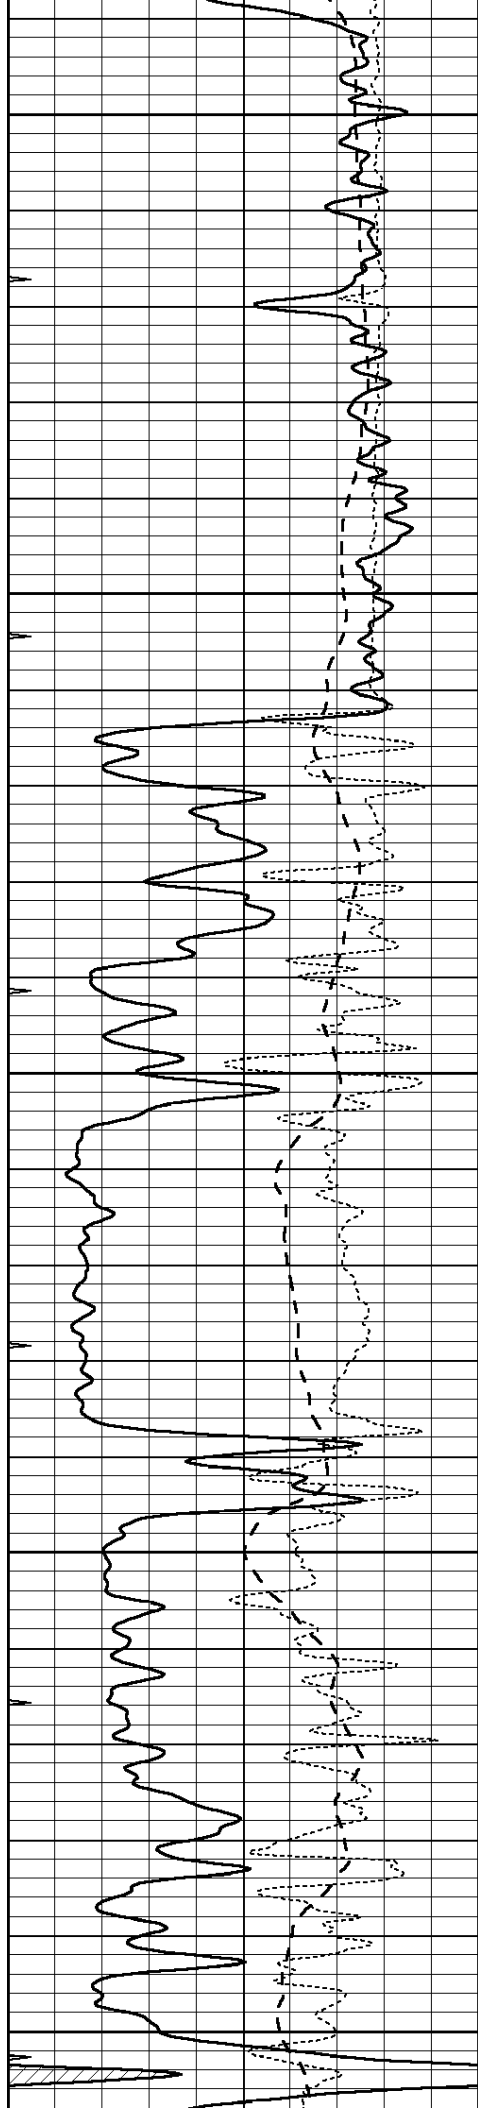


4000


4050

4100

4150

4200

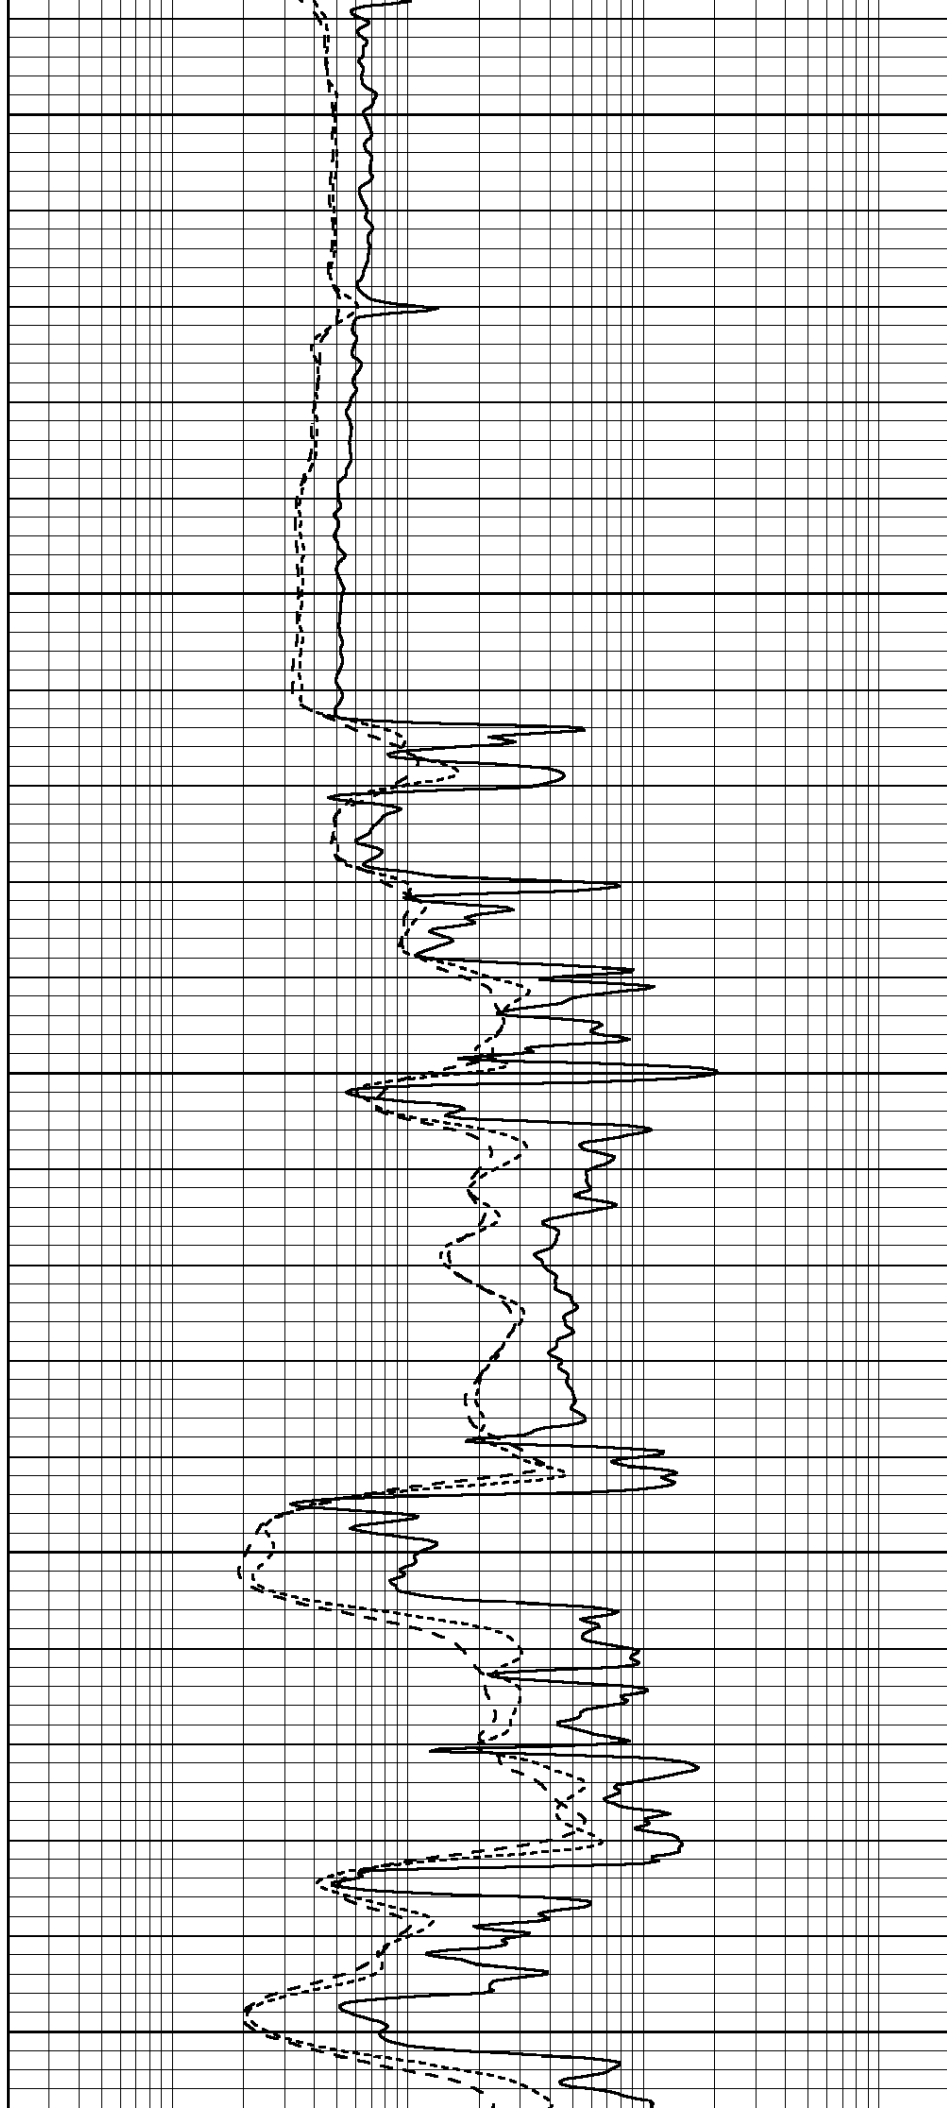

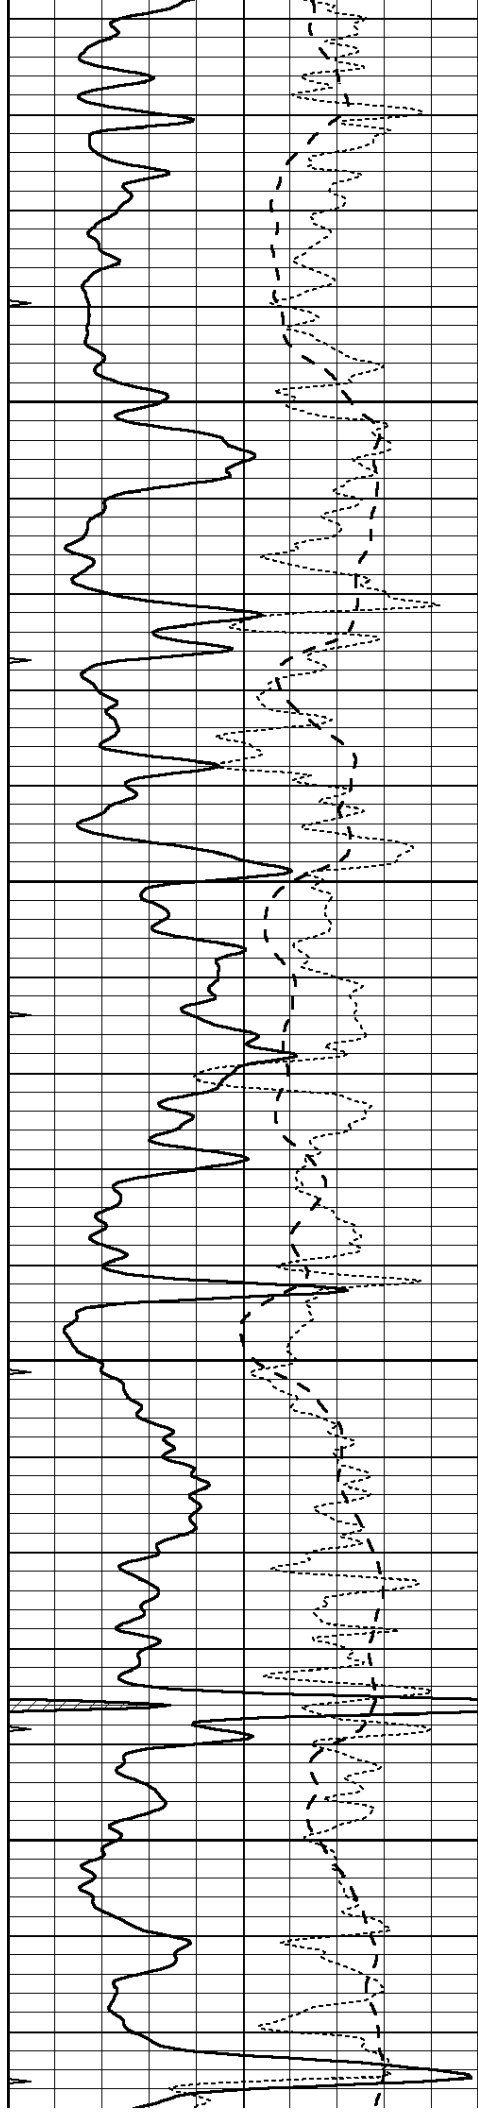



4250

4300

4350

4400

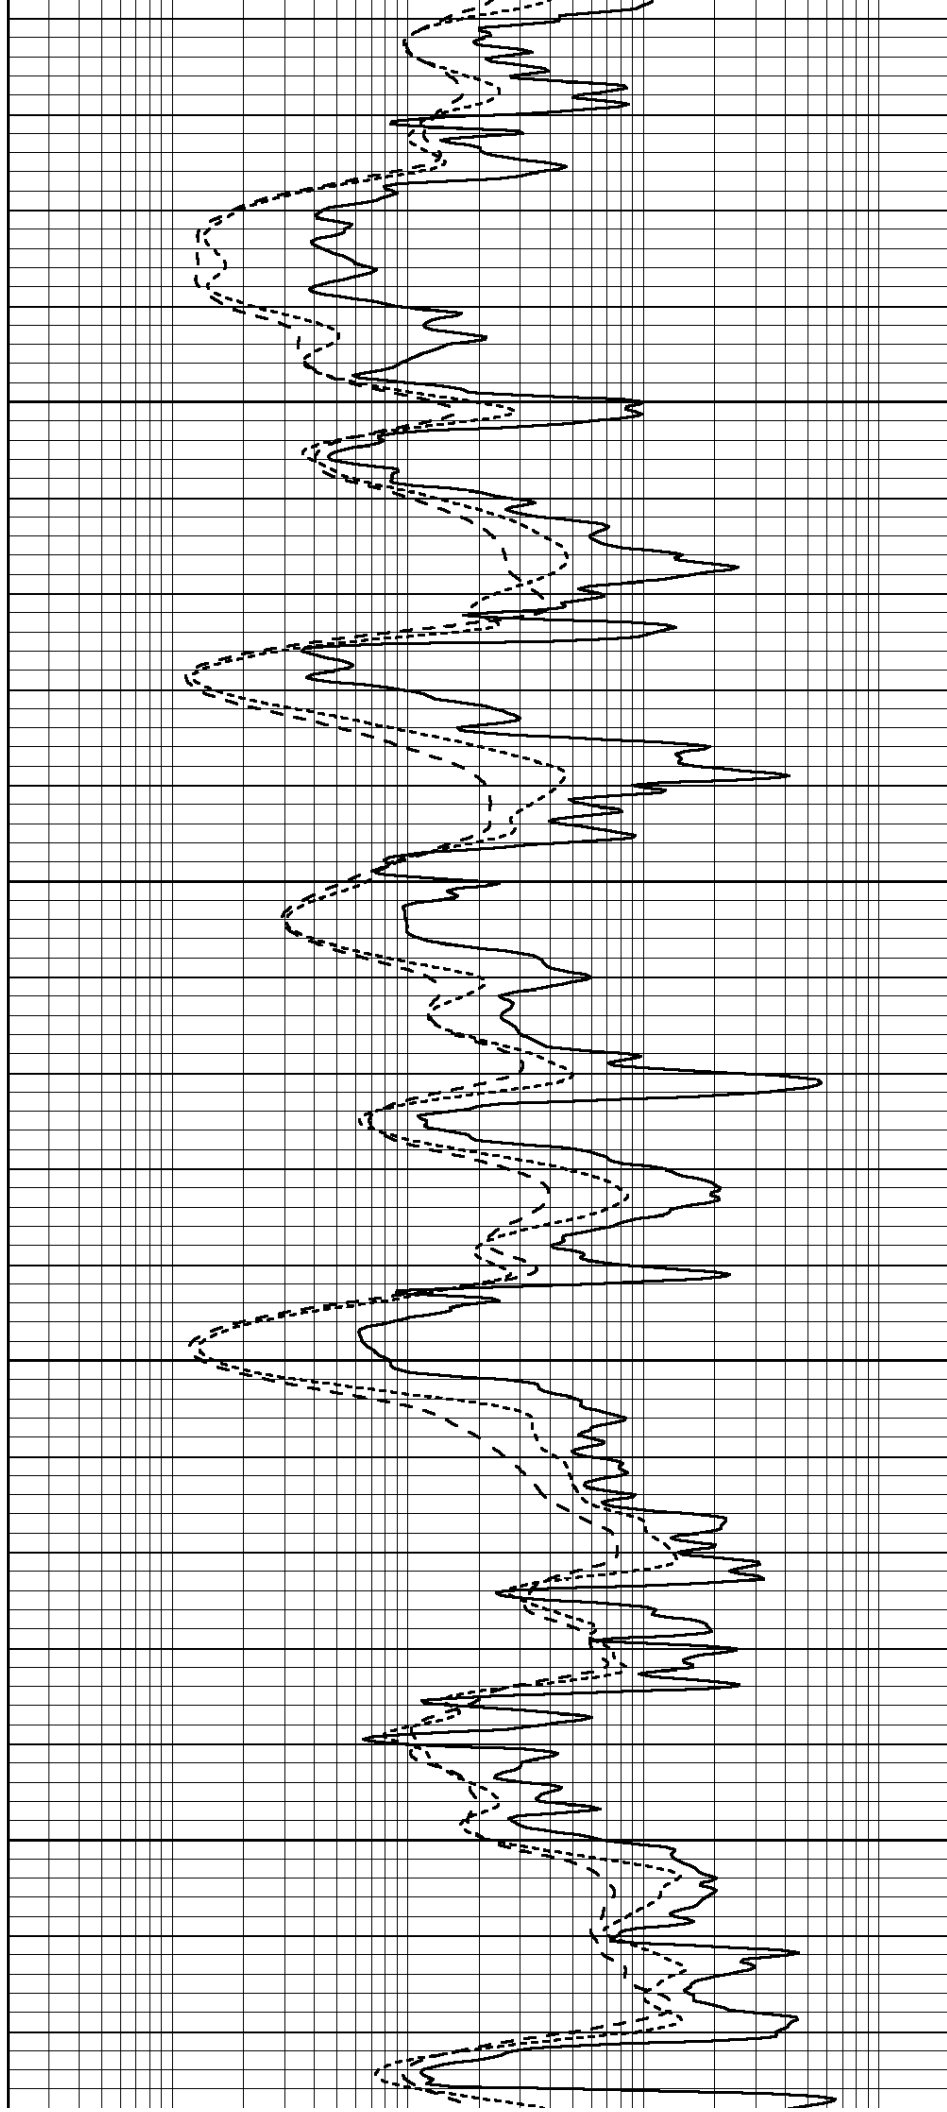

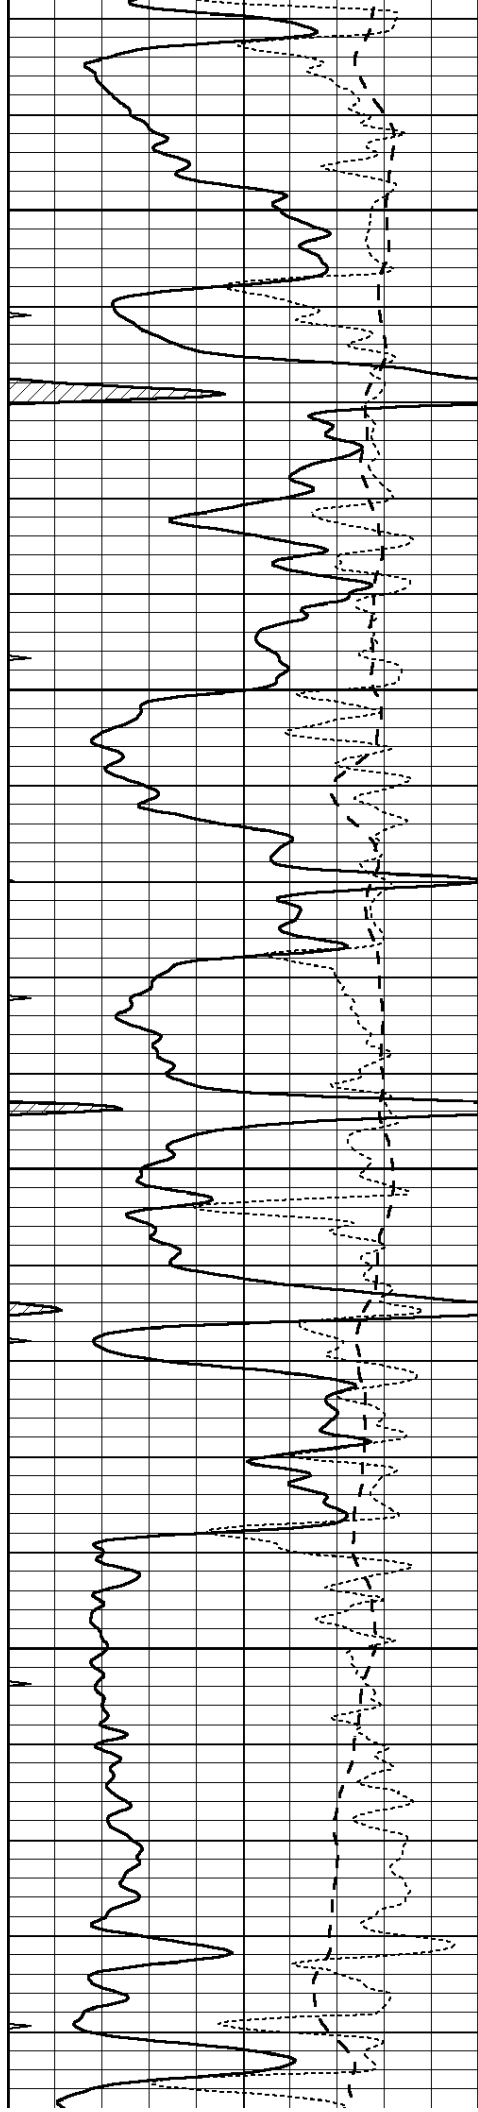





4450

4500

4550

4600

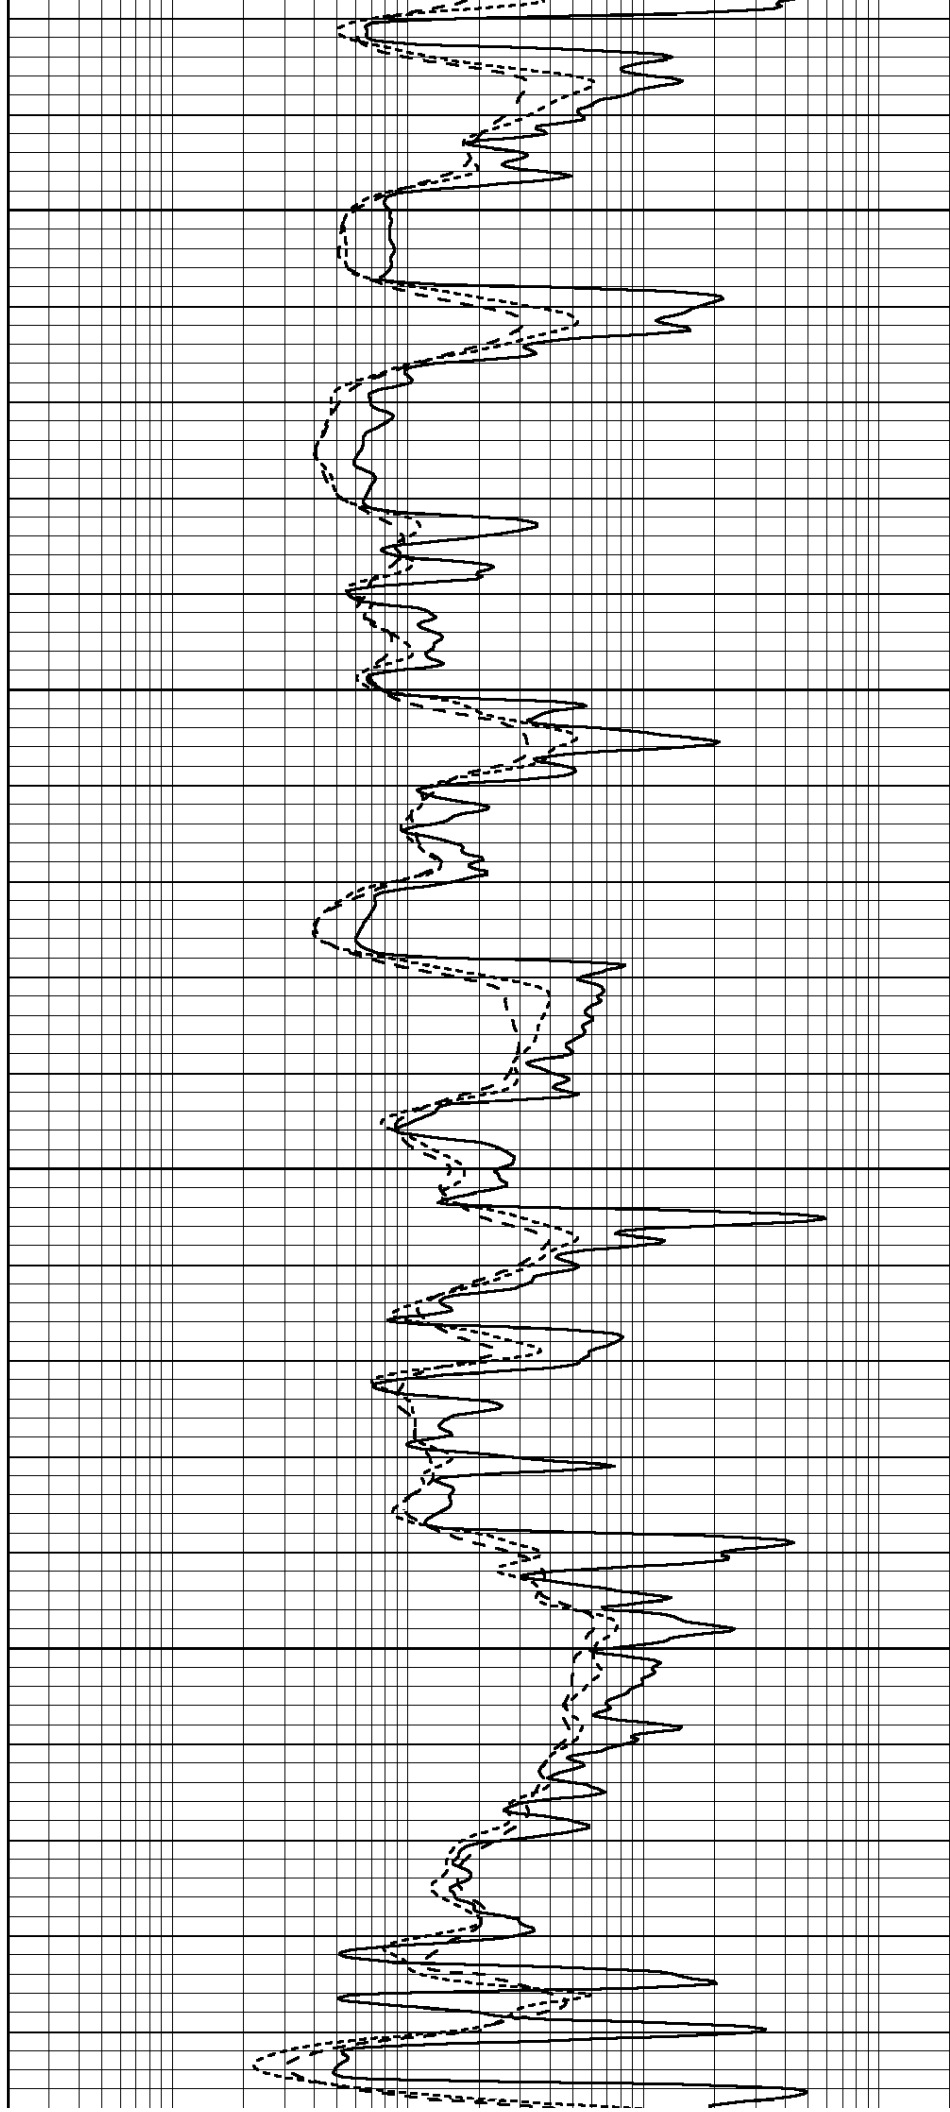

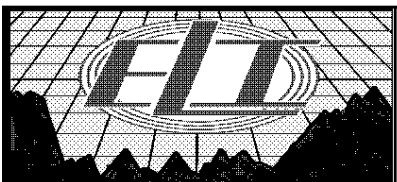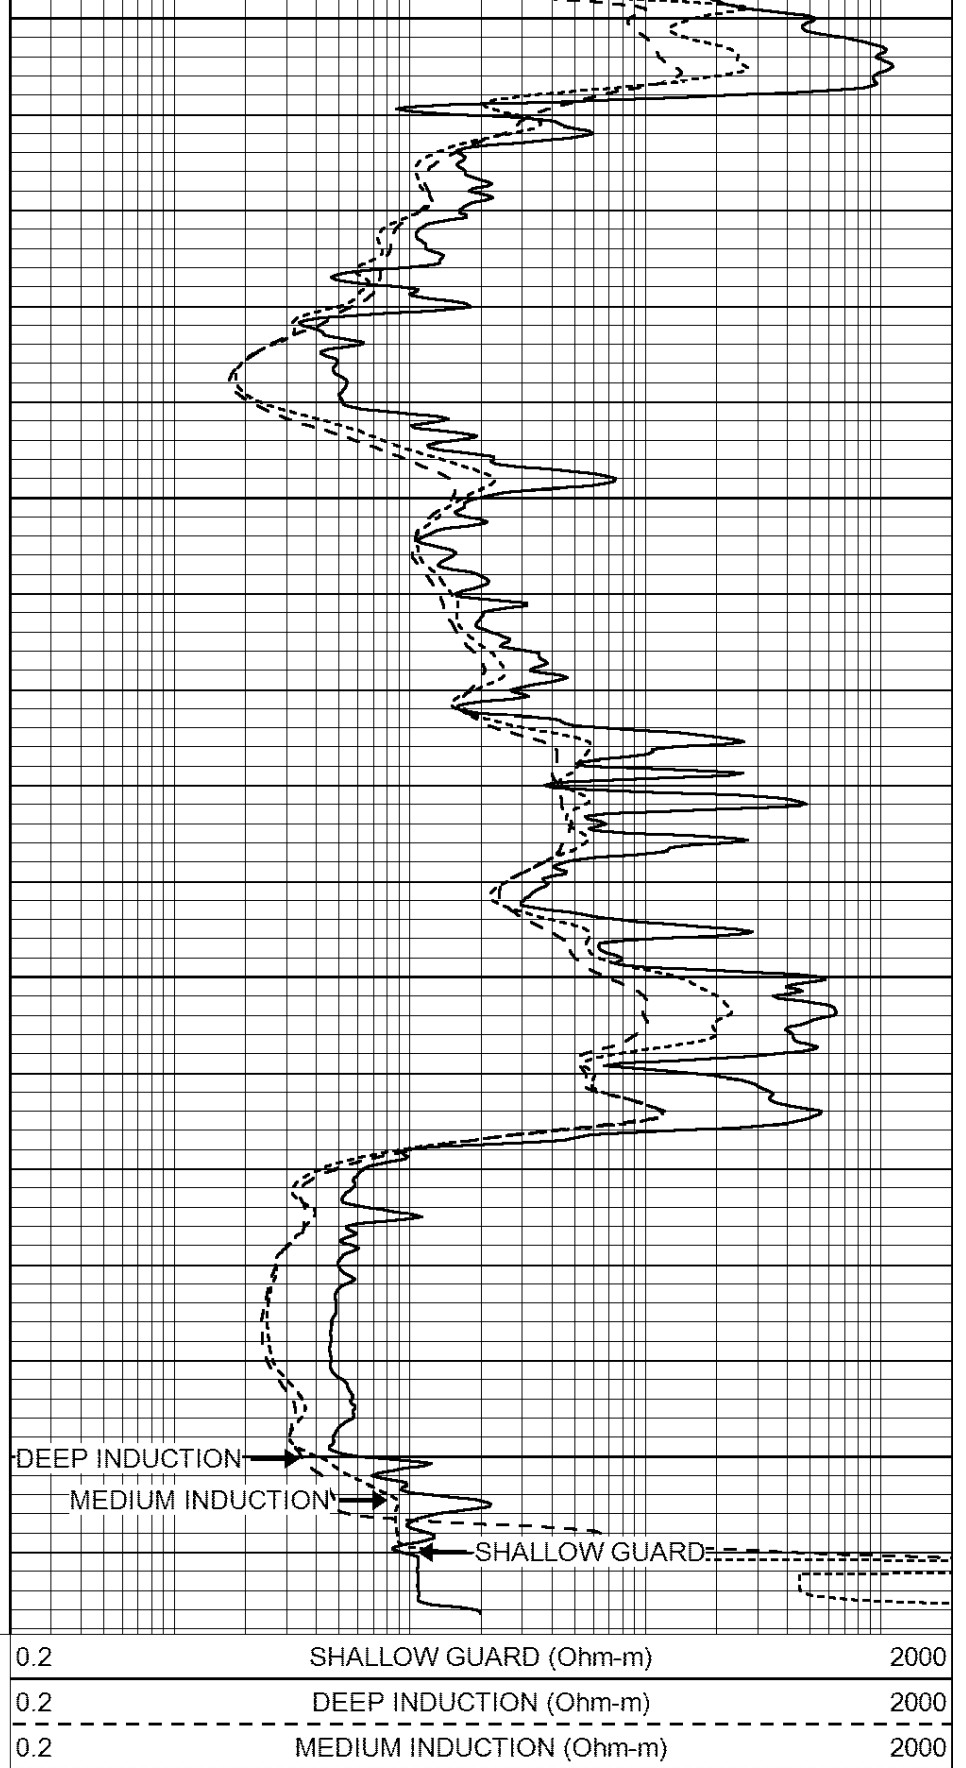
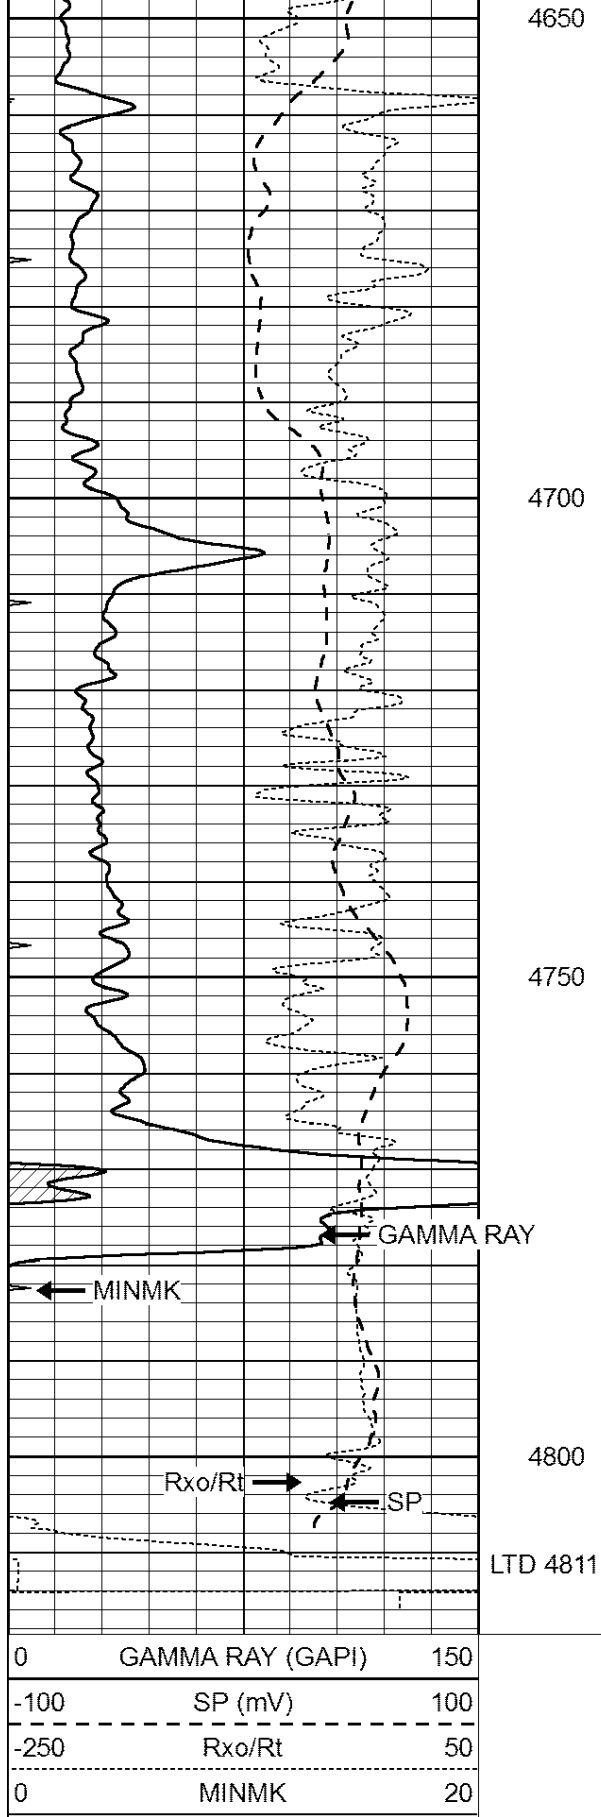



REPEAT SECTION

Database File: 3497ddn.db
Dataset Pathname: pass2.1
Presentation Format: _dil
Dataset Creation: Thu Apr 18 03:45:20 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

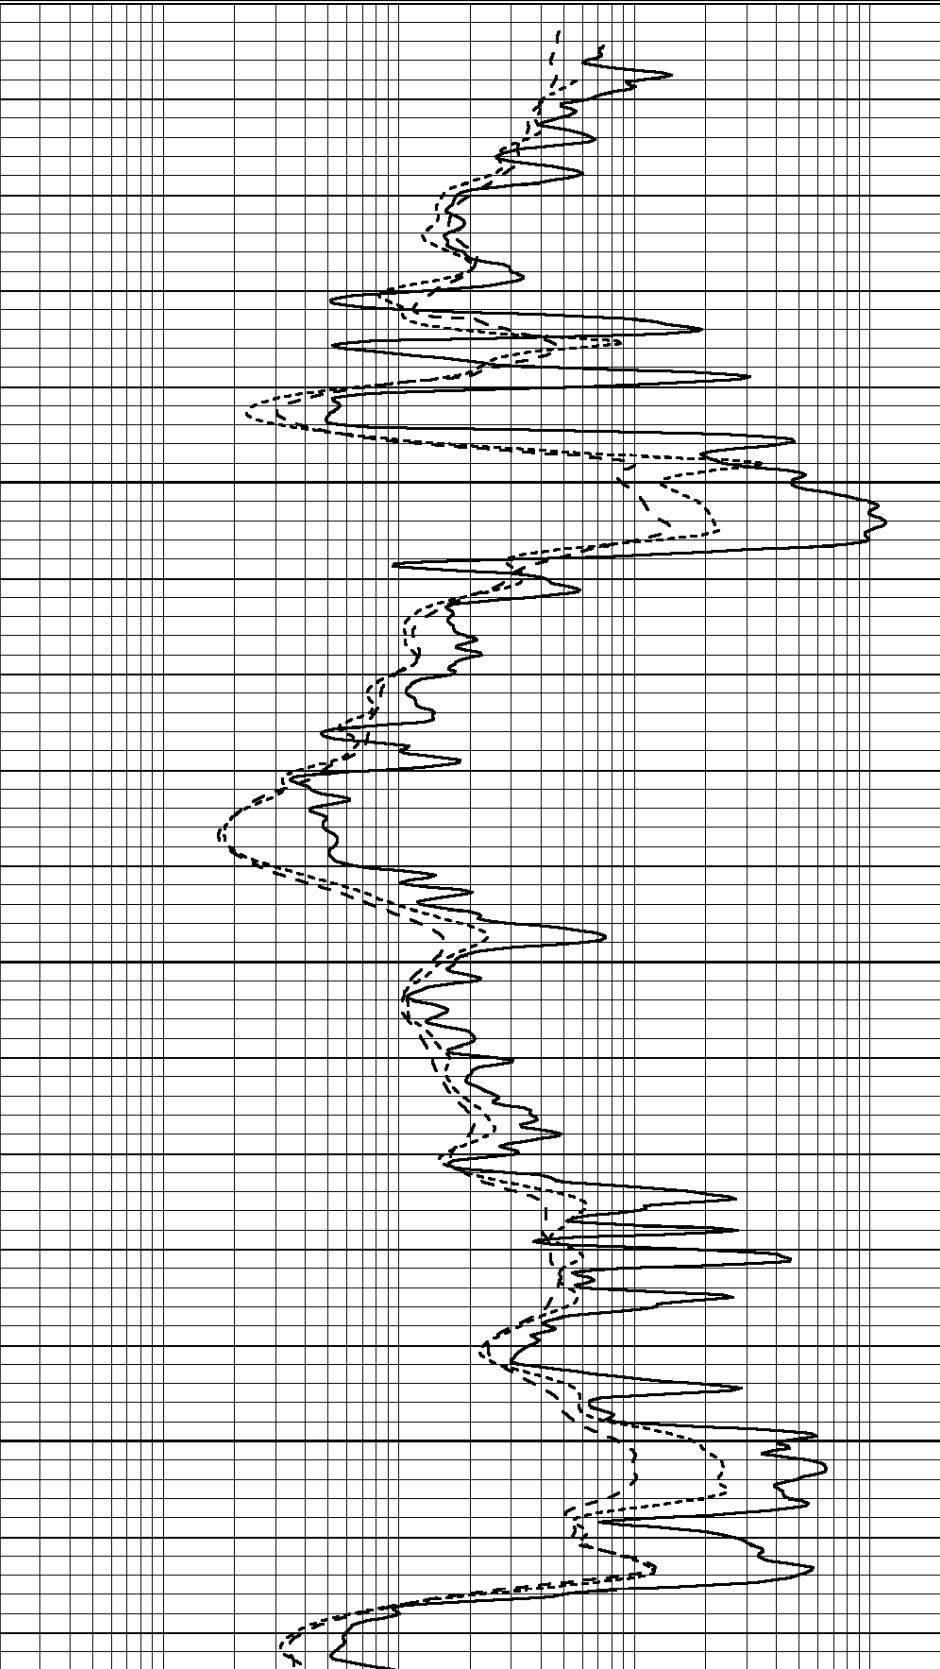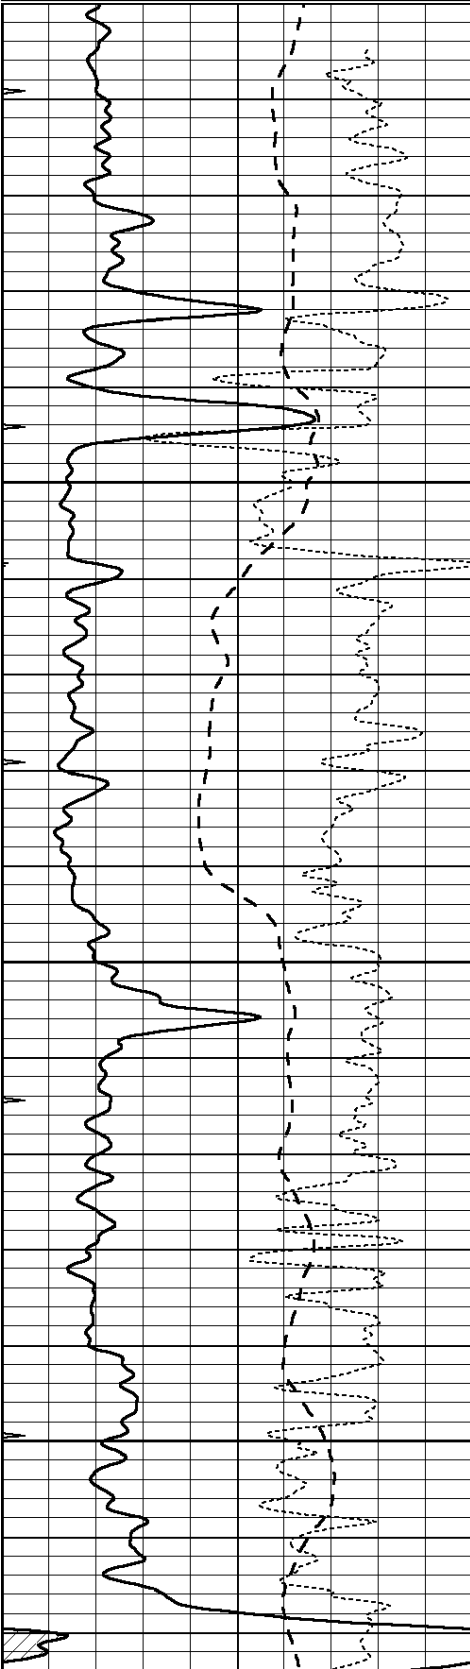

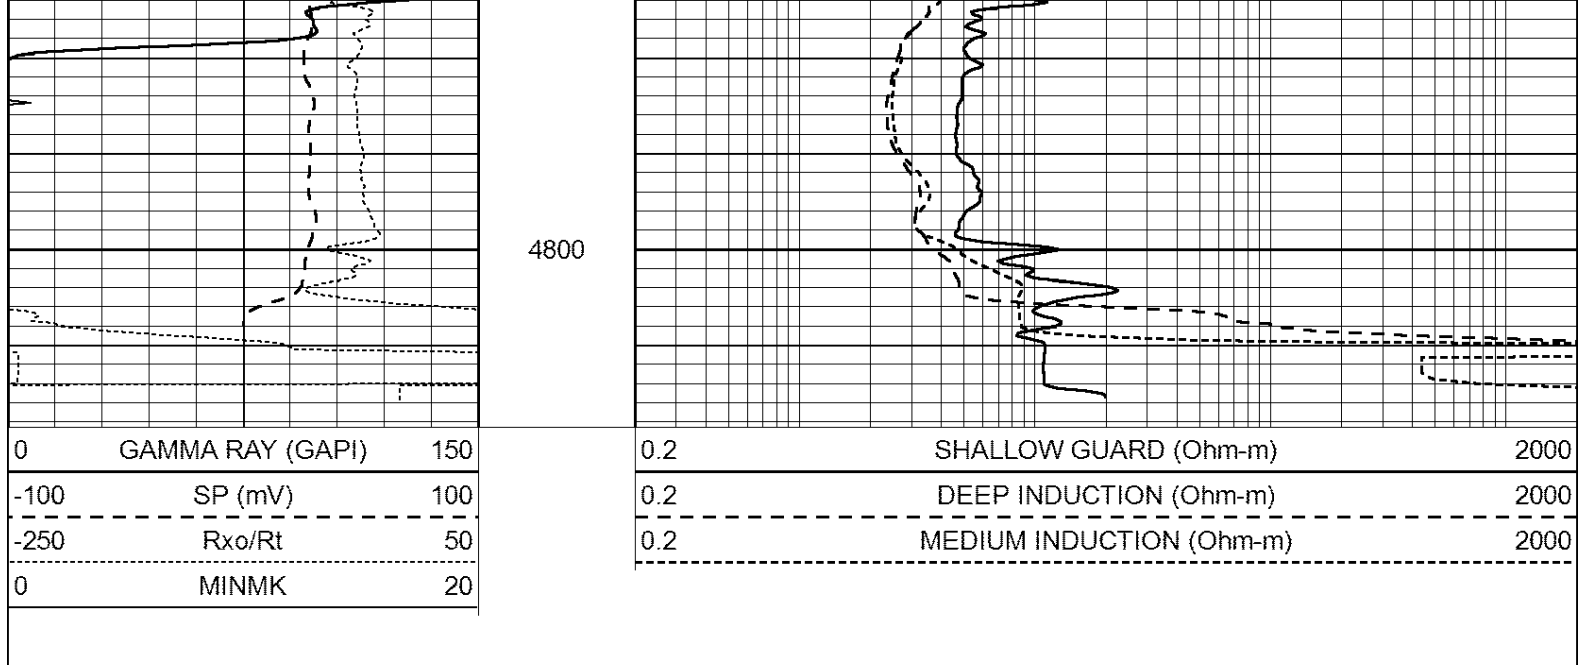

Calibration Report									
Database File:		3497ddn.db							
Dataset Pathname:		pass2.1							
Dataset Creation:		Thu Apr 18 03:45:20 2019							
Dual Induction Calibration Report									
Serial-Model:		PROBE8-DILG							
Surface Cal Performed:		Mon Sep 10 14:28:35 2018							
Downhole Cal Performed:		Mon Sep 10 14:28:38 2018							
After Survey Verification Performed:		Mon Sep 10 14:28:40 2018							
Surface Calibration									
		Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b	
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000	
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000	
Internal:	Zero	Cal		Zero	Cal		m	b	
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619	
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739	
Downhole Calibration									
		Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000	
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000	
LL3		7.500	V		1500.000	Ohm-m			
		0.000	V		20.000	Ohm-m			
		-7.200	V		3800.000	mmho-m			
After Survey Verification									
		Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'	
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000	
LL3		1.000	Ohm-m		1.000	Ohm-m			
		0.000	Ohm-m		0.000	Ohm-m			
		1.000	mmho-m		1.000	mmho-m			

Litho Density Calibration Report
Serial: 001N Model: PRB

Master Calibration

Performed Fri Feb 22 10:21:38 2019

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1650.2	7609.7	2906.5	8386.5	cps
Window 2	1538.2	6635.9	2614.4	7212.4	cps
Window 3	1257.0	3718.7	1765.8	3927.1	cps
Window 4	376.8	375.6	373.4	374.5	cps
Long Space	0.0	5097.7	1076.2	5674.2	cps
Short Space	2.8	1704.3	1106.3	1723.6	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.5	Rib Slope	: 0.982	Density/Spine Ratio	: 0.545
Spine Angle	: 74.5	Spine Slope	: 3.599	Spine Intercept	: -18.2

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		

	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION				
	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Mon Sep 10 14:29:23 2018	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5500	GAPI/cps