

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-039-20982-00-00
Spot: SWNW Sec/Twnshp/Rge: 6-3S-27W
1820 feet from N Section Line, 525 feet from W Section Line
Lease Name: SIMPSON Well #: 1-6
County: DECATUR Total Vertical Depth: 2136 feet

Operator License No.: 33486
Op Name: DARK HORSE OIL COMPANY LLC
Address: 34861 FOREST PARK DRIVE
ELIZABETH, CO 80107

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	221		

\$ 69.42

Well Type: LH UIC Docket No: _____ Date/Time to Plug: 08/07/2006 6:15 PM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: KEITH VANPELT Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: Order 205 sxs Common with 1/4# flocele per sack.
Lost circulation at 2136' - could not get circulation back.

Plugging Proposal Received By: HERB DEINES WitnessType: NONE
Date/Time Plugging Completed: 08/07/2006 1:00 AM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug 1900' w/50 sxs common with 3% cc.
Waited 4 hours and established good returns at 1525'.
2nd. Plug at 1525' w/80 sxs common with 1/4# flocele per sack.
3rd. Plug at 275' w/40 sxs common with 1/4# flocele per sack.
4th. Plug at 40' w/10 sxs common with 1/4# flocele per sack.
Rathole with 15 sxs common with 1/4# flocele per sack.
Mousehole with 10 sxs common with 1/4# flocele per sack.

Perfs:

INVOICED
DATE 8-17-06
2007060395


RECEIVED
AUG 16 2006
KCC WICHITA

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed _____

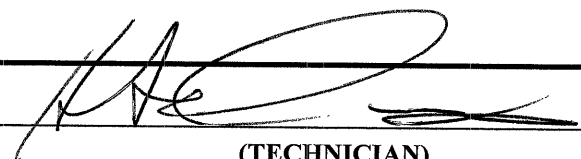

(TECHNICIAN)

AUG 07 2006

DP