

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21736-00-00
Spot: S2SWNWSE Sec/Twnshp/Rge: 30-17S-20W
1485 feet from S Section Line, 2310 feet from E Section Line
Lease Name: SLOAN Well #: 1
County: RUSH Total Vertical Depth: 4234 feet

Operator License No.: 9860
Op Name: CASTLE RESOURCES, INC.
Address: BOX 87
SCHOENCHEN, KS 67667

String	Size	Depth (ft)	Pulled (ft)	Comment
PC		1389		WITH 150 SX CMT \$137.61
PROD	5.5	4231	0	
SURF	8.625	335		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/22/2005 8:00 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Revd. from: _____ Company: _____ Phone: _____

Proposed Plugging Method: PUMP 200 SX CMT WITH 300# HULLS. PUMP 5 SX CMT DOWN 8 5/8" CASING. PRESSURE TEST. PUMP 170 SX CMT DOWN 5 1/2". PRESSURE TEST.

Plugging Proposal Received By: _____ WitnessType: NONE
Date/Time Plugging Completed: 11/22/2005 12:00 AM KCC Agent: STEVE DURRANT

Actual Plugging Report:

PUMP 200 SX CMT WITH 300# HULLS. PUMP 5 SX CMT DOWN 8 5/8" CASING. PRESSURED TO 500#. DID NOT TAKE ANY CMT. PUMP 170 SX CMT DOWN 5 1/2" CASING. PRESSURED TO 475#. DID NOT TAKE ANY CMT.

Perfs:

Top	Bot	Thru	Comments
4105	4168		


INVOICED
8-17-06
DATE
2007060394
RECEIVED
AUG 16 2006

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: CSG

KCC WICHITA

District: 01

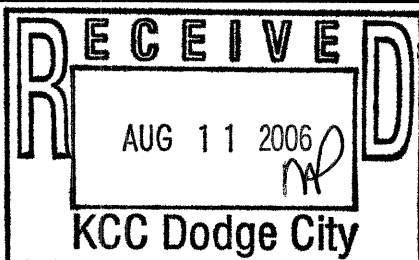

Signed Steve Durrant
(TECHNICIAN)

PPT