

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-21530-00-00  
Spot: S2SWSESW Sec/Twnshp/Rge: 33-23S-35W  
110 feet from S Section Line, 1710 feet from W Section Line  
Lease Name: HERBERS SWD Well #: 1  
County: KEARNY Total Vertical Depth: 1655 feet

Operator License No.: 5952  
Op Name: BP AMERICA PRODUCTION COMPANY  
Address: 2225 WEST OKLAHOMA AVENUE  
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	2.375	1651	0	
SURF	5.5	930		

\$ ~~102~~  
53.79

Well Type: SWD UIC Docket No: D27303.0 Date/Time to Plug: 07/19/2006 2:00 PM  
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES  
Proposal Rcvd. from: JOE EUDEY Company: BP AMERICA PRODUCTION Phone: (620) 356-6955

Proposed  
Plugging  
Method:

PUMP 35 SX CMT & 100# HULLS DOEN 2 3/8" TUBING. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 07/19/2006 3:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 35 SX CMT & 100# HULLS DOWN 2 3/8" TUBING. PRESSURE TO 700# &  
HELD. PUMP 2 SX CMT DOWN 2 3/8" X 5 1/2" ANNULUS. PRESSURE TO 700#.

Perfs:


Top	Bot	Thru	Comments
1551	1651		

INVOICED  
DATE 8-11-06  
2007060372  
RECEIVED  
AUG 11 2006  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

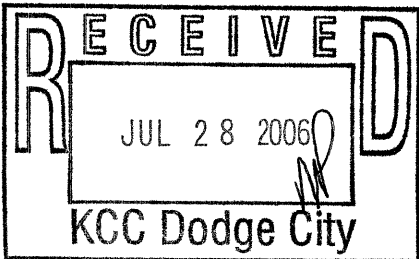

Signed

*Ken Jehlik*

(TECHNICIAN)

Form CR-21

PKT