

**KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION**
Please TYPE Form and File ONE Copy

Form CP-1
September 2003
**This Form must be Typed
Form must be Signed
All blanks must be Filled**

API # 15 - 171-20023-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 09/25/69.

Well Operator: Novy Oil & Gas, Inc. KCC License #: 31714
(Owner / Company Name) (Operator's)

Address: 125 N. Market suite 1230 City: Wichita

State: Kansas Zip Code: 67202 Contact Phone: (316) 265 - 4651

Lease: Smith Well #: 10 Sec. 26 Twp. 19 S. R. 33 East West

C - SW - NE - Spot Location / QQQQ County: Scott

1980 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

1980 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8 Set at: 357 Cemented with: 270 Sacks

Production Casing Size: 4 1/2 Set at: 4228 Cemented with: 300 Sacks

List (ALL) Perforations and Bridgeplug Sets: perf, 4100 - 4114, BP 4090, Perf 4064 - 4072, 4026 - 4032

Elevation: 2967 (G.L. / K.B.) T.D.: 4800 PBDT: 4193 Anhydrite Depth: 2100
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): sand off perfs top of sand 4000' Place a 5 sack cement cap on top of sand. place gel pill from 4000 to 1400 spot 25 sacks, perf at 1300 pump 80 sacks squeeze. Pump 150 sacks down casing annulus spot gel from 1300 to surface place 10 sack cap on top. cut off casing 5' below ground.

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Michael E. Novy

Phone: (316) 265 - 4651

Address: 125 N. Market suite 1230 City / State: Wichita, Kansas

Plugging Contractor: Mike's Testing & Salvage, Inc. KCC License #: 31529
(Company Name) (Contractor's)

Address: PO. Box 467, Chase, Kansas 67524 Phone: (620) 938 - 2943


Proposed Date and Hour of Plugging (if known?): _____

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 8-23-06 Authorized Operator / Agent: Michael E. Novy
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

**RECEIVED
AUG 25 2006
KCC WICHITA**

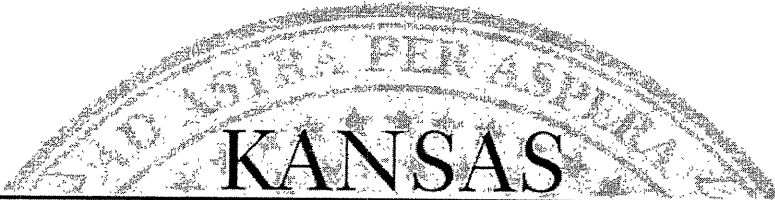

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Novy Oil & Gas, Inc.
125 N. Market Ste. 1230
Wichita, KS 67202-1712

August 28, 2006

Re: SMITH #10
API 15-171-20023-00-00
SWNE 26-19S-33W, 1980 FNL 1980 FEL
SCOTT COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888

Sincerely

David P. Williams
Production Supervisor