



DUAL INDUCTION LOG

Company	WOOLSEY OPERATING CO. LLC.		
Well	BROWN "A" #1		
Field	WILDCAT		
County	BARBER		
State	KANSAS		
Company	WOOLSEY OPERATING COMPANY, LLC.		
Well	BROWN "A" #1		
Field	WILDCAT		
County	BARBER		
State	KANSAS		
Location:	API # : 15-007-24354-0000		Other Services CDL/CNL/PE SONIC
Permanent Datum	GROUND LEVEL		Elevation
Log Measured From	330' FSL & 2040' FWL S/2 - SE - SW		1504
Drilling Measured From	SEC 2 TWP 34S RGE 12W		K.B. 1517 D.F. 1515 G.L. 1504
Date	8/1/19		
Run Number	ONE		
Depth Driller	5300		
Depth Logger	5300		
Bottom Logged Interval	5298		
Top Log Interval	00		
Casing Driller	10 3/4"@276'		
Casing Logger	276		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 7,000 PPM
Density / Viscosity	8.9/50		
pH / Fluid Loss	10.5/10.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.450@92F		
Rmf @ Meas. Temp	.338@92F		
Rmc @ Meas. Temp	.540@92F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.329@129F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	10:00 A.M.		
Maximum Recorded Temperature	128F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BILL KLAVER		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS

MEDICINE LODGE, KS., (160 & 281 JUNCTION) 12 1/2S. TO "SCOTT CANYON RD.", 1W., TO
"CLAIRMONT RD.", 1N. TO "BLACK KETTLE RD." 1/2W., N. INTO

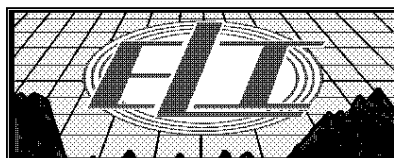


MAIN SECTION

Database File: 3748pe.db
 Dataset Pathname: pass3.5
 Presentation Format: dil2
 Dataset Creation: Thu Aug 01 12:14:32 2019
 Charted by: Depth in Feet scaled 1:600



0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

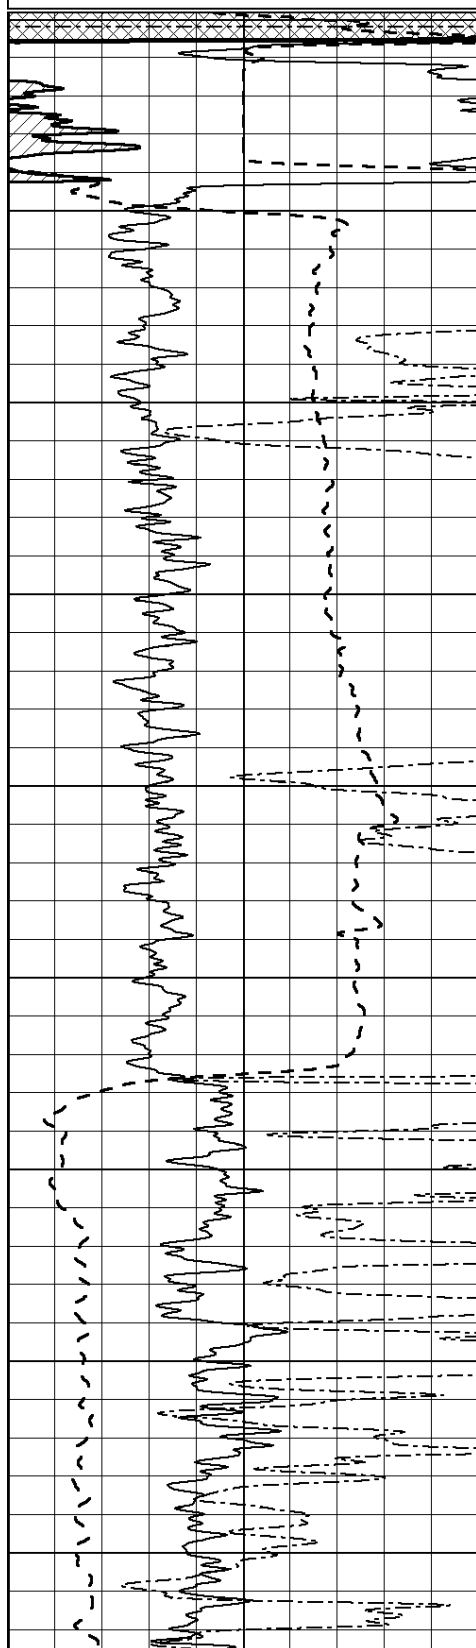

0
50
100
150
200
250
300
350
400

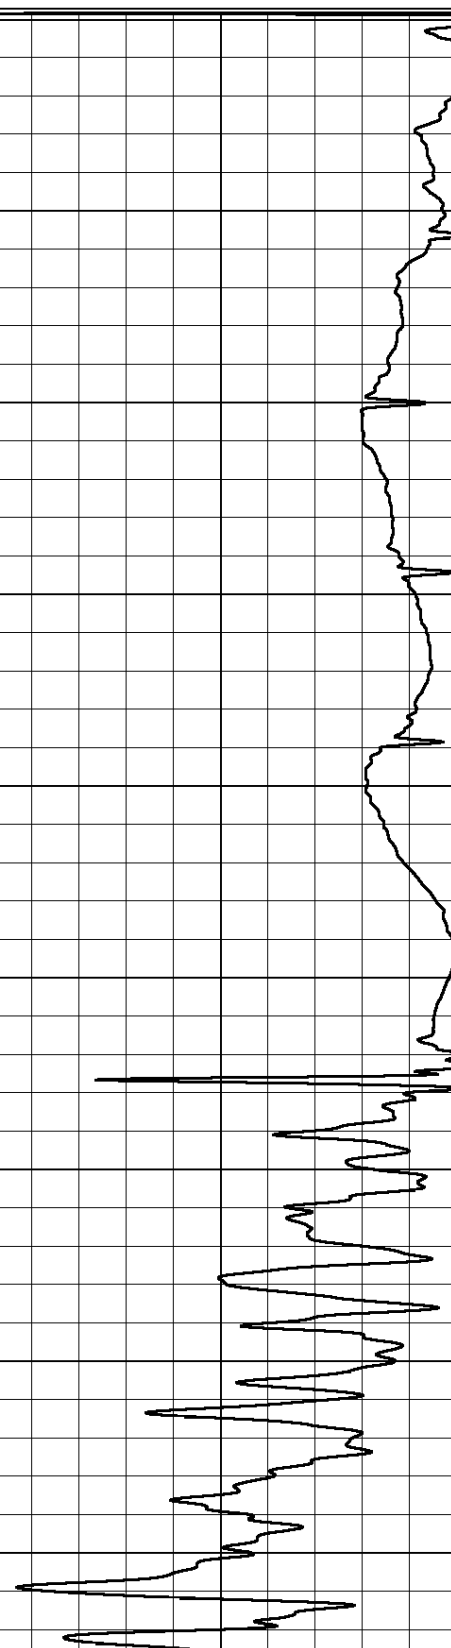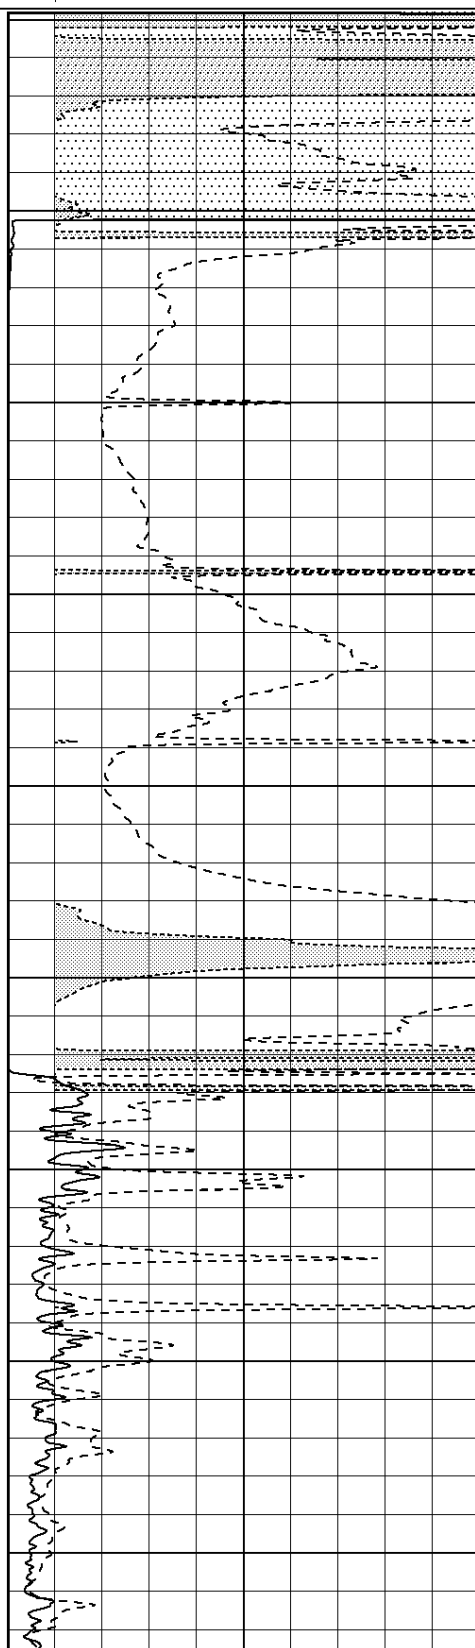

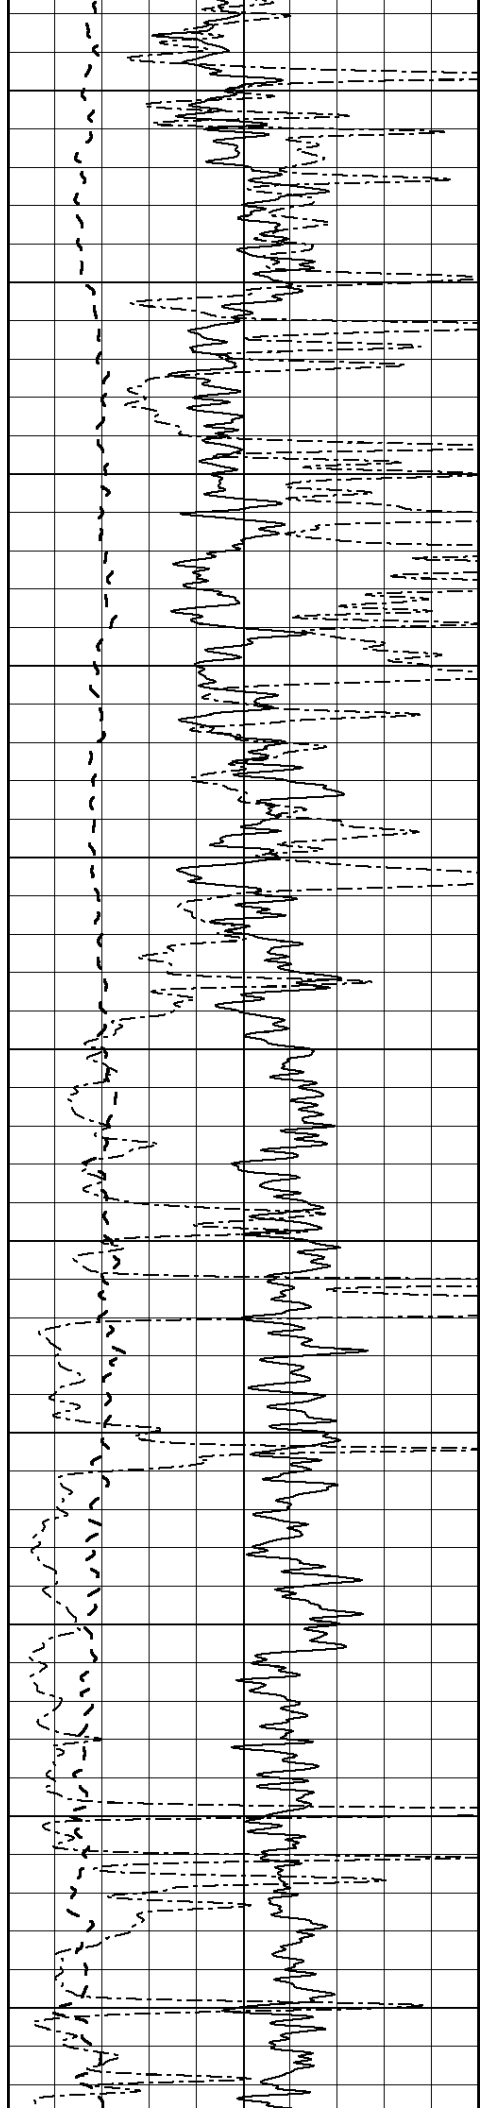

450

500

550

600

650

700


750


800

850



900


950

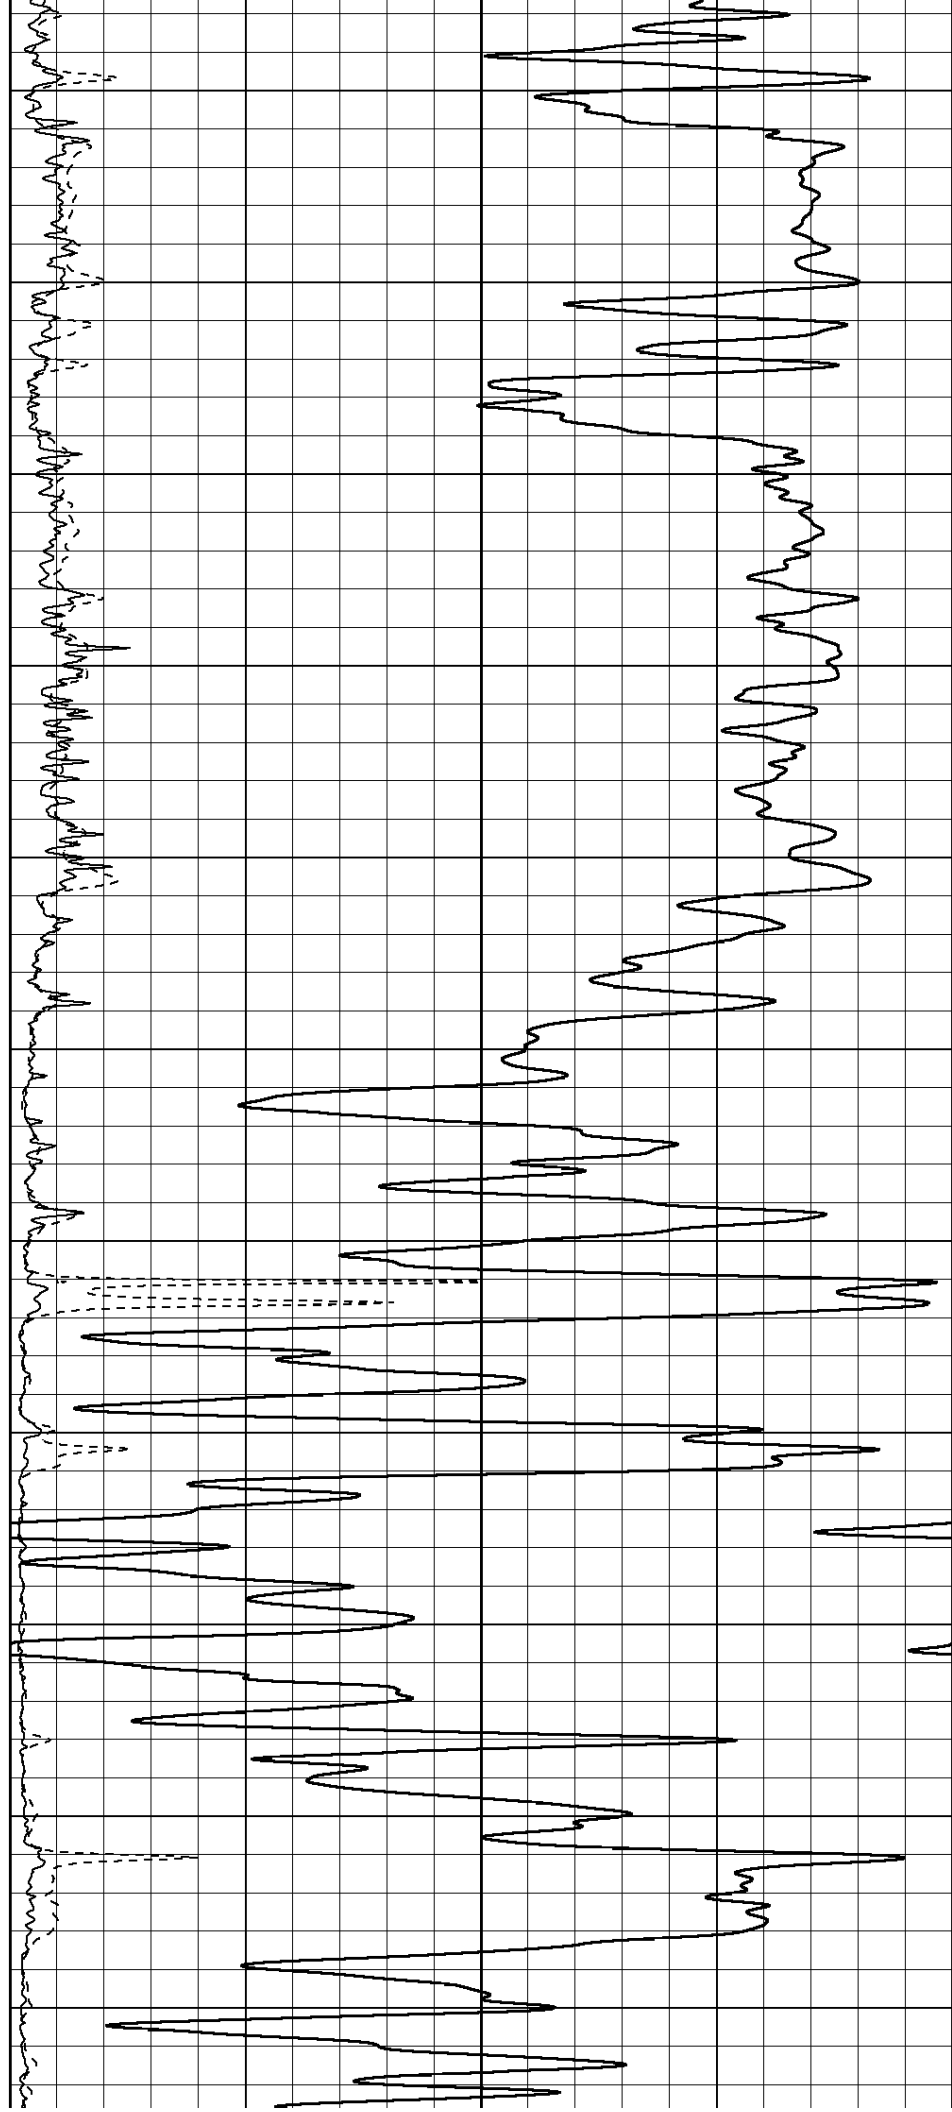

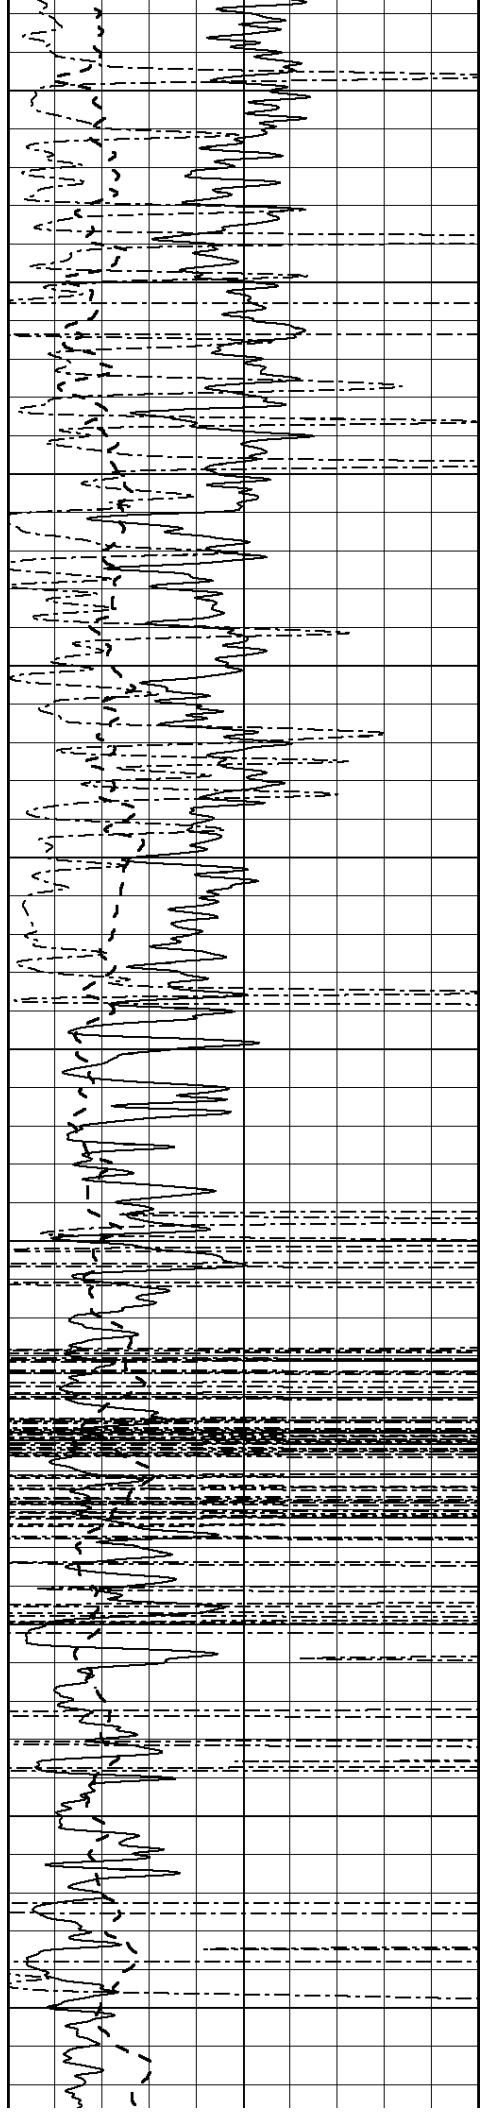

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

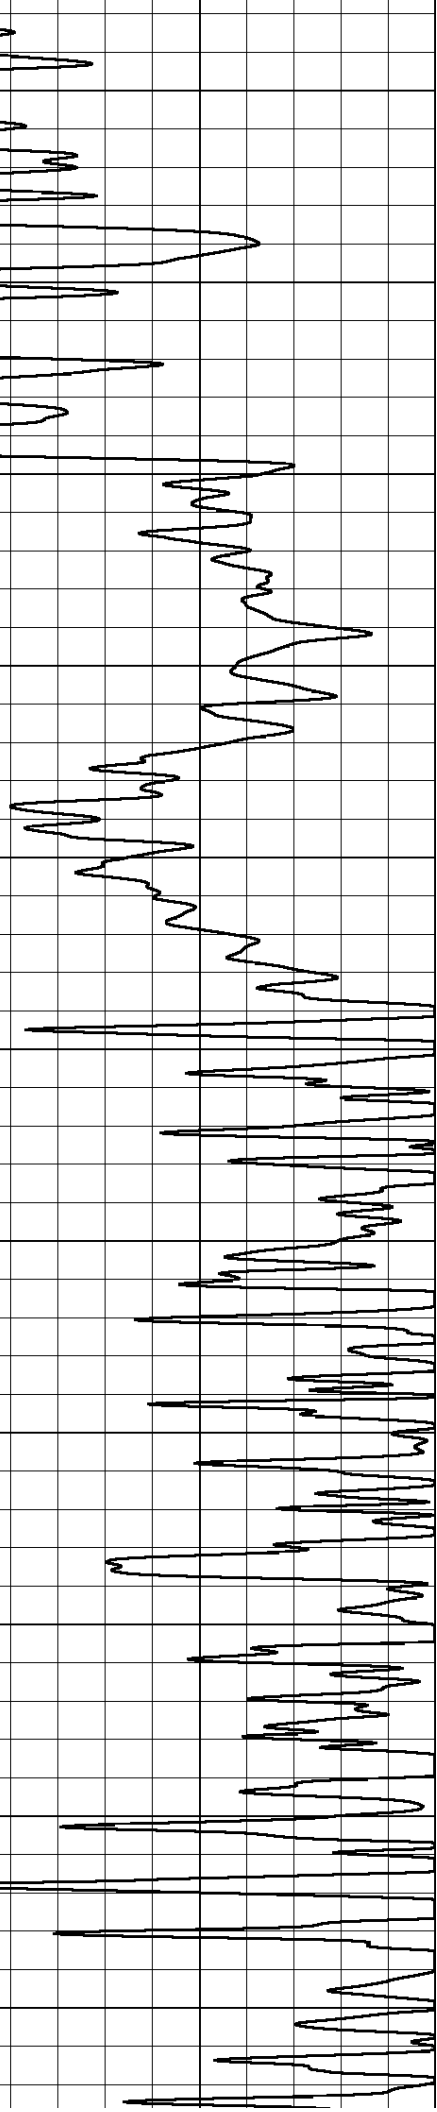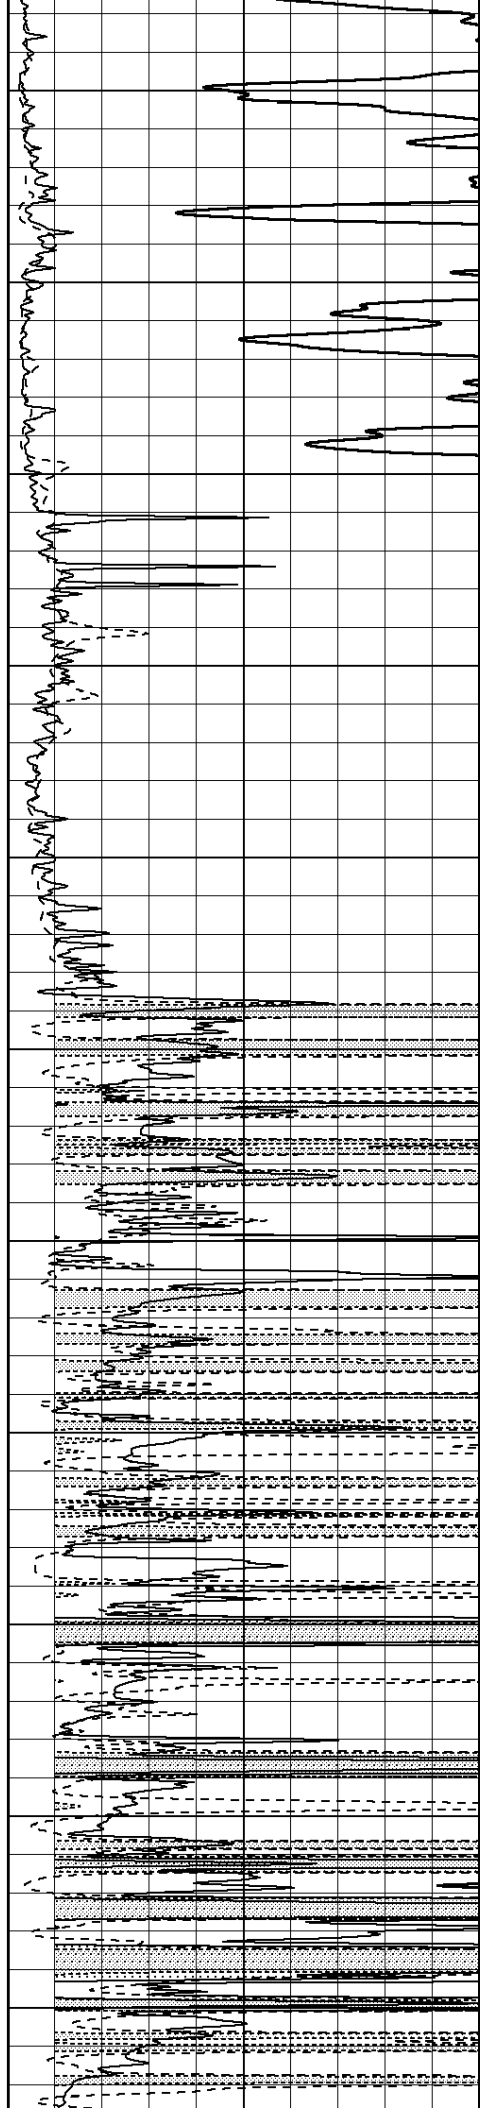

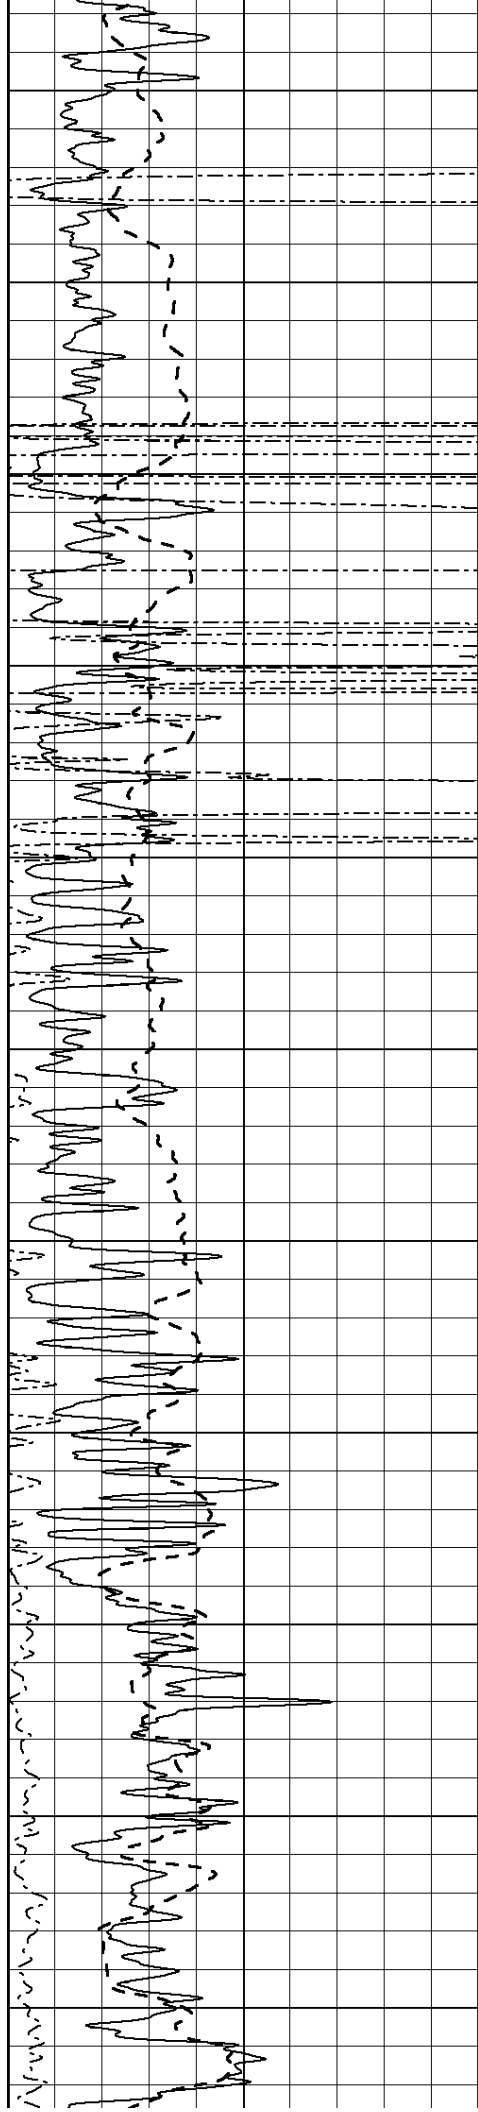

1550

1600

1650

1700

1750

1800



1850


1900

1950

2000

2050

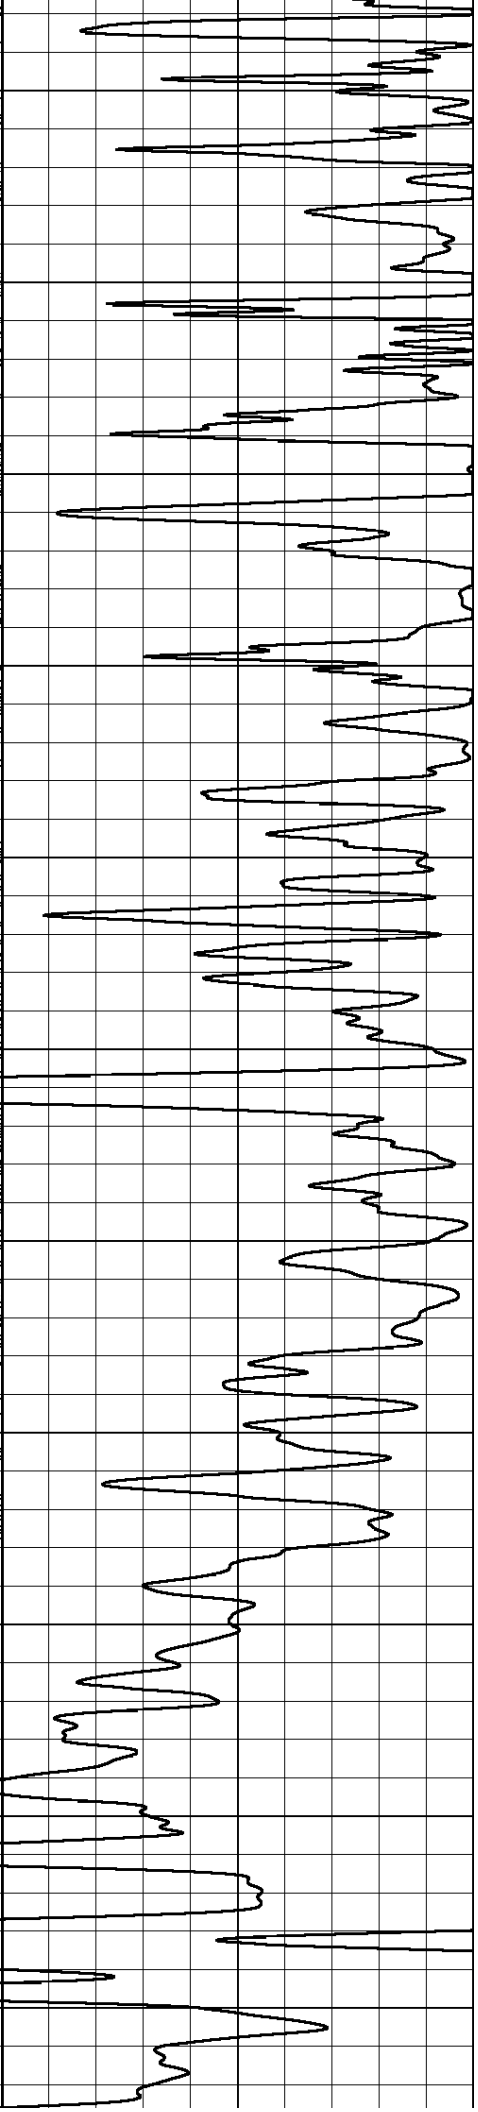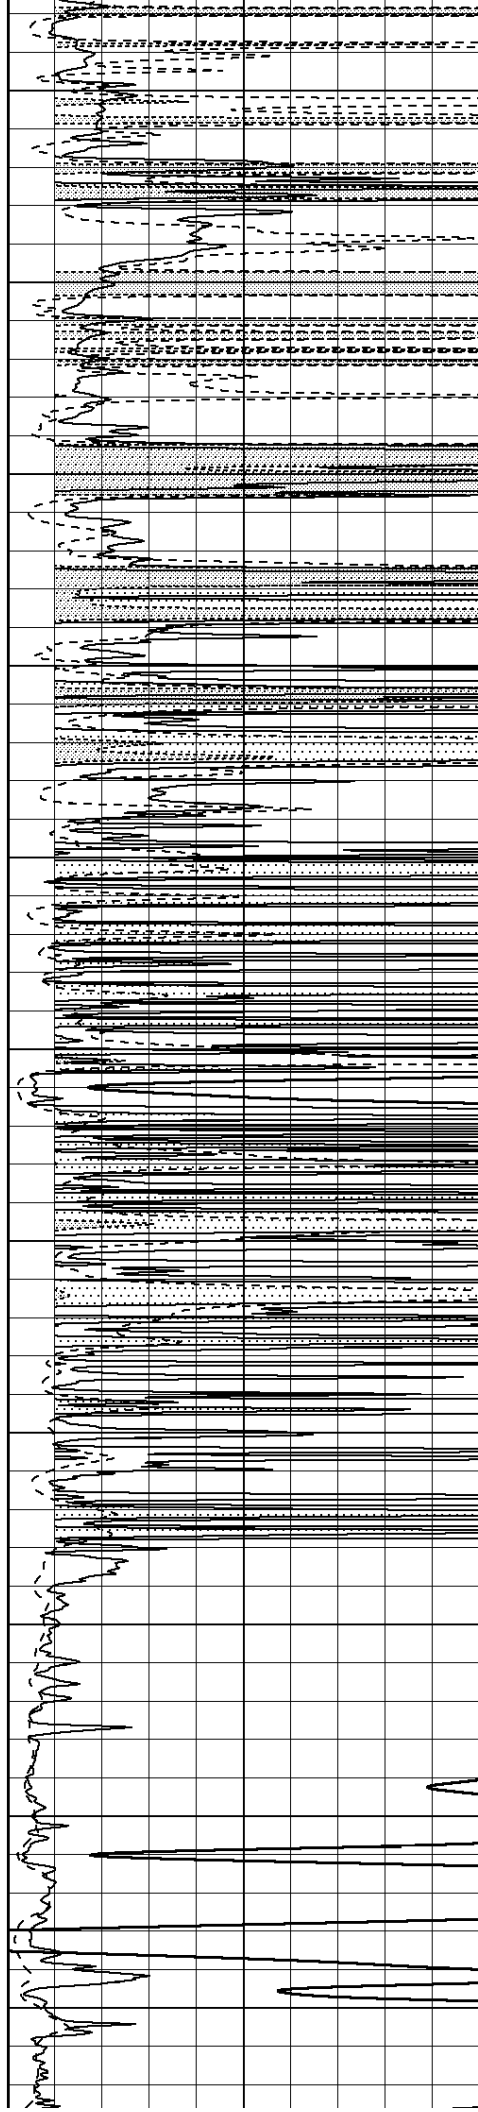

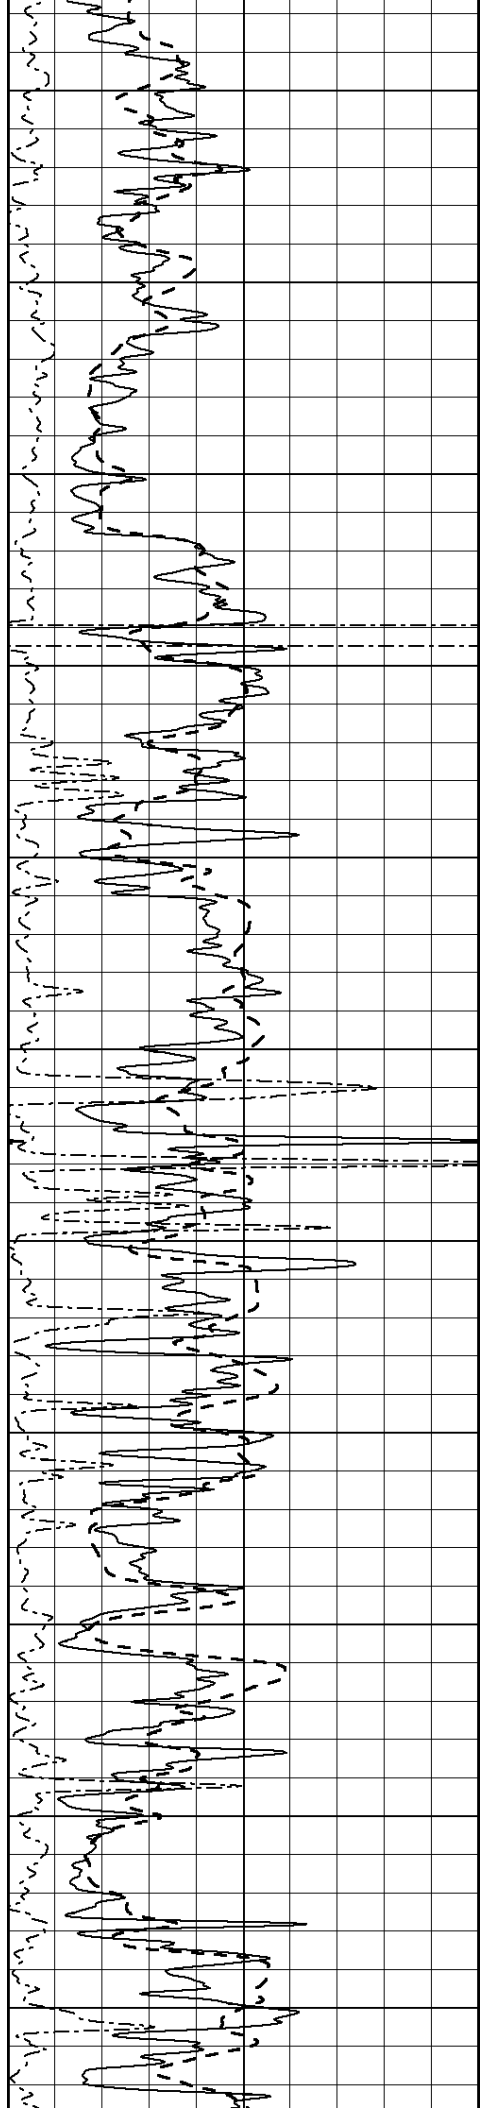

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

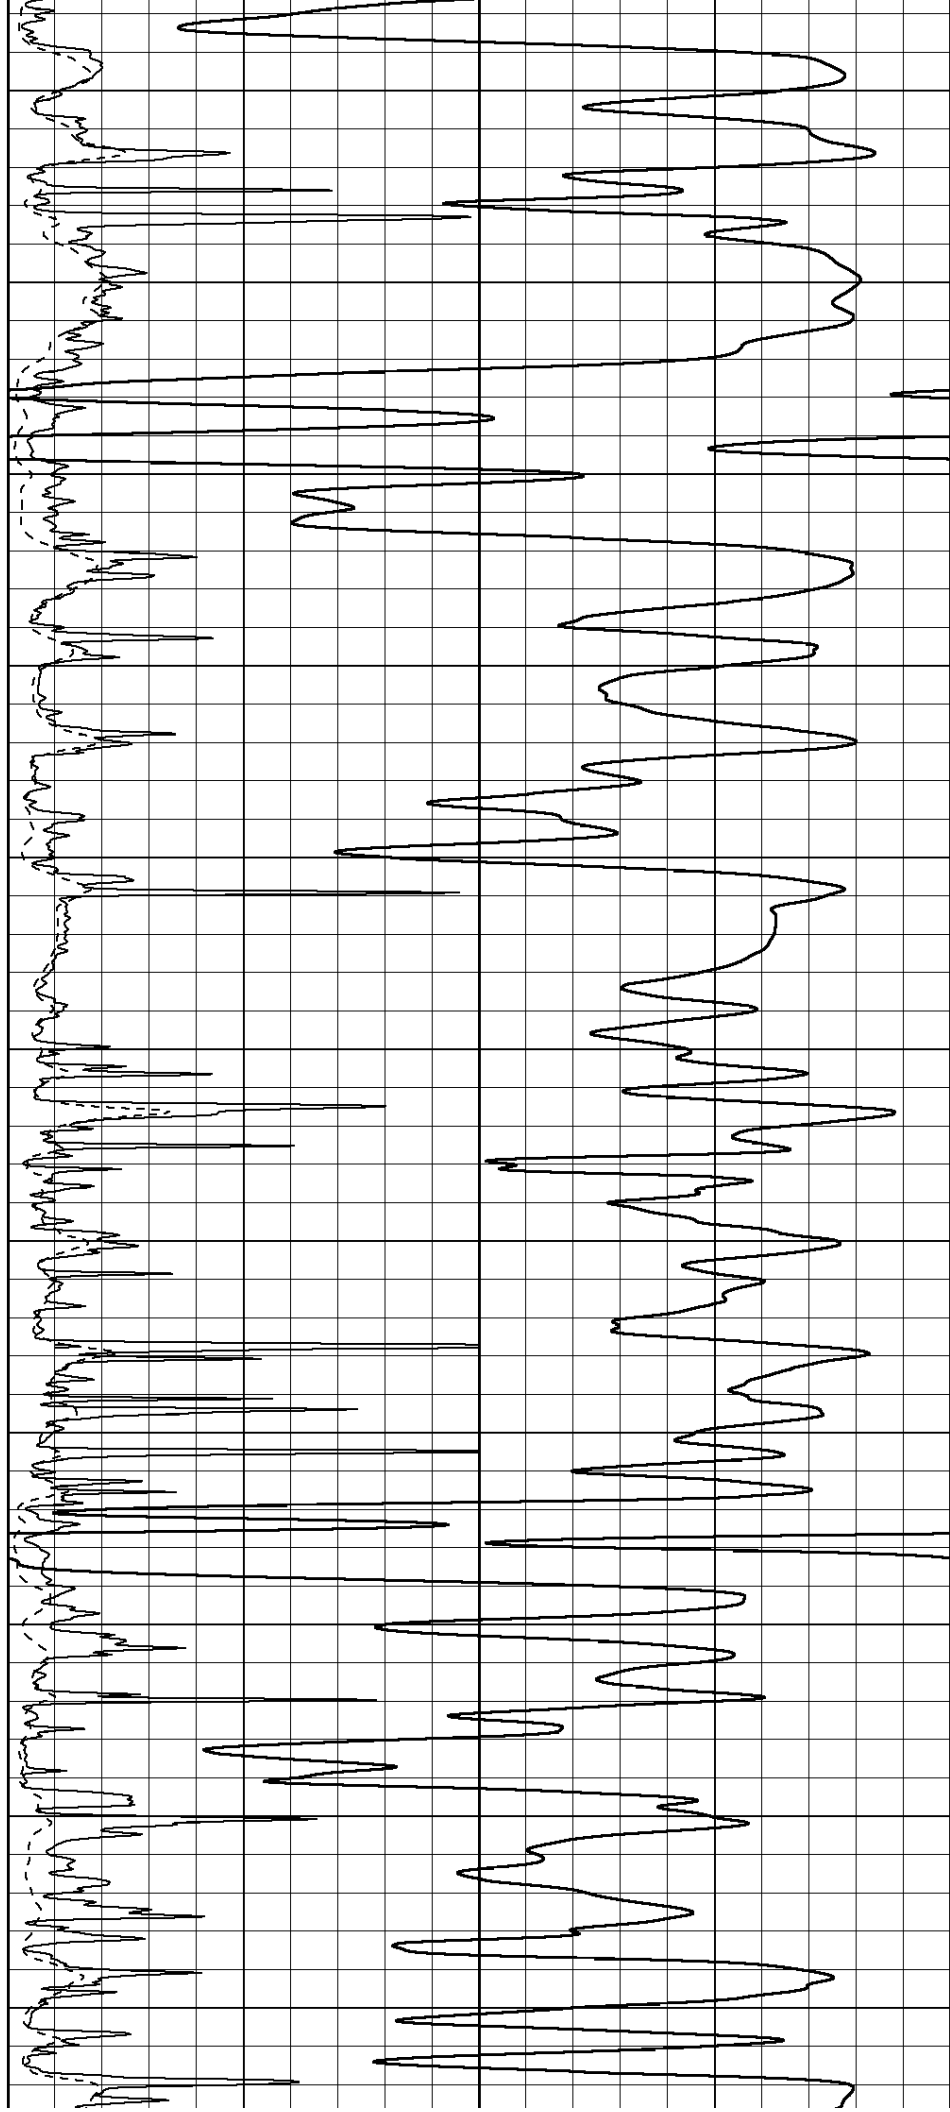

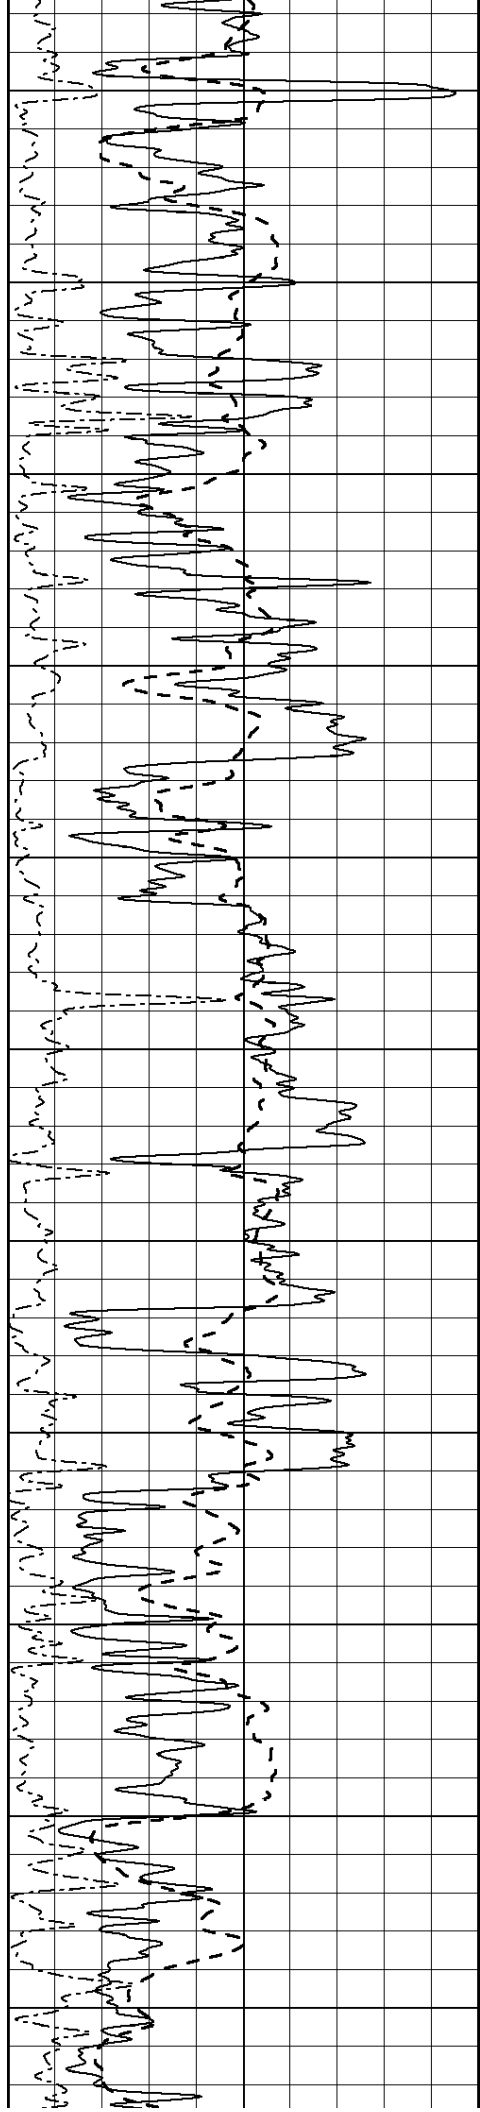

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

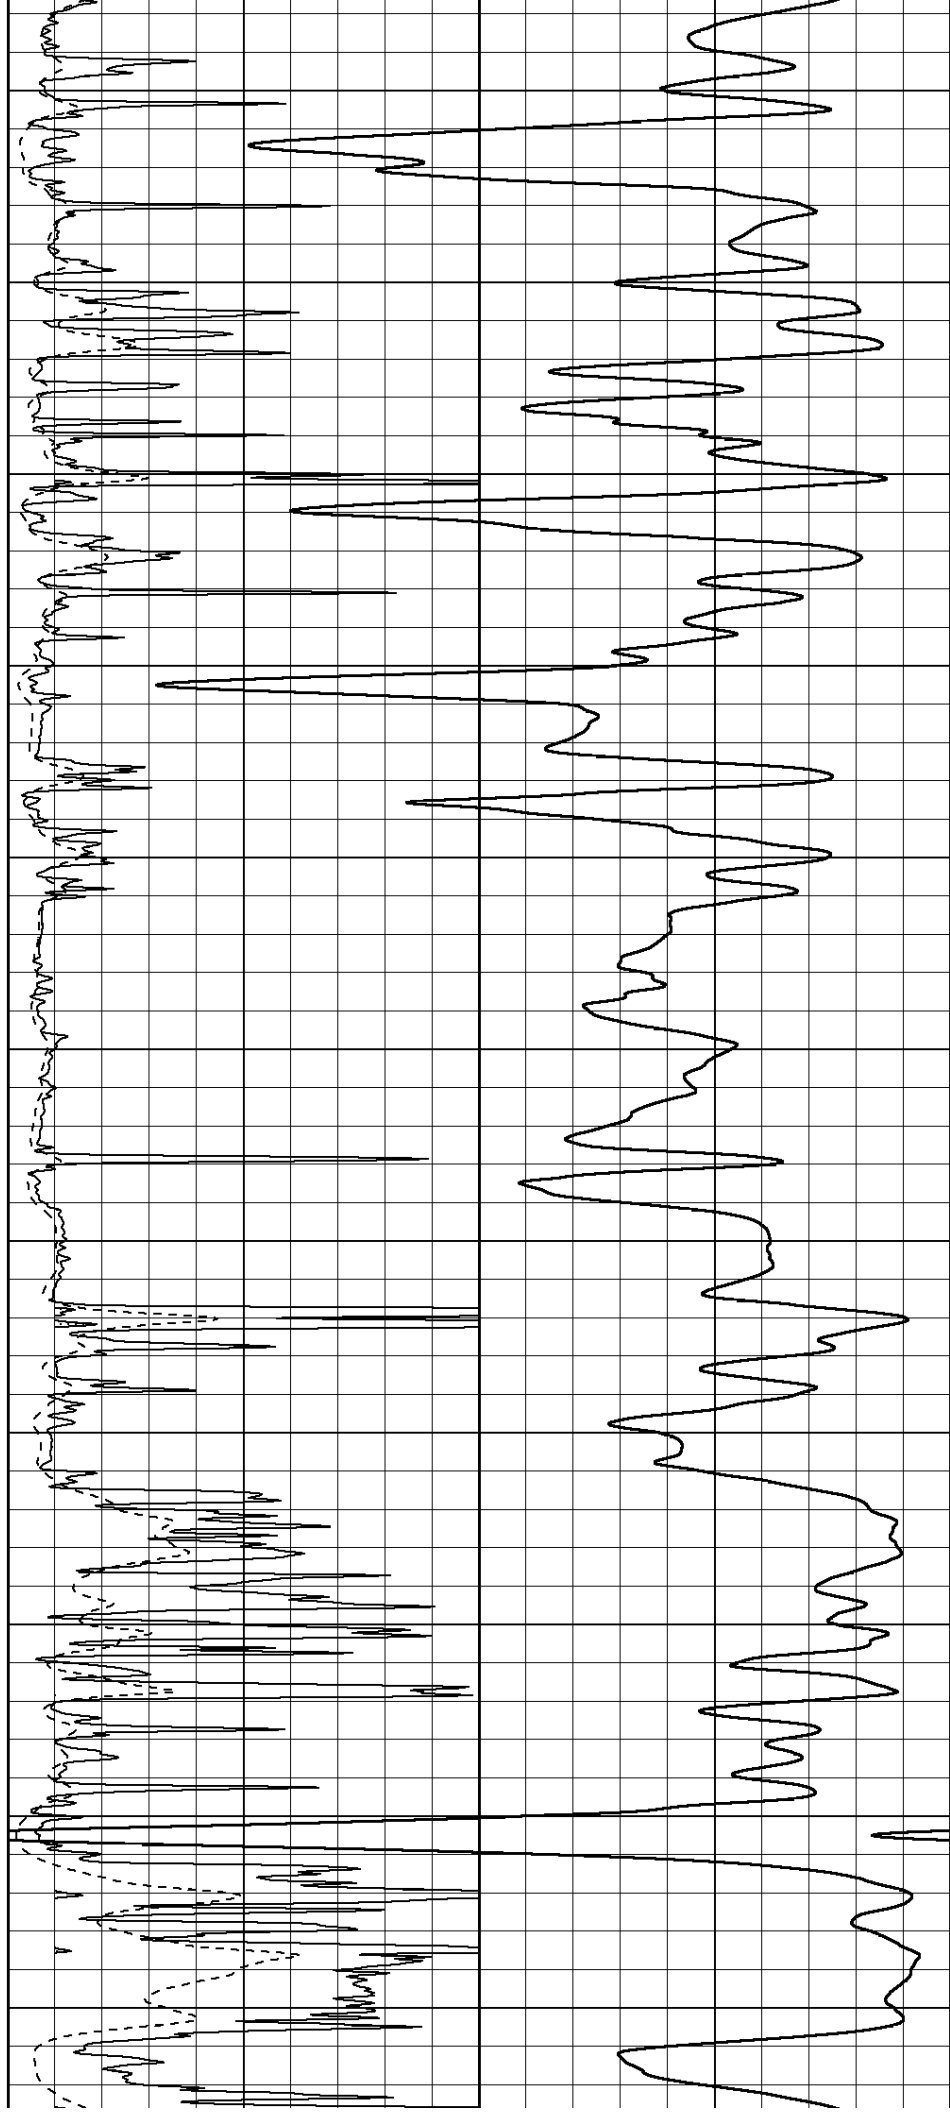

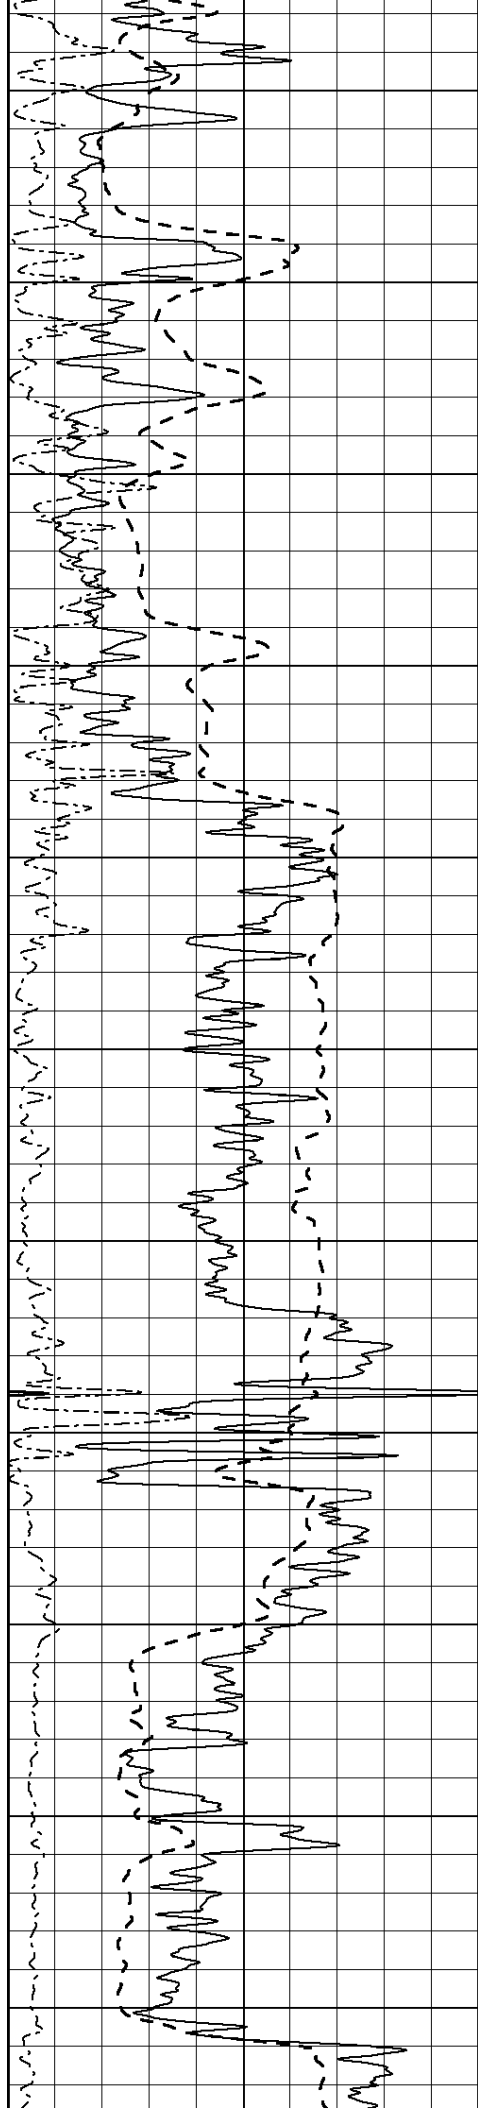

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

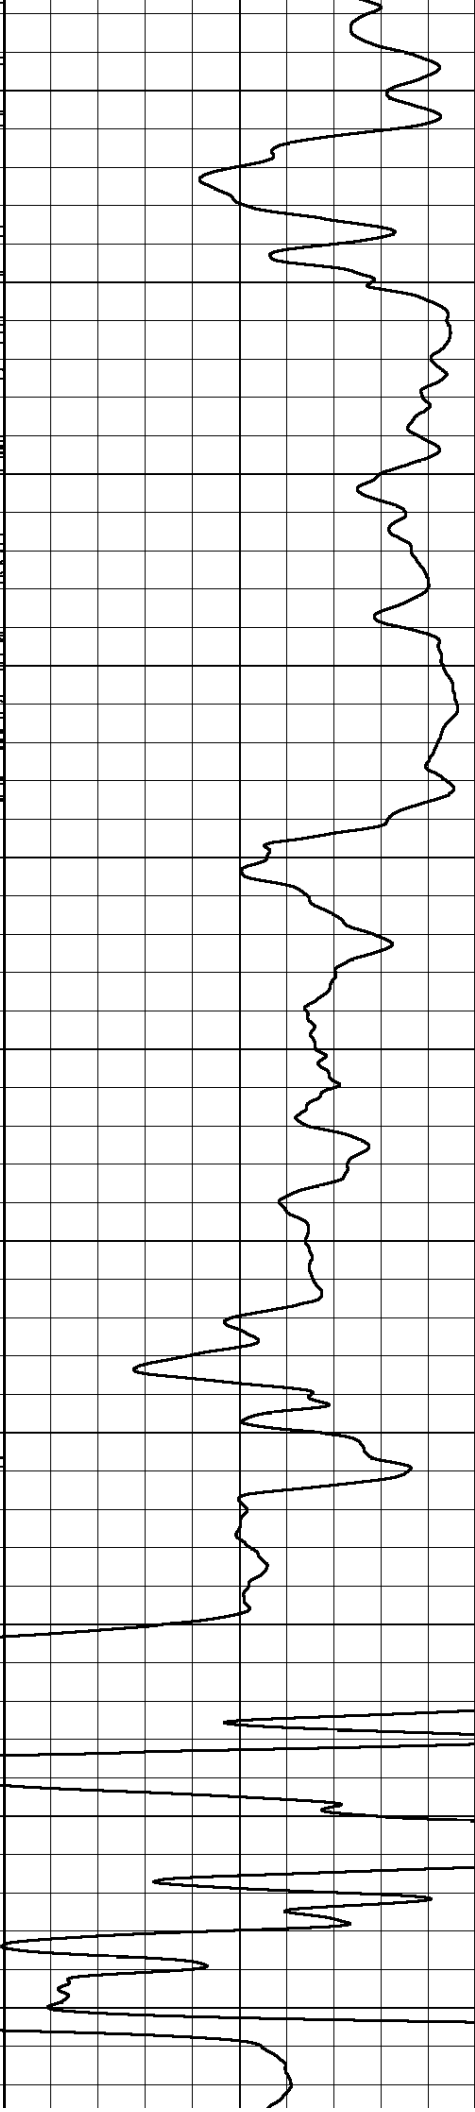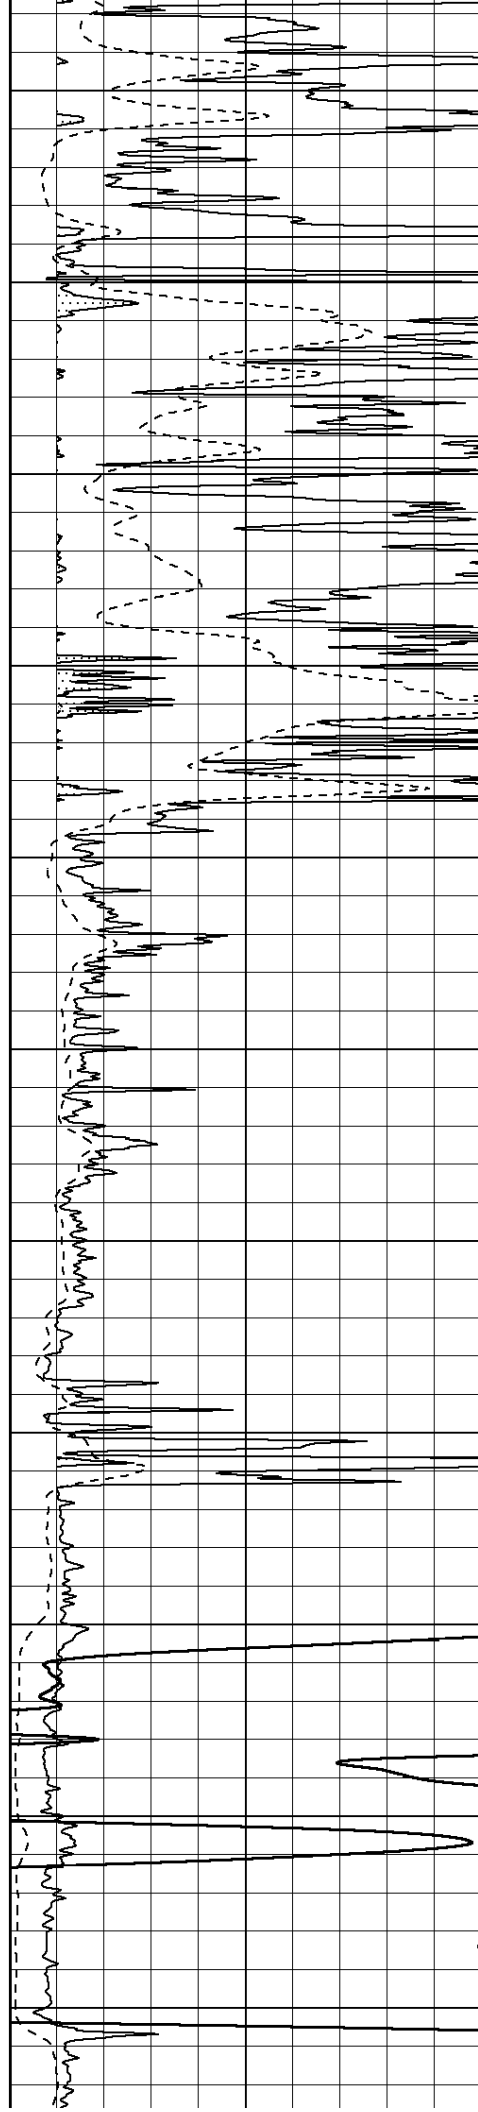

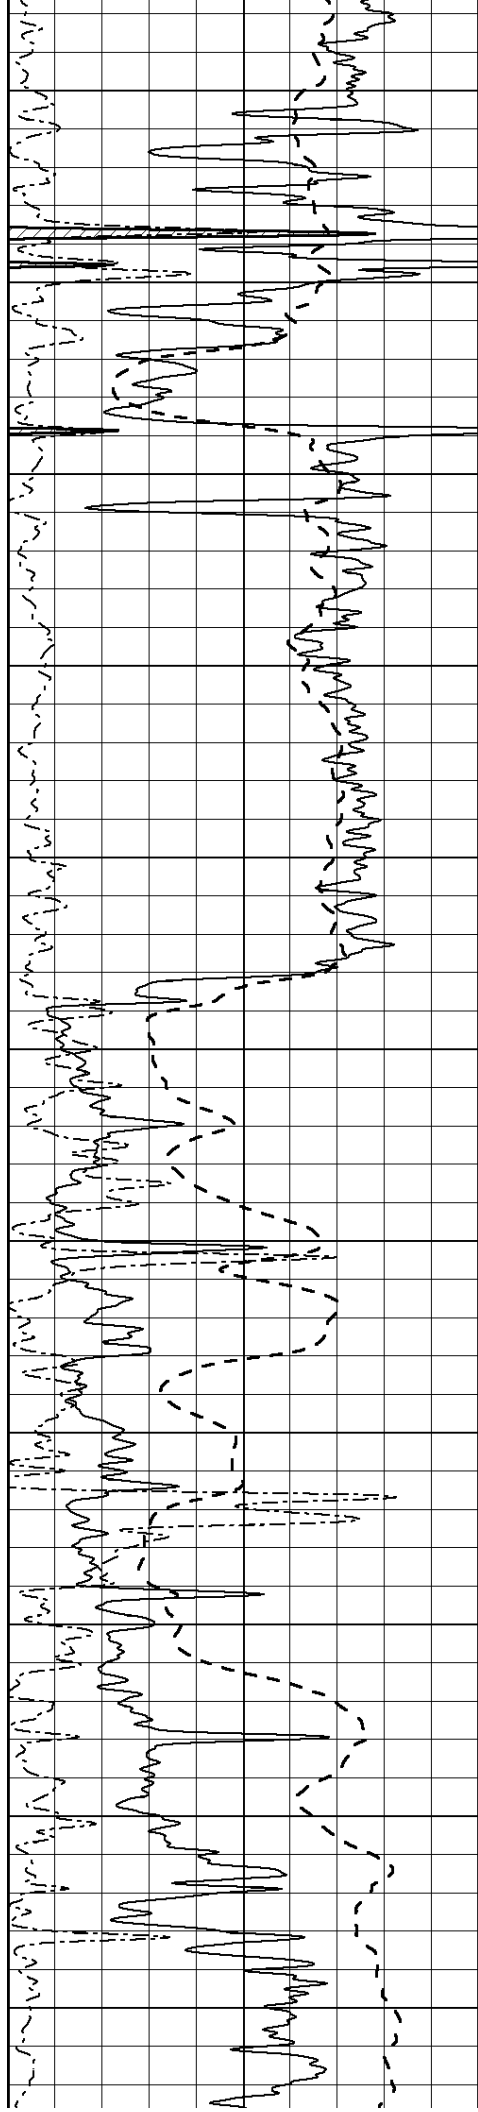

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

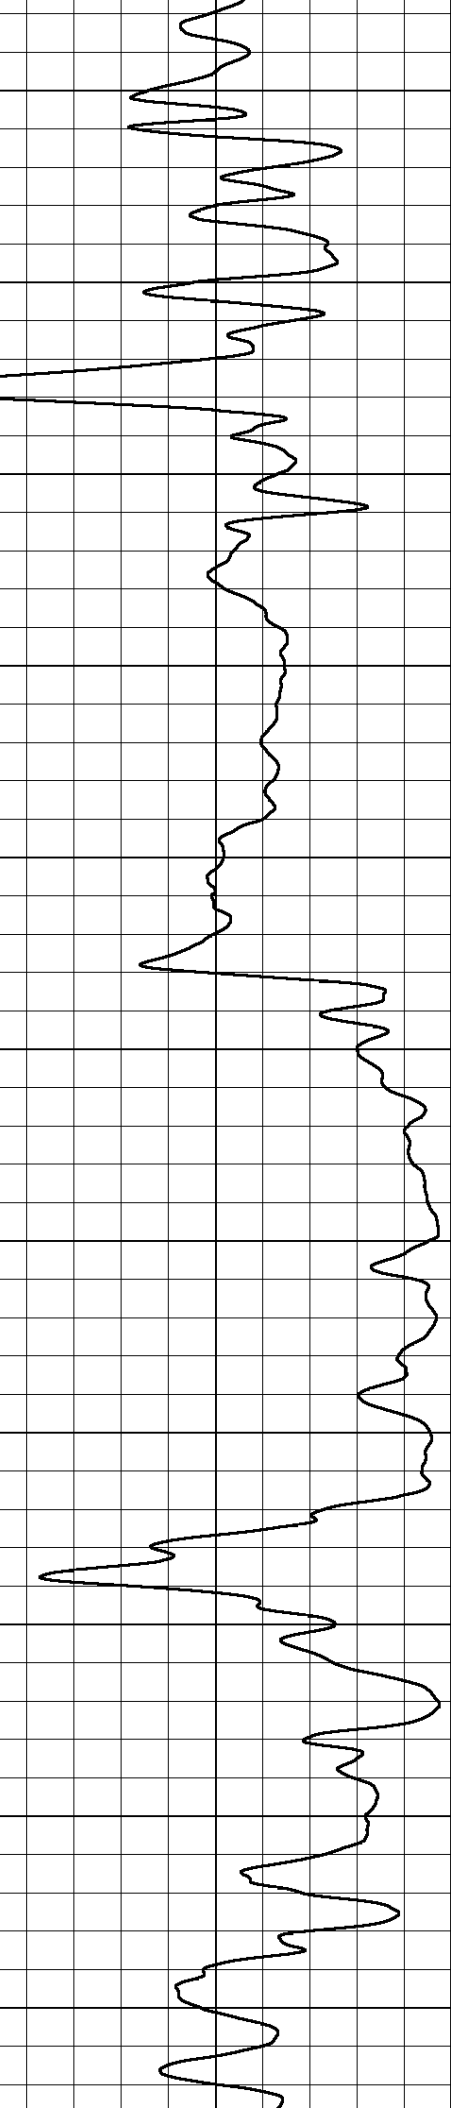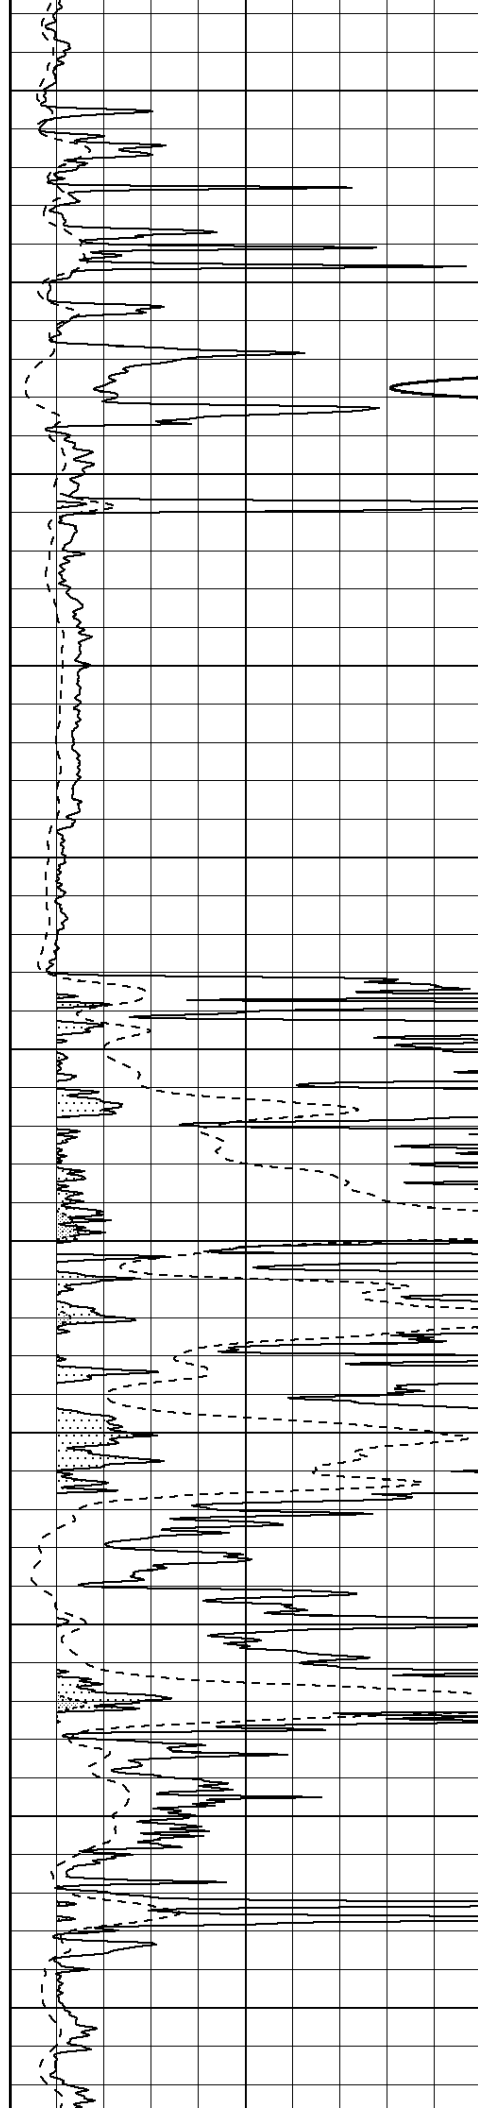

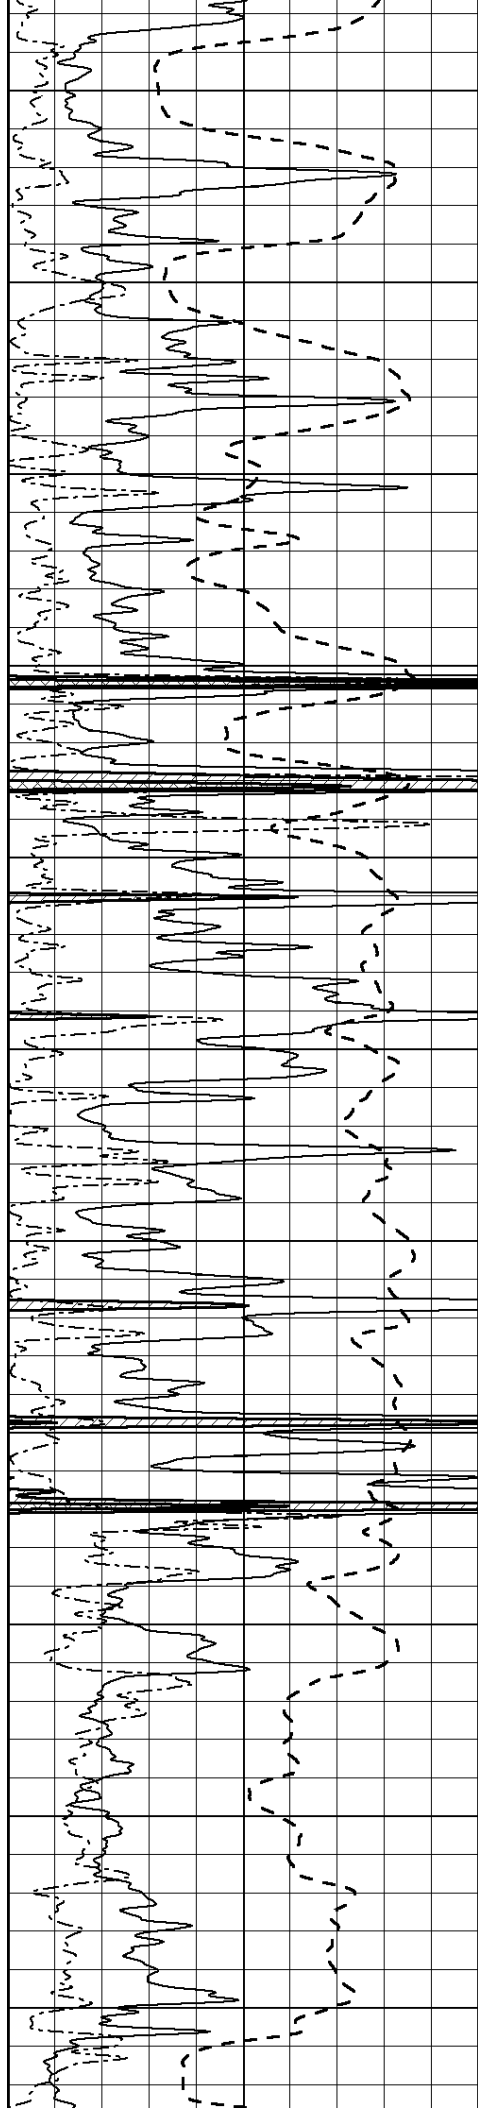

4300

4350

4400

4450

4500

4550



4600


4650

4700

4750


4800

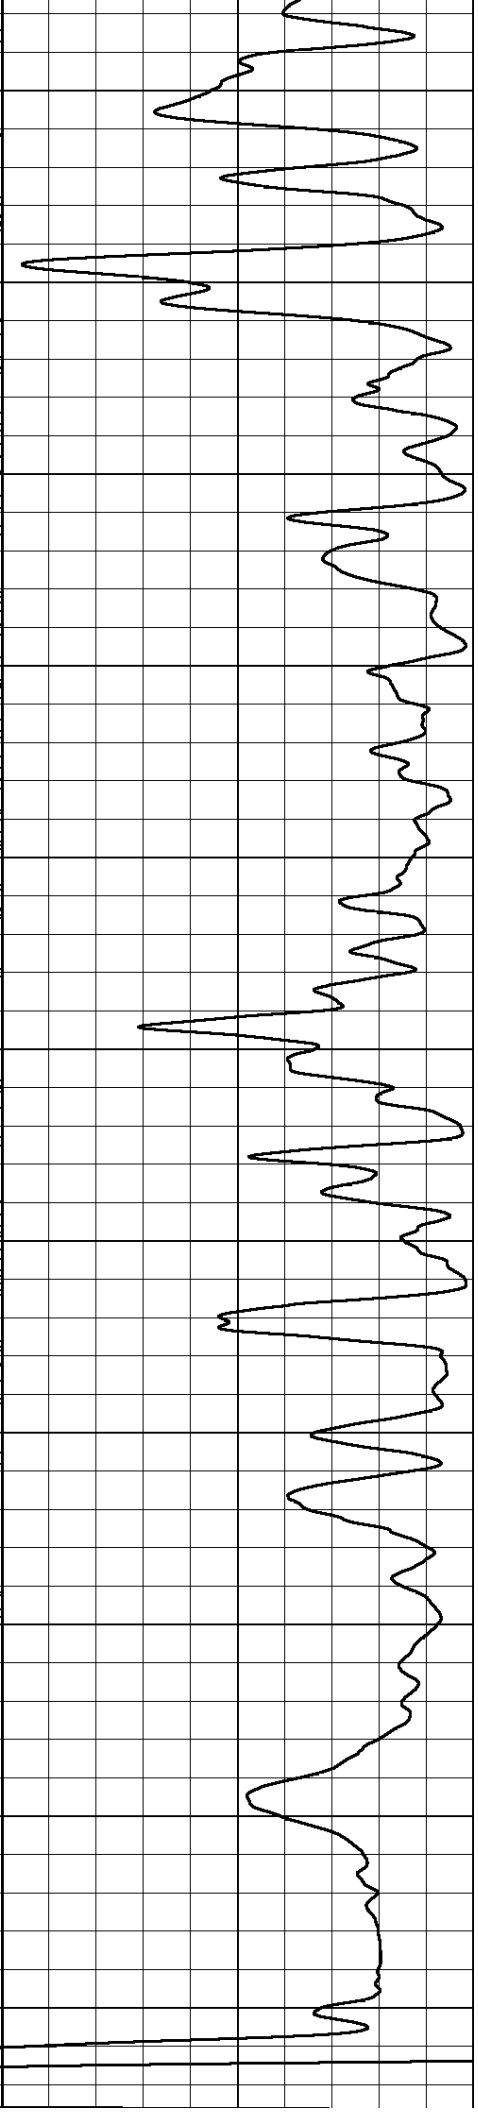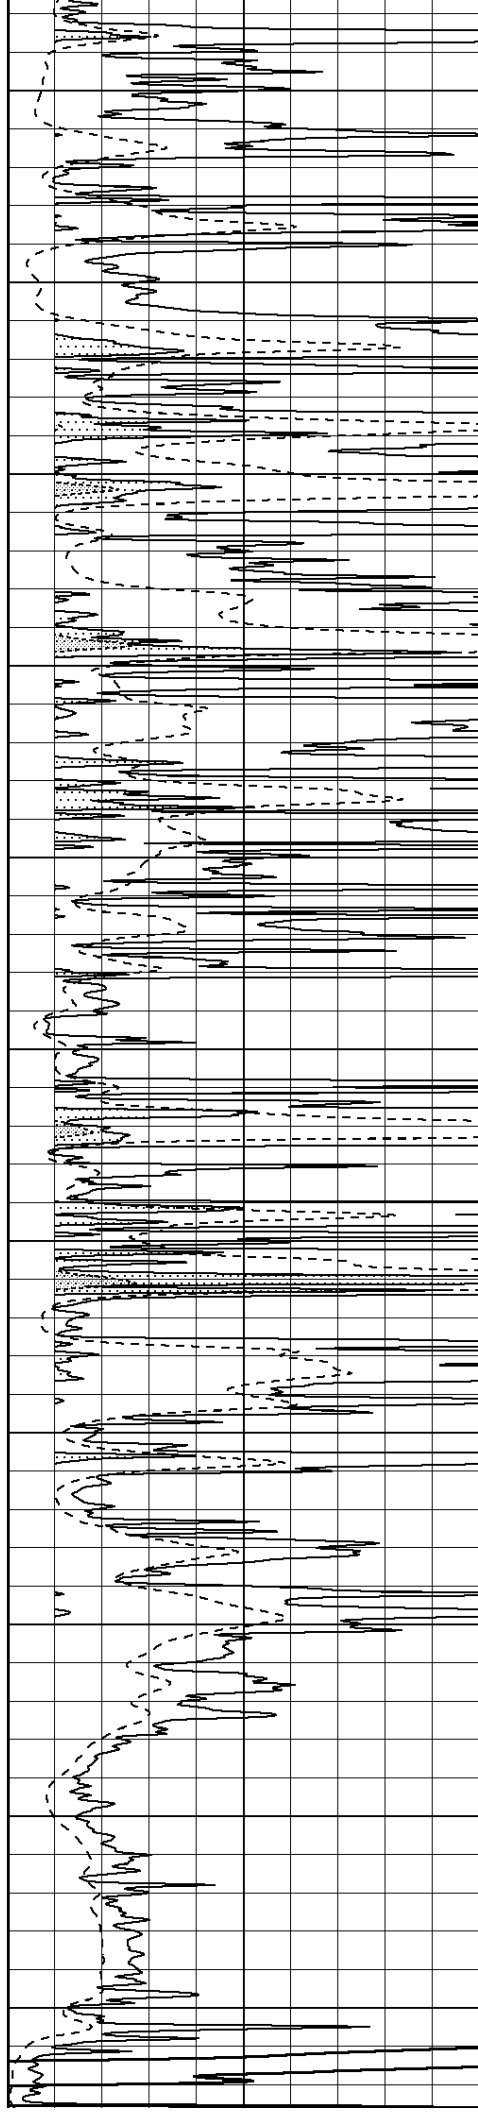

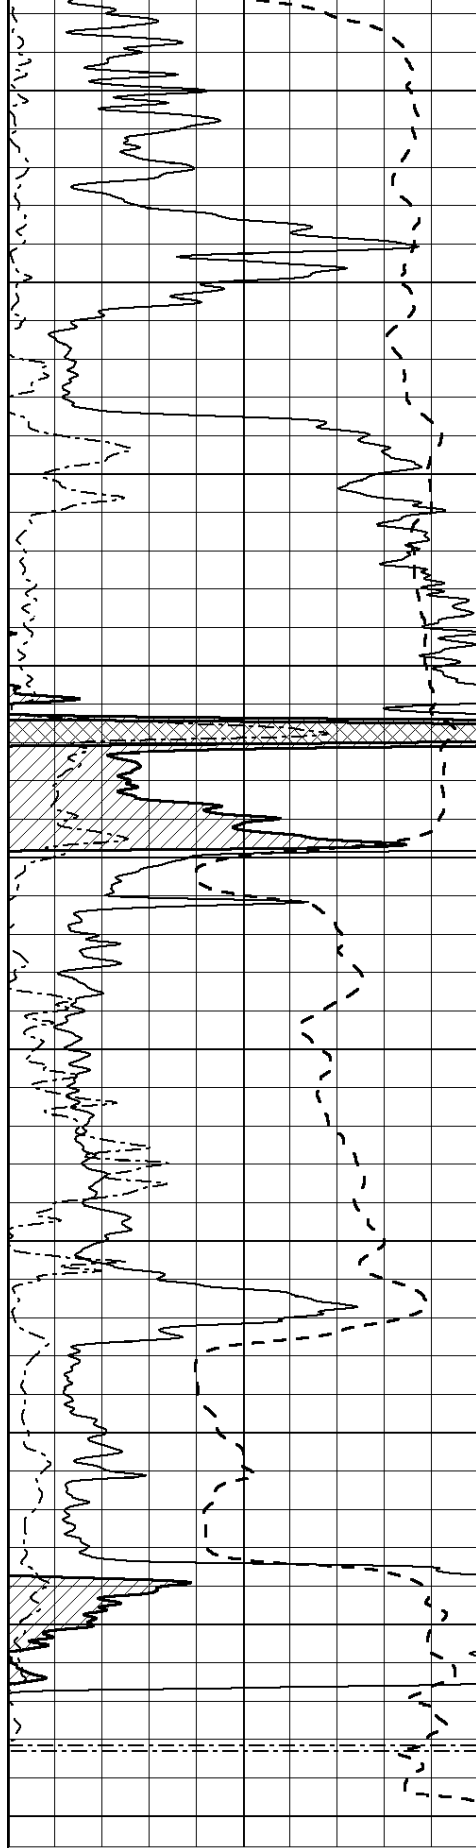


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

4850
4900
4950
5000
5050
5100
5150
5200
5250
5300

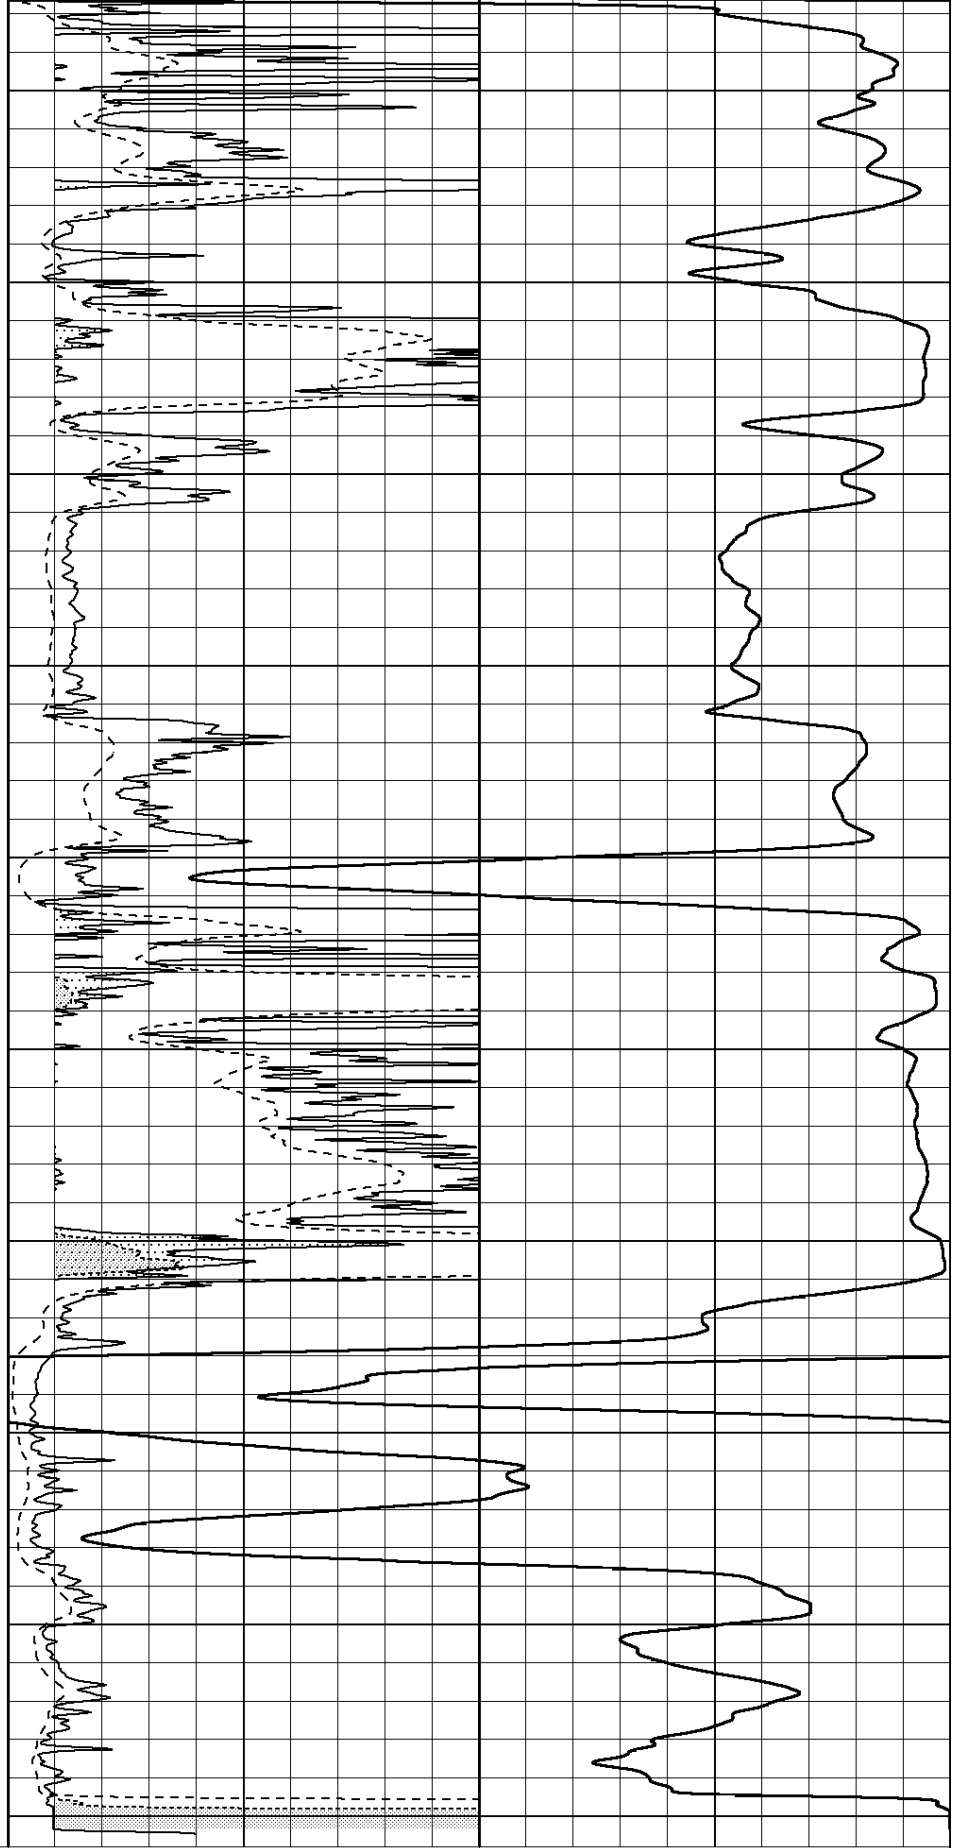

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500


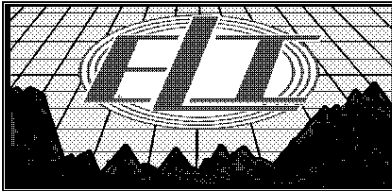


MAIN SECTION

Database File: 3748pe.db
Dataset Pathname: pass3.5
Presentation Format: _dil
Dataset Creation: Thu Aug 01 12:14:32 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

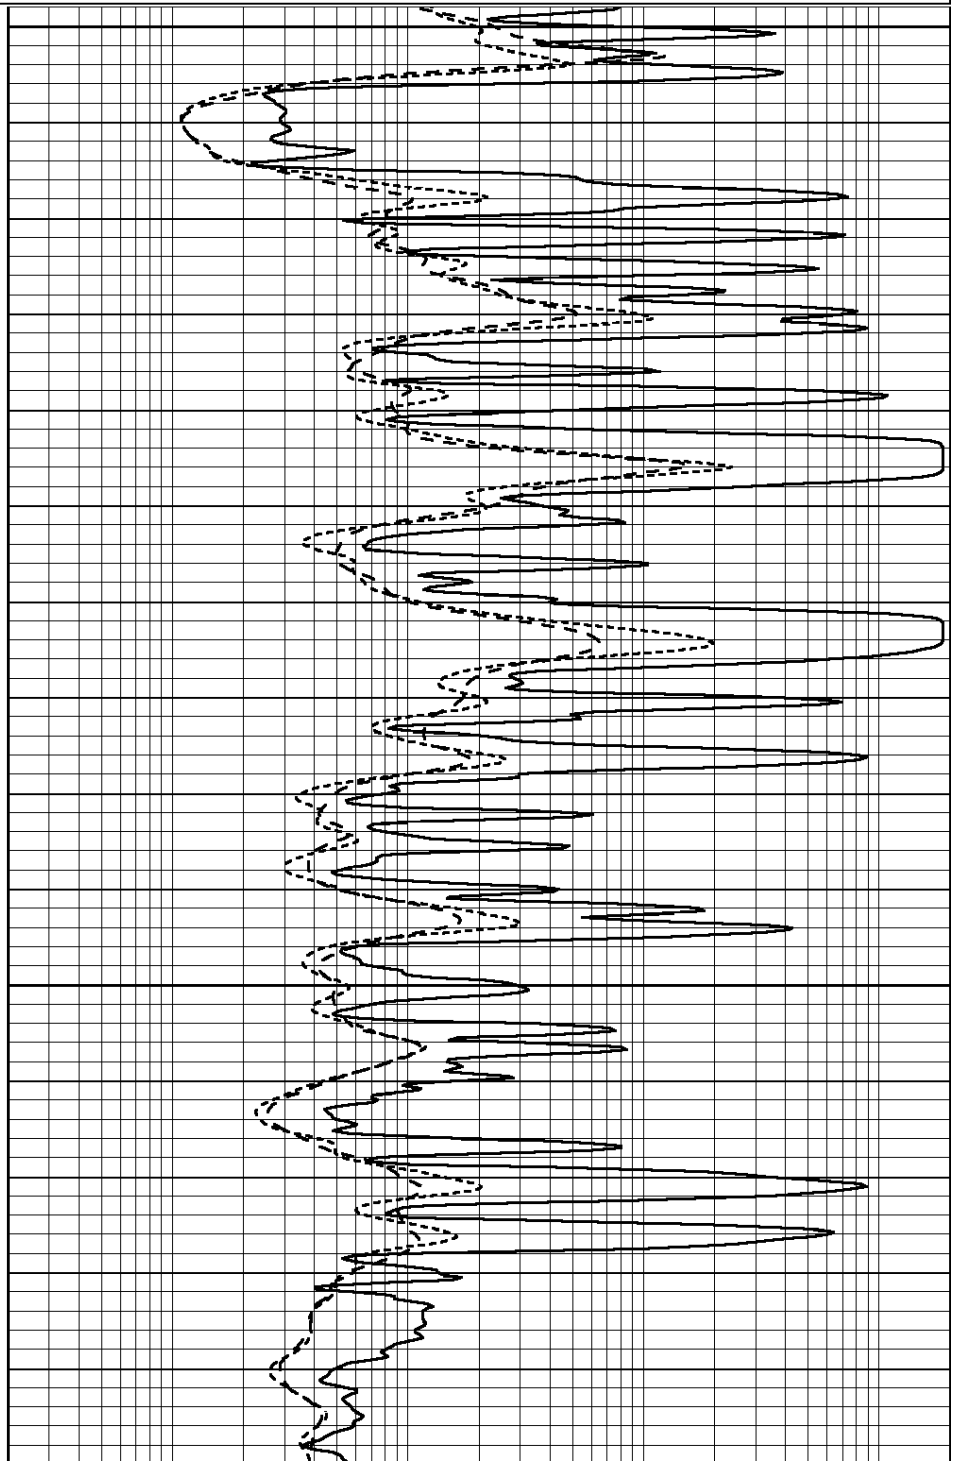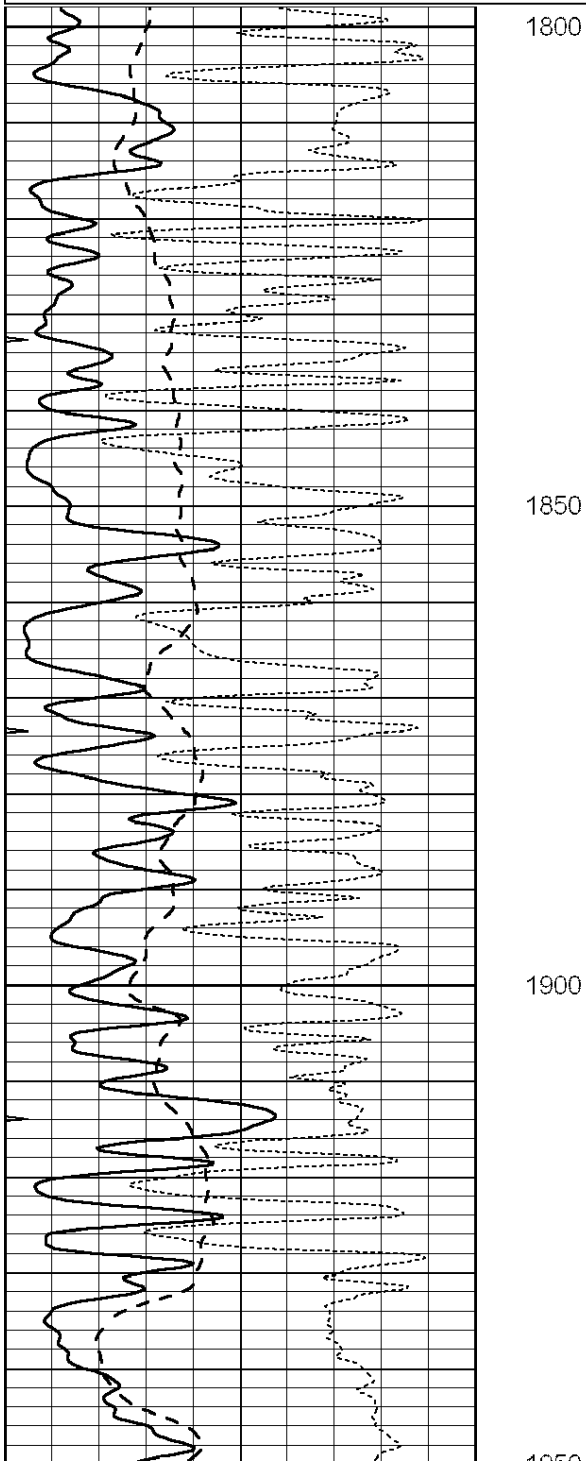



1950


2000

2050

2100

2150

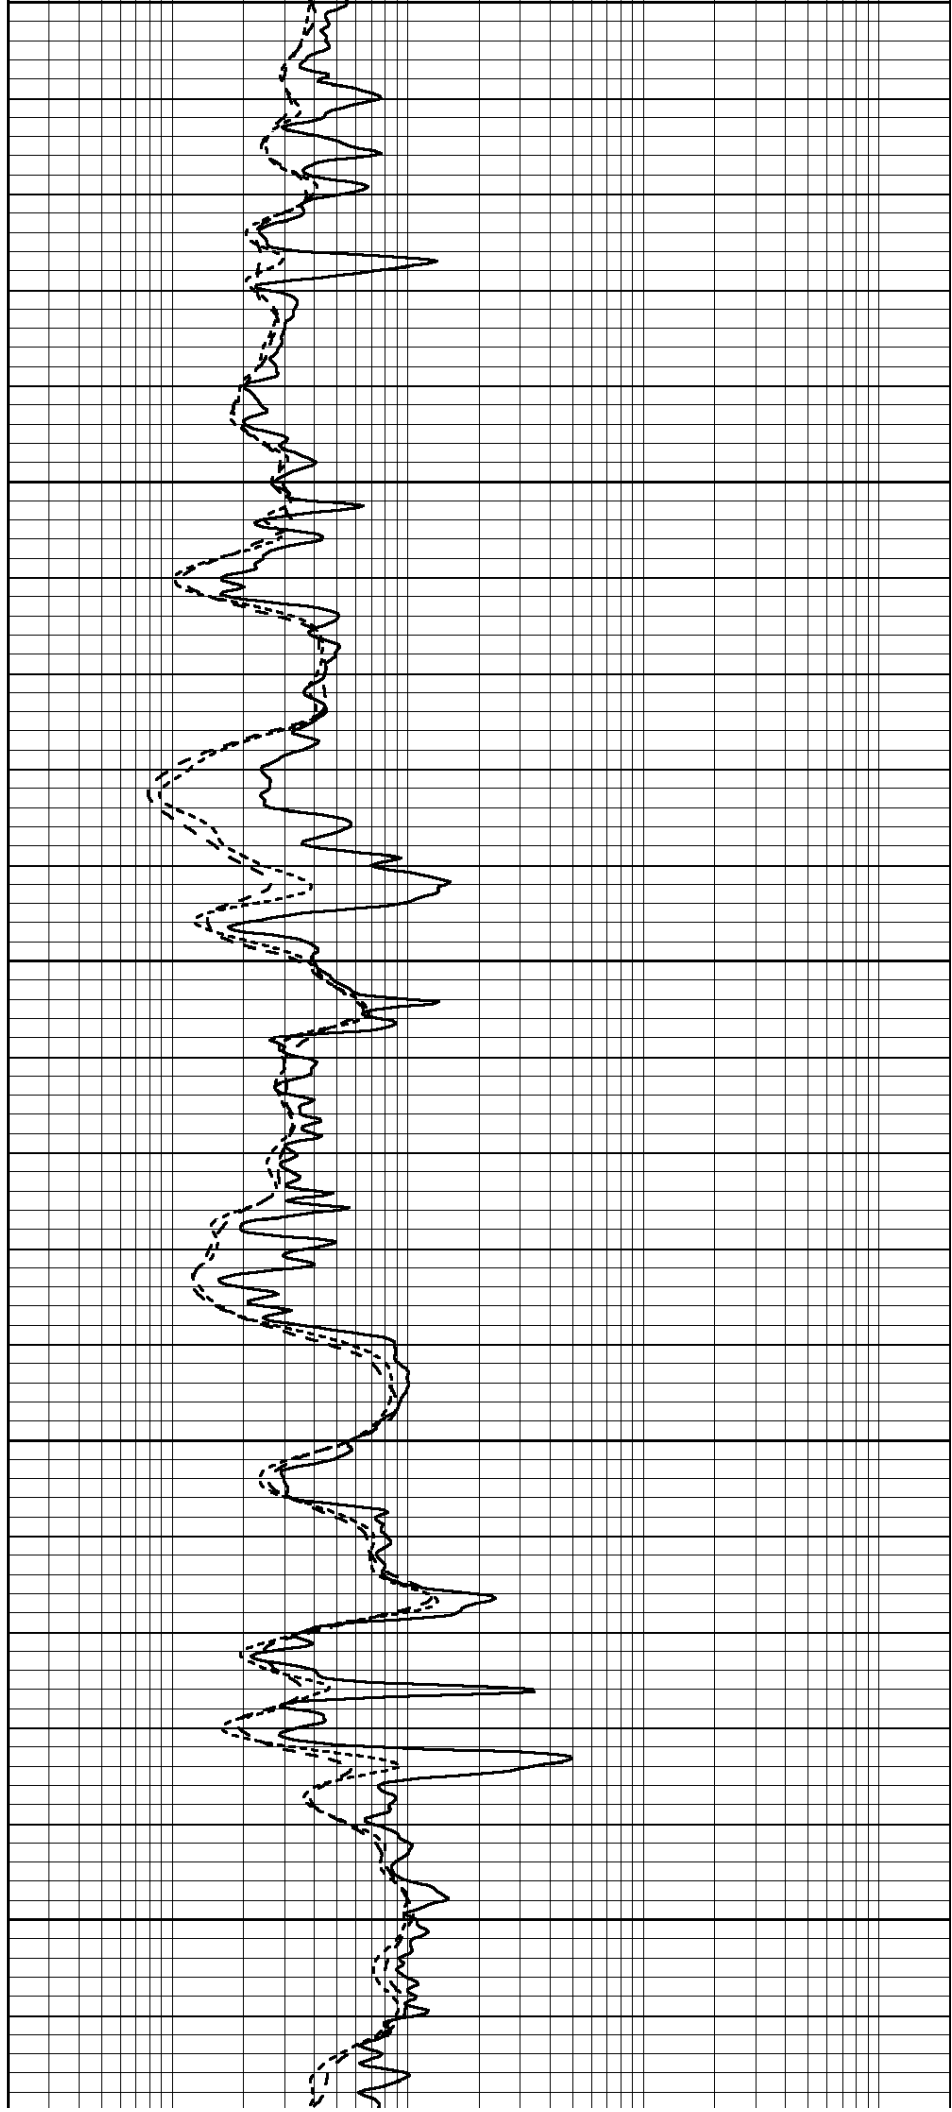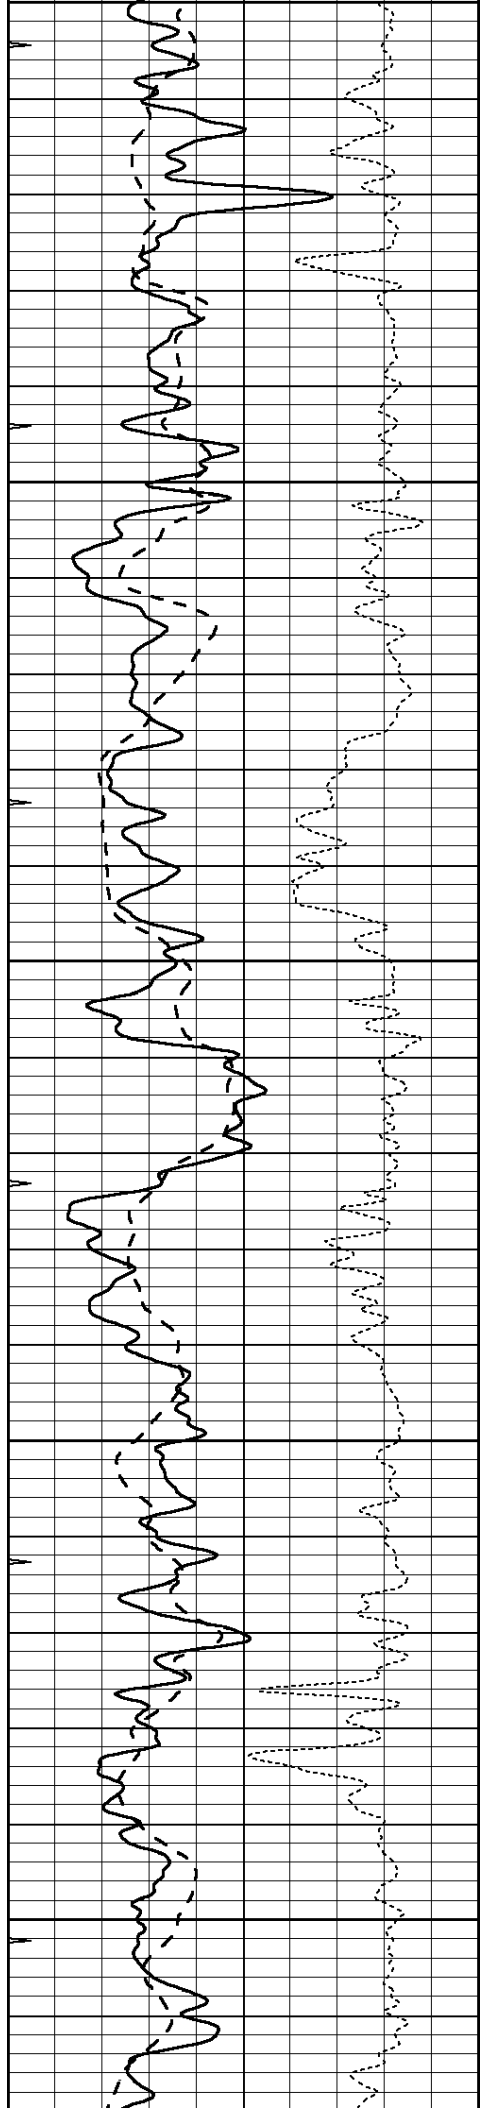

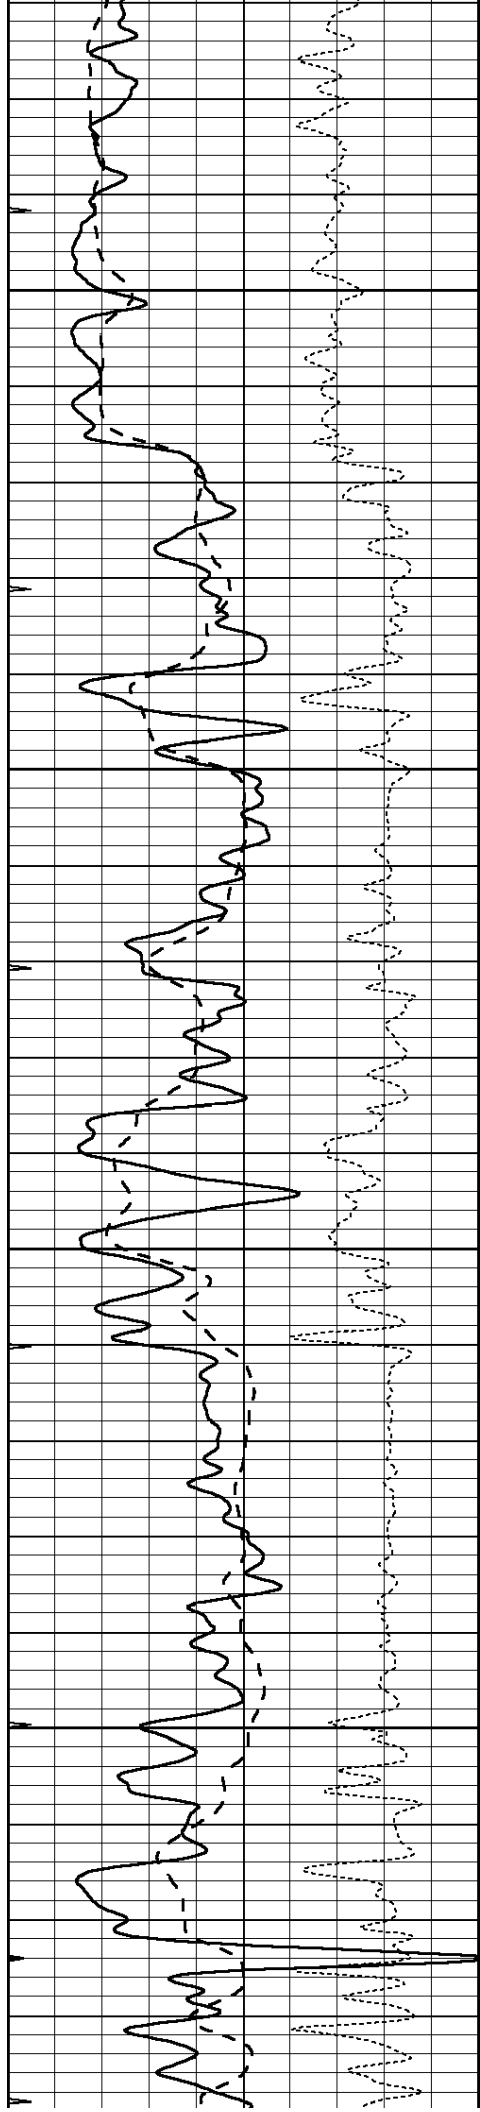



2200

2250

2300

2350

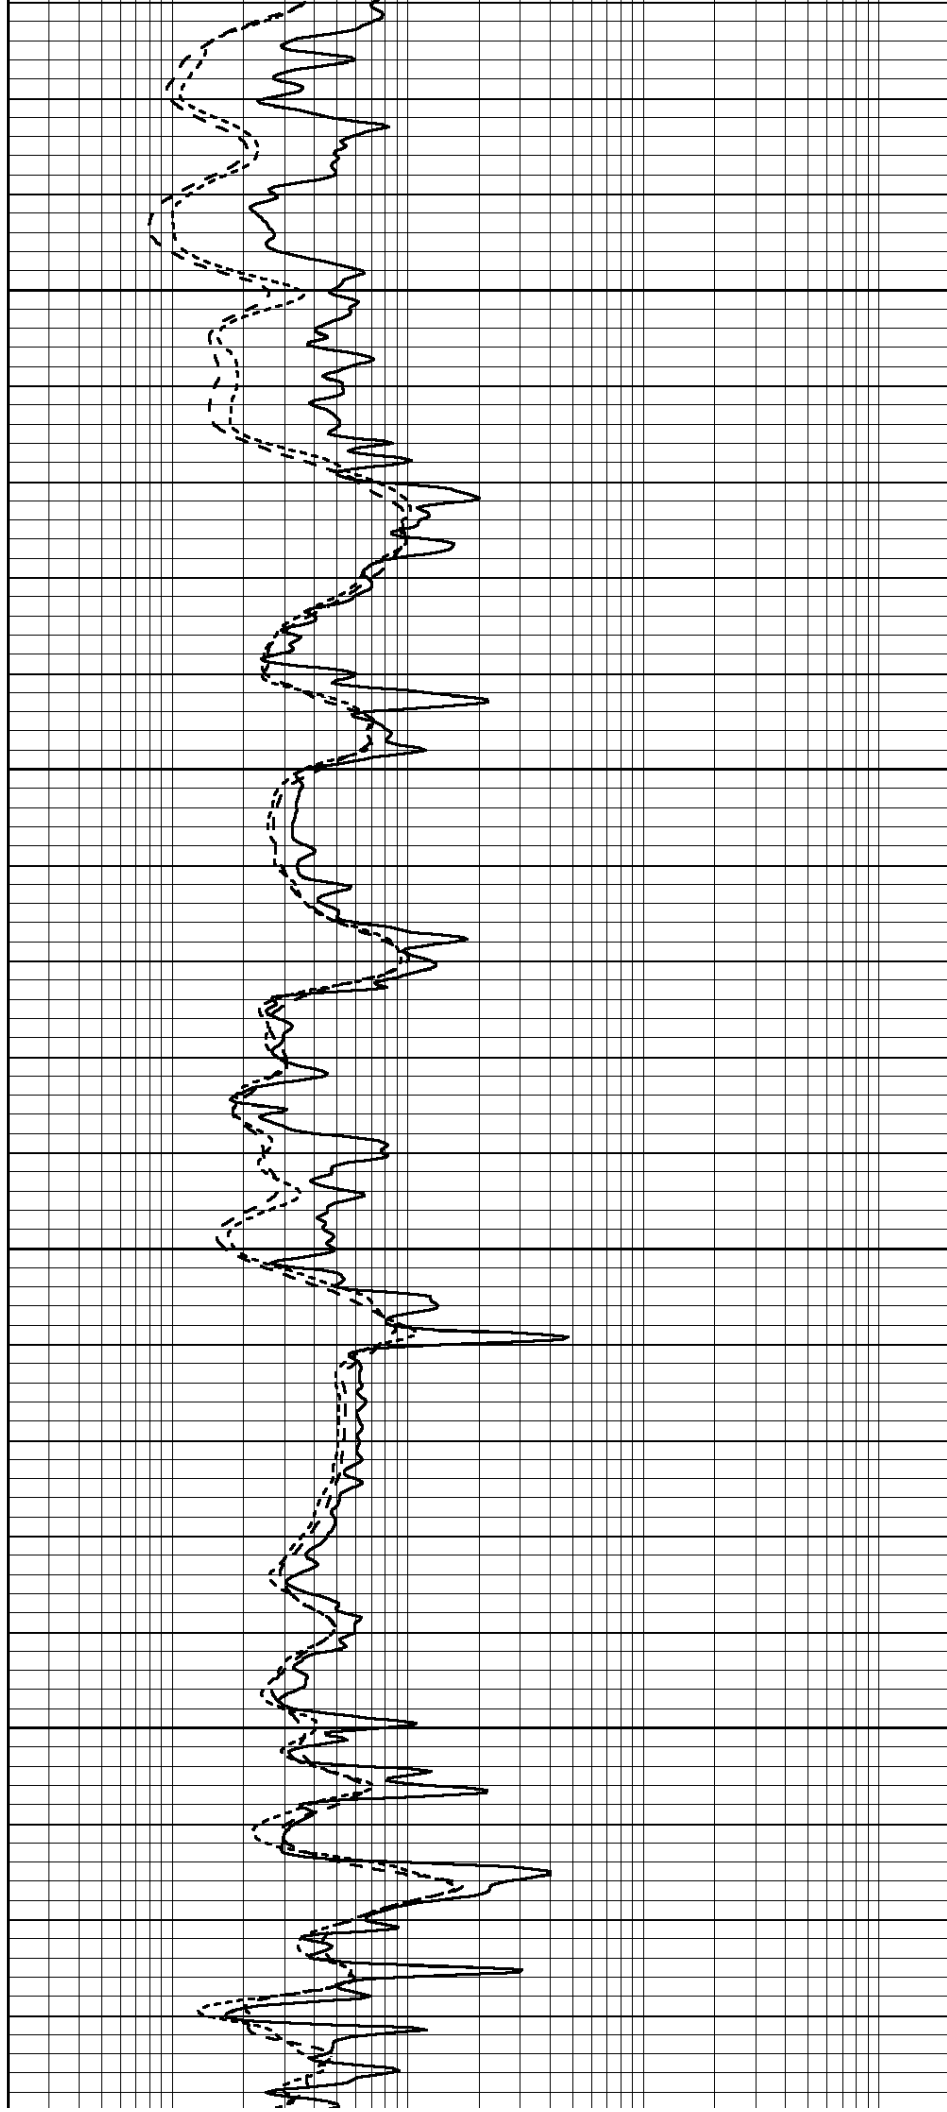

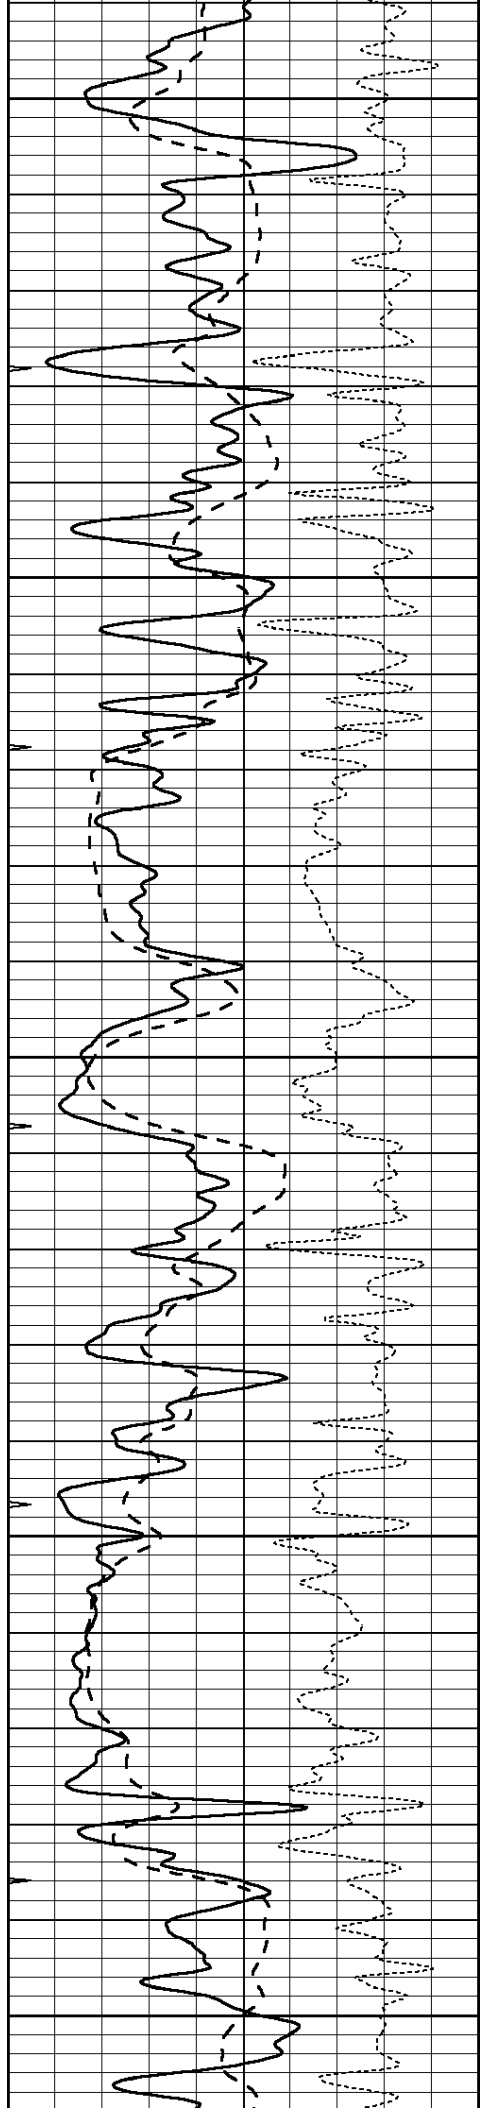


2400


2450

2500

2550

2600

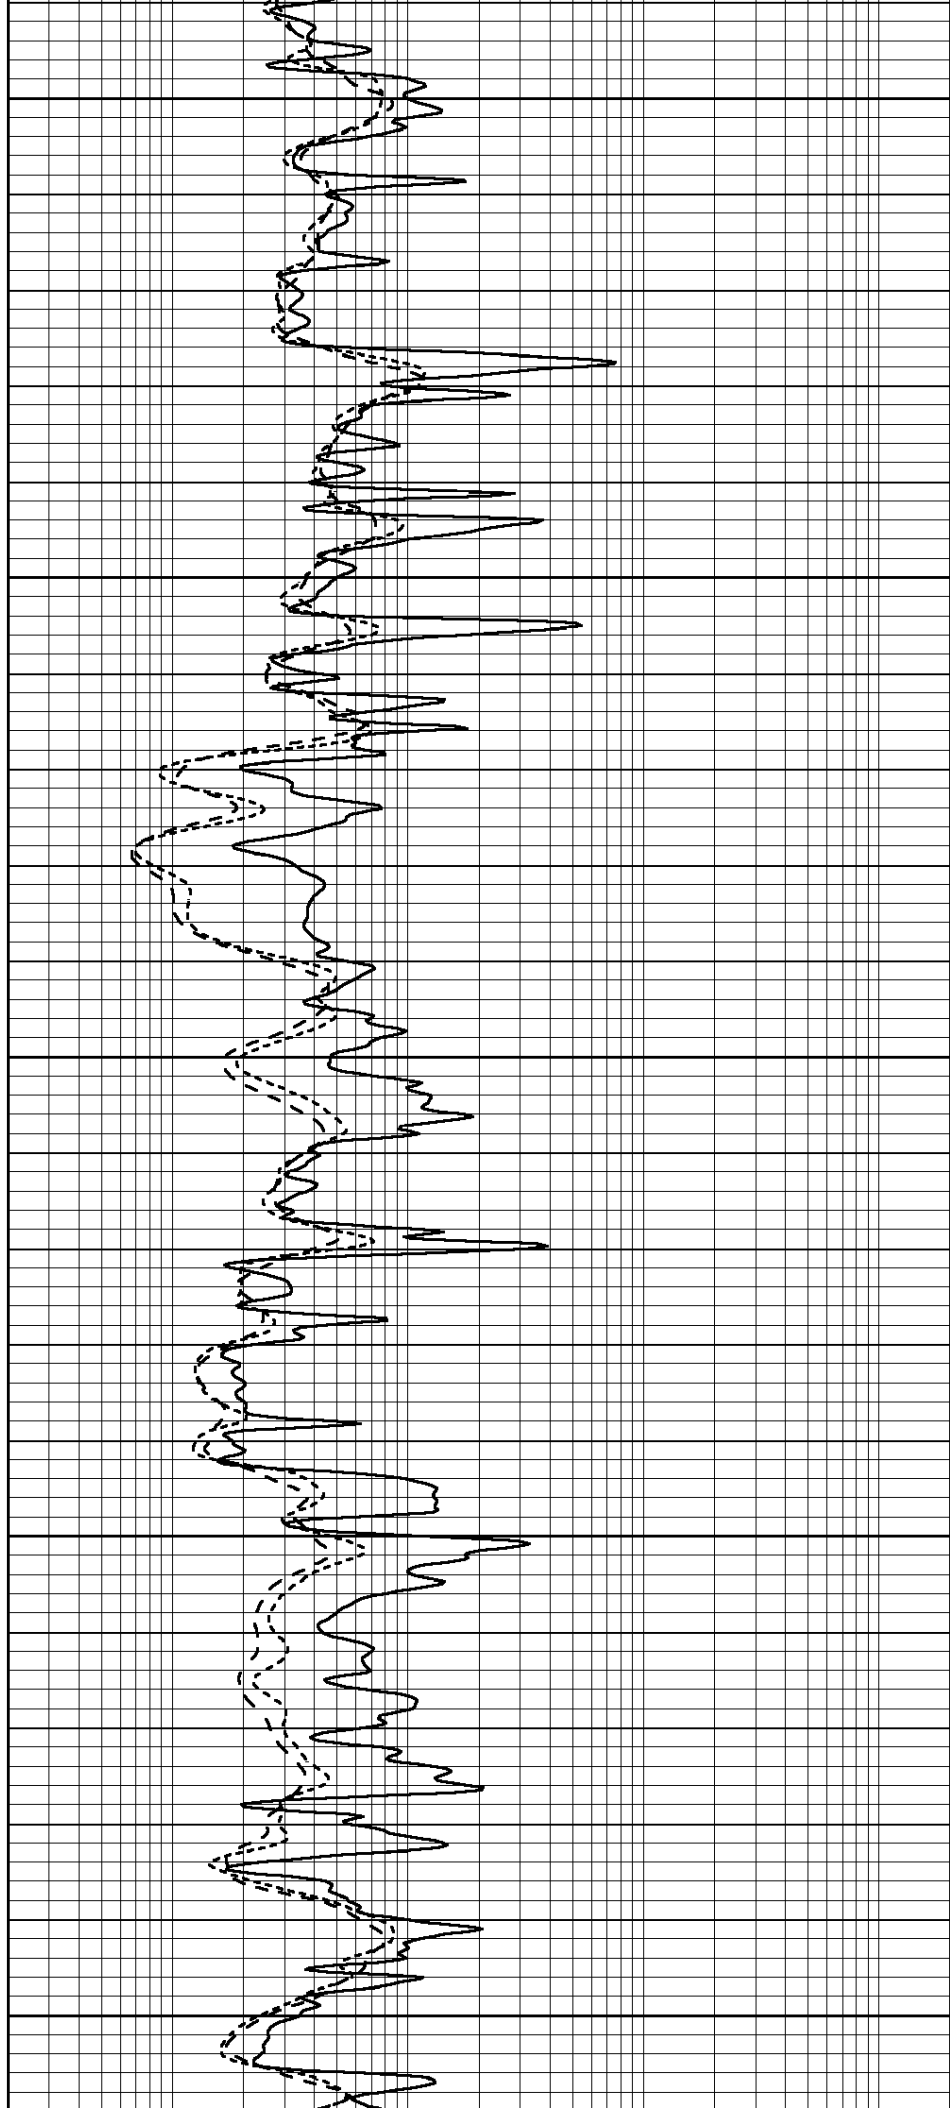

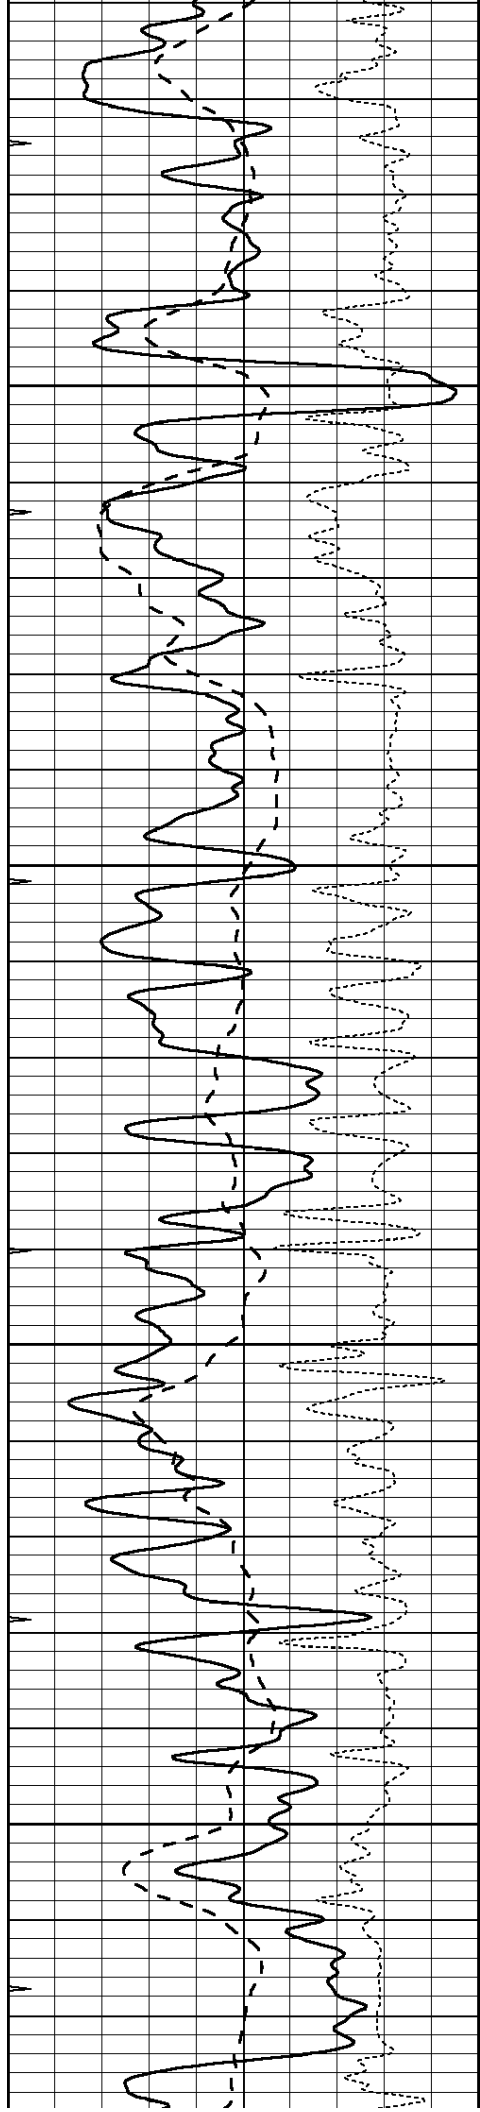



2650

2700

2750

2800

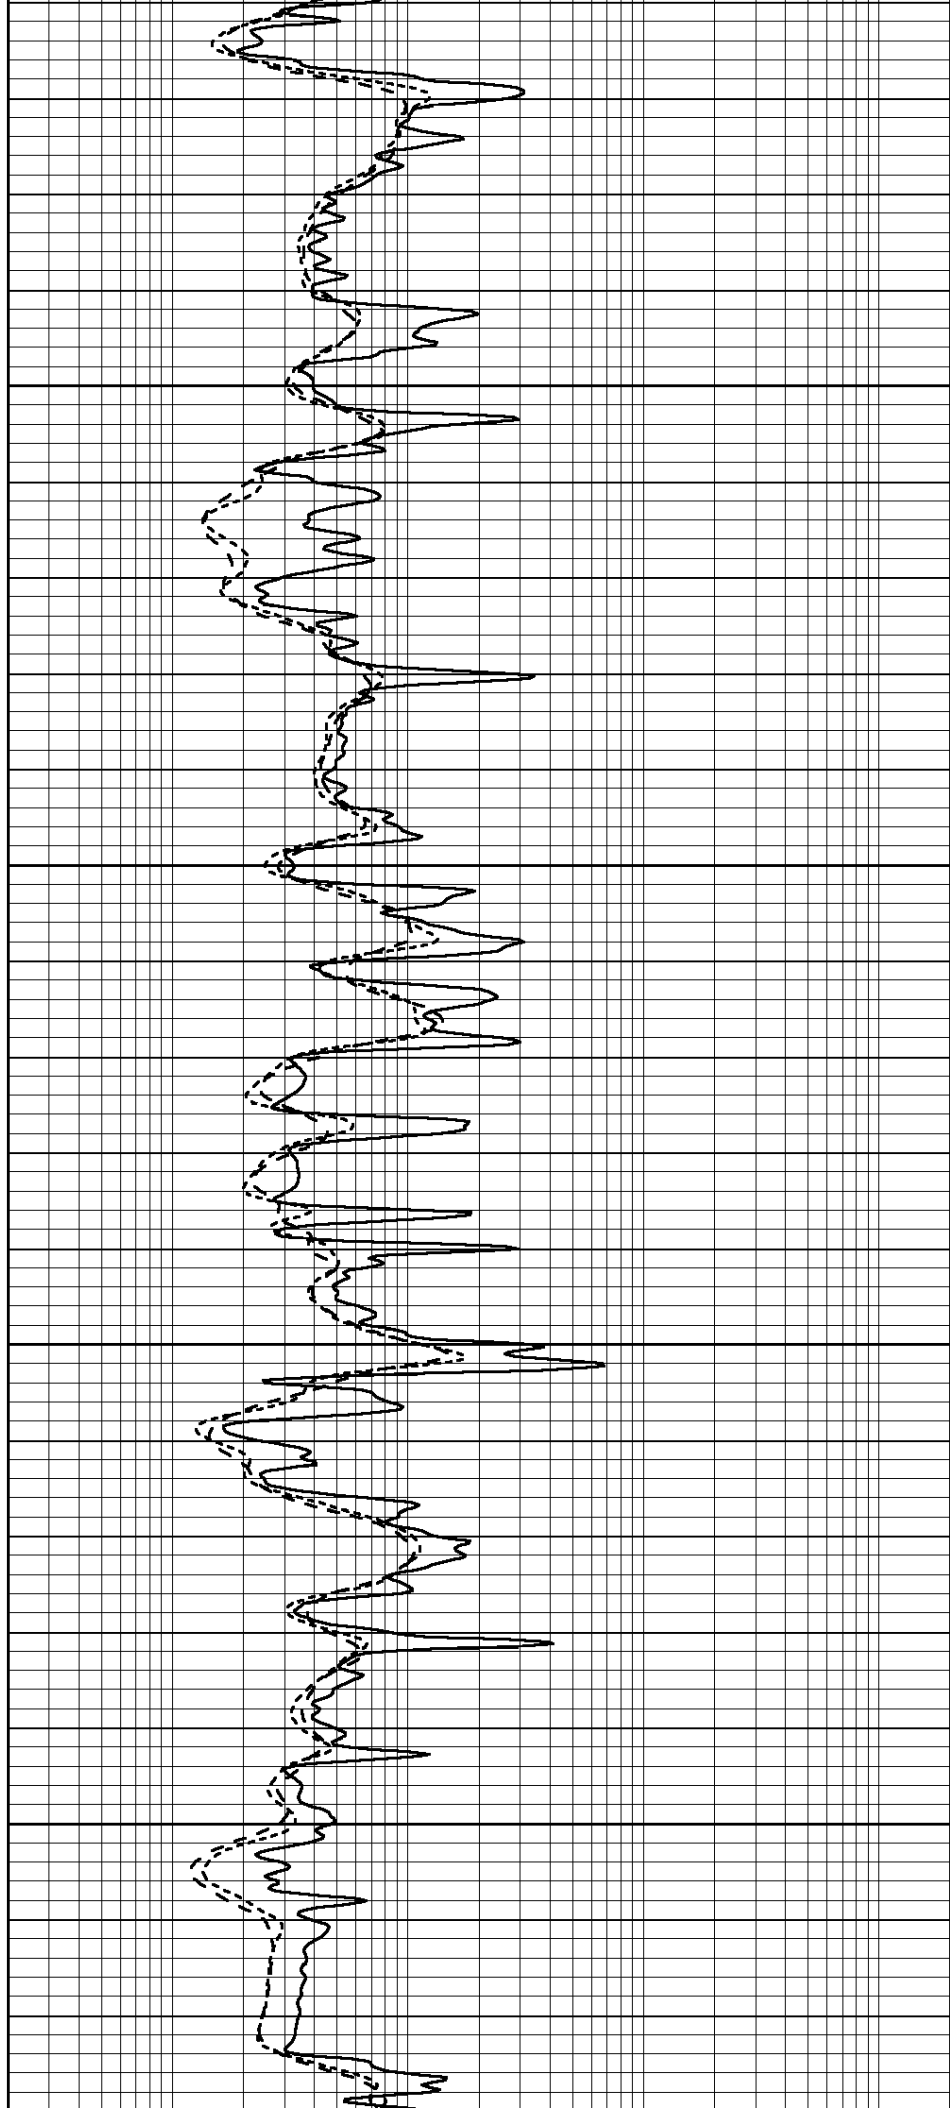

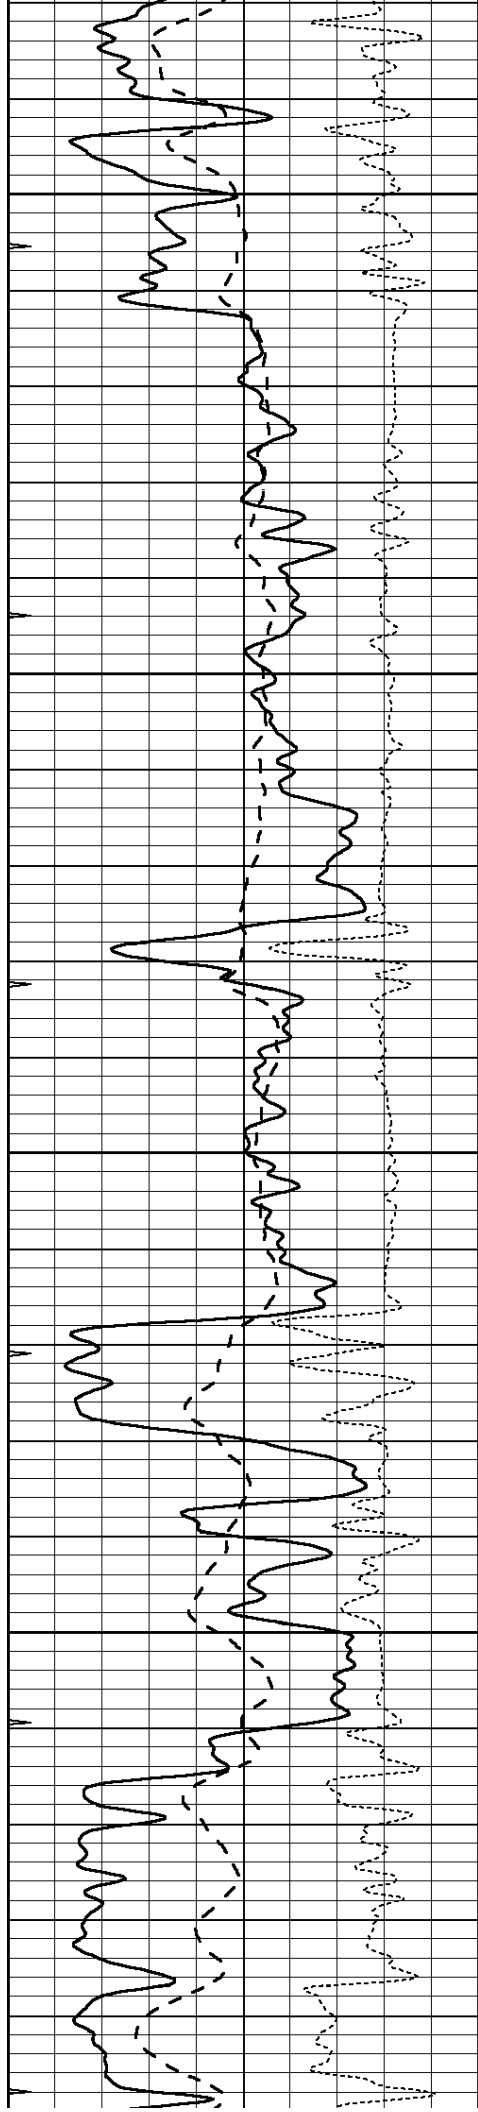


2850


2900

2950

3000

3050

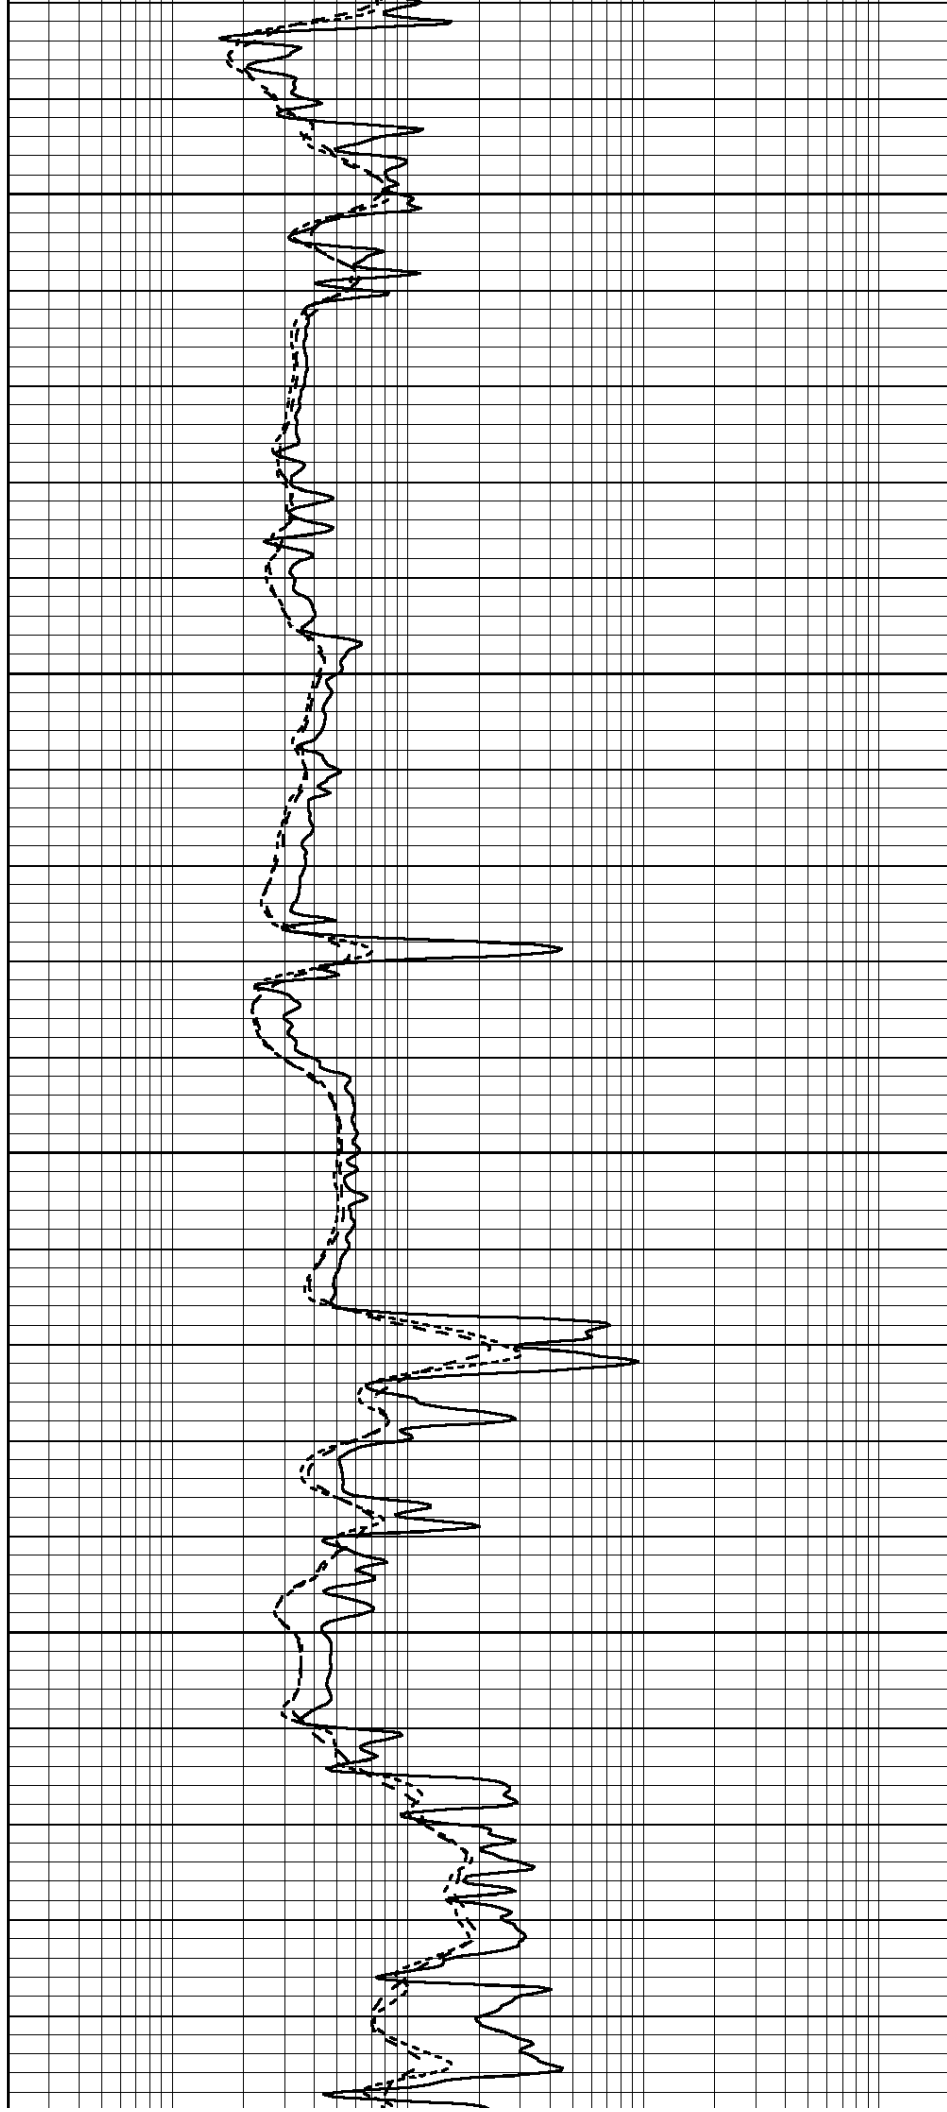

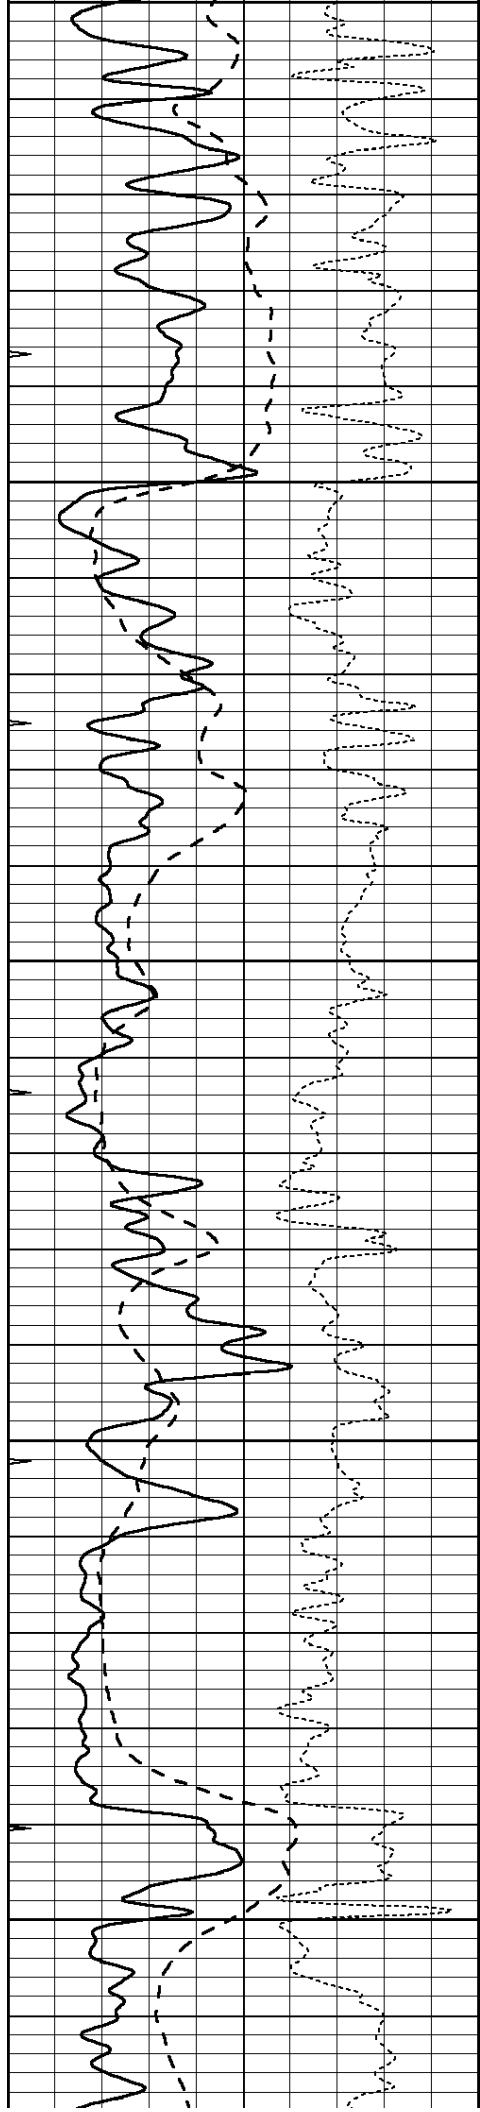


3050


3100

3150

3200

3250

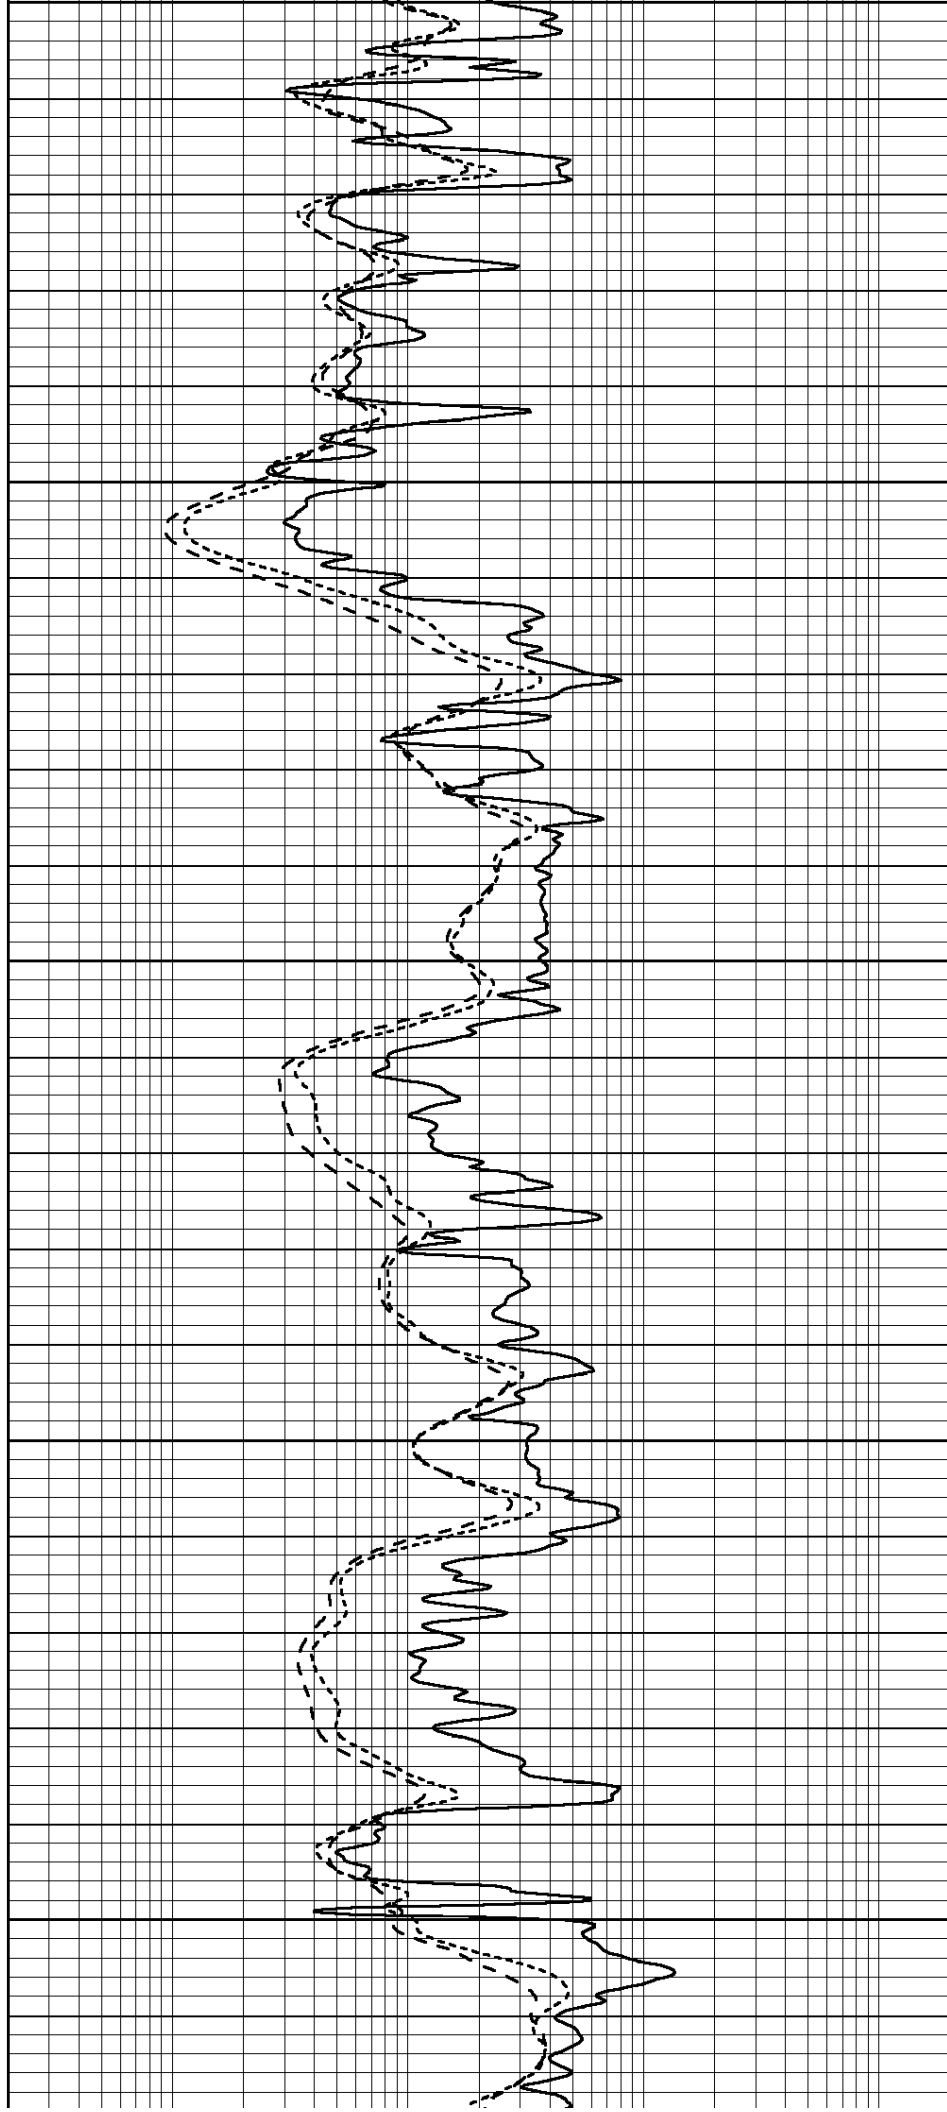

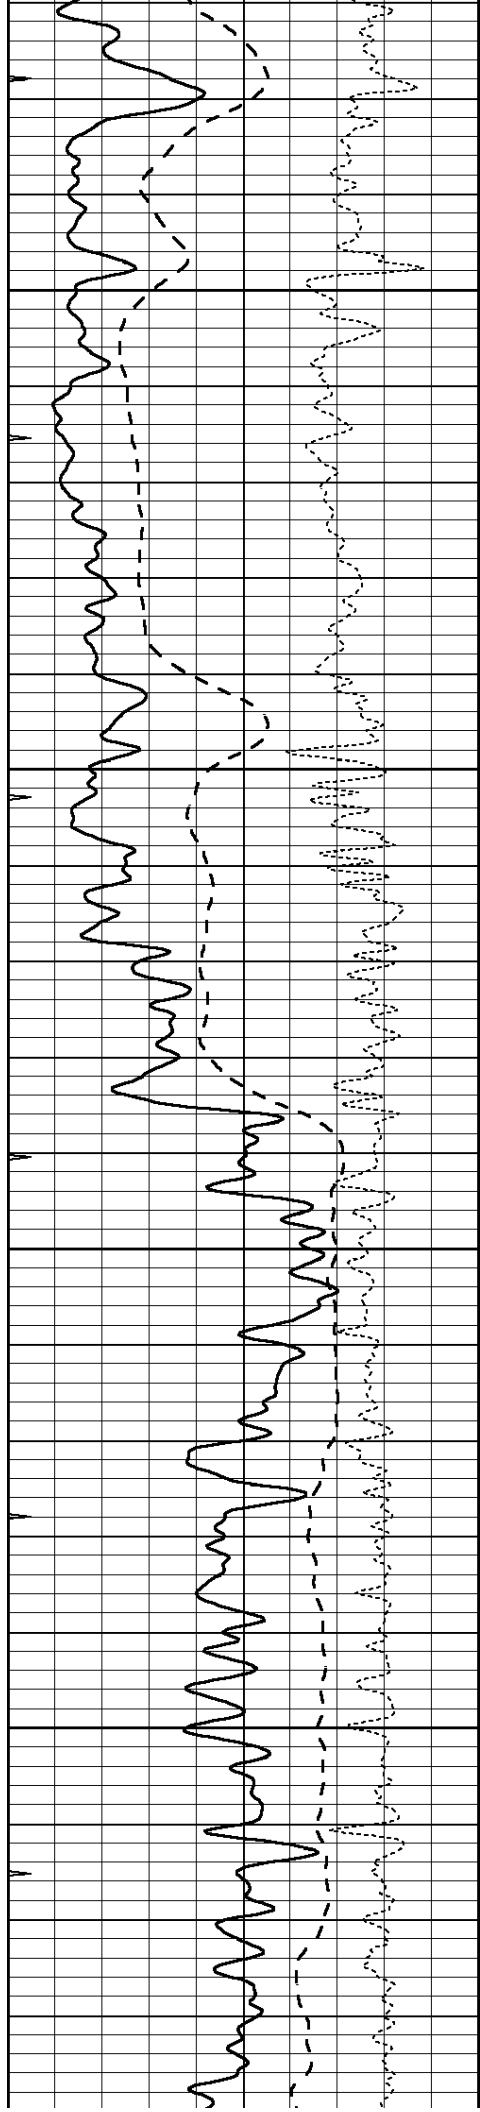



3300

3350

3400

3450

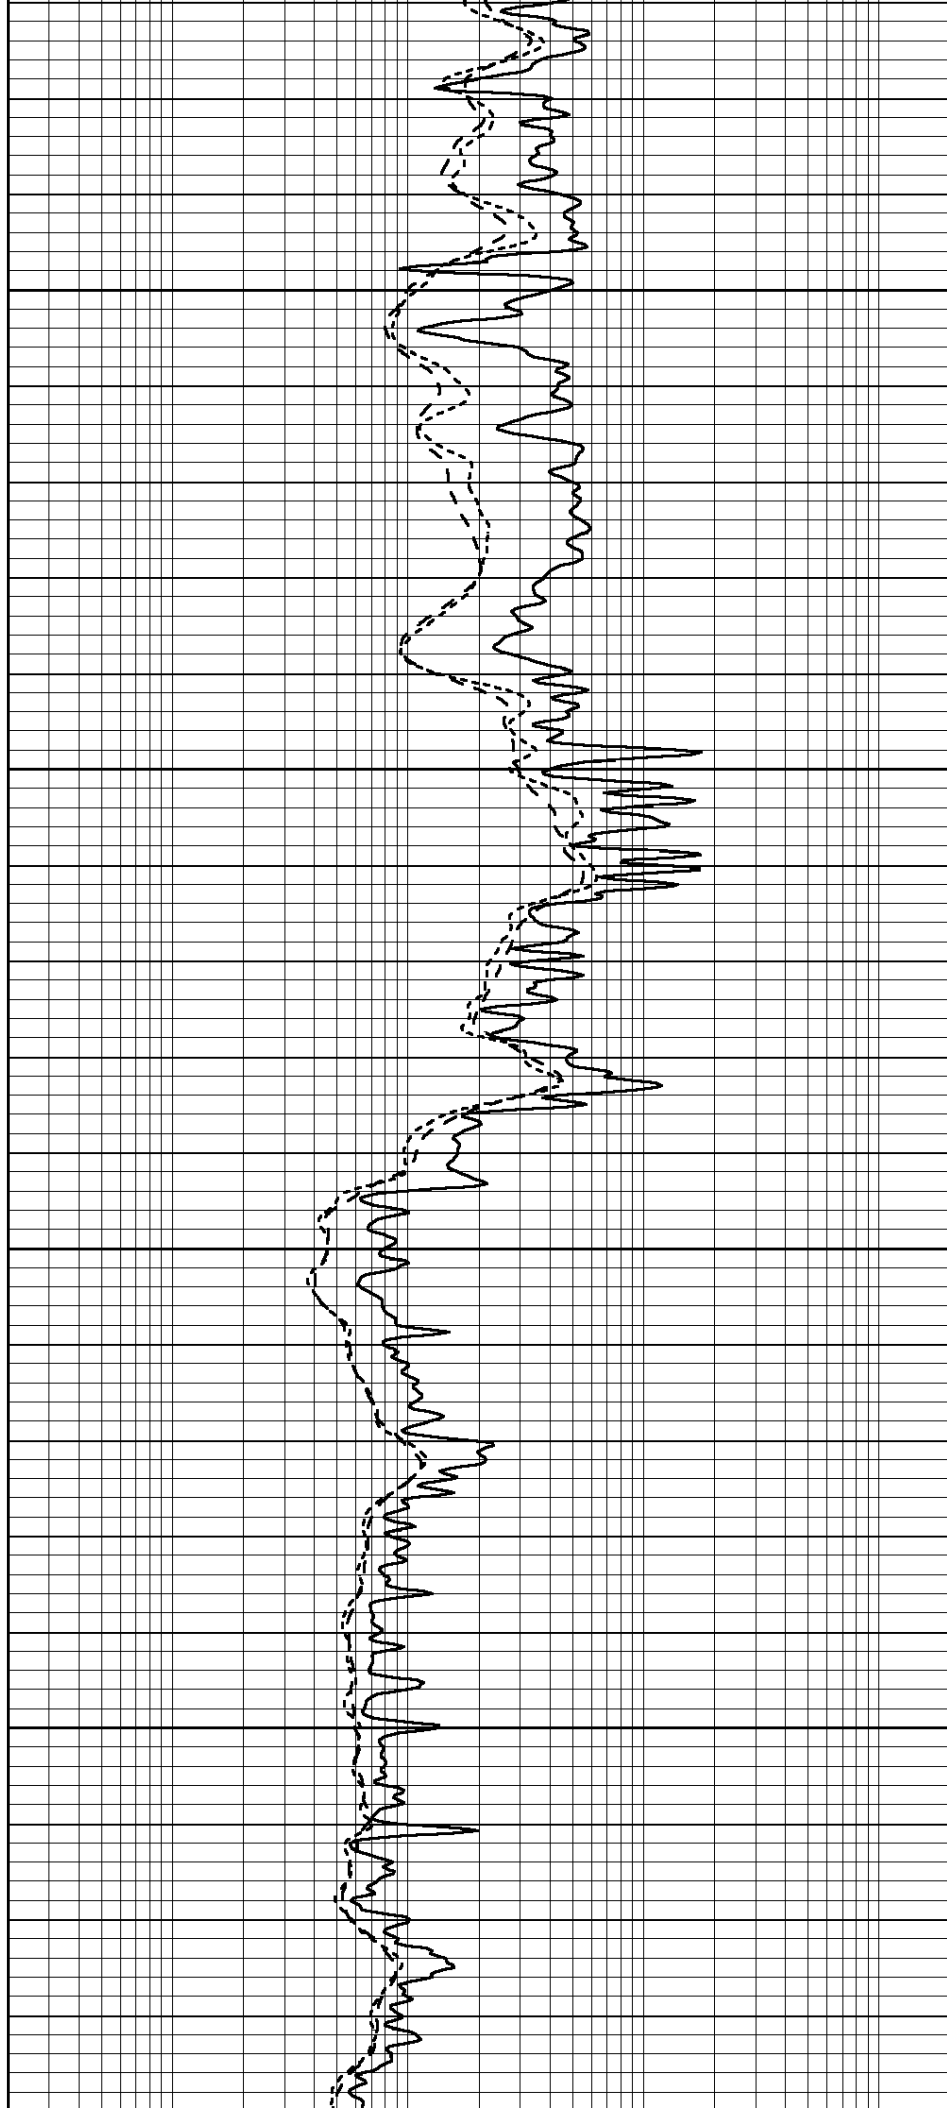

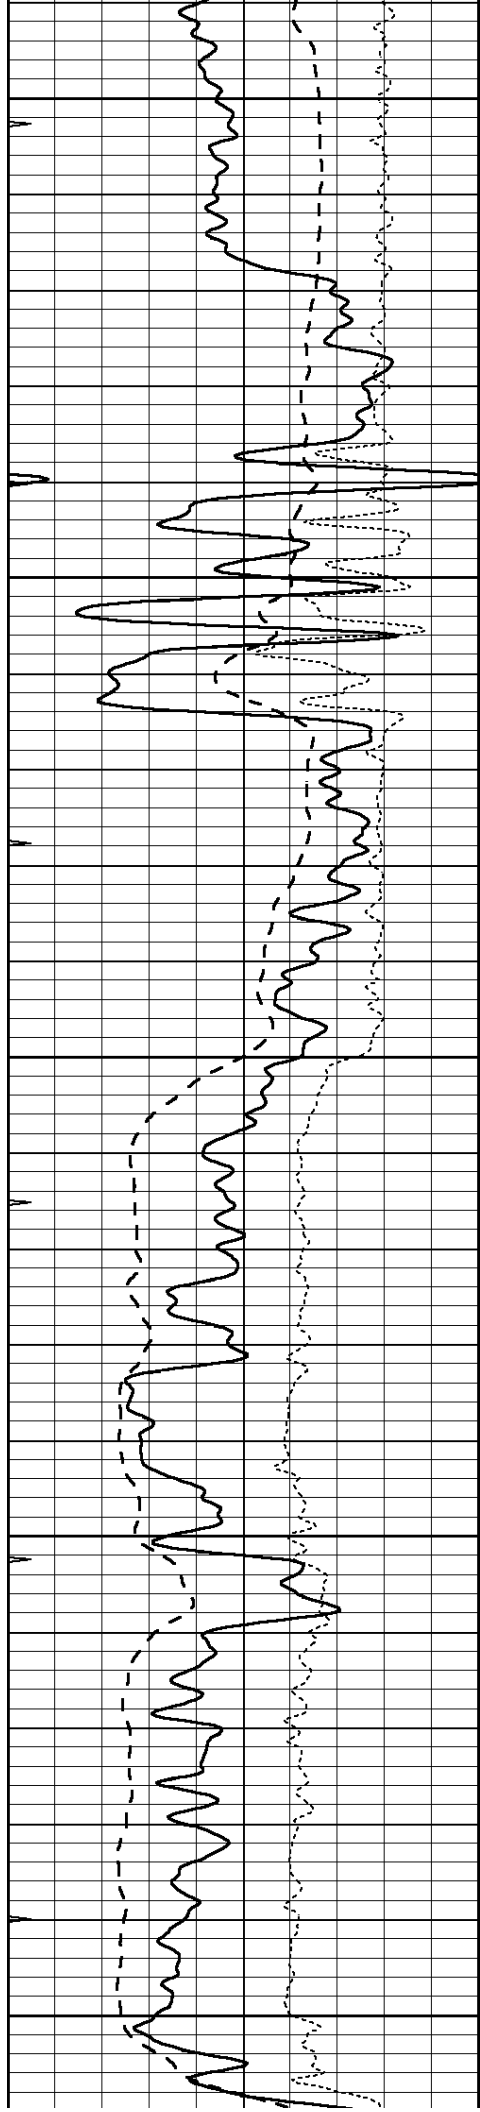


3500


3550

3600

3650

3700

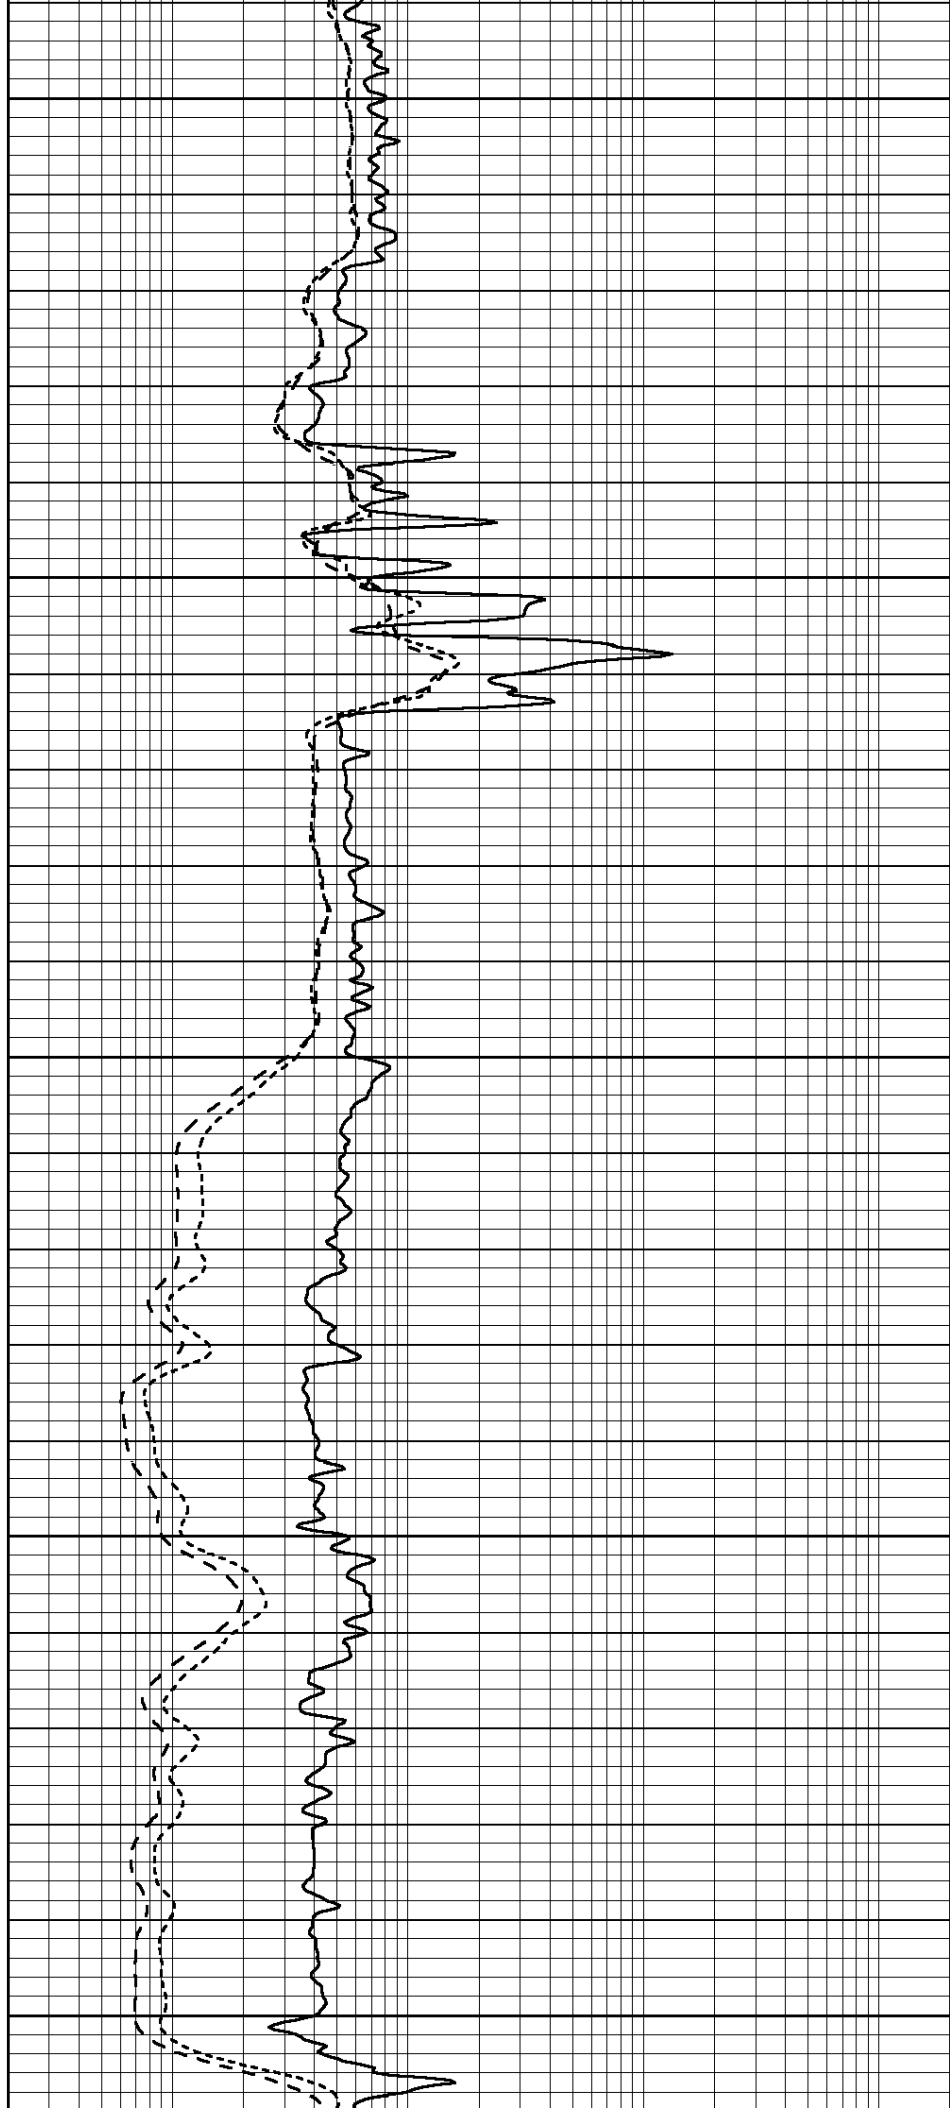

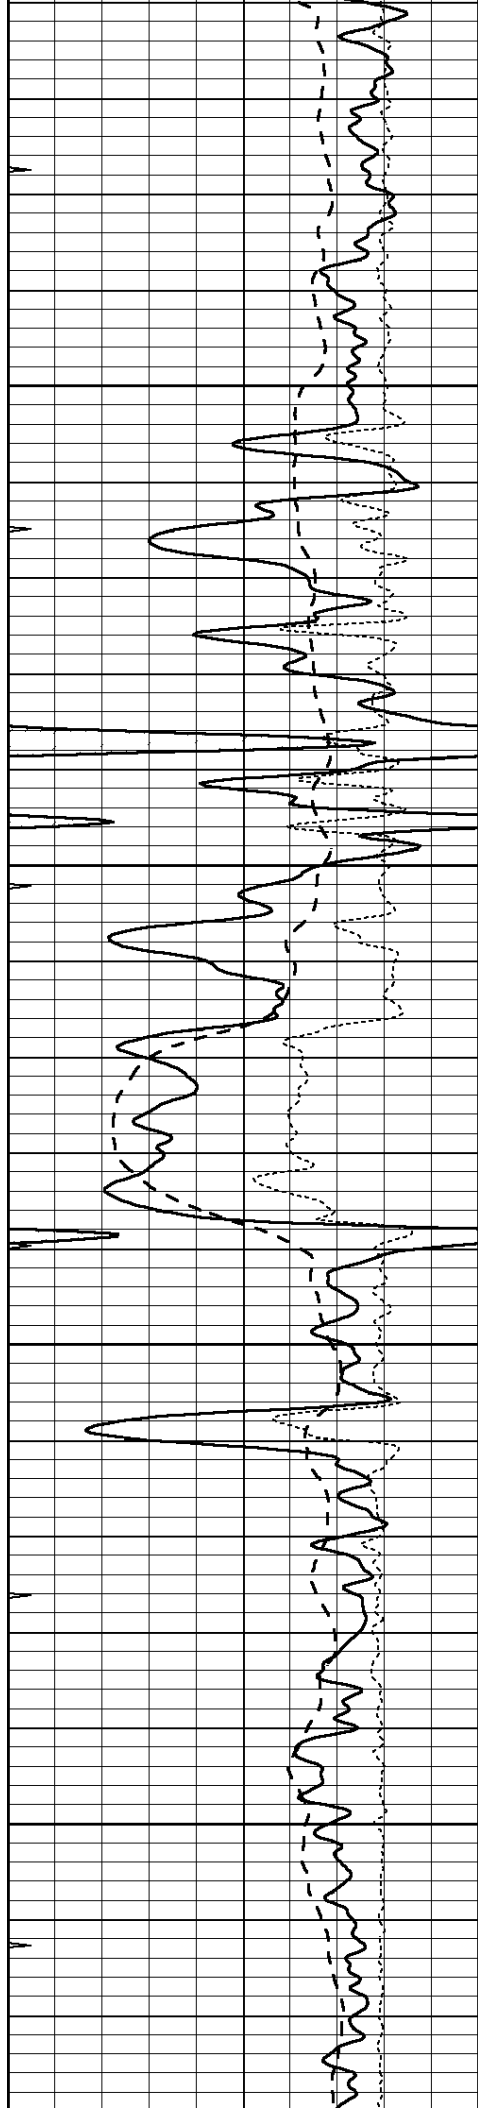



3750

3800

3850

3900

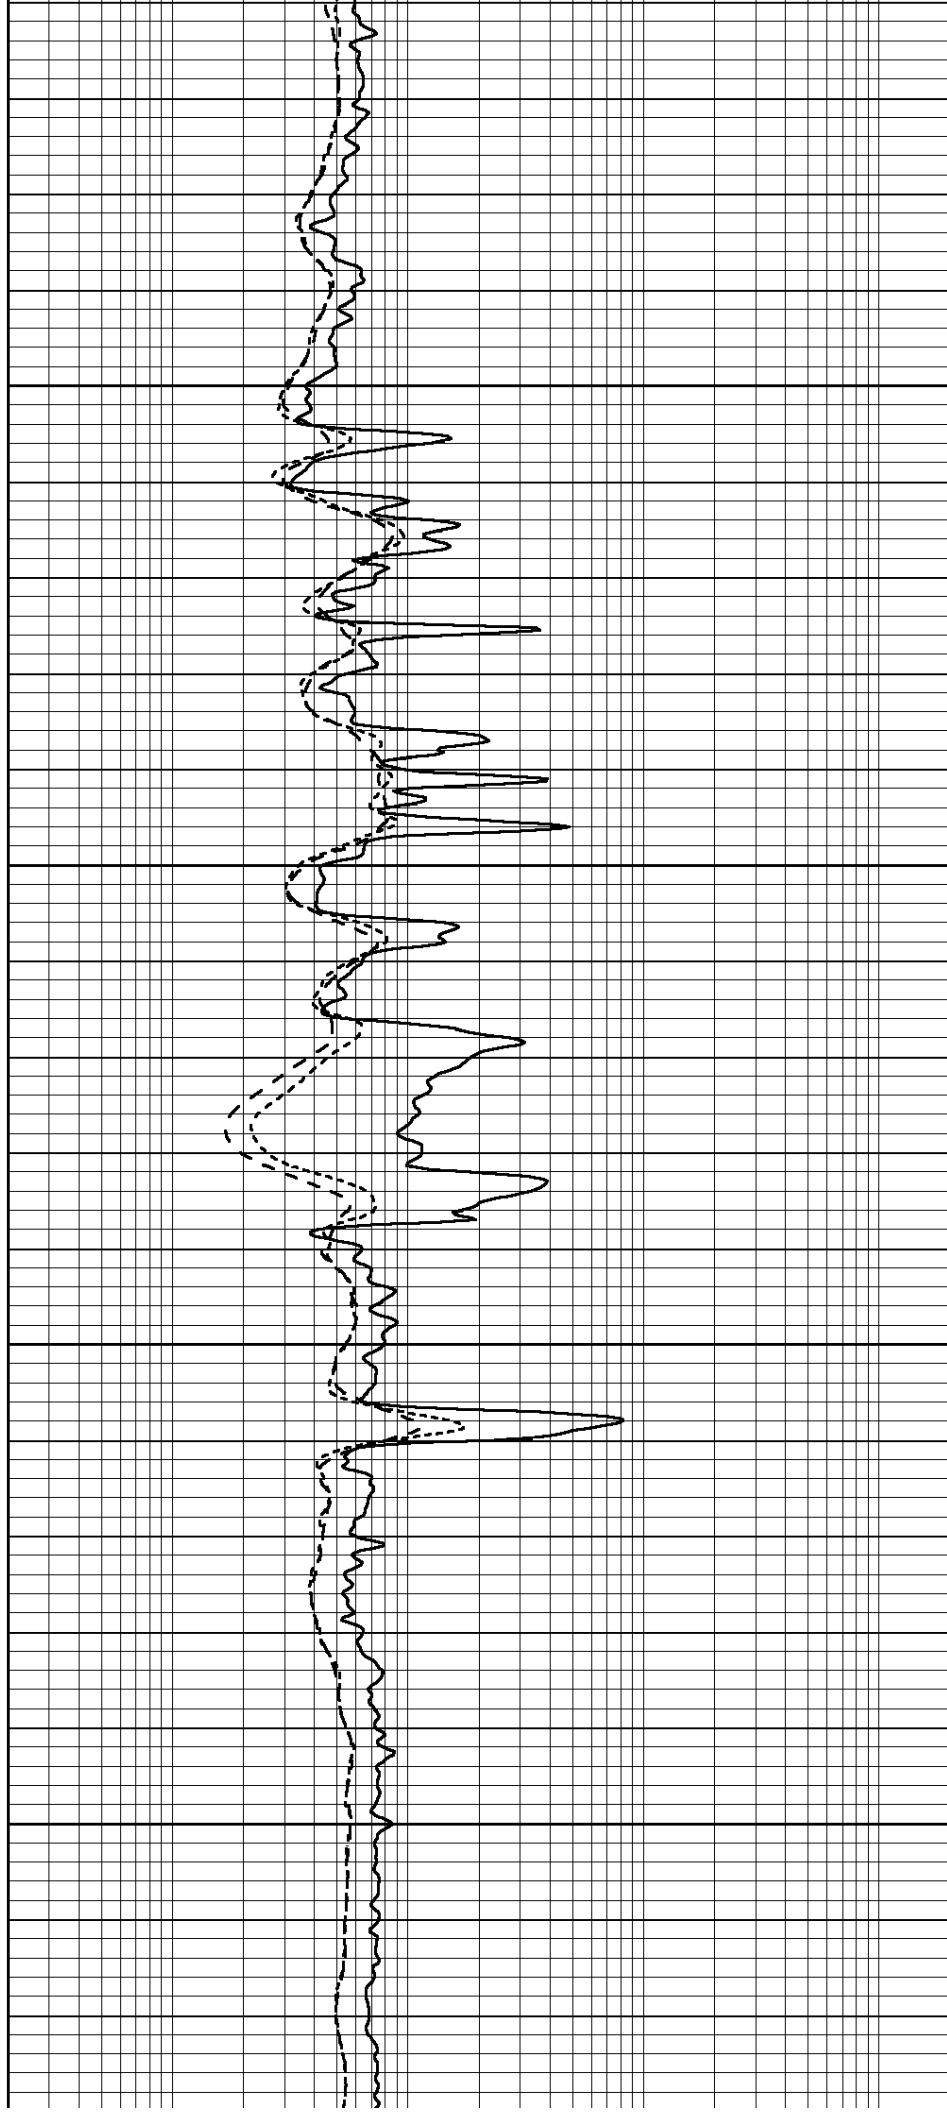

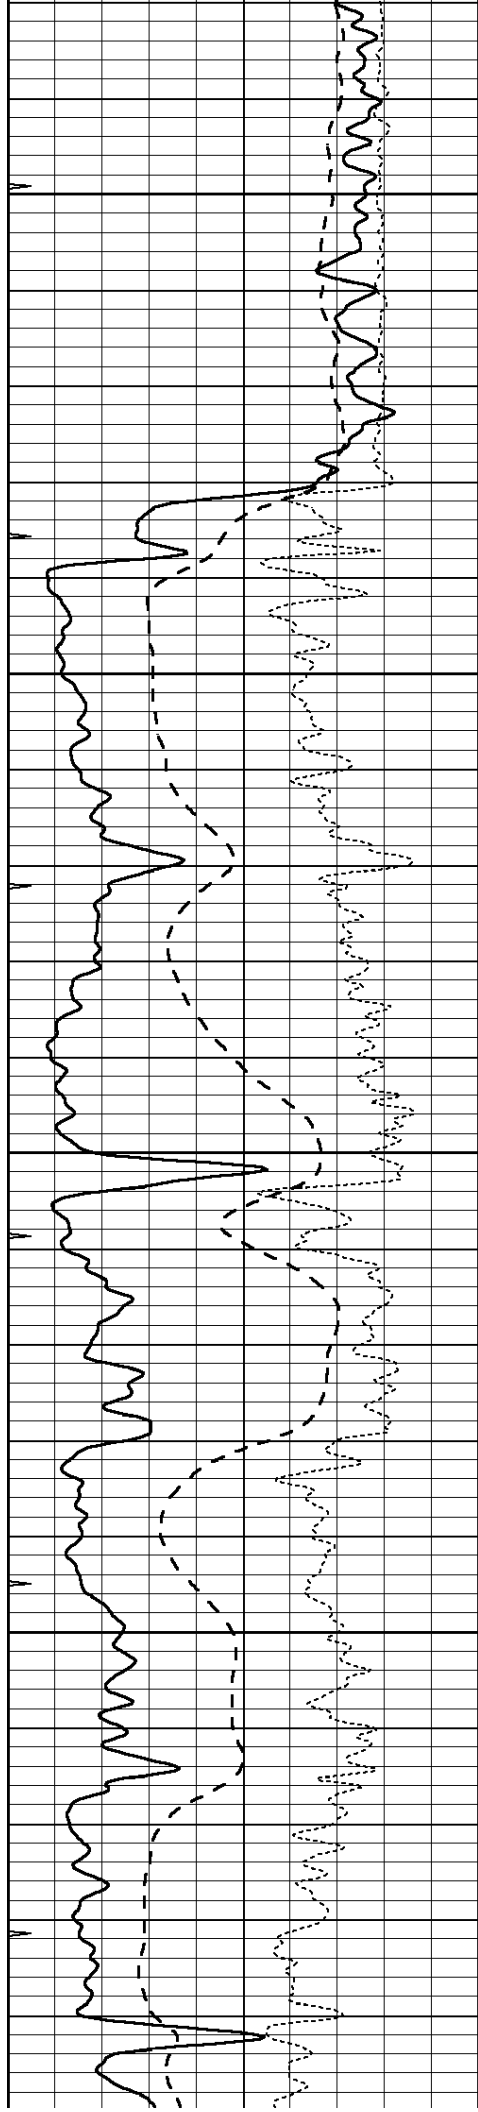


3950


4000

4050

4100

4150

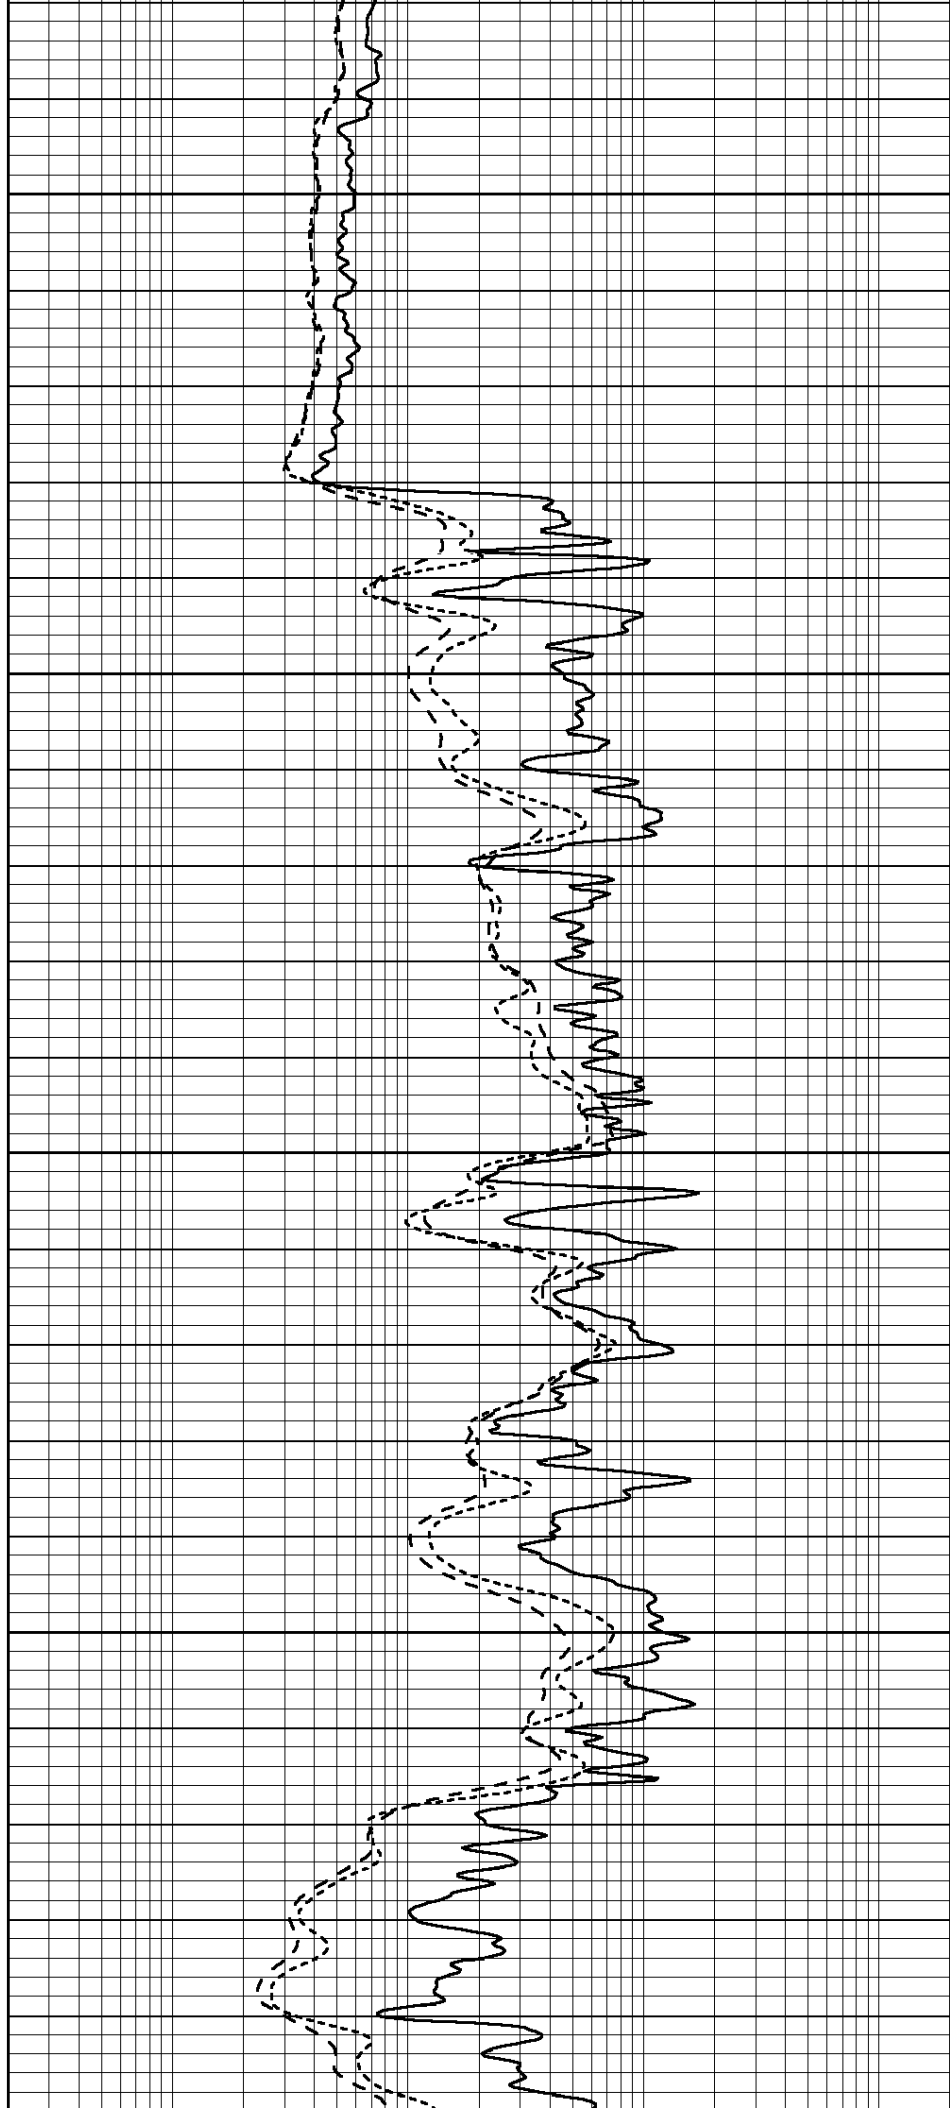

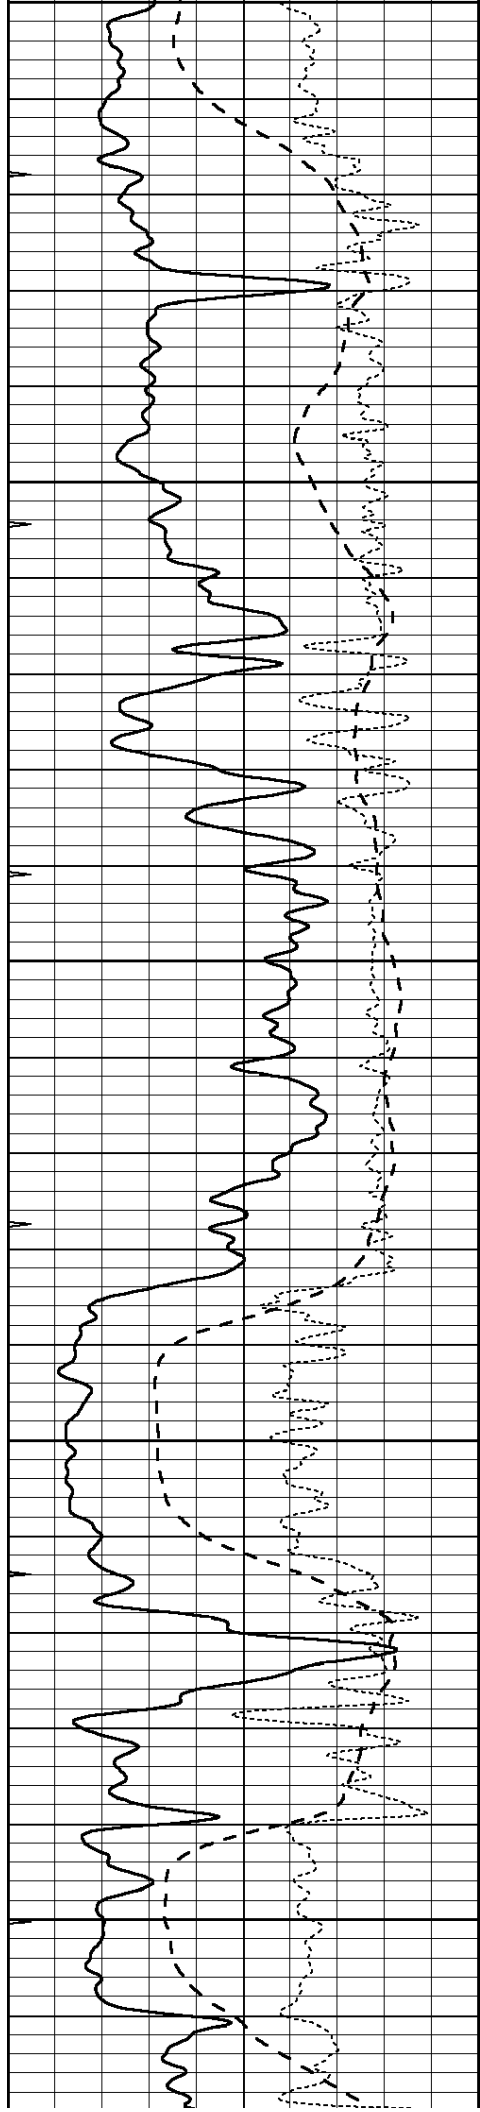


4150


4200

4250

4300

4350

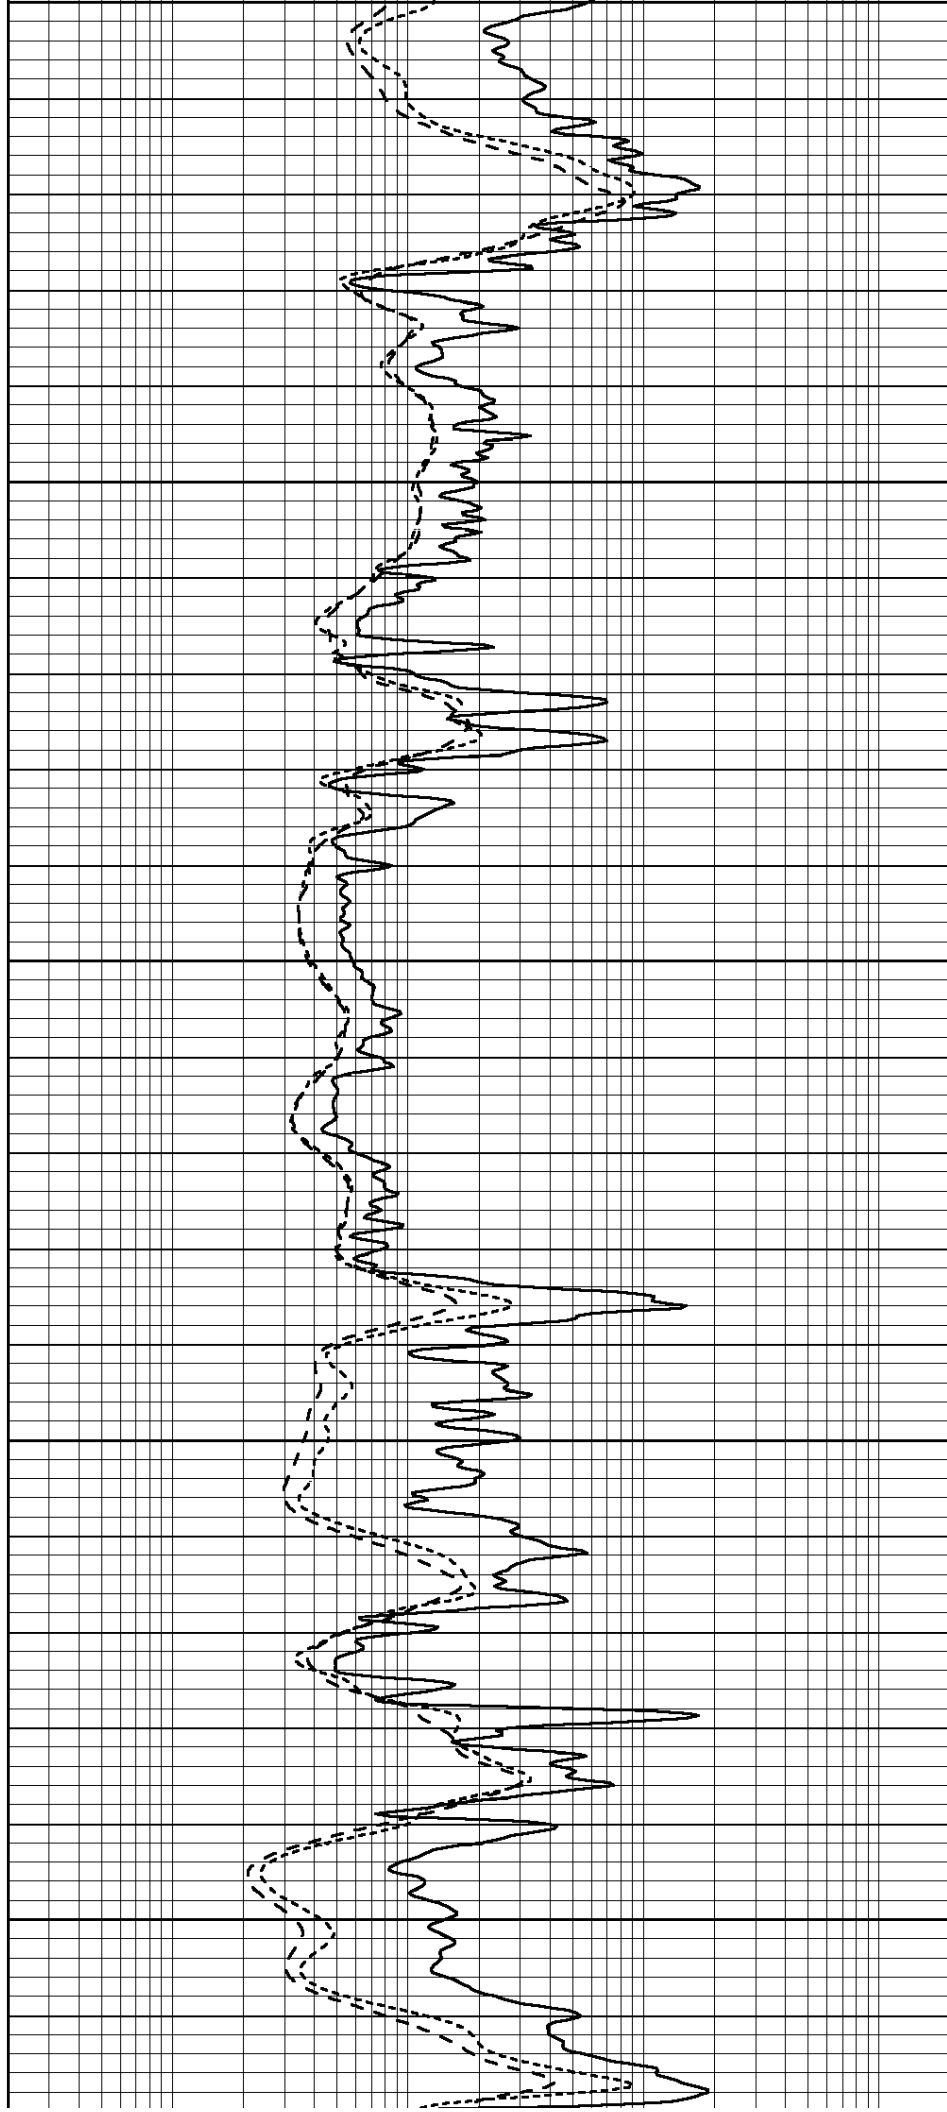

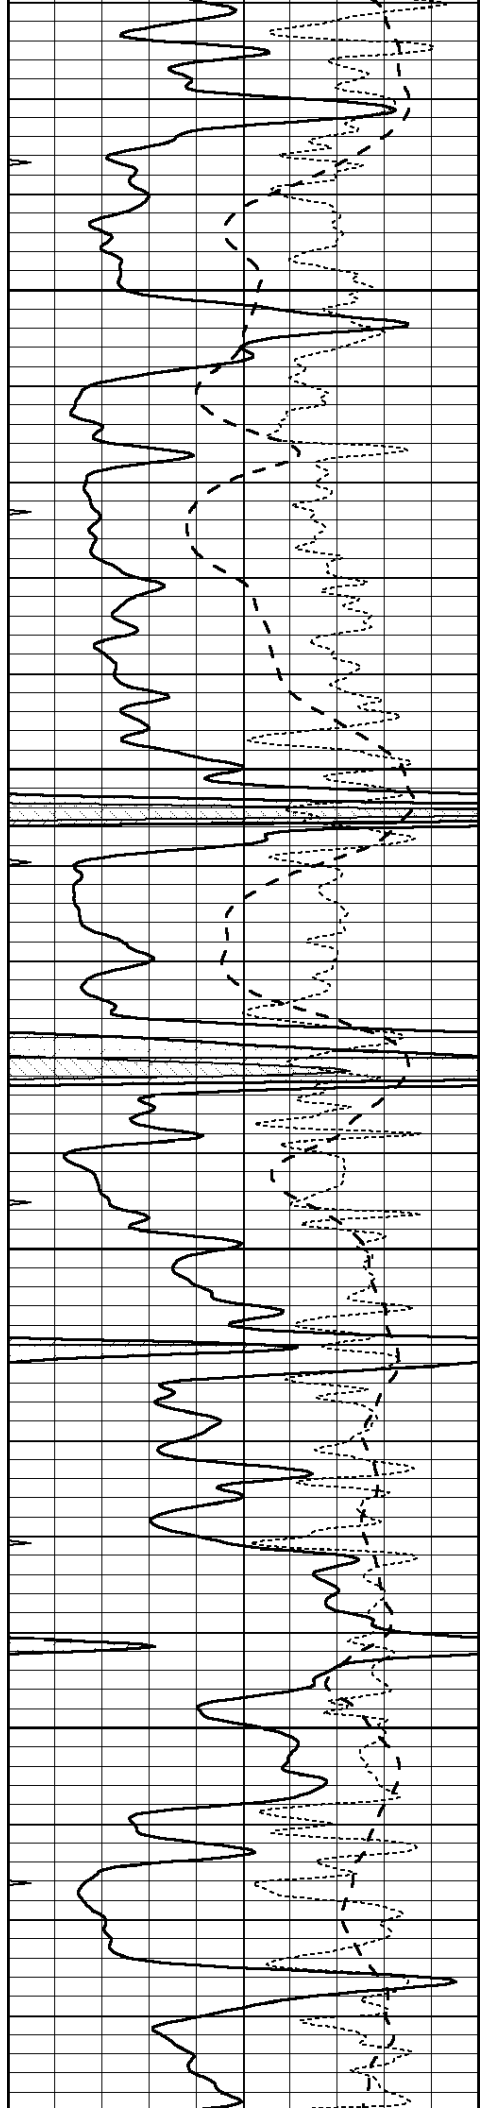



4400

4450

4500

4550

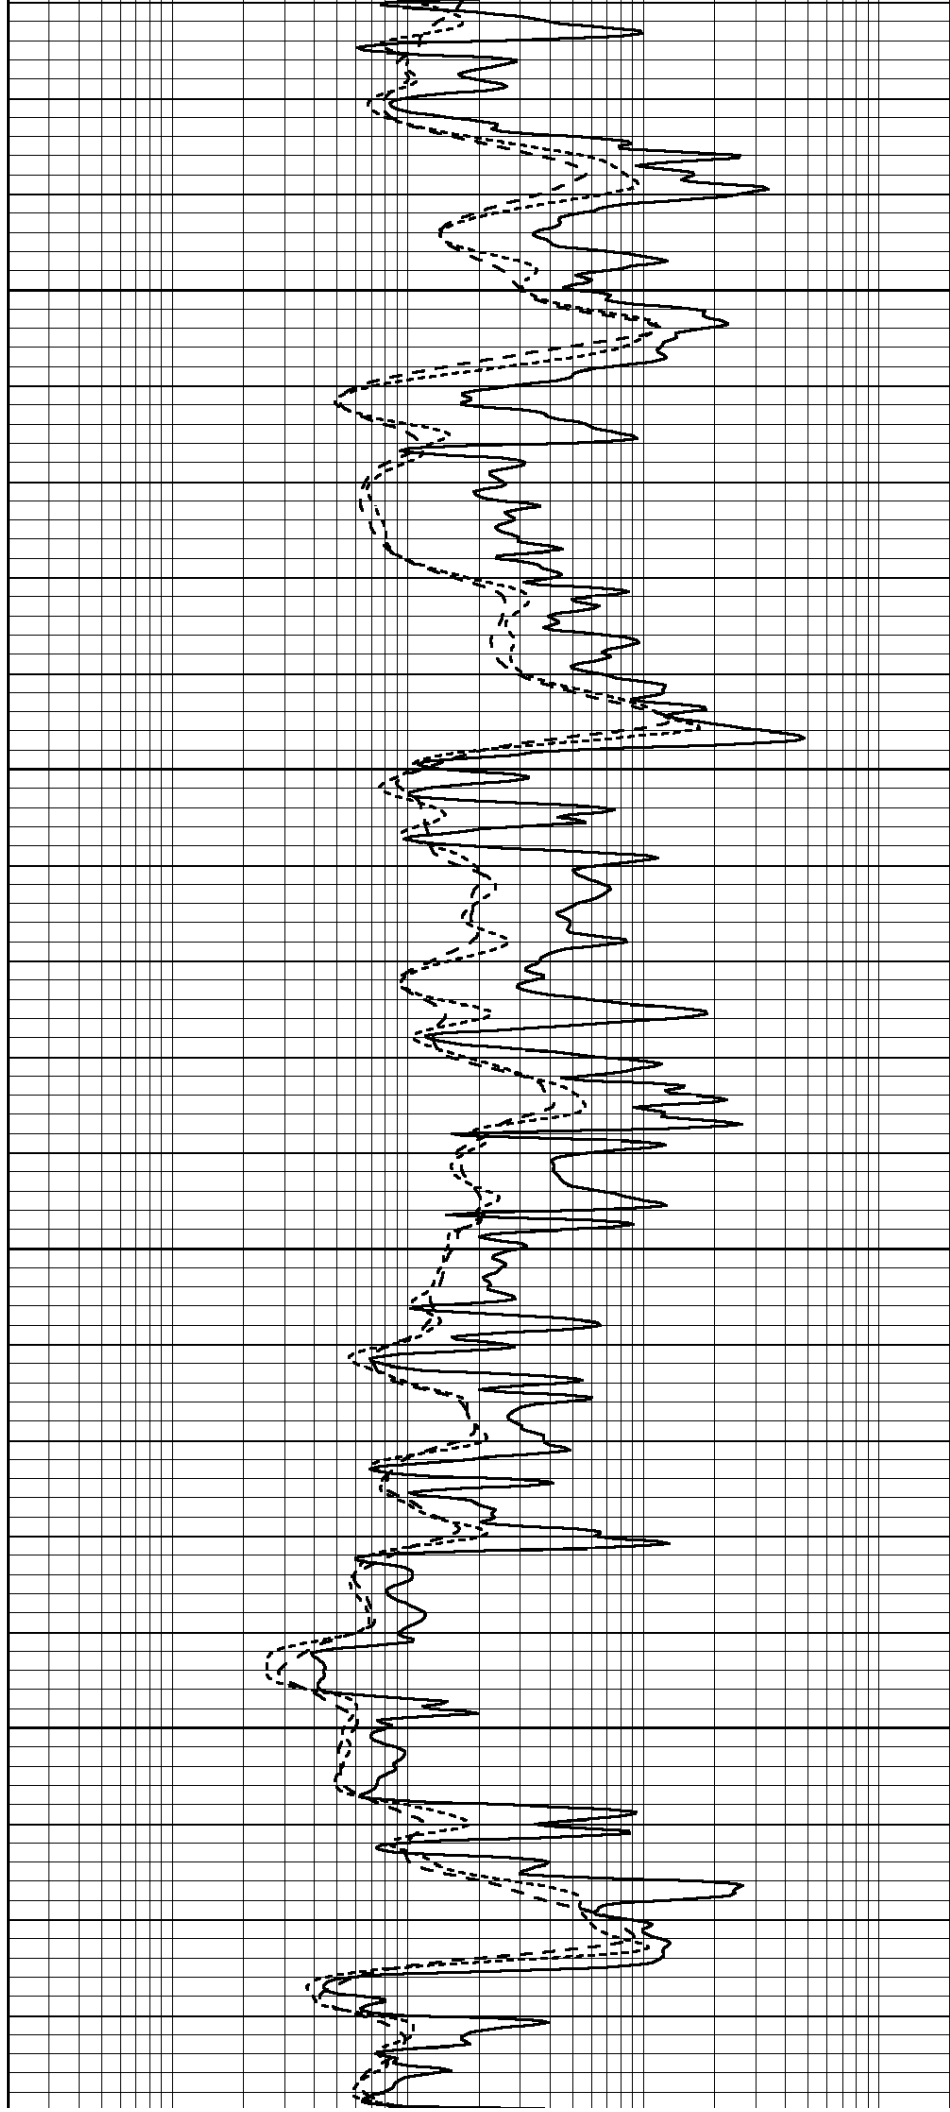

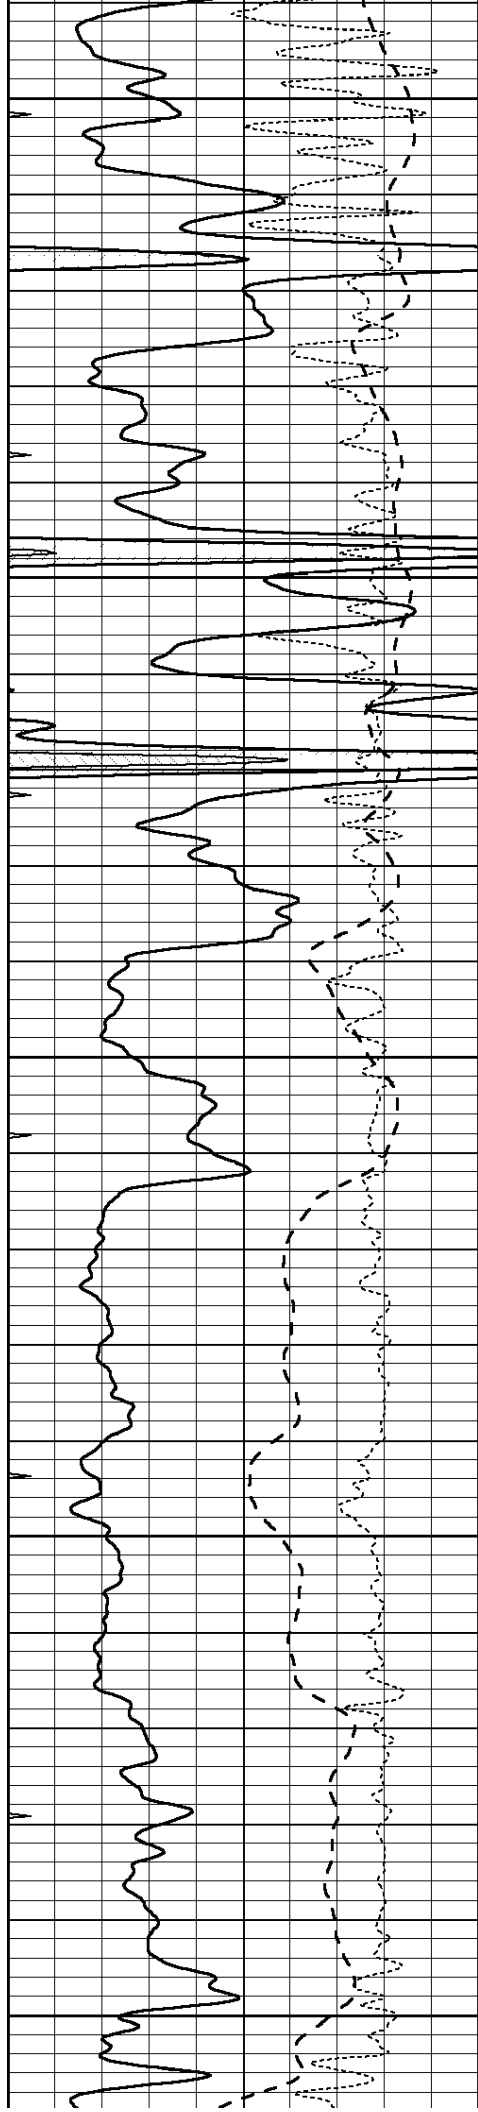


4600


4650

4700

4750

4800

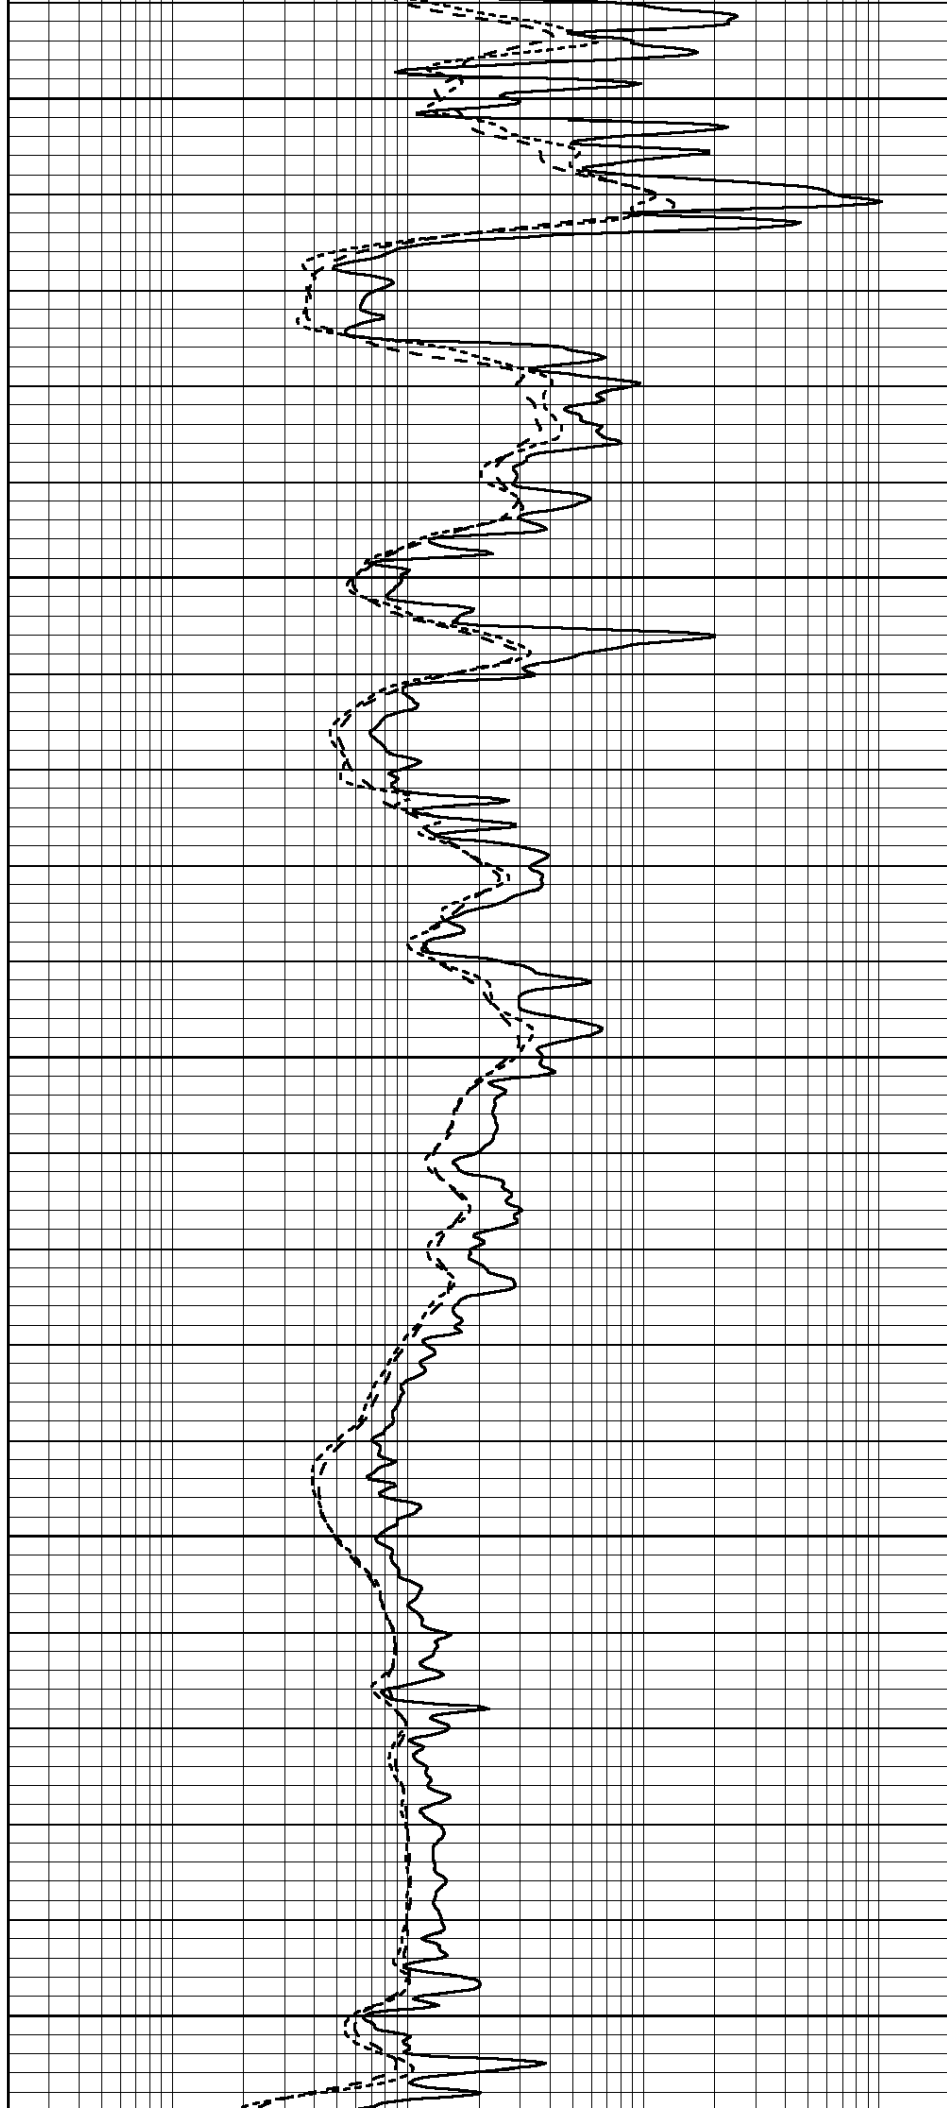

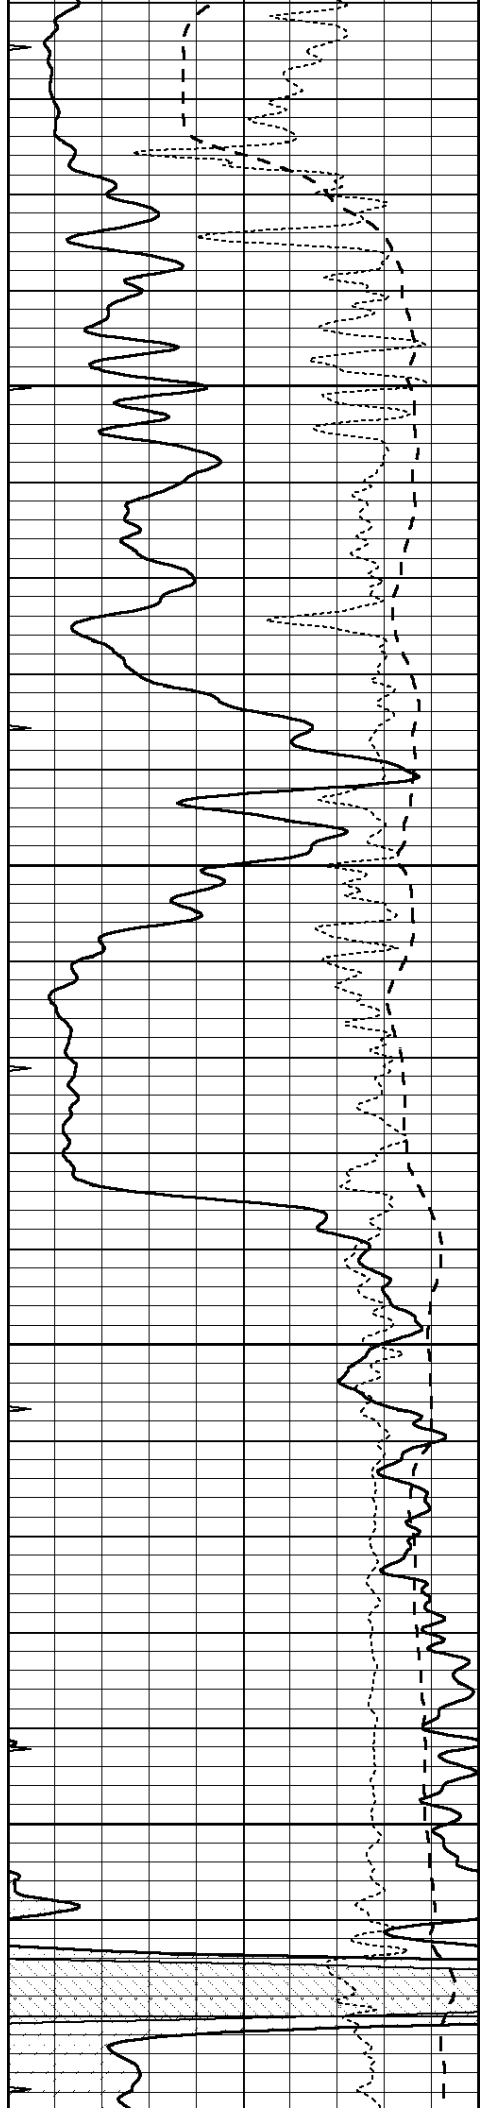



4850

4900

4950

5000

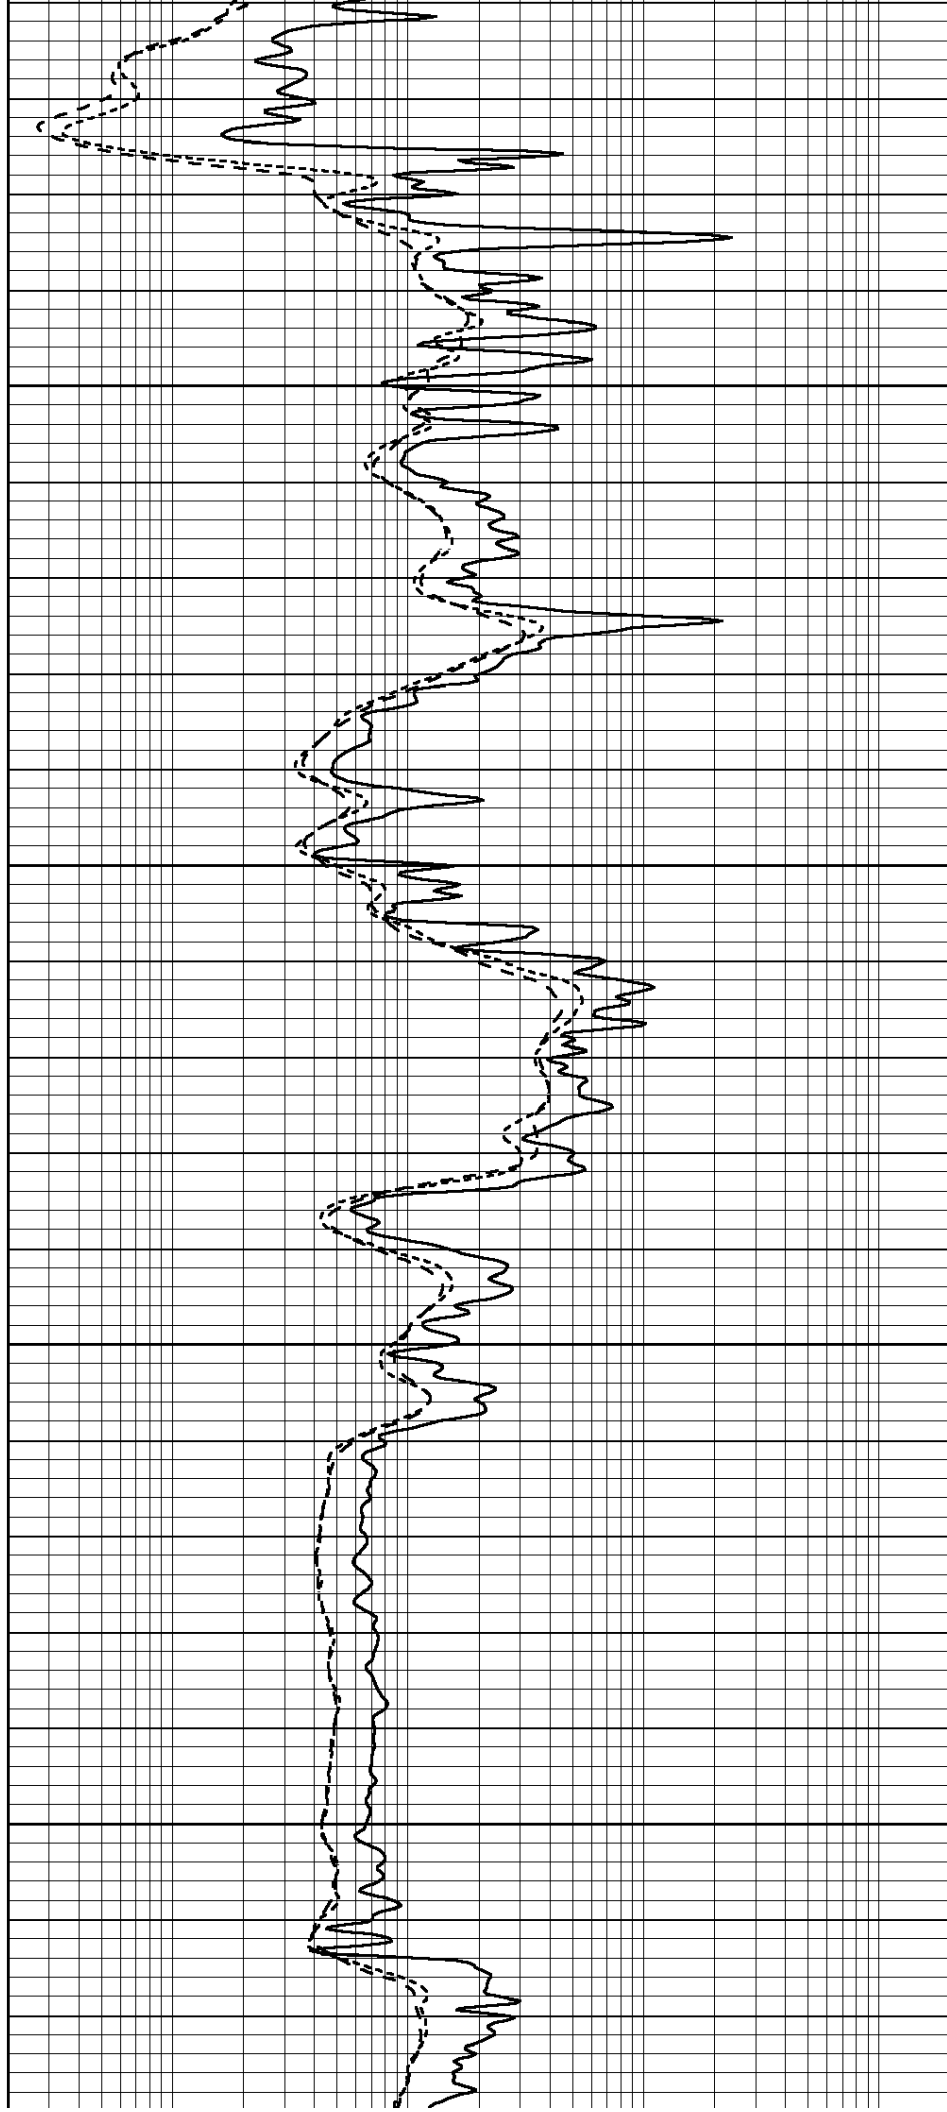

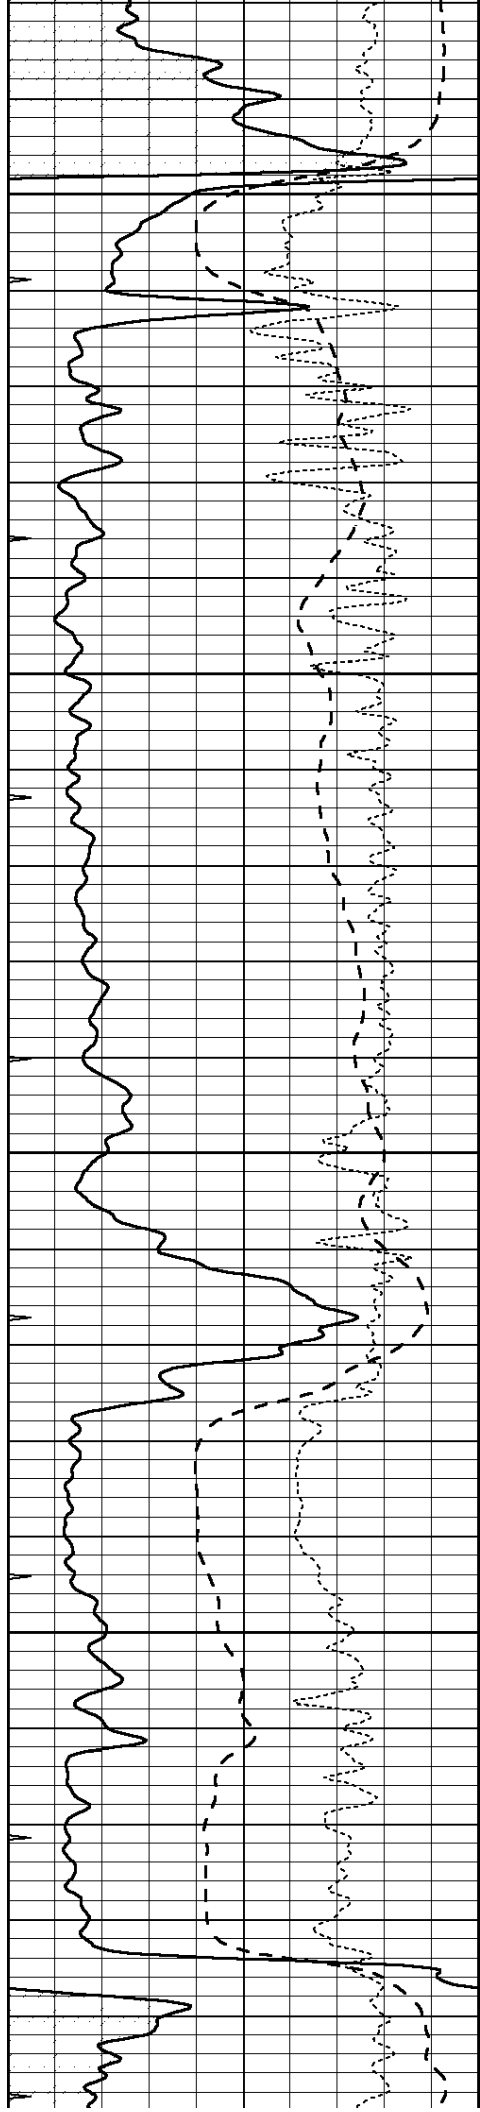


5050




5100

5150

5200





5250

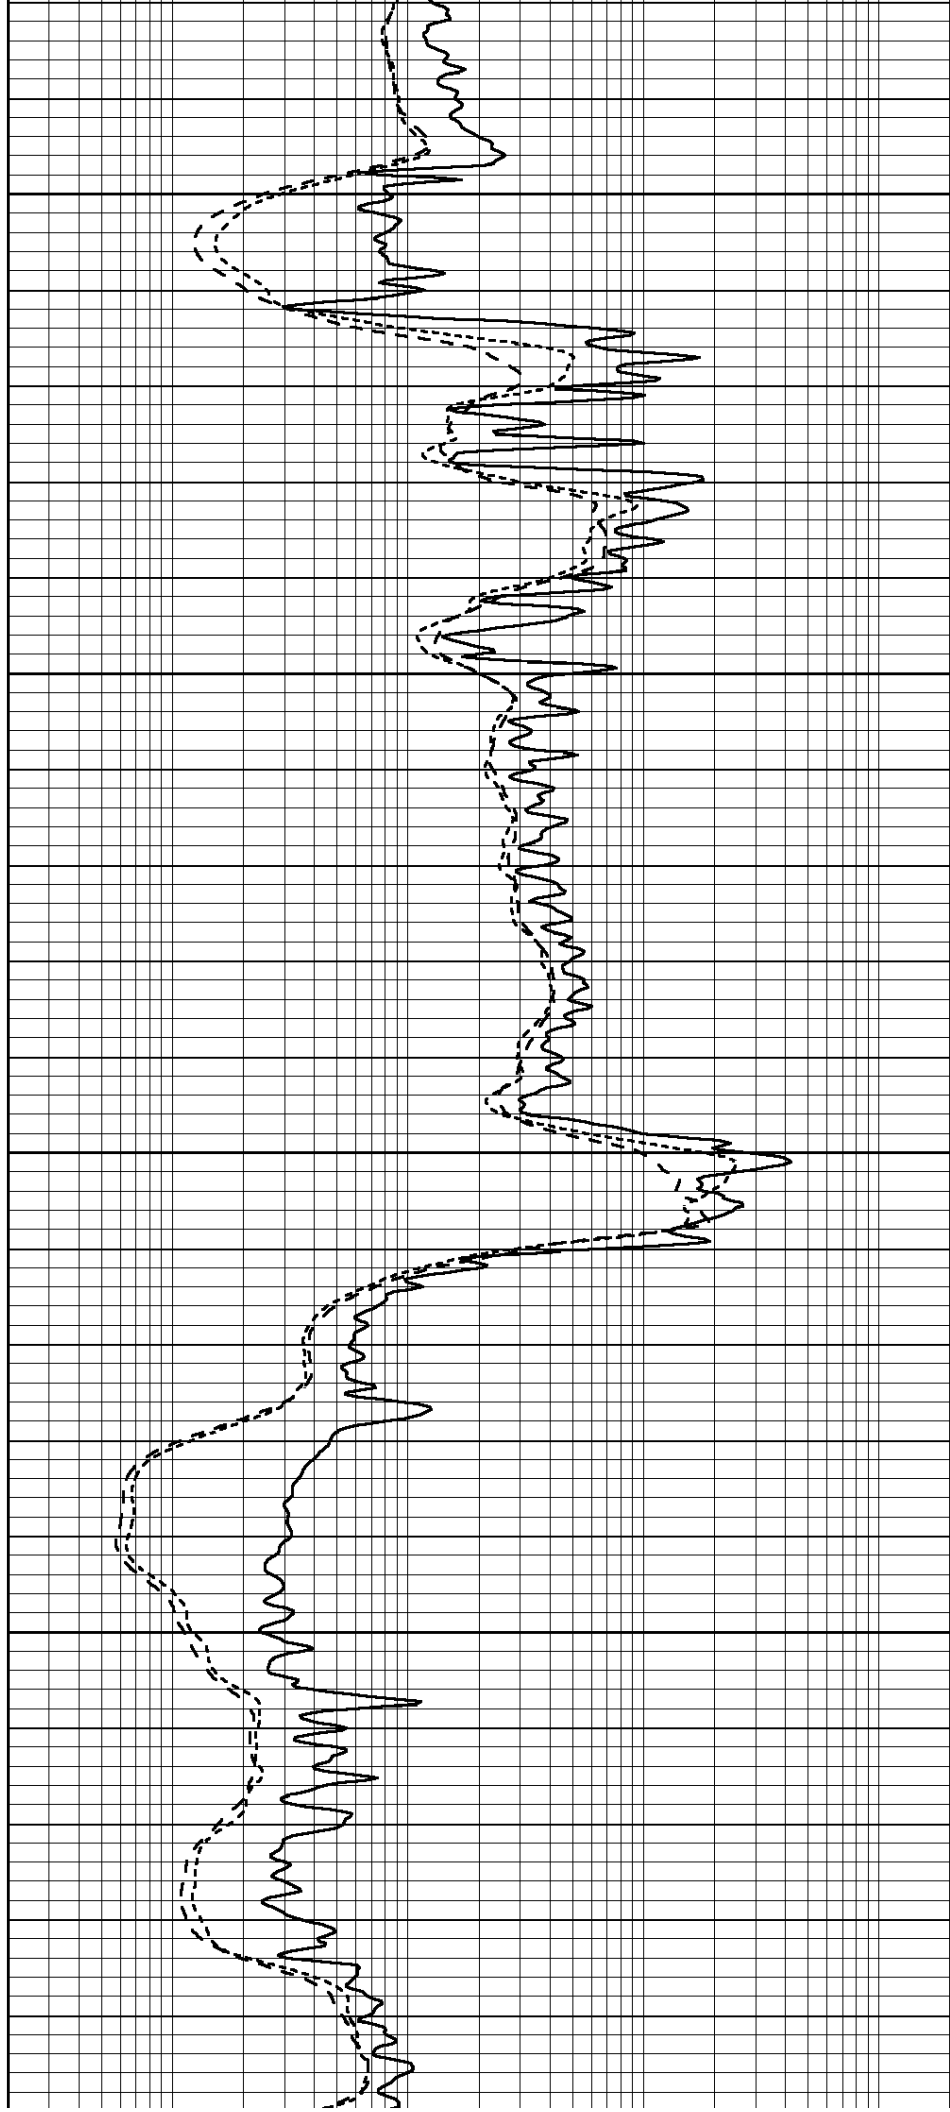


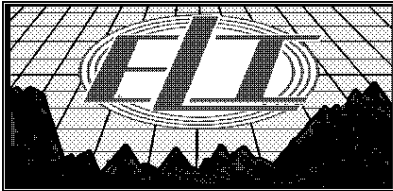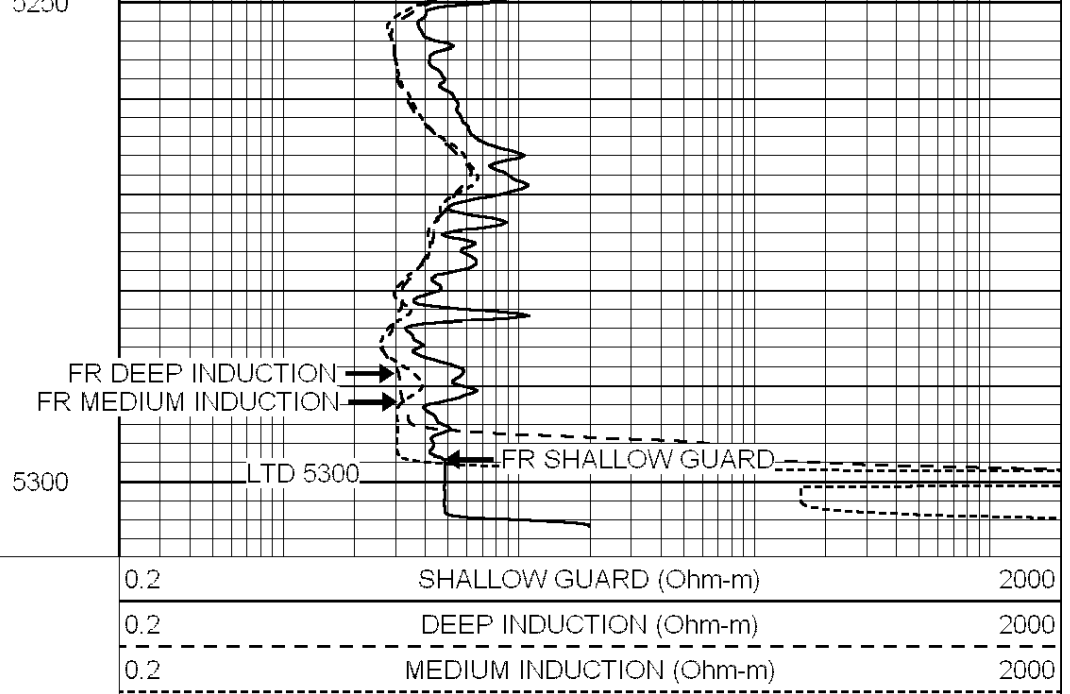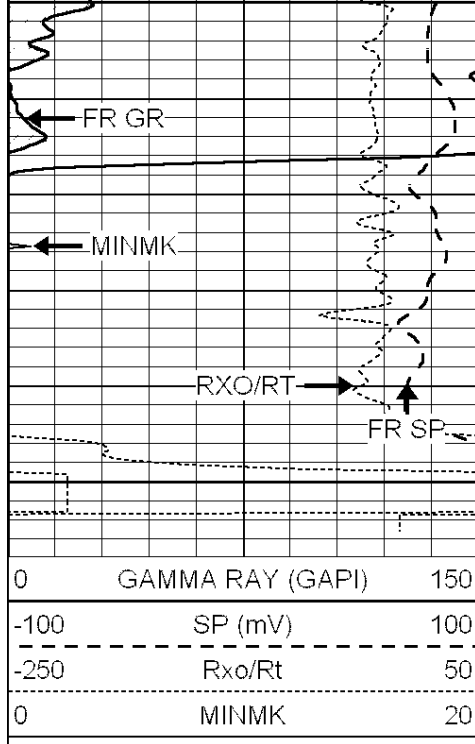

REPEAT SECTION

Database File: 3748pe.db
 Dataset Pathname: pass2.4
 Presentation Format: _dil
 Dataset Creation: Thu Aug 01 10:19:07 2019 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

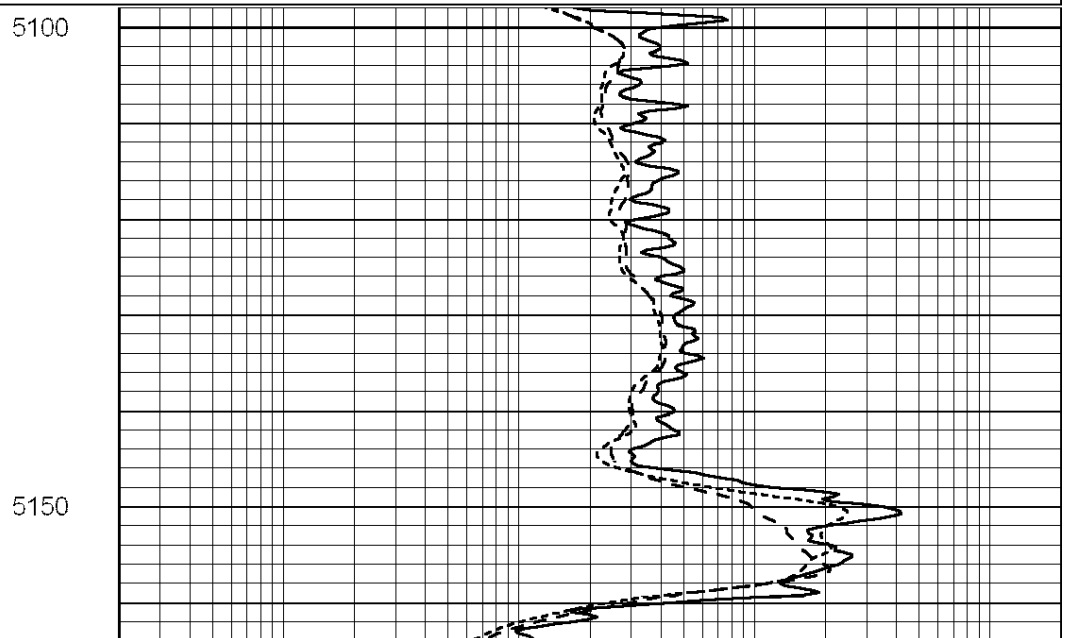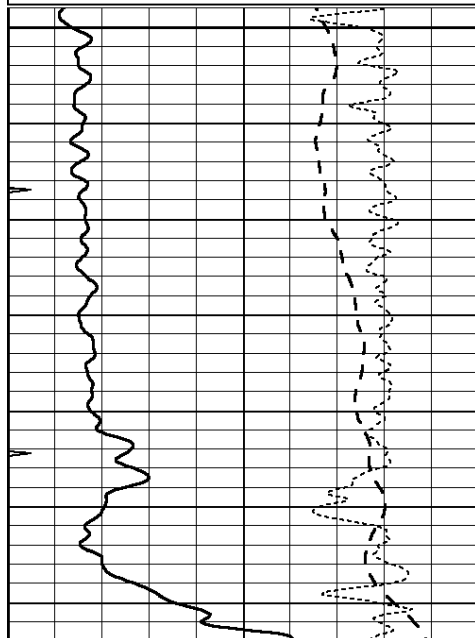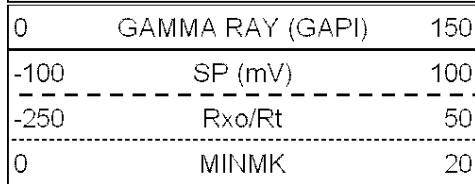

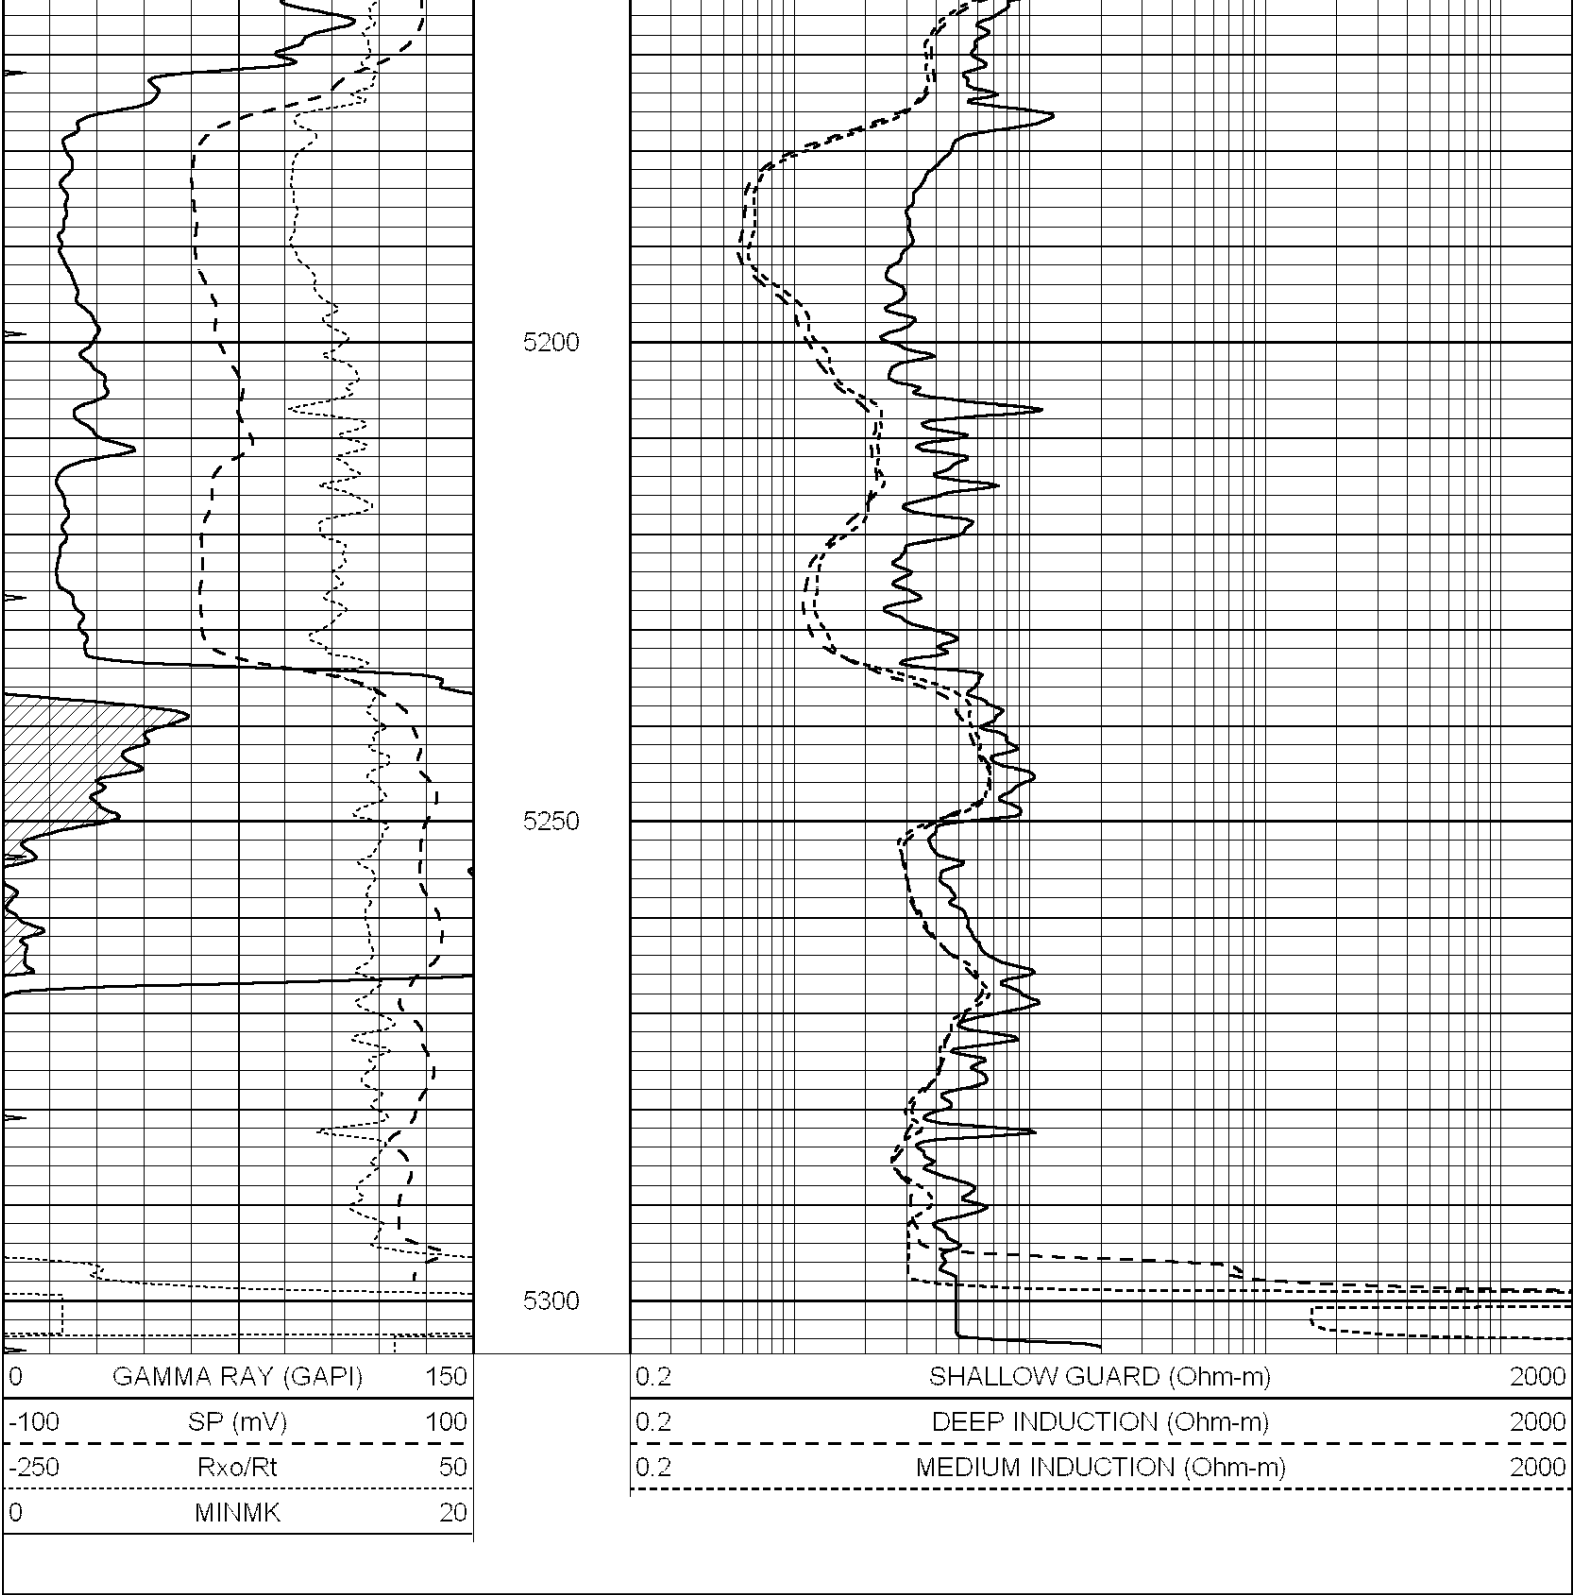

Calibration Report			
Database File:	1598ddn.db		
Dataset Pathname:	pass4		
Dataset Creation:	Wed Aug 30 02:13:00 2017 by Log SOC 120430		
Dual Induction Calibration Report			
Serial-Model:	PROBE7-DILG		
Surface Cal Performed:	Wed Aug 30 00:06:33 2017		
Downhole Cal Performed:	Mon Jul 28 12:02:56 2008		
After Survey Verification Performed:	Mon Jul 28 12:02:56 2008		
Surface Calibration	Readings	References	Results

Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002				Model: PRB				

Master Calibration					Performed Mon Aug 21 11:27:42 2017			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	837.1	10632.5	2945.1	12110.1				cps
Window 2	772.0	9117.4	2570.1	10197.3				cps
Window 3	631.7	4669.0	1481.9	5042.9				cps
Window 4	187.0	187.5	185.9	189.9				cps
Long Space	0.0	8345.4	1798.1	9425.3				cps
Short Space	1.1	1927.9	1285.9	2050.2				cps
Rho		1.7100	2.5960	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio				: 0.558
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept				: -19.6

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Correction		0.0000	0.0000	0.0000				g/cc
Measured Pe			0.0000	0.0000				

After Survey Verification					Performed Wed Dec 31 18:00:00 1969			
---------------------------	--	--	--	--	------------------------------------	--	--	--

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	OPEN_GR	
Performed:	Wed May 31 00:09:32 2017	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2800	GAPI/cps