

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-12743-00-00
Spot: NWNW Sec/Twnshp/Rge: 18-22S-12W
4620 feet from S Section Line, 4620 feet from E Section Line
Lease Name: HARMS W Well #: 4
County: STAFFORD Total Vertical Depth: 3691 feet

Operator License No.: 30606
Op Name: MURFIN DRILLING CO., INC.
Address: 250 N. WATER, STE 300
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
L1	5.5	3206		WITH 15 SX CMT
PROD	7	3689	0	WITH 125 SX CMT
SURF	13	250		WITH 210 SX CMT

\$ 119.96

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/21/2006 9:00 AM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: MARK ROBBEN Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/21/2006 12:30 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

COULD NOT GET PAST 2150'. PUMP 300# HULLS & 70 SX CMT AT 2100'.
PERFORATED 7" AT 750'. PULLED TUBING TO 750'. PUMPED 80 SX CMT
CIRCULATING CMT TO SURFACE UP 7". PULLED TUBING. SQUEEZED DOWN 7"
WITH 50 SX CMT. MAXIMUM PRESSURE 800 PSIG. SHUT IN PRESSURE 500 PSIG.
PUMPED 75 SX CMT DOWN 13" X 7" ANNULUS. DEVELOPED HOLE IN 13" AT 150
PSIG.

Perfs:

Top	Bot	Thru	Comments
3689	3691		
3646	3649		


INVOICED
DATE 8/30/06
NO. 2007060462

RECEIVED
AUG 28 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY QUALITY CEMENTING.

Plugged through: TBG

District: 01

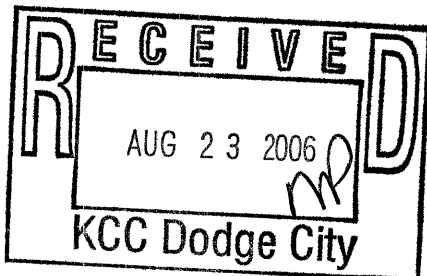

Signed

Richard W. Lacey

(TECHNICIAN)

[Handwritten signature]
Form CP-23

[Handwritten initials]