



DUAL INDUCTION LOG

Company IA OPERATING, INC.
 Well CARRIE #2-5
 Field BLUE HILL NORTHWEST
 County ELLIS
 State KANSAS

Company IA OPERATING, INC.
 Well CARRIE #2-5
 Field BLUE HILL NORTHWEST
 County ELLIS State KANSAS

Location: API # : 15-051-26958-0000
 2180' FSL & 1460' FWL
 SEC 2 TWP 12S RGE 16W
 Permanent Datum GROUND LEVEL Elevation 1815
 Log Measured From KELLY BUSHING 8' A.G.L.
 Drilling Measured From KELLY BUSHING
 Other Services CDL/CNL/ML SON
 Elevation K.B. 1823
 D.F. 1821
 G.L. 1815

Date	08/01/19
Run Number	ONE
Depth Driller	3450
Depth Logger	3449
Bottom Logged Interval	3448
Top Log Interval	00
Casing Driller	8 5/8" @ 983
Casing Logger	983
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.0/56
pH / Fluid Loss	10.0/8.8
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.5 @ 86F
Rmt @ Meas. Temp	.38 @ 86F
Rmc @ Meas. Temp	.60 @ 86F
Source of Rmf / Rmc	MEASURED
Rm @ BHT	.38 @ 111F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	111F
Equipment Number	1523
Location	HAYS, KANSAS
Recorded By	GUS PFANENSTIEL
Witnessed By	JEFF LAWLER

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS
 BLUE HILL SCHOOL HOUSE NORTH TO HOMESTEAD RD.
 EAST 1 1/4 MILE, SOUTH INTO.



MAIN PASS




Database File: 4079pe.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil2
 Dataset Creation: Thu Aug 01 03:44:36 2019 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:600


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50

1000	CILD (mmho/m)	0
------	---------------	---

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

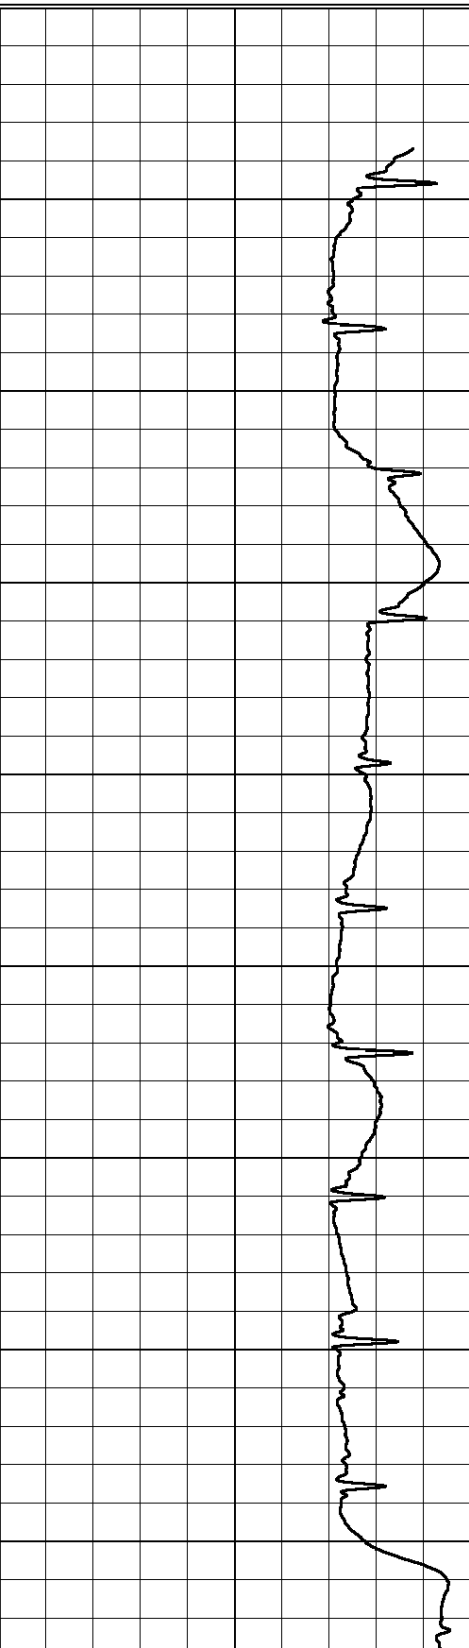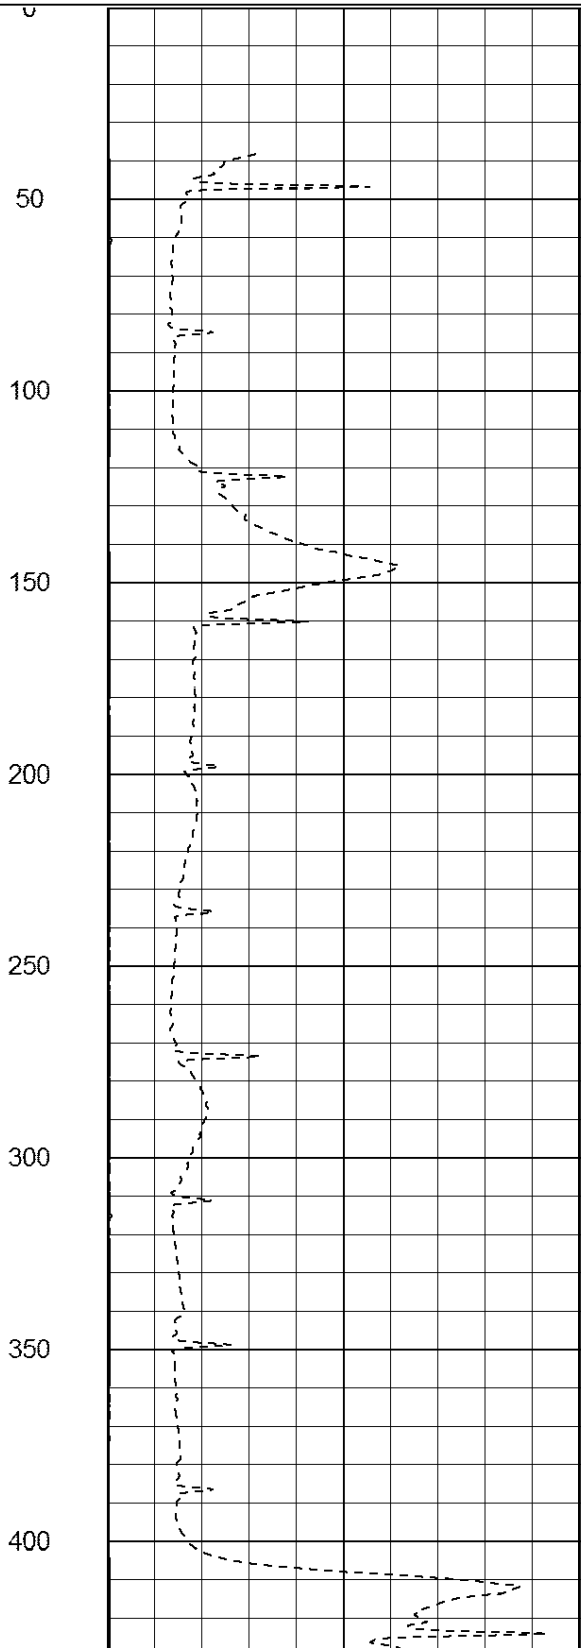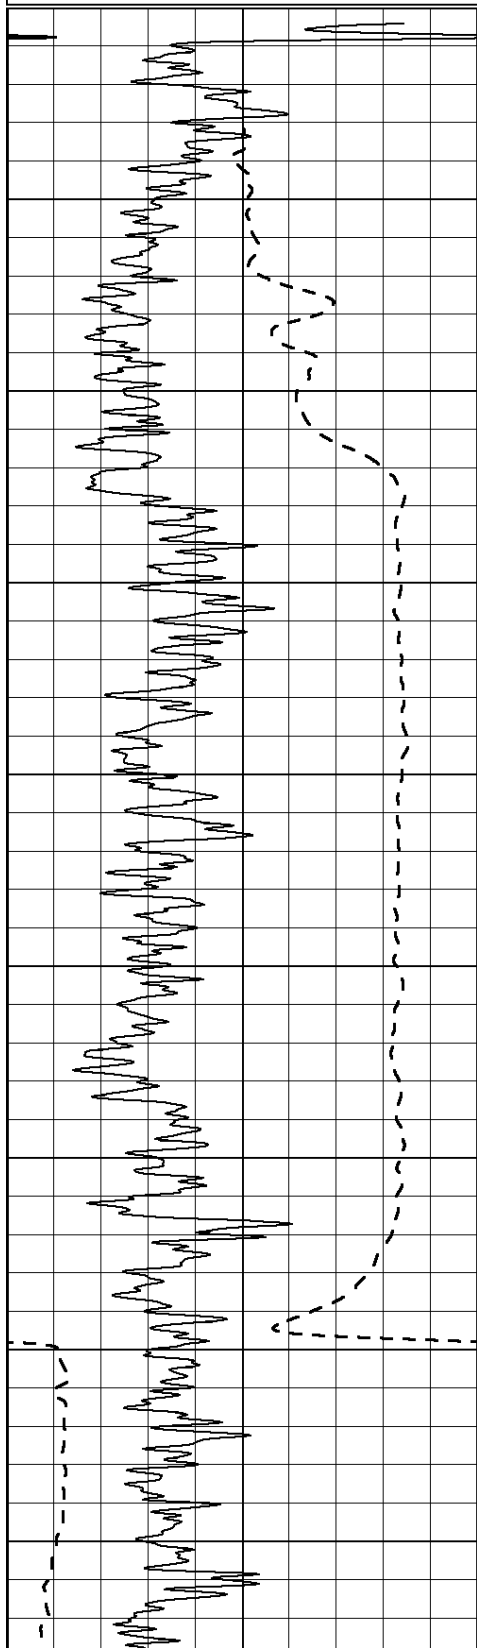

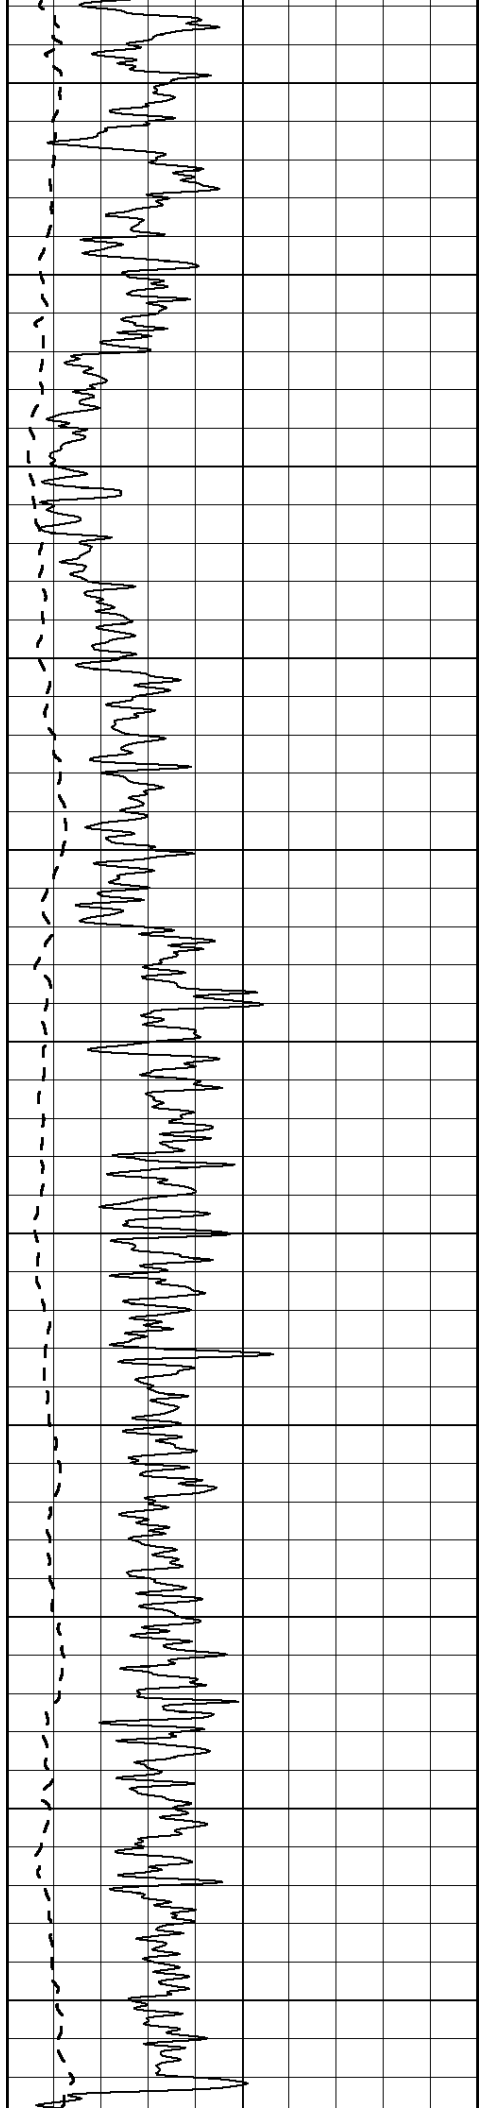

450

500

550

600

650

700


750



800



850



900


950

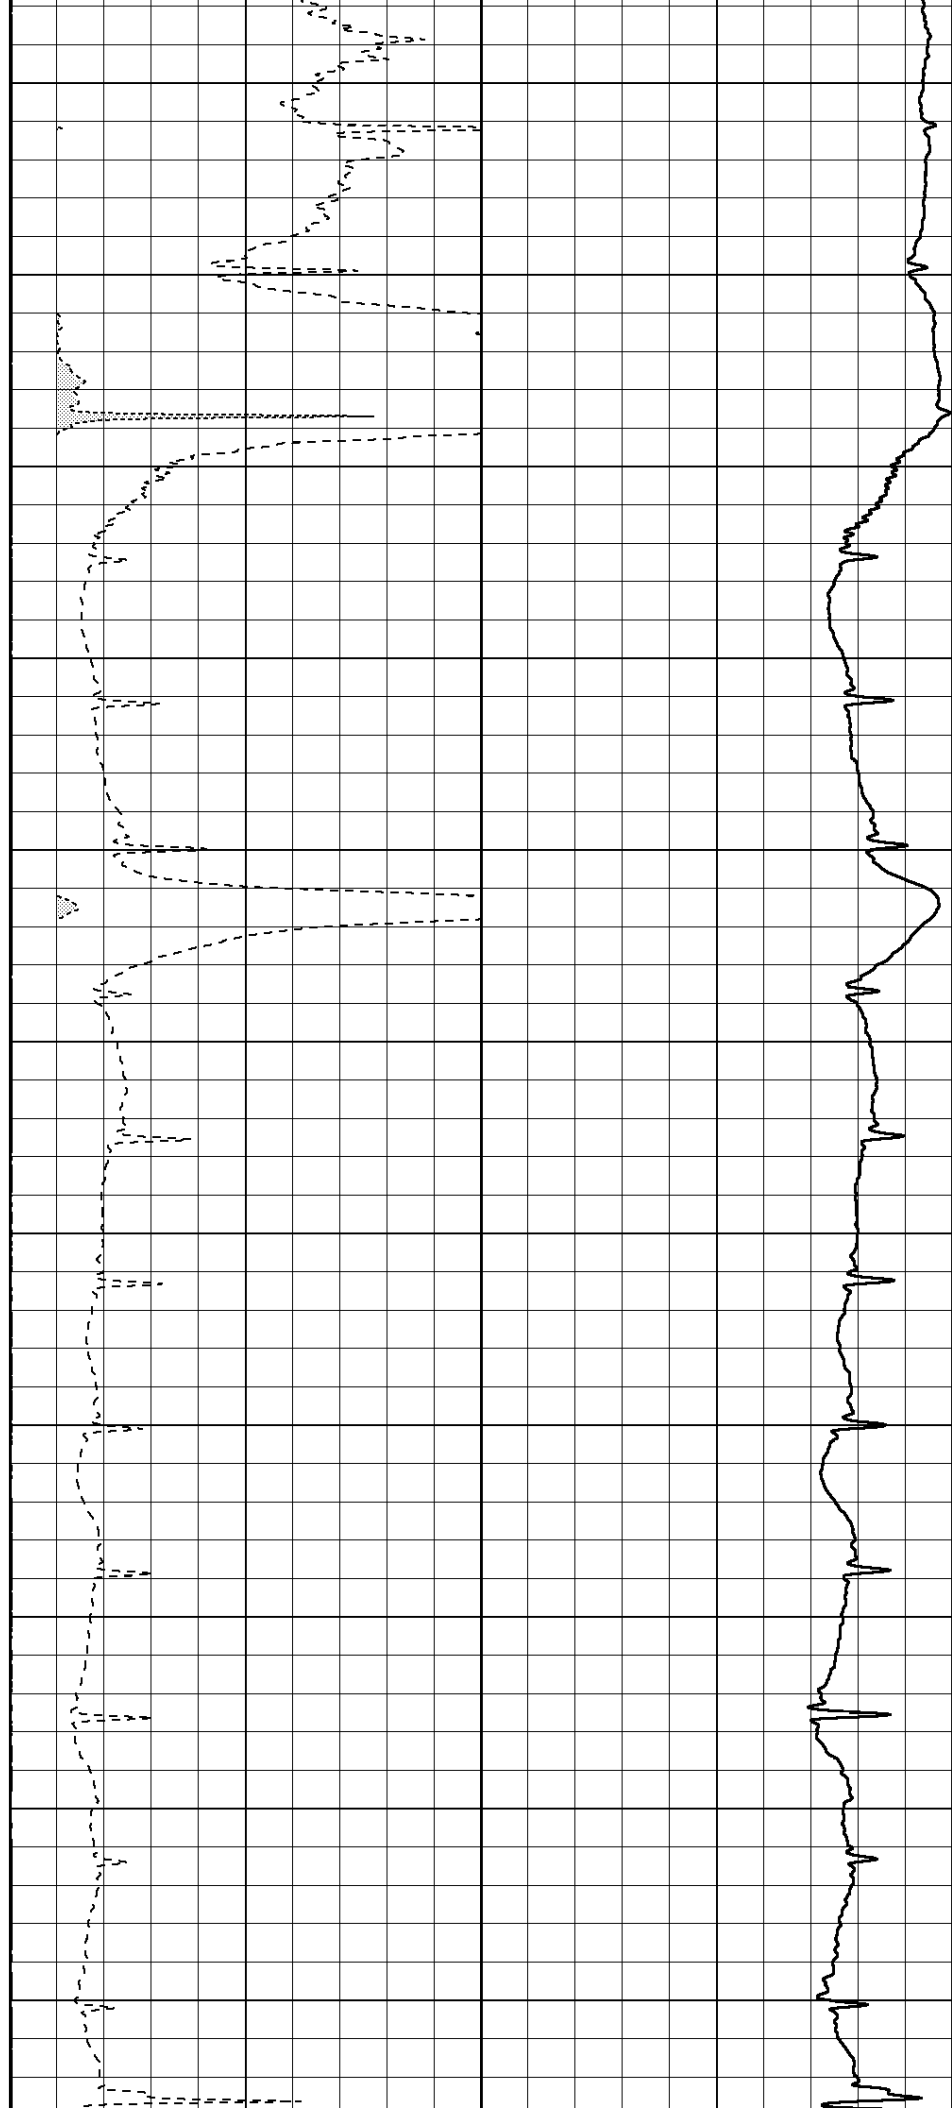

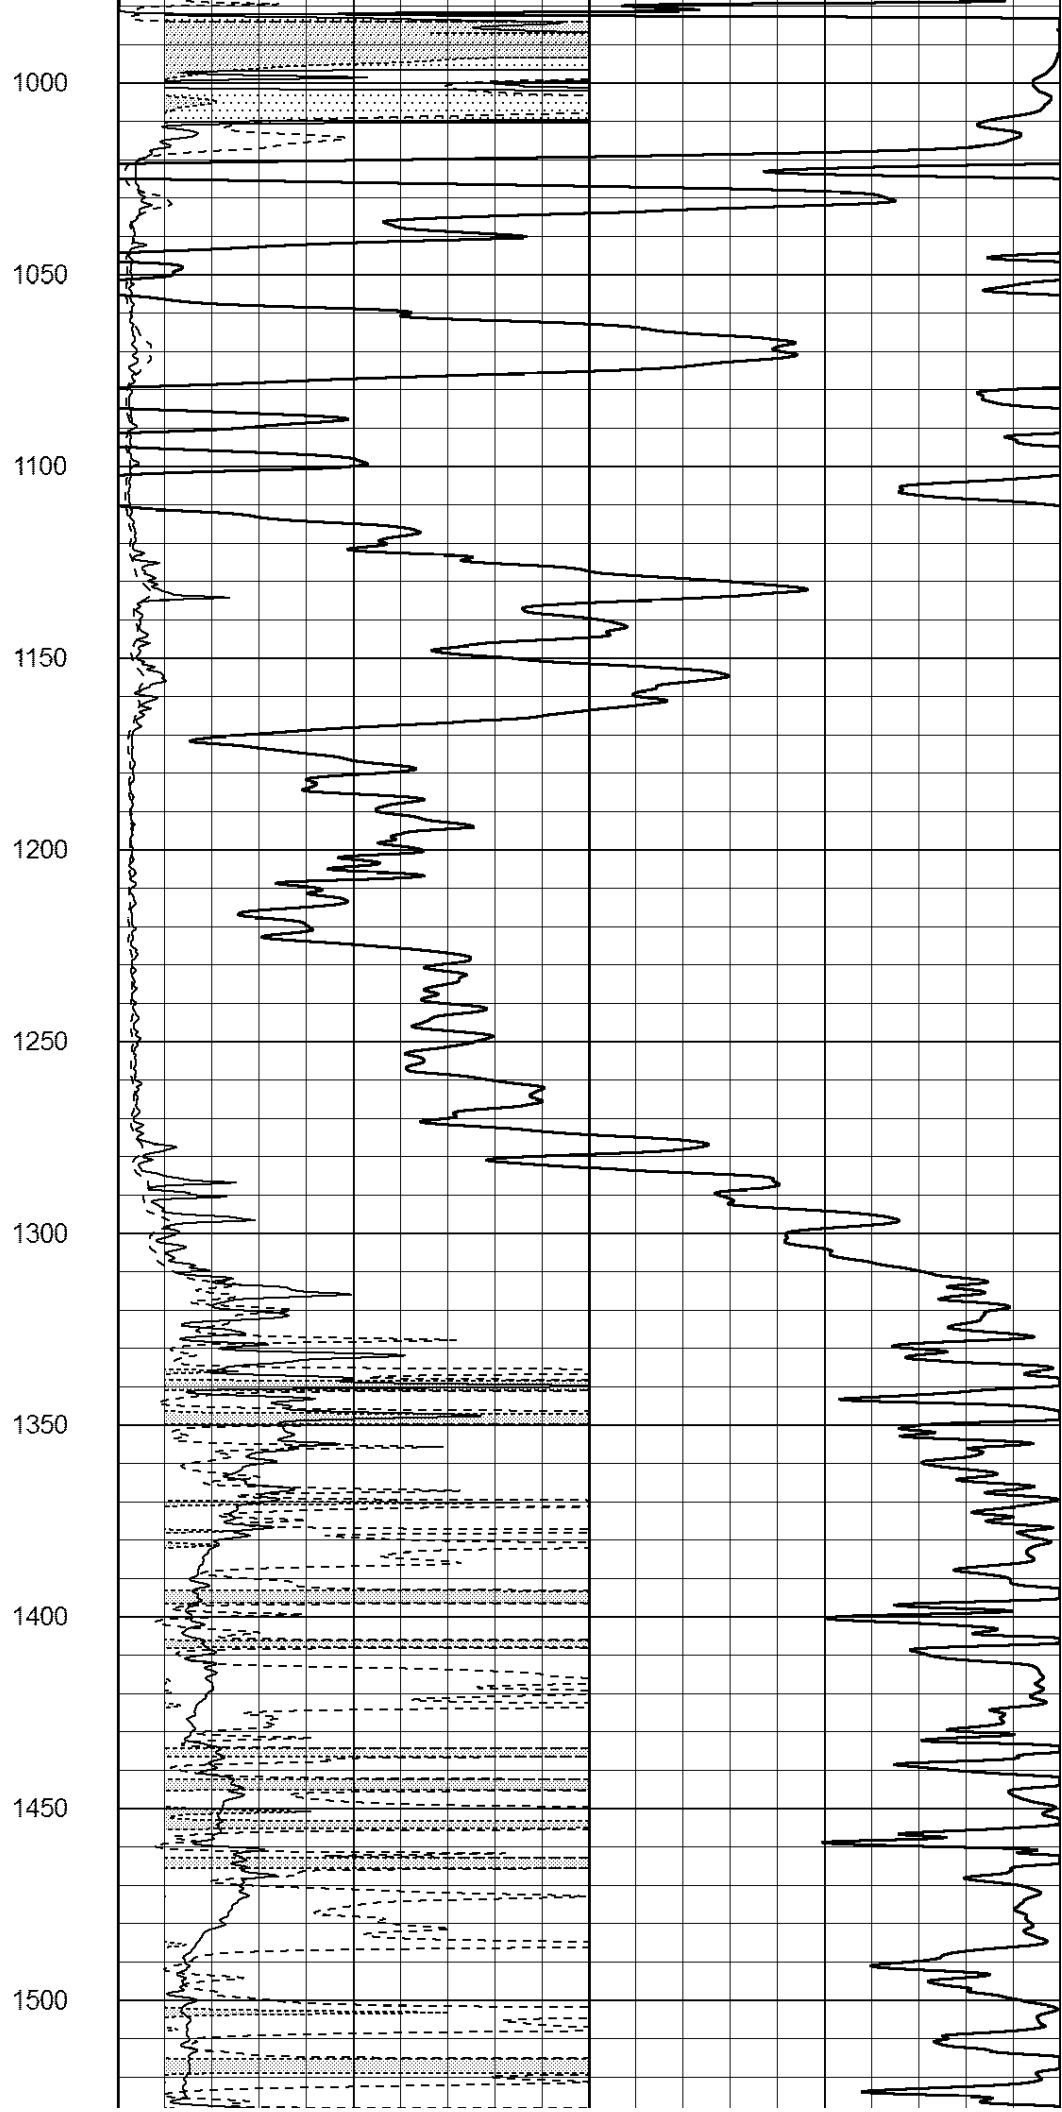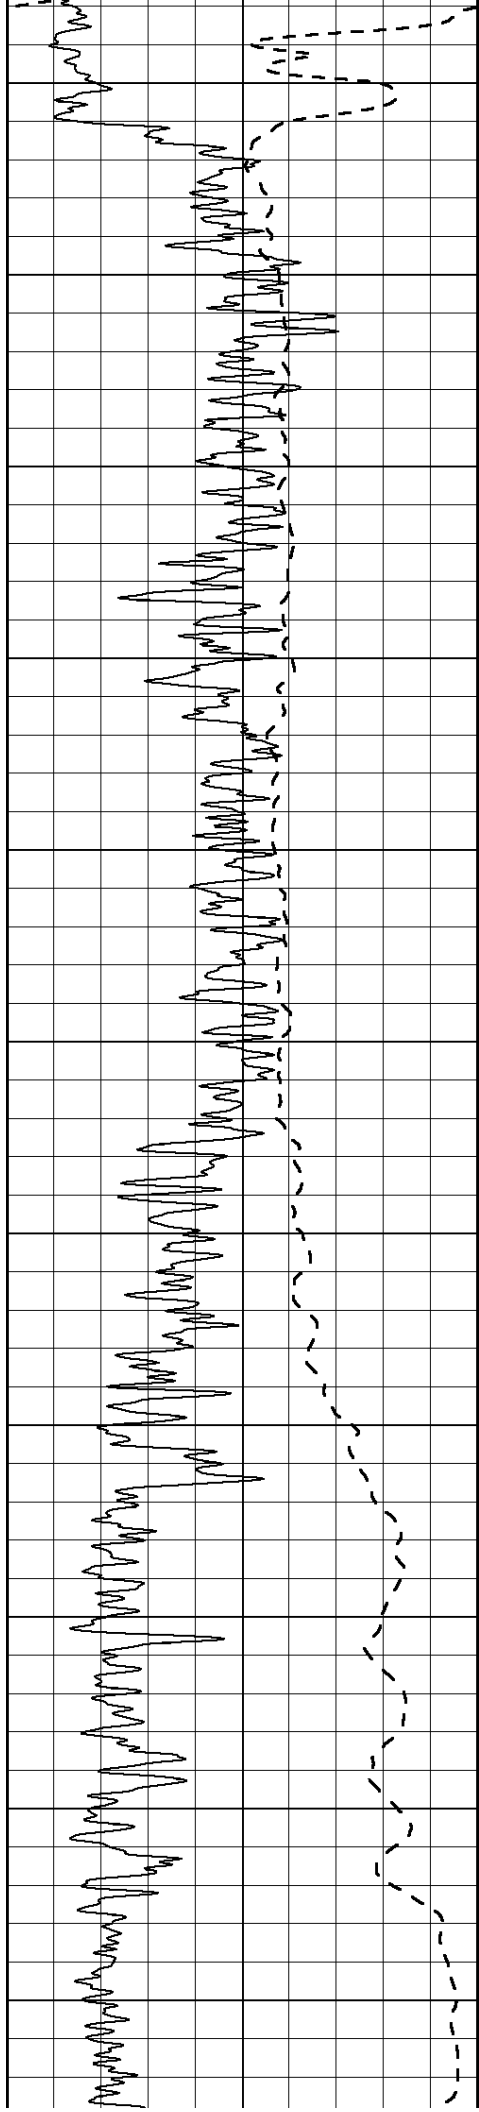

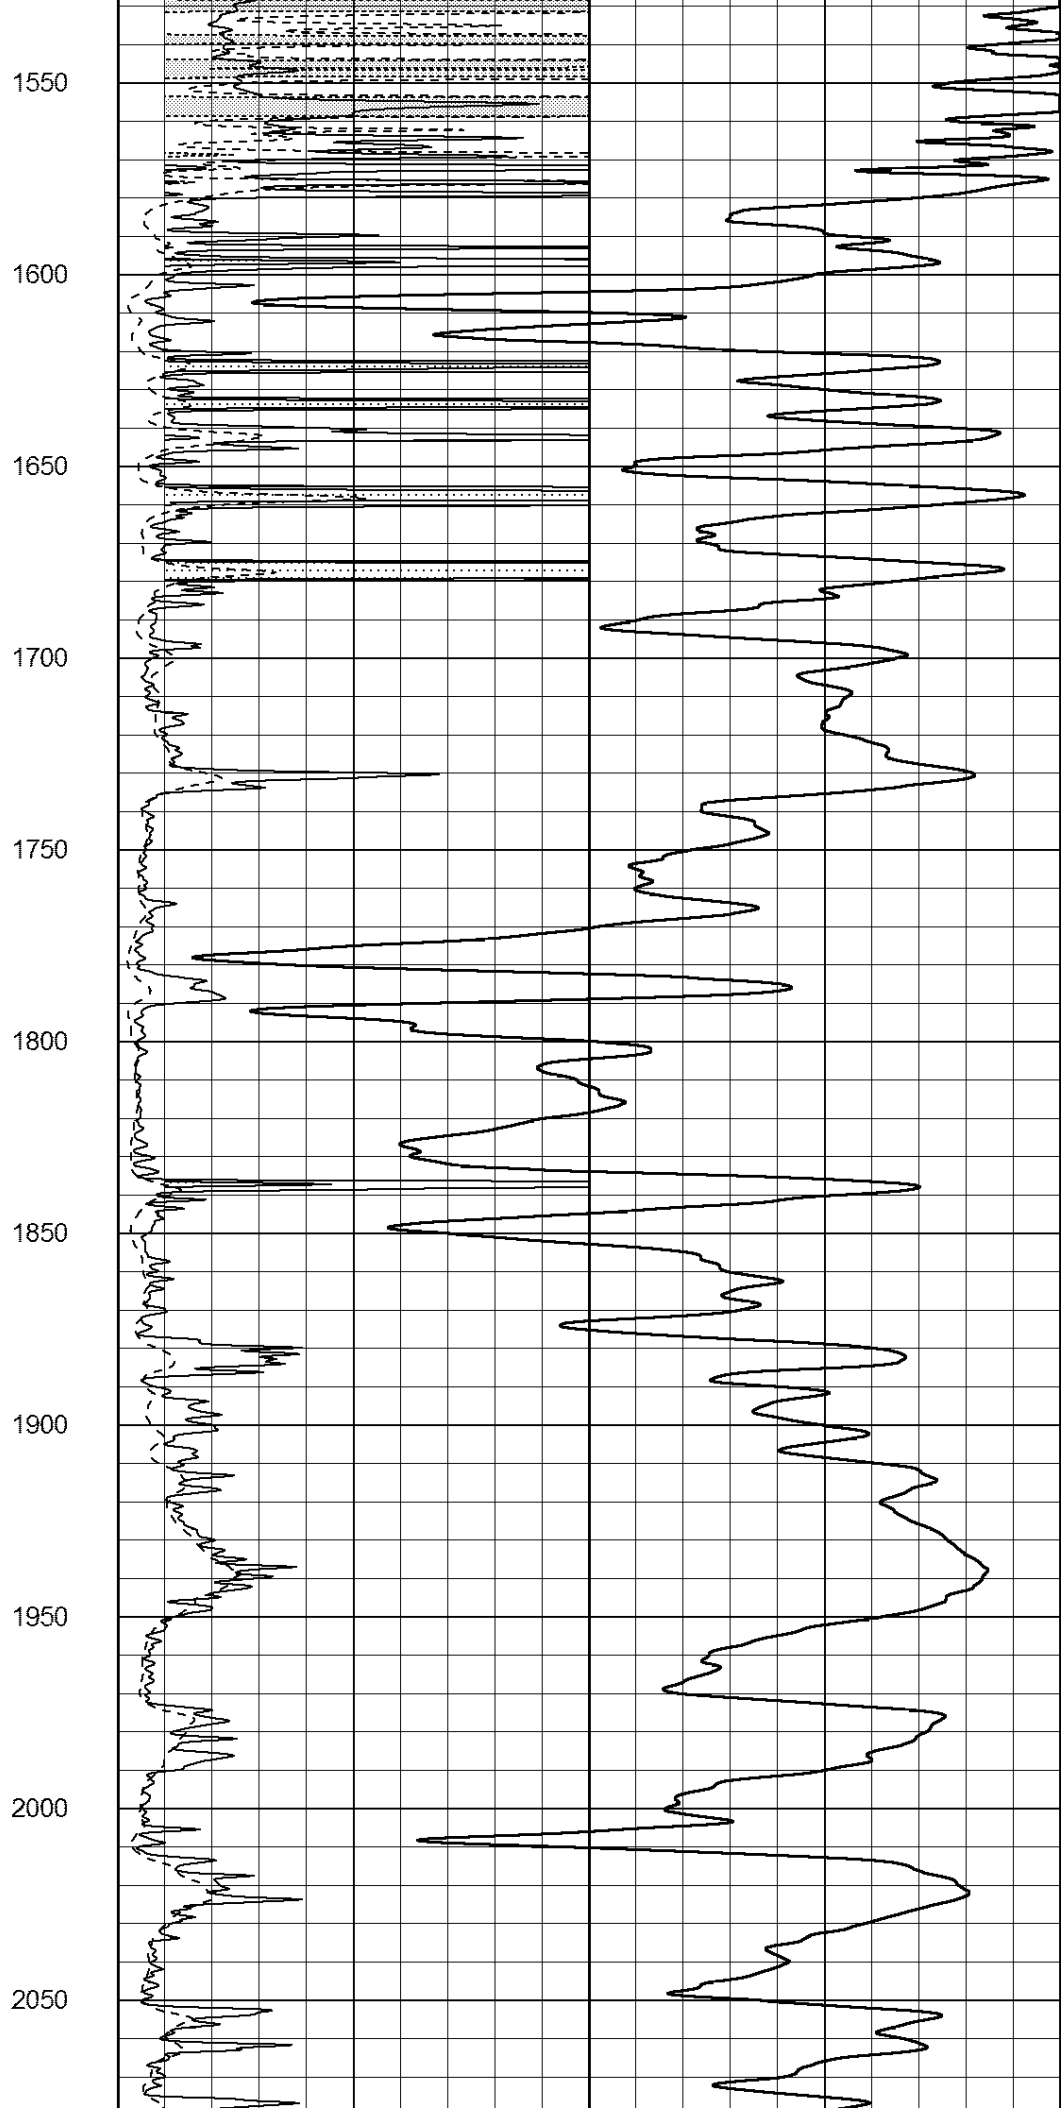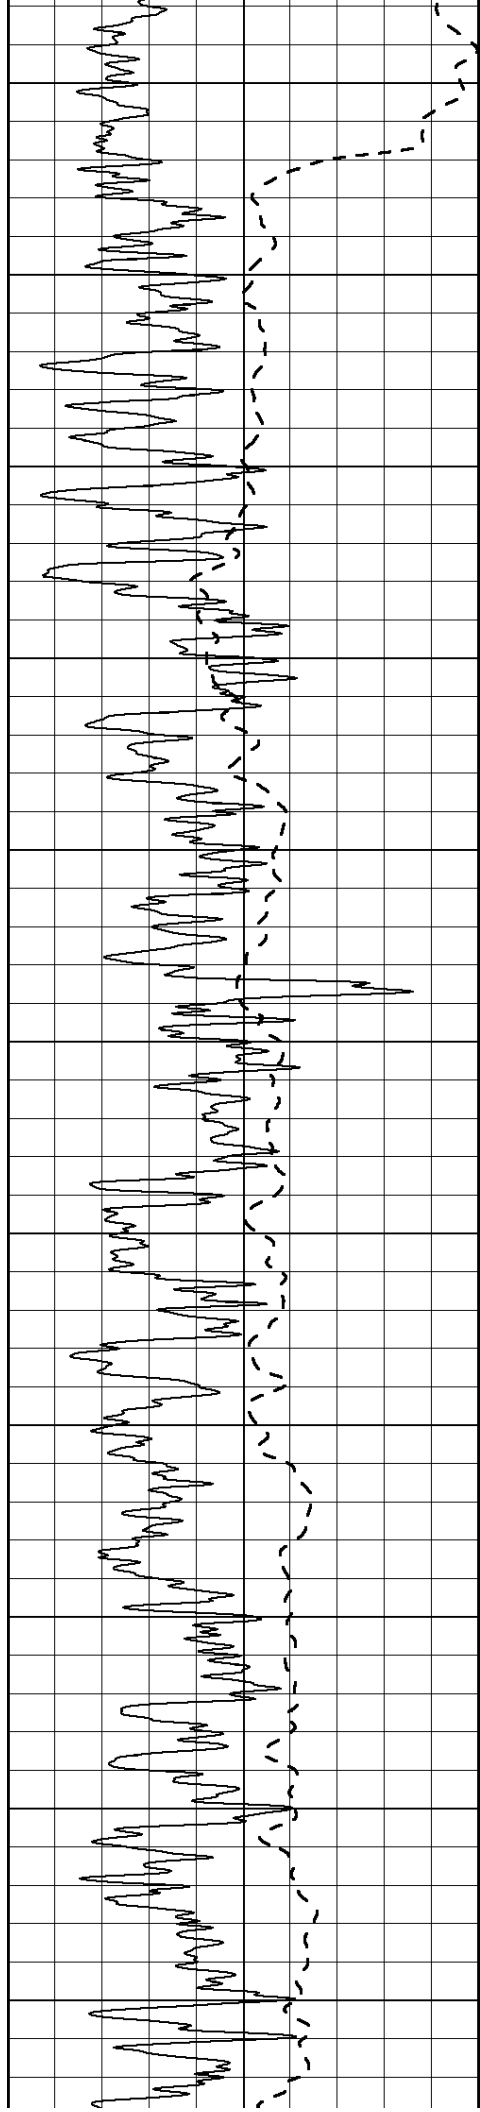

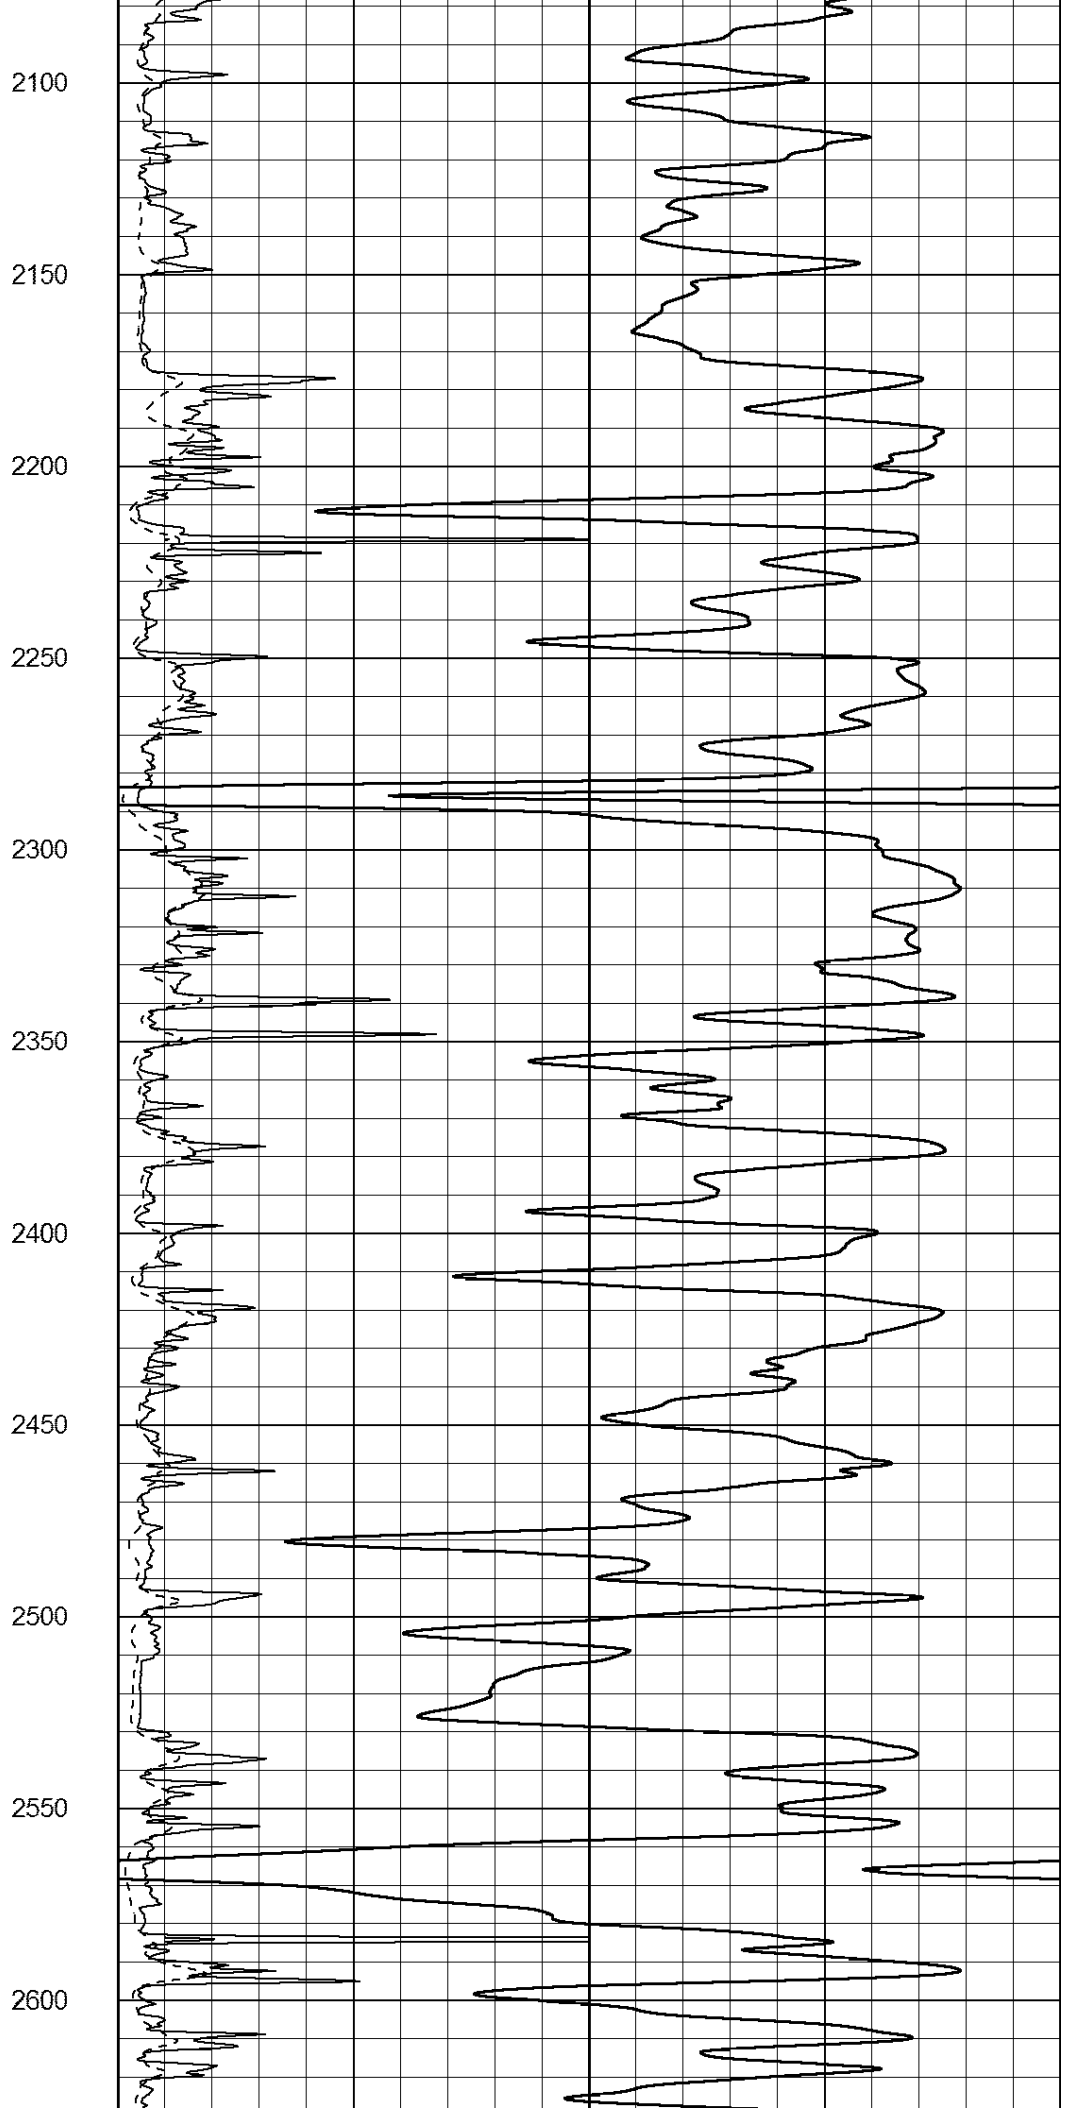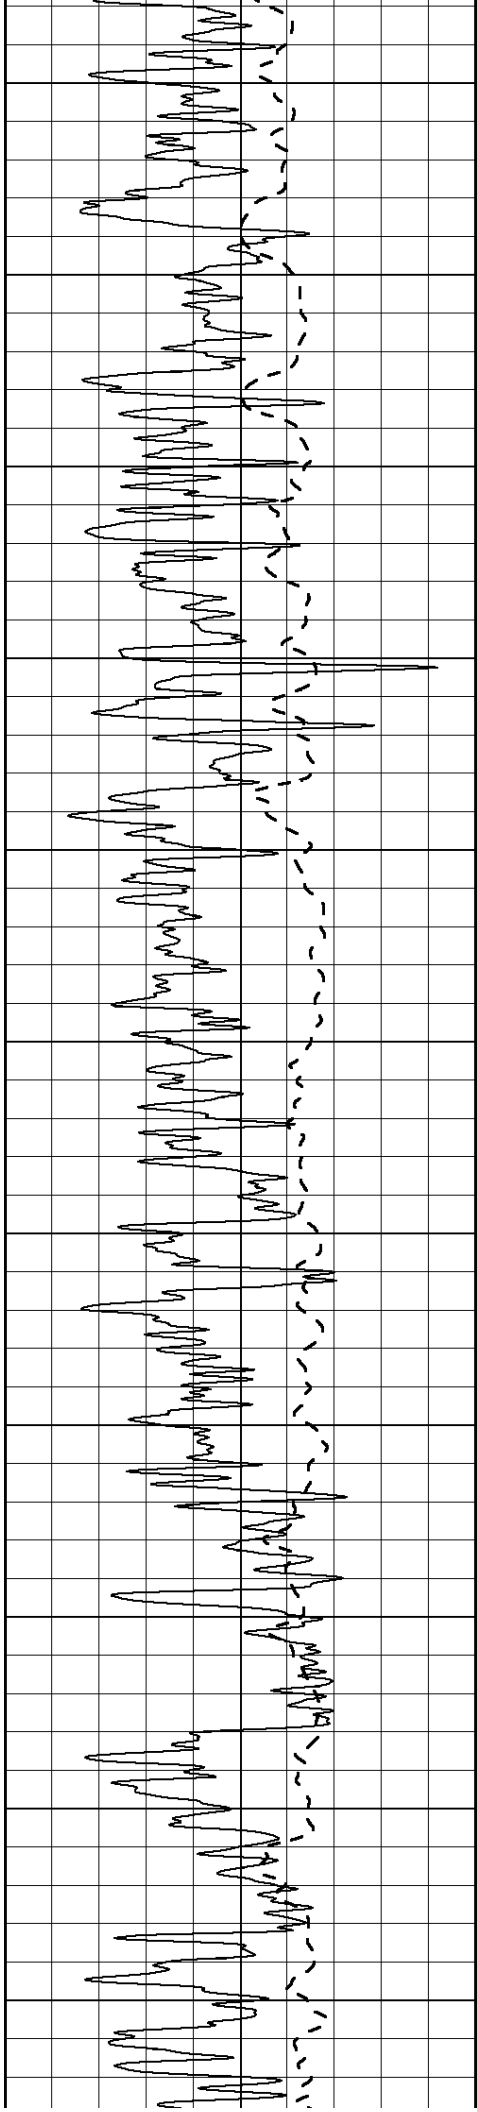

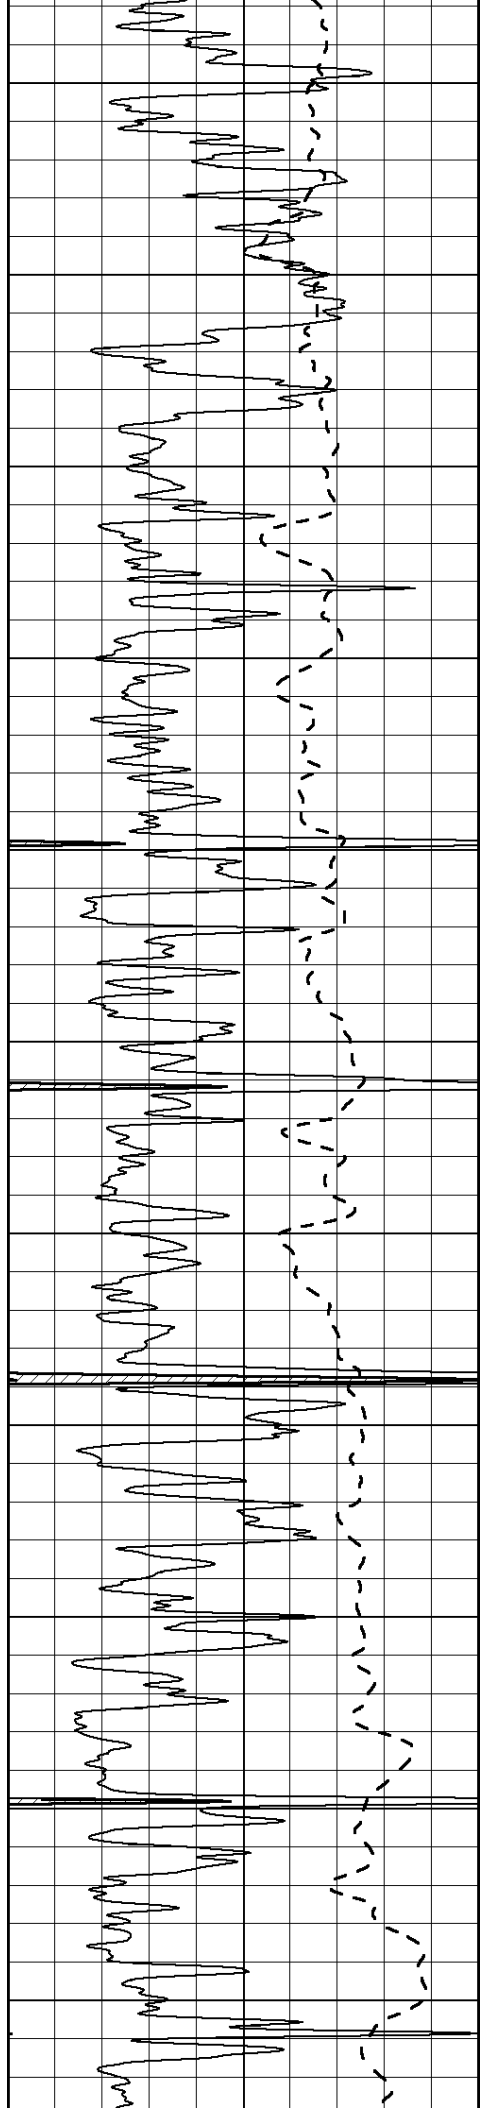

2650

2700

2750

2800

2850

2900


2950



3000

3050

3100

3150

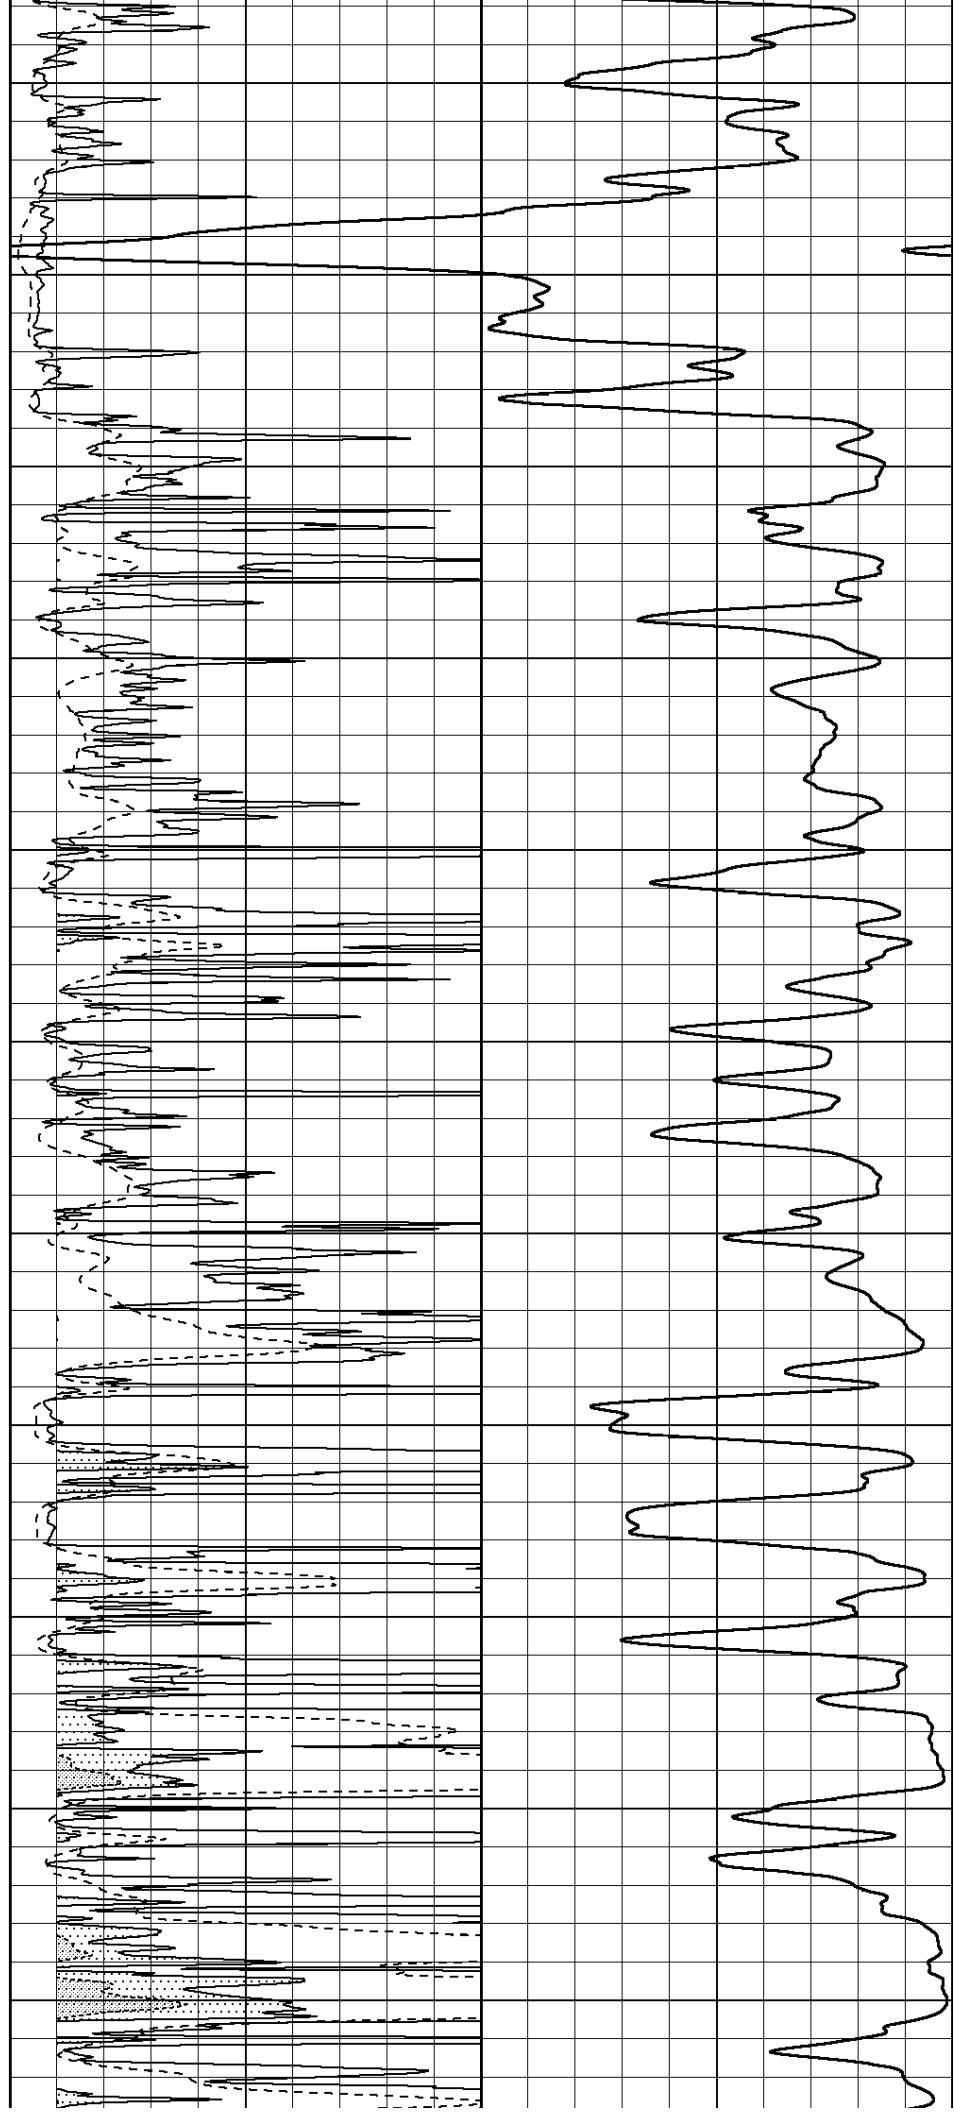

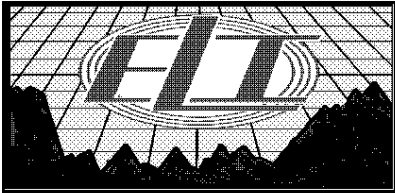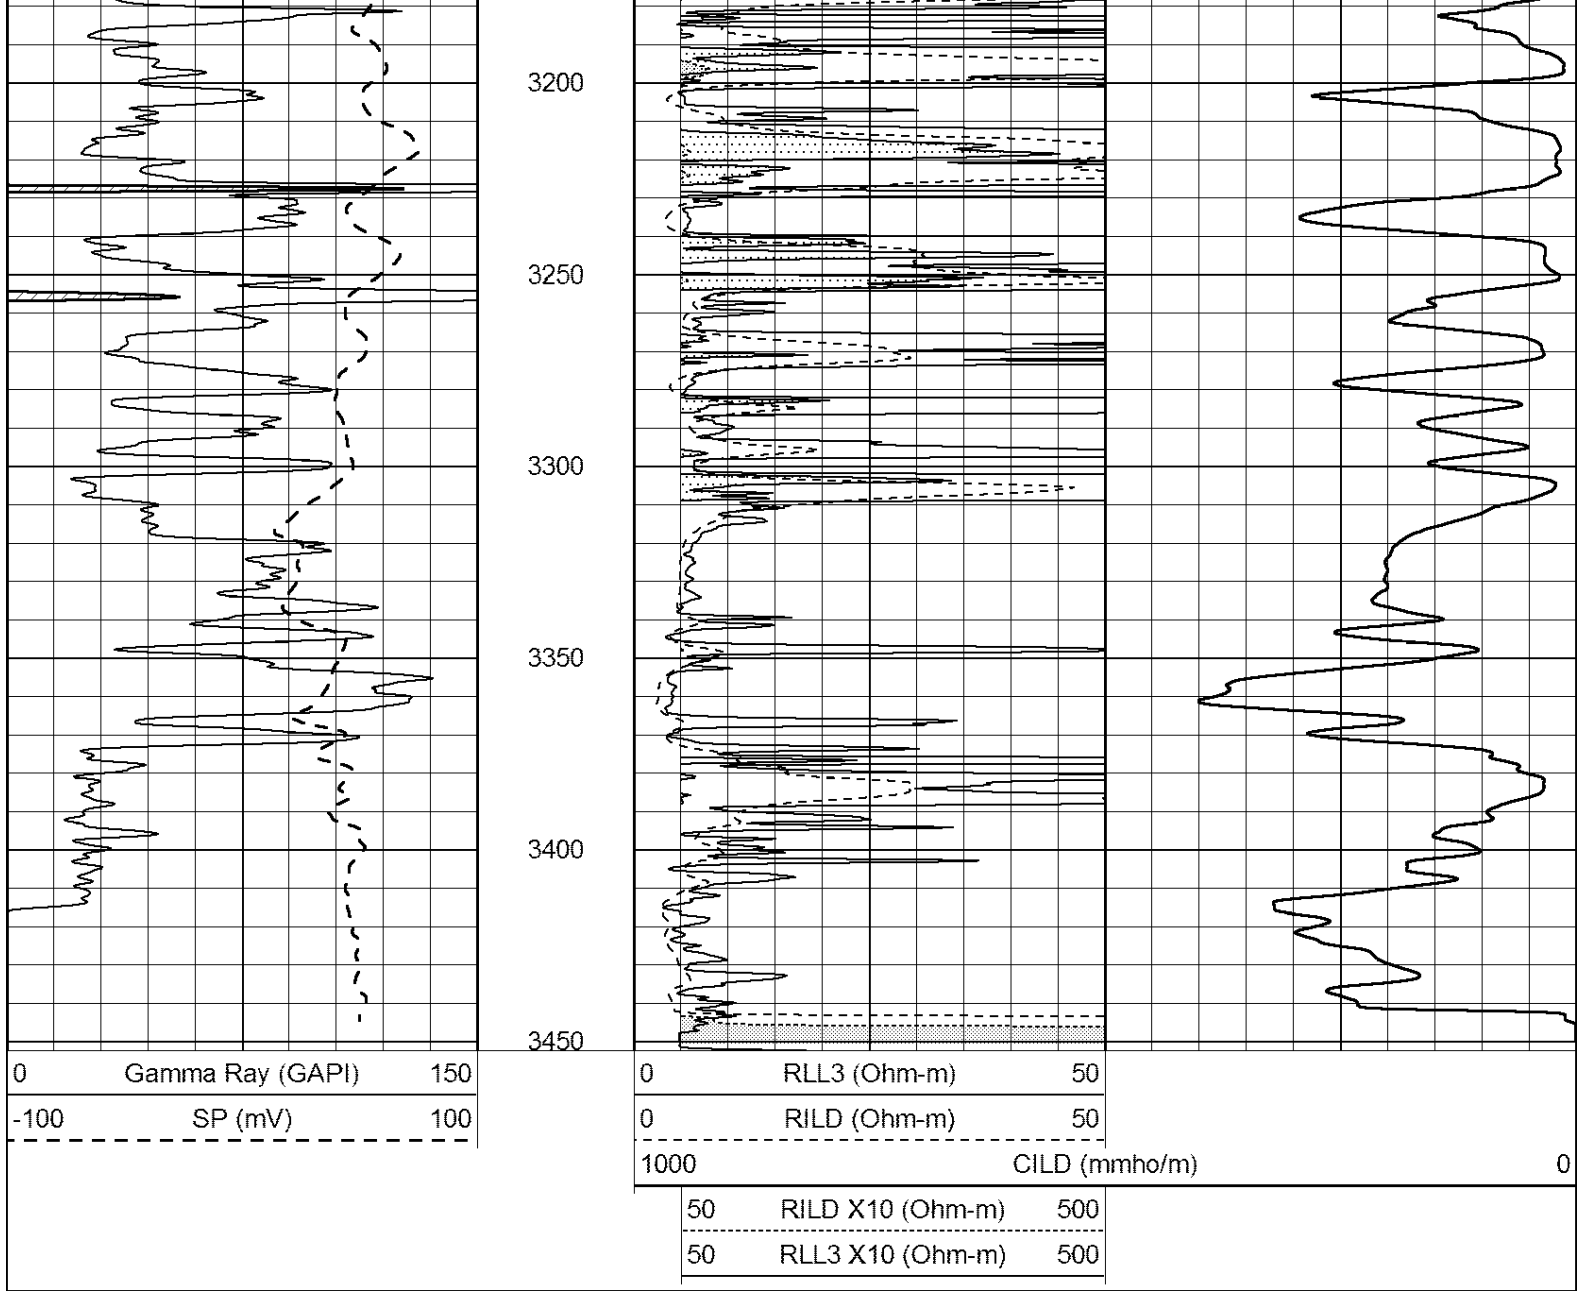


MAIN PASS


Database File: 4079pe.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Thu Aug 01 03:44:36 2019 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

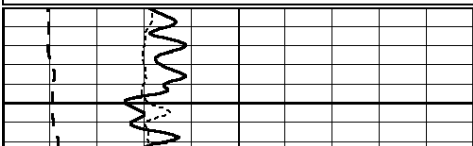


950

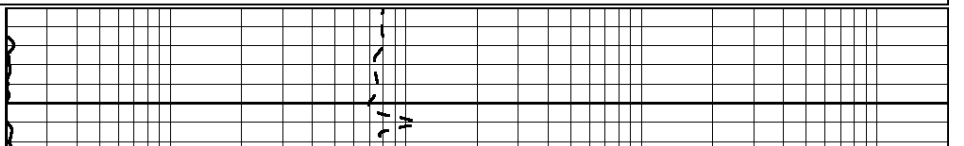

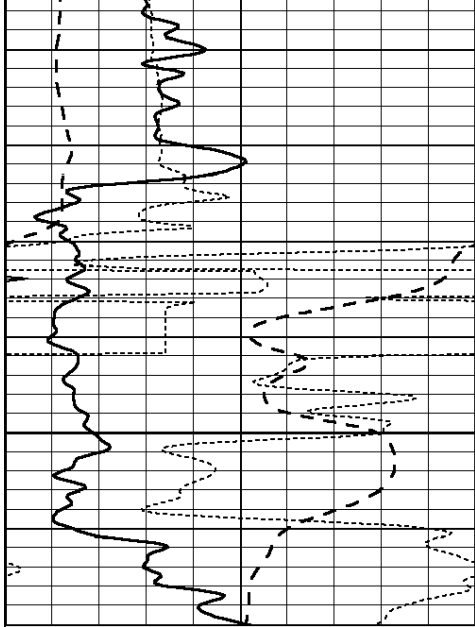


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

1000

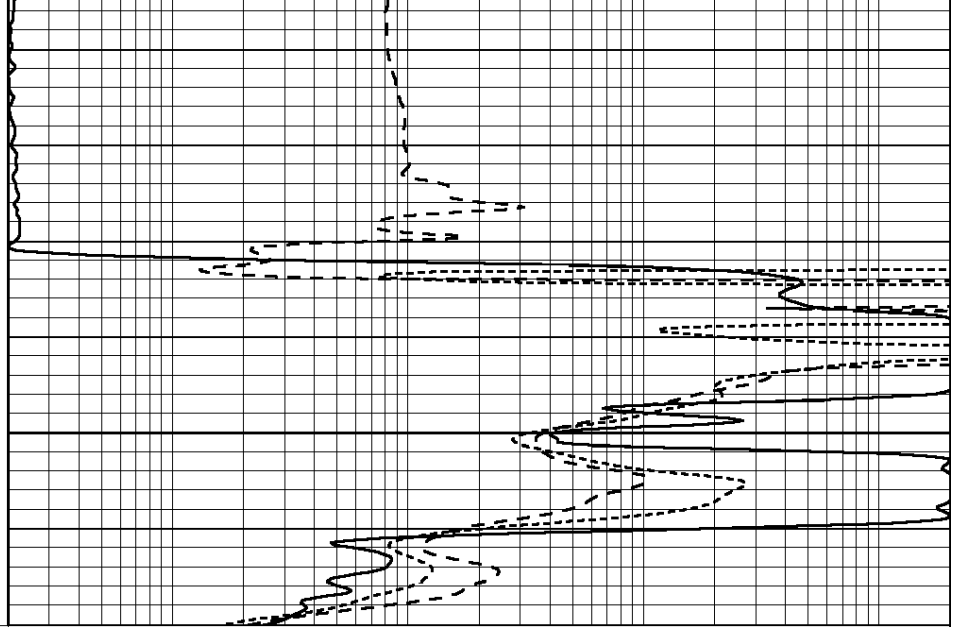

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

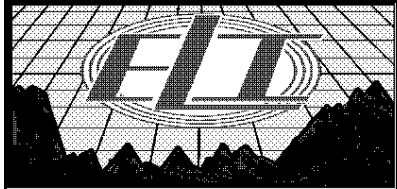


MAIN PASS

Database File: 4079pe.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Thu Aug 01 03:44:36 2019 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

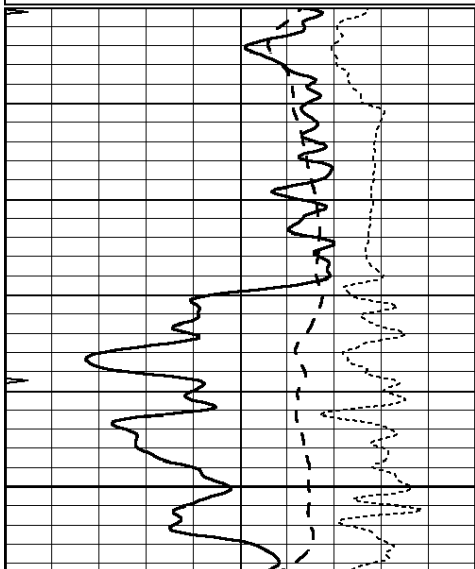

2500

2550

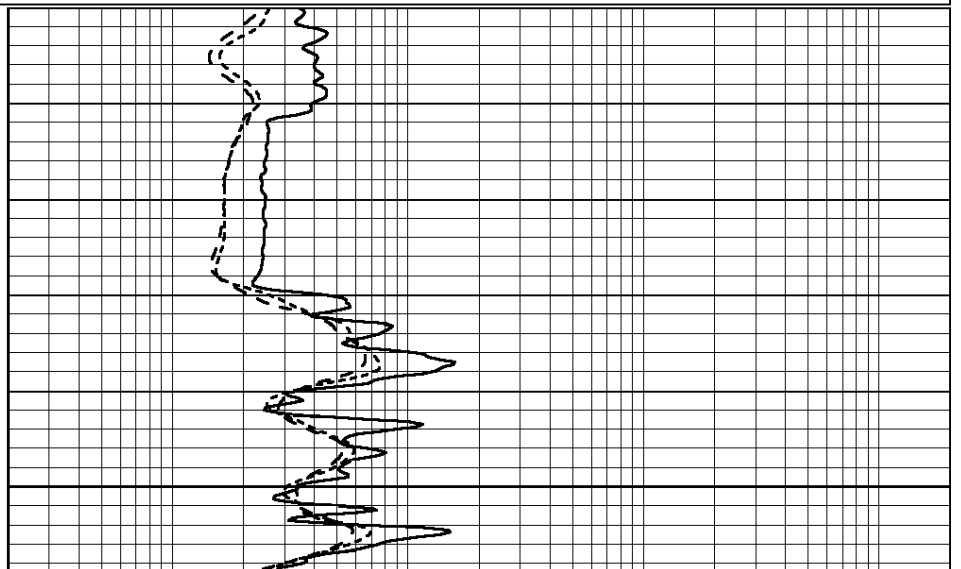

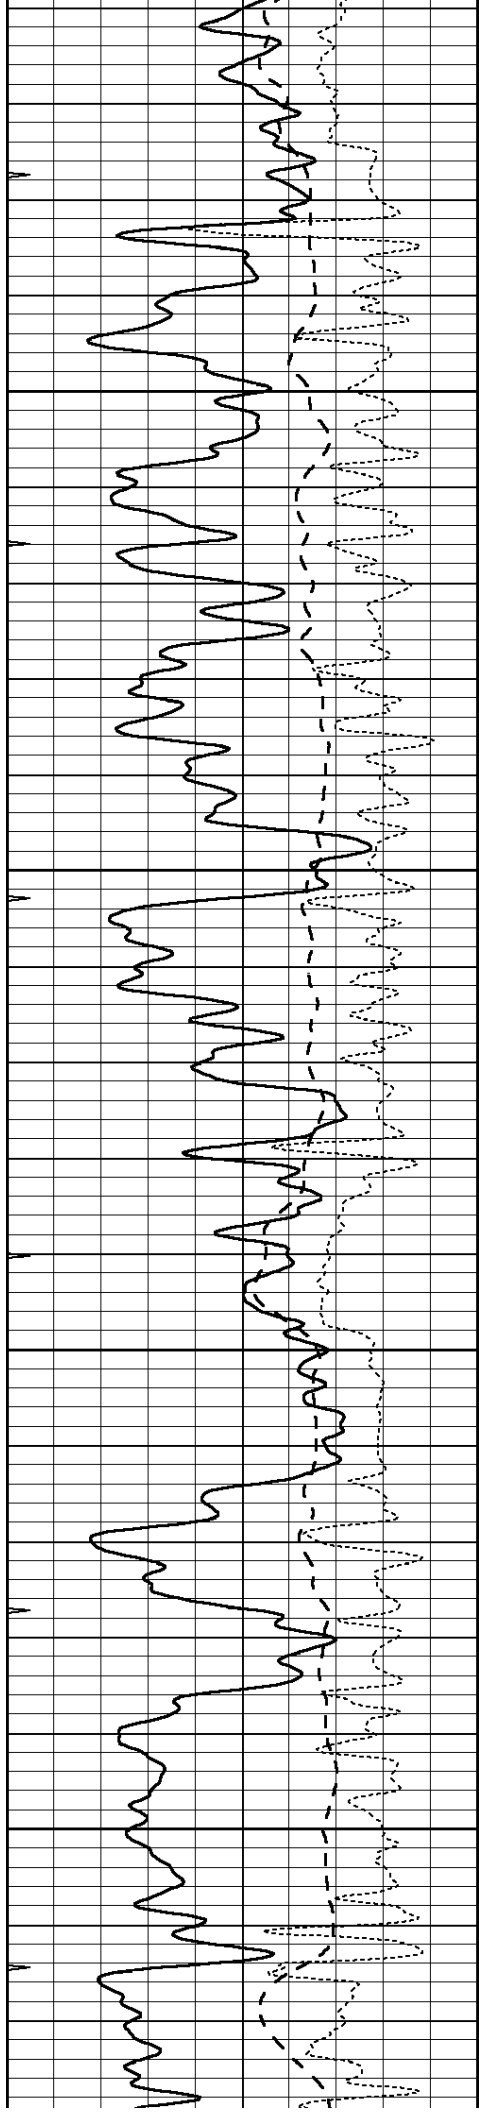



2600

2650

2700

2750

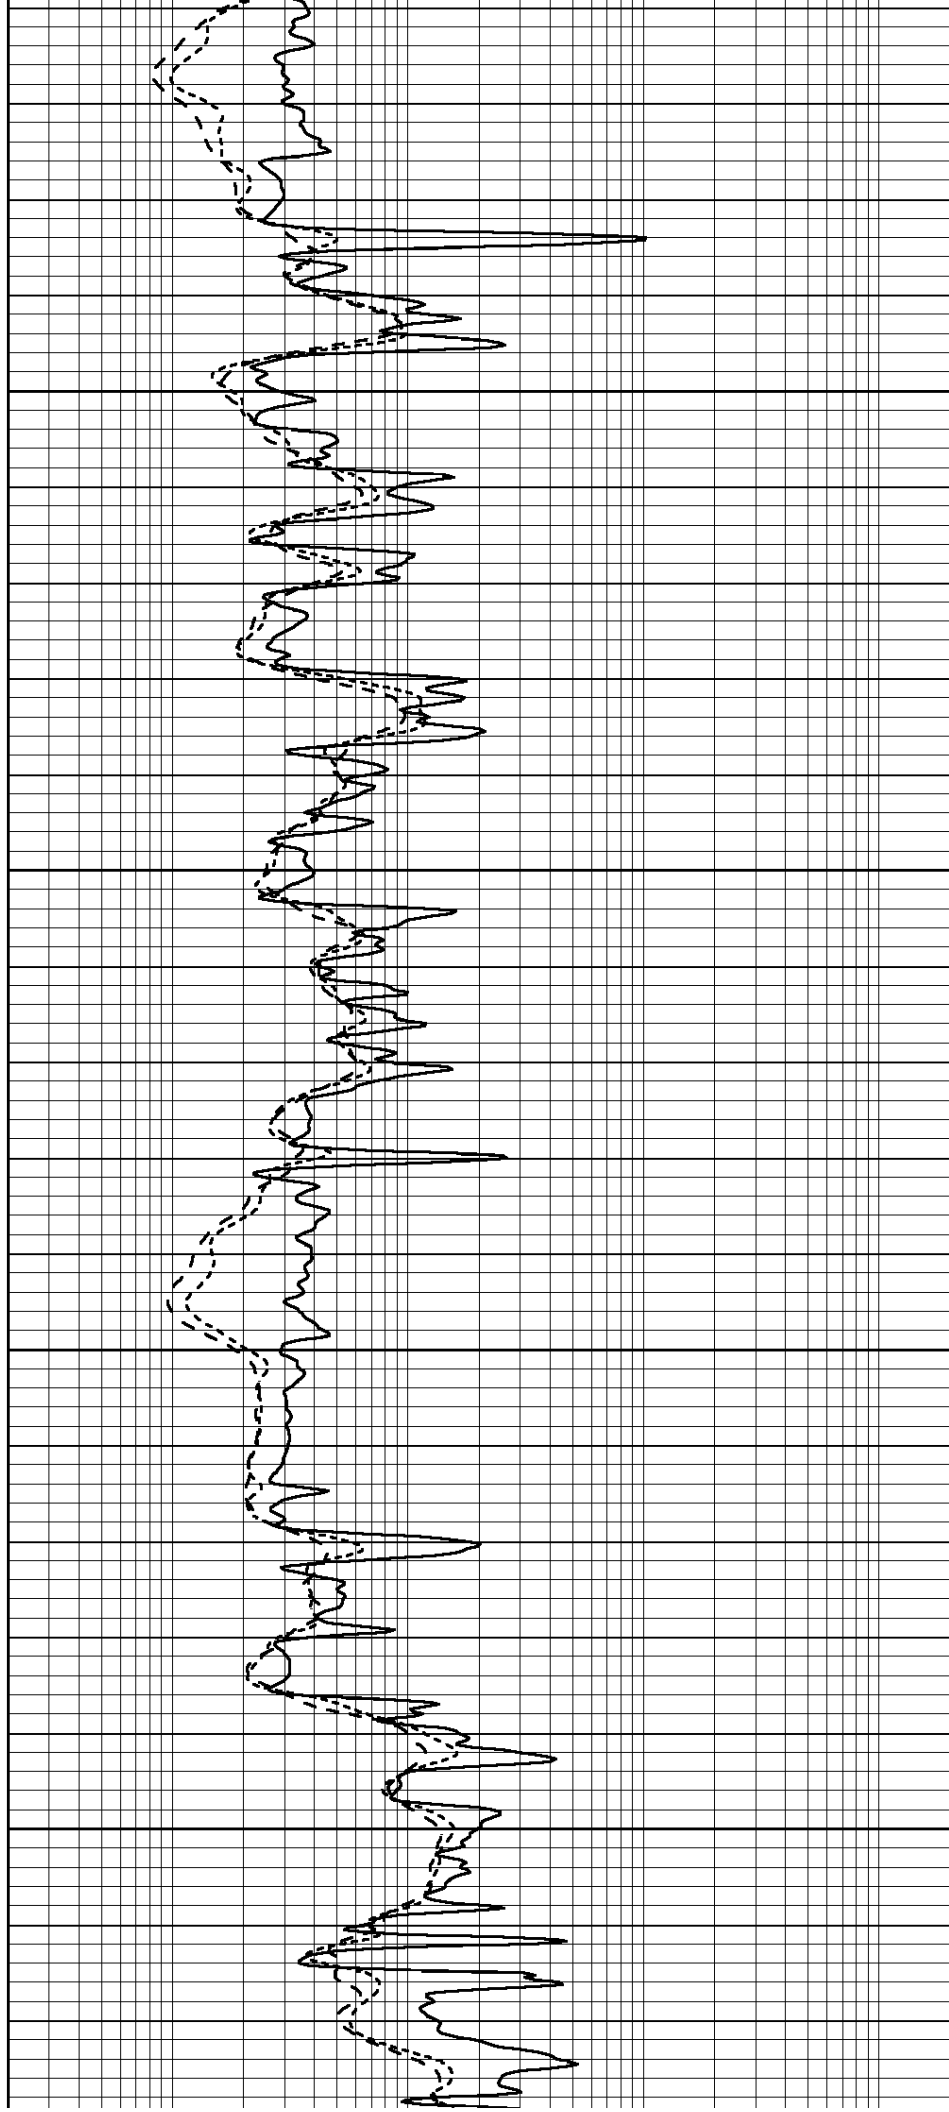

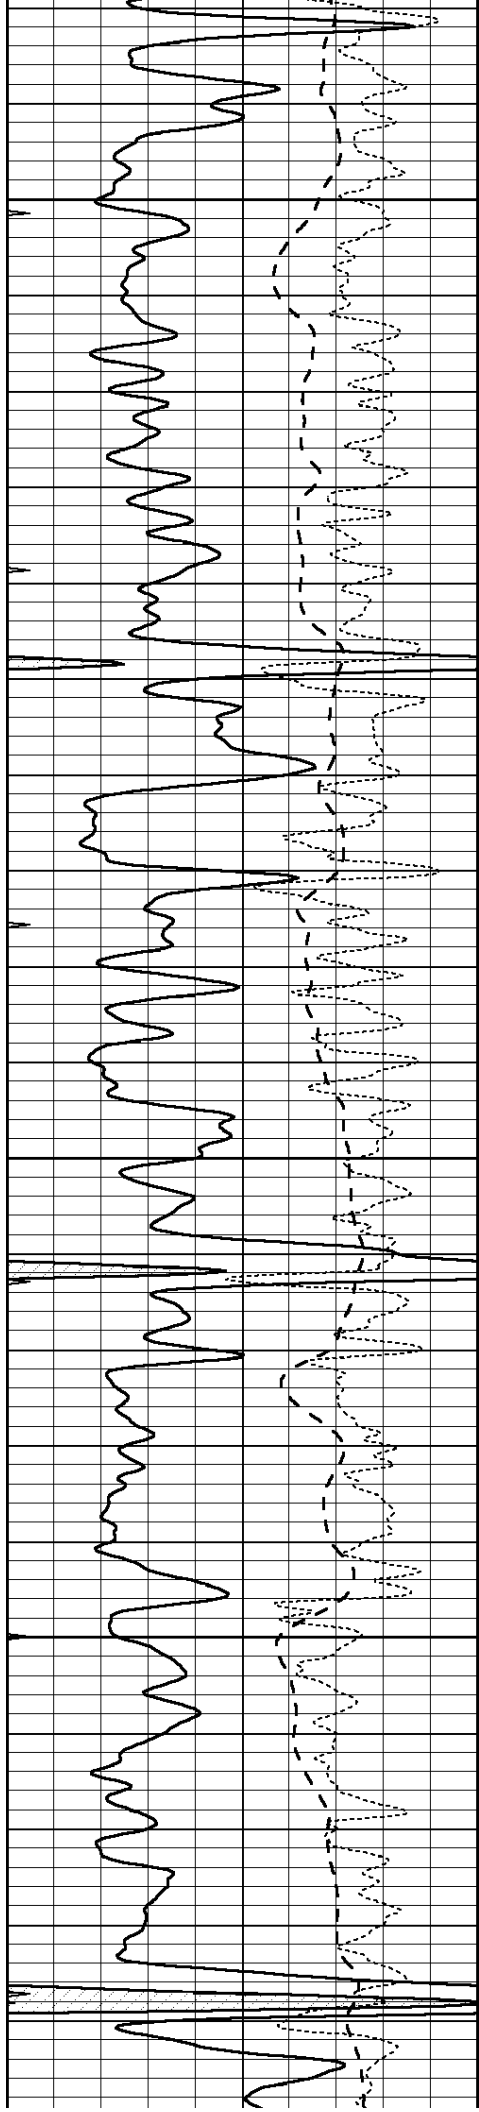



2800

2850

2900

2950

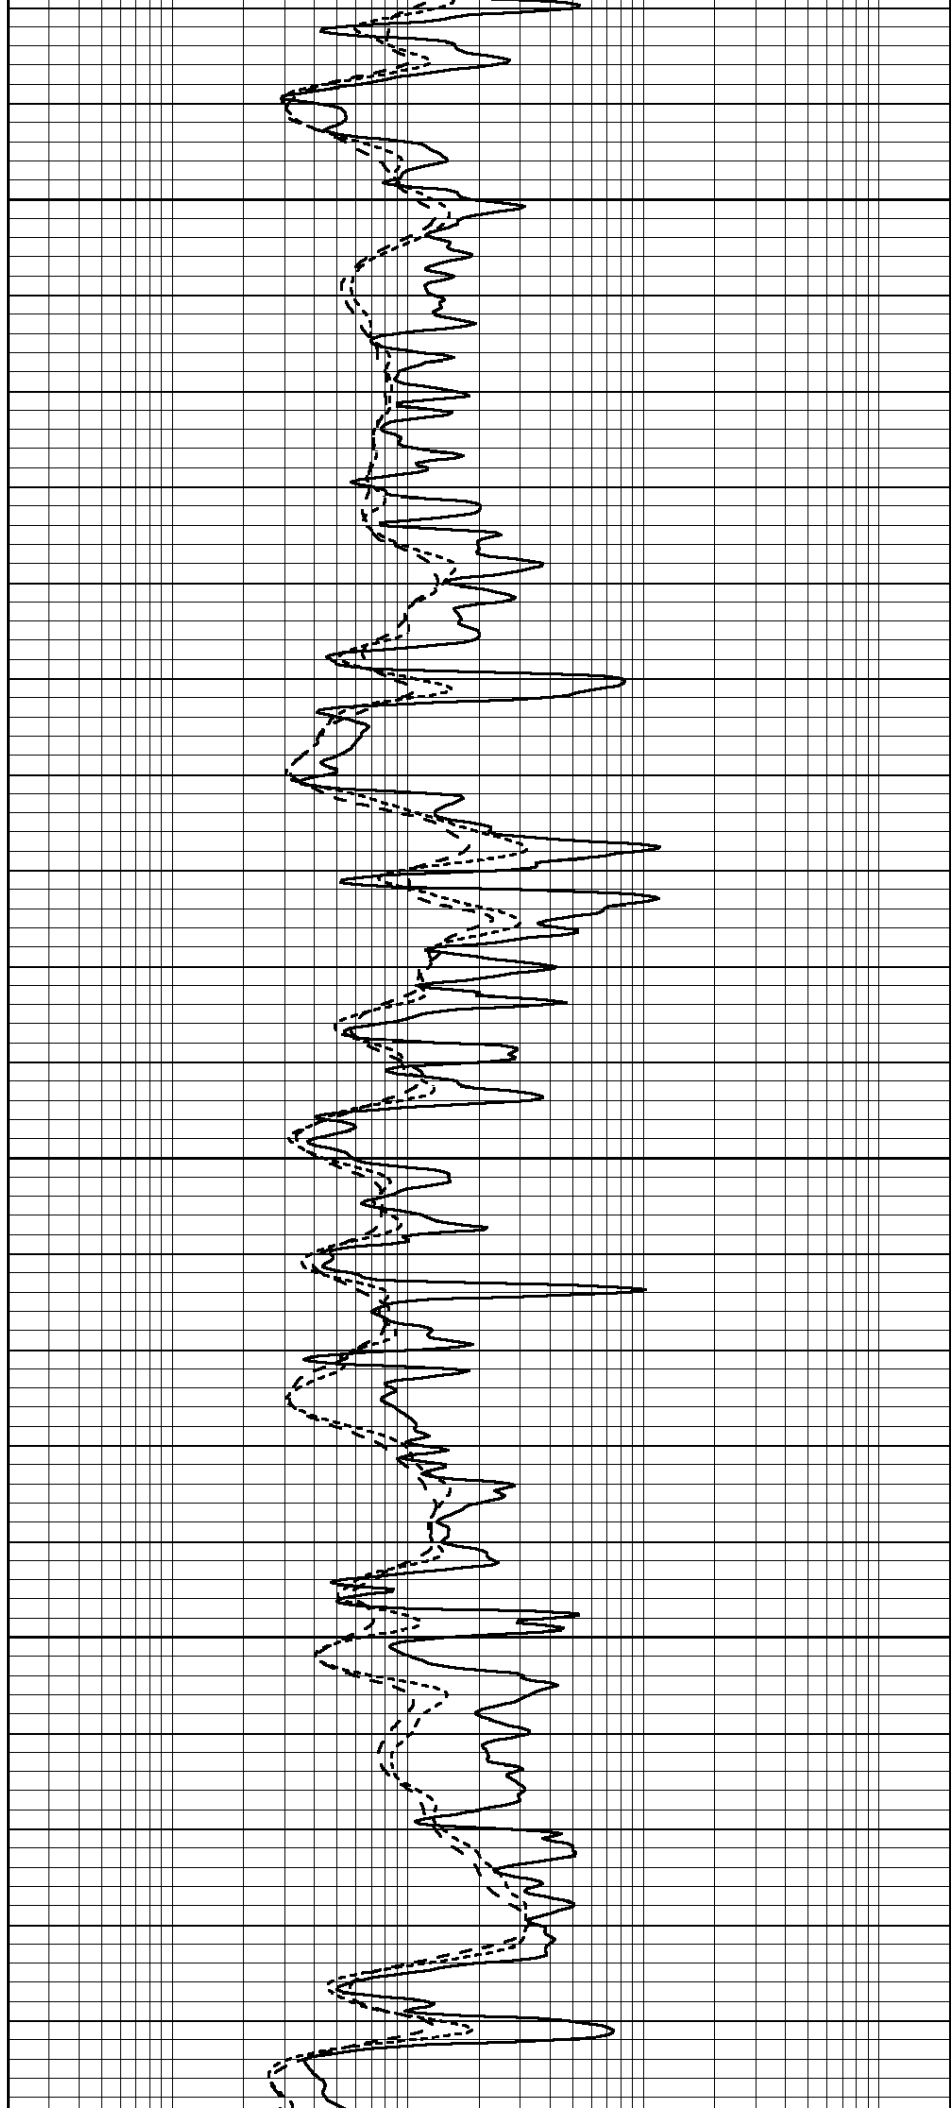

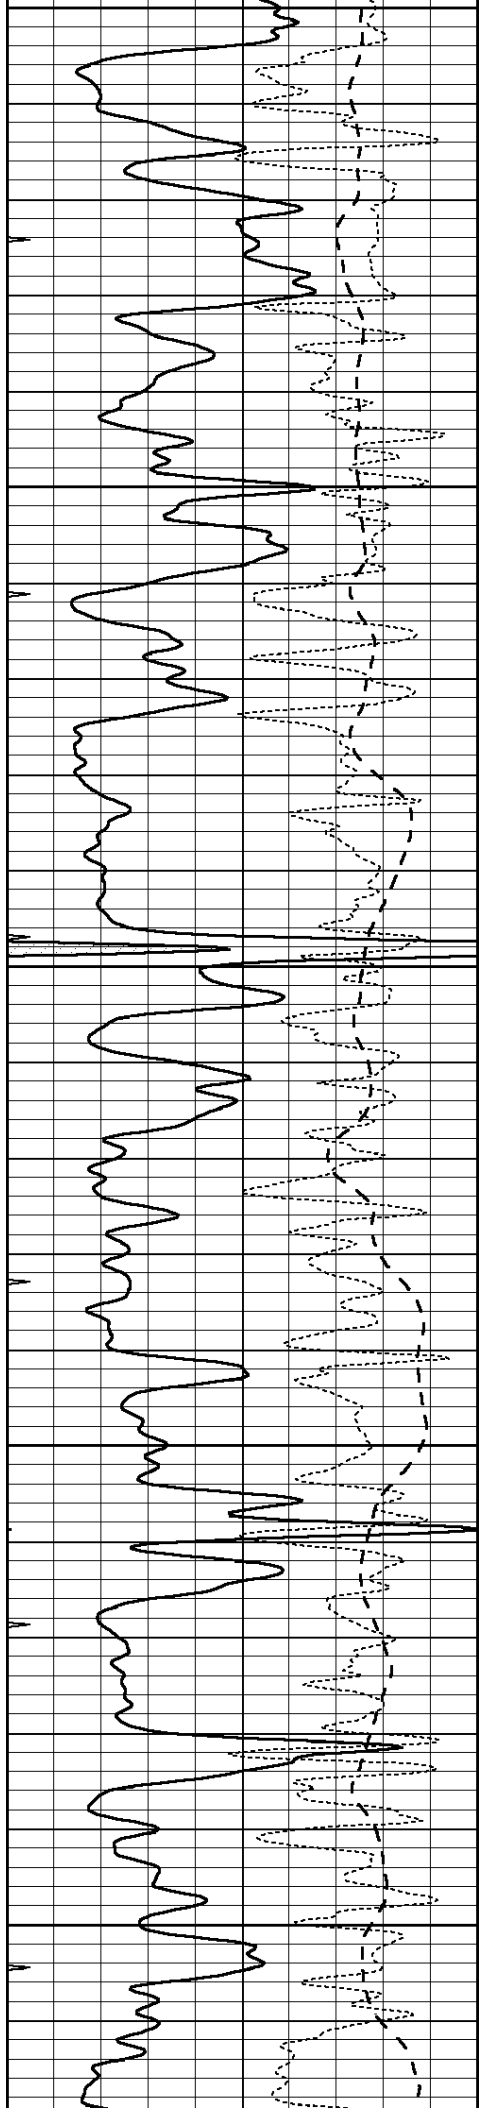


3000


3050

3100

3150

3200

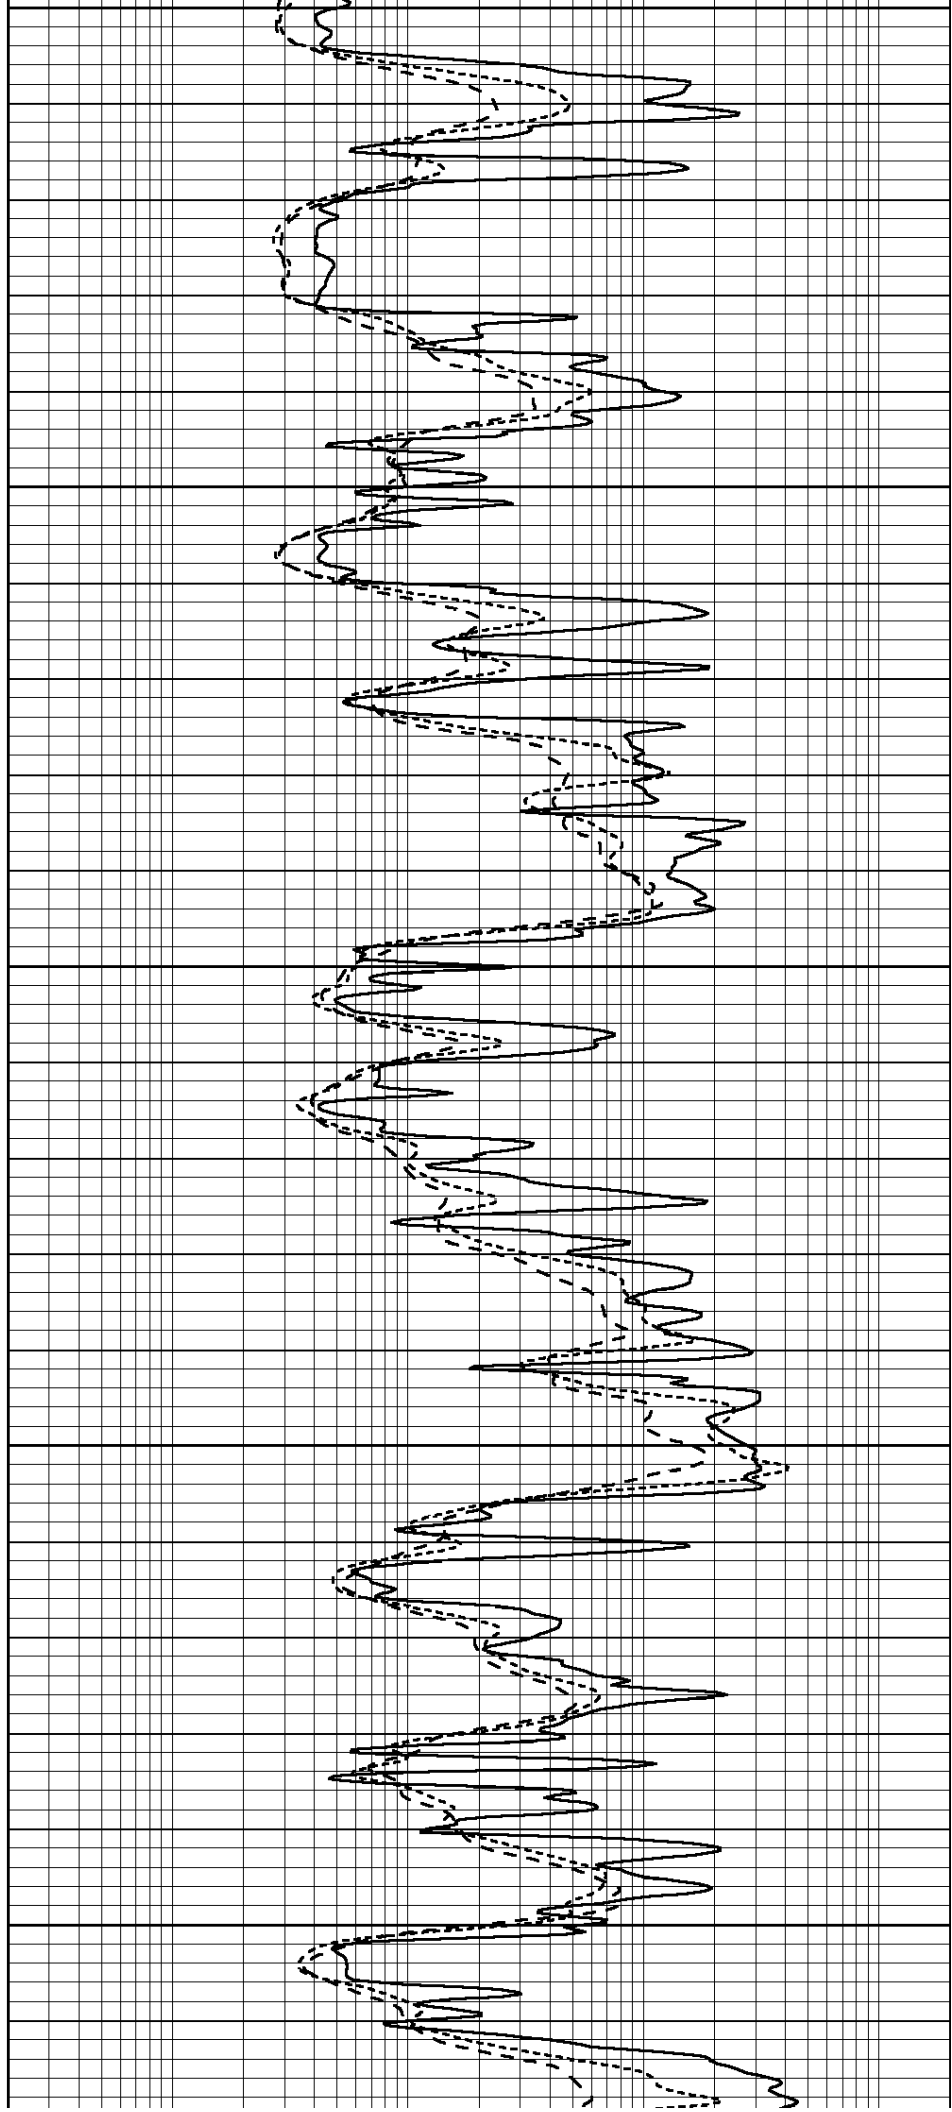

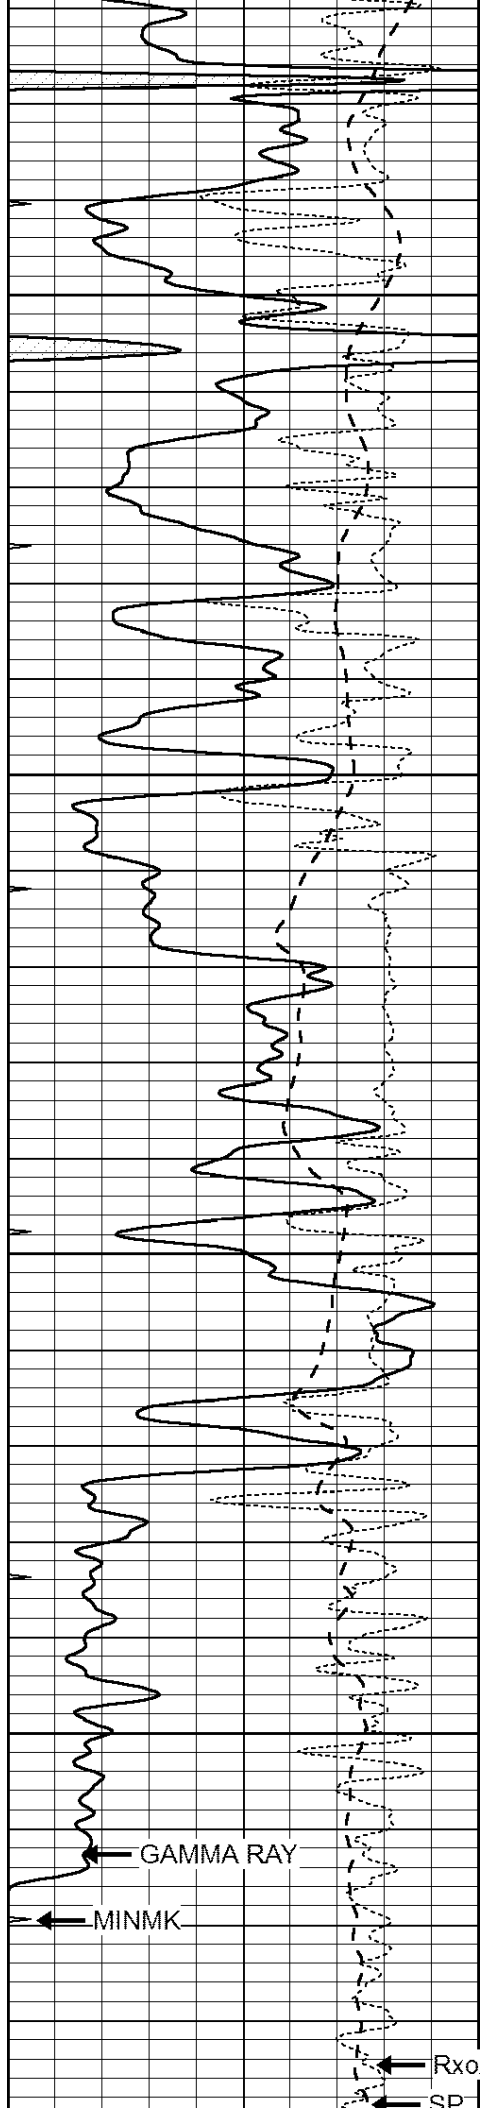

3250

3300

3350


3400

GAMMA RAY


MINMK

Rxo/Rt


SP

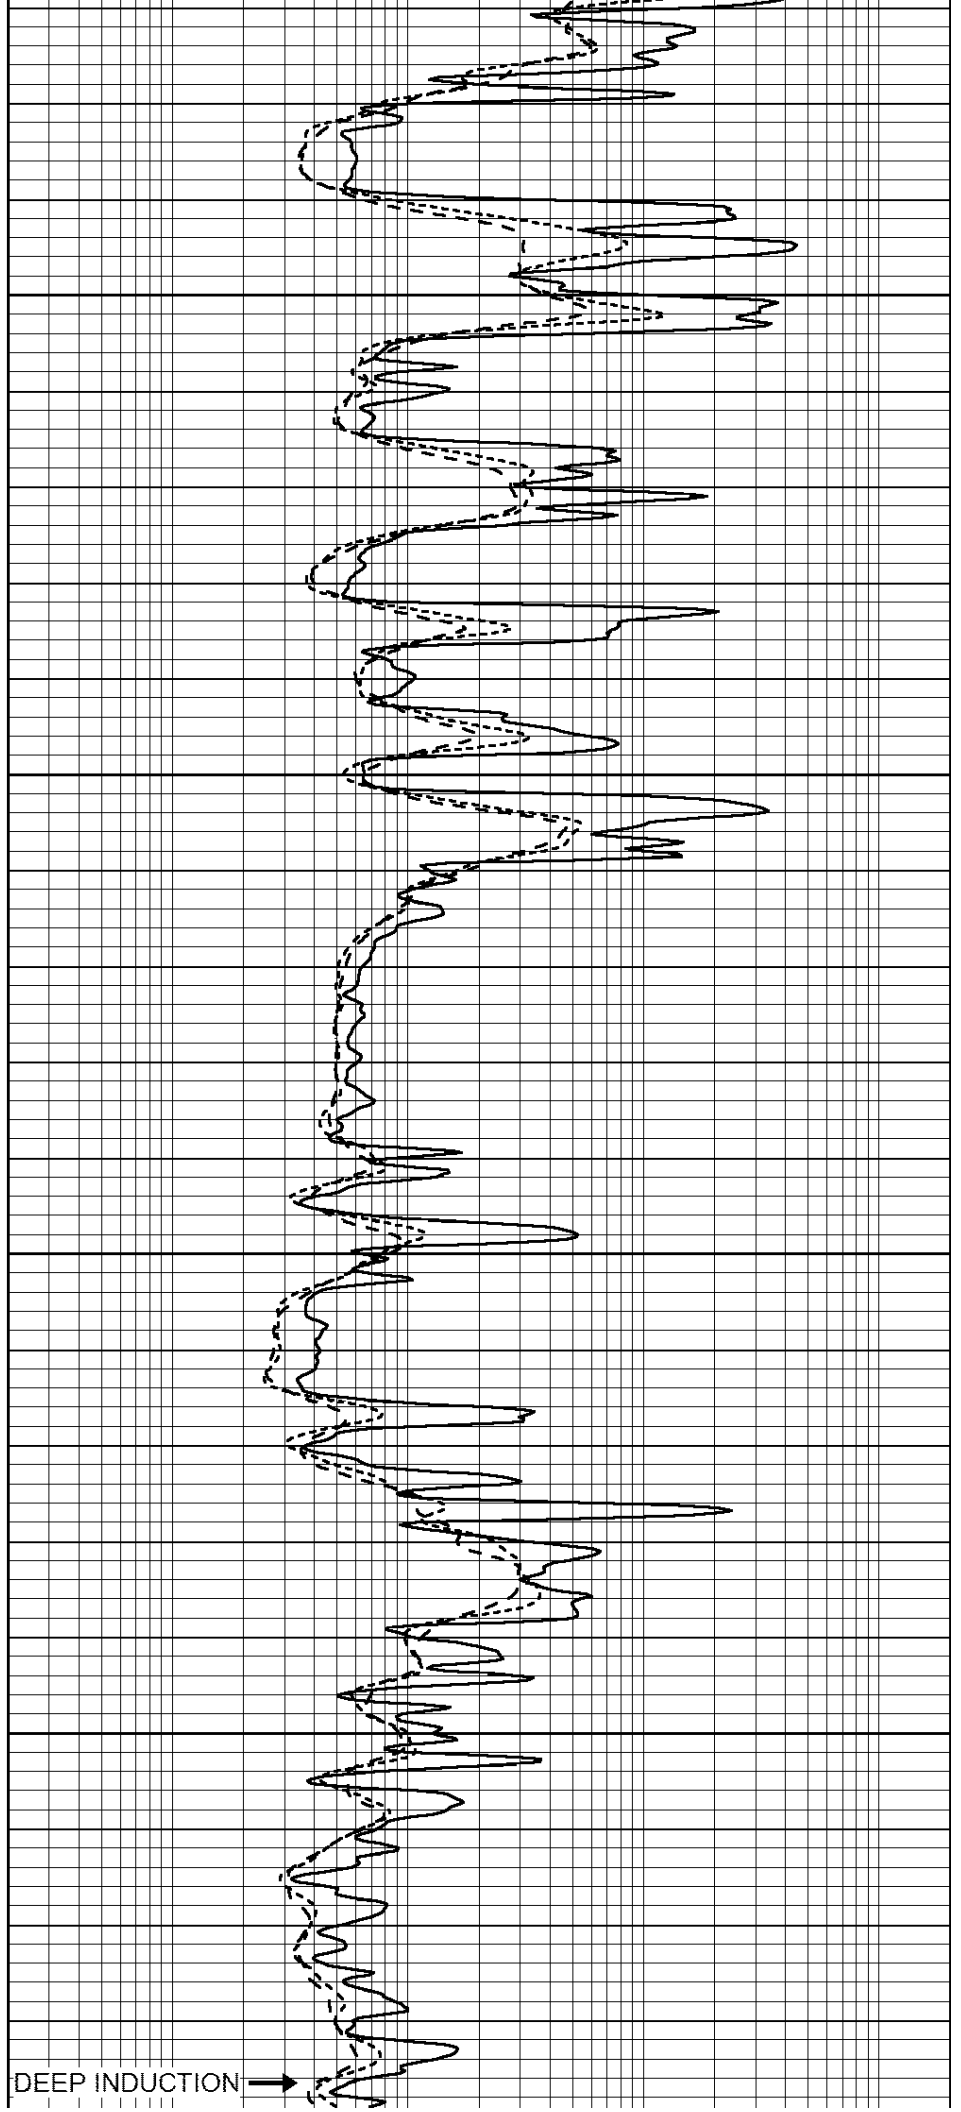

DEEP INDUCTION

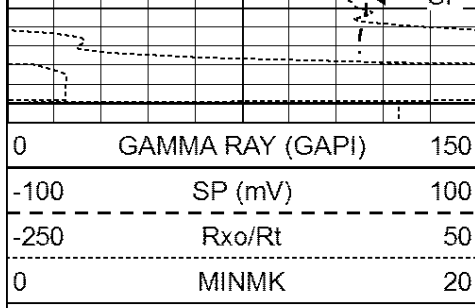


3450 LTD 3449

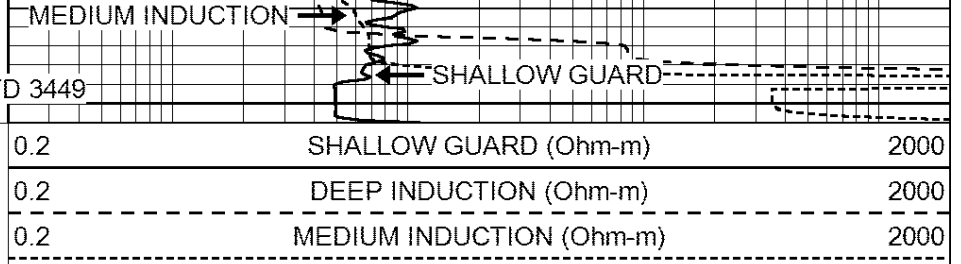

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

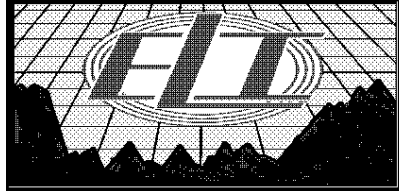


REPEAT SECTION

Database File: 4079pe.db
 Dataset Pathname: pass2RP
 Presentation Format: _dil
 Dataset Creation: Thu Aug 01 03:00:40 2019
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

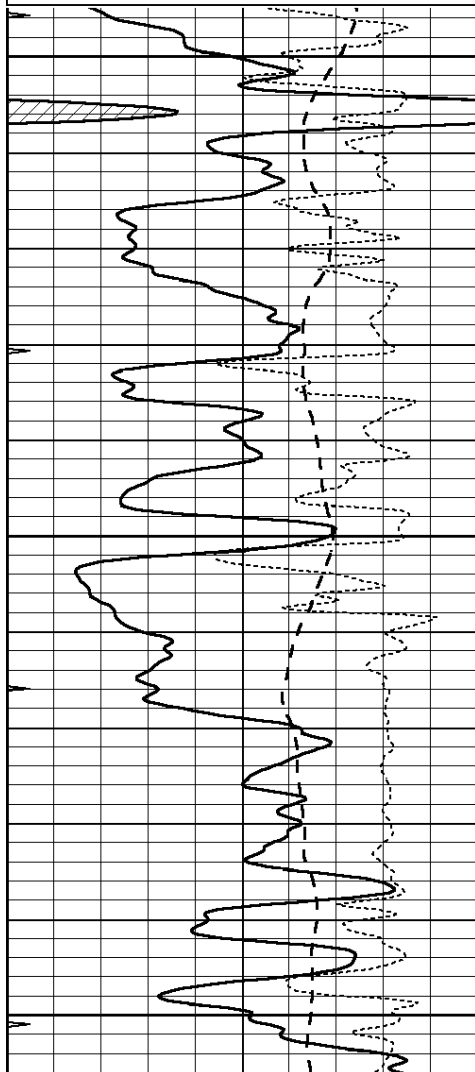


3250

3300

3350

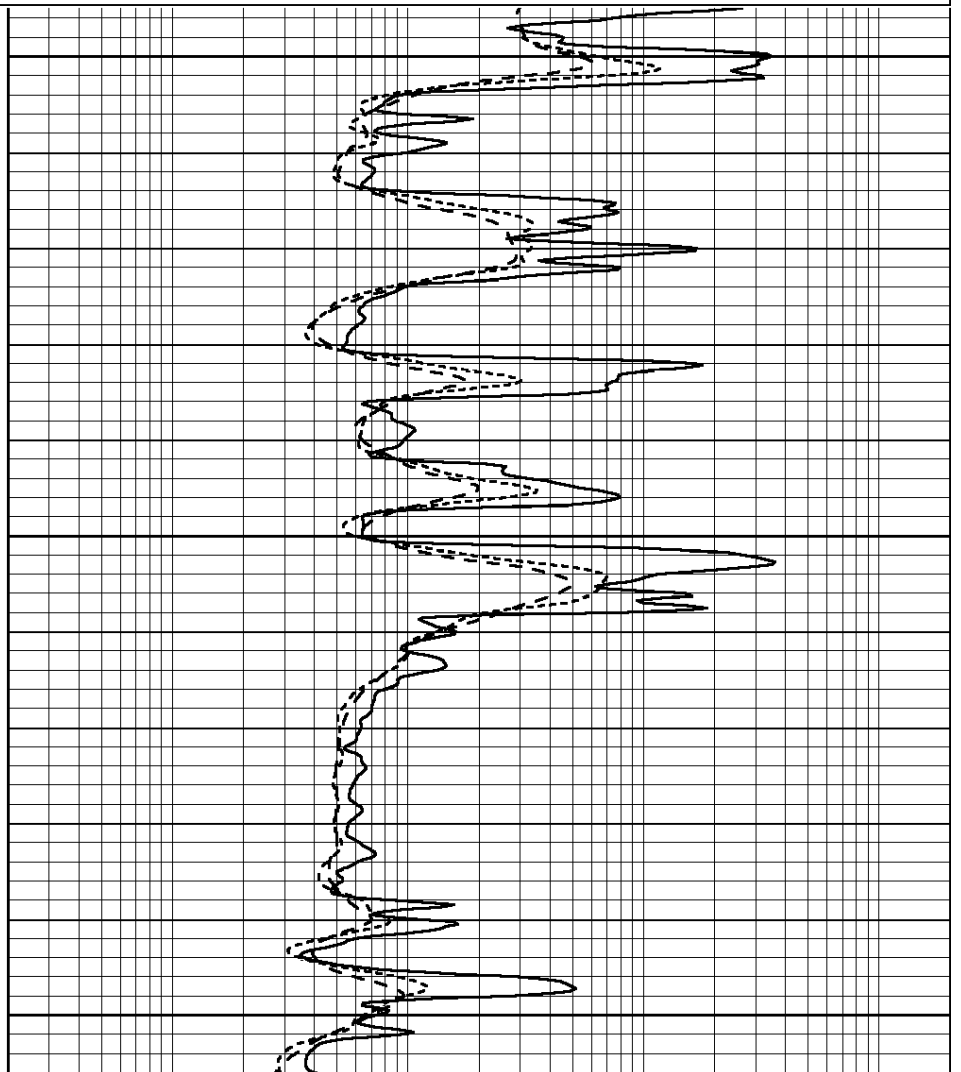

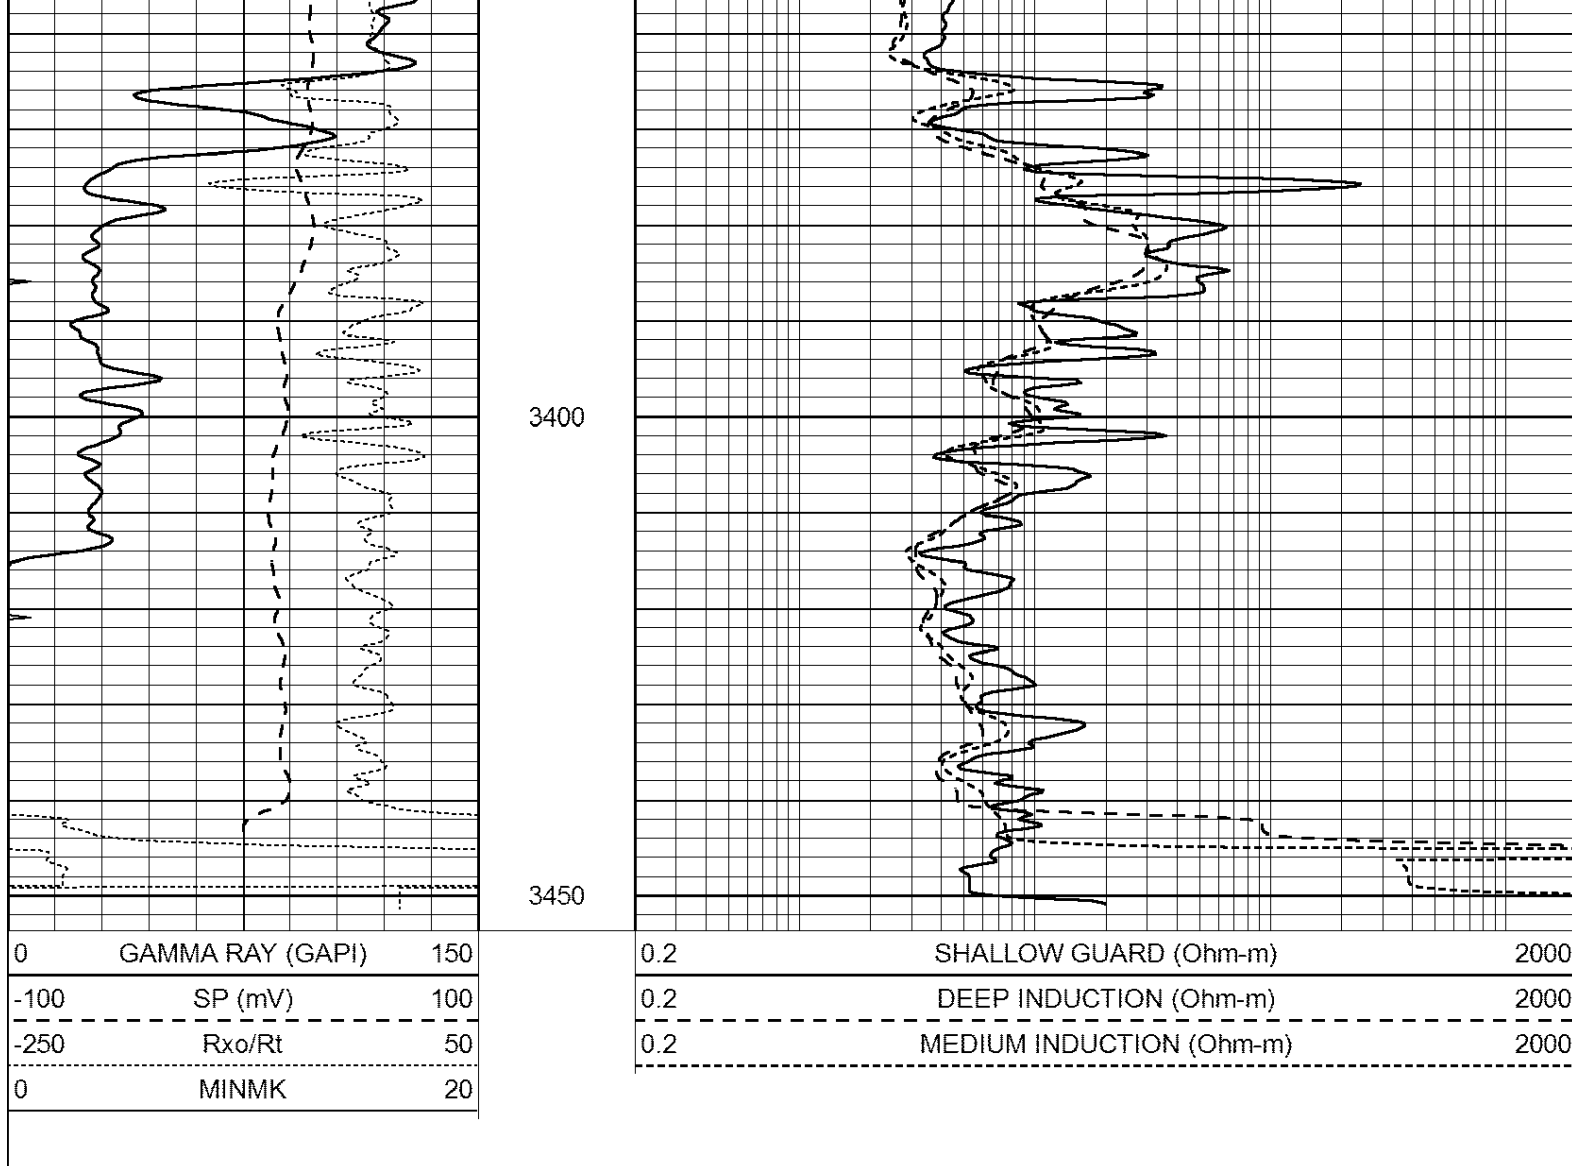

Calibration Report

Database File: 4079pe.db
 Dataset Pathname: pass2RP
 Dataset Creation: Thu Aug 01 03:00:40 2019

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Mon Sep 10 14:28:35 2018
 Downhole Cal Performed: Mon Sep 10 14:28:38 2018
 After Survey Verification Performed: Mon Sep 10 14:28:40 2018

Surface Calibration

Loop:	Readings				References		Results	
	Air	Loop	V		Air	Loop	m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings		References		Results	
Zero	Cal	Zero	Cal	m'	b'

Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 001N Model: PRB

Master Calibration		Performed Fri Feb 22 10:21:38 2019					
	Background	Magnesium	Aluminum	Sandstone			
Window 1	1650.2	7609.7	2906.5	8386.5	cps		
Window 2	1538.2	6635.9	2614.4	7212.4	cps		
Window 3	1257.0	3718.7	1765.8	3927.1	cps		
Window 4	376.8	375.6	373.4	374.5	cps		
Long Space	0.0	5097.7	1076.2	5674.2	cps		
Short Space	2.8	1704.3	1106.3	1723.6	cps		
Rho		1.7100	2.5900	1.3800	g/cc		
Pe		0.0000	2.5700	1.5500			
Rib Angle	: 44.5	Rib Slope	: 0.982	Density/Spine Ratio	: 0.545		
Spine Angle	: 74.5	Spine Slope	: 3.599	Spine Intercept	: -18.2		

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969					
	Background	Magnesium	Aluminum	Sandstone			
Window 1	0.0	0.0	0.0	0.0	cps		
Window 2	0.0	0.0	0.0	0.0	cps		
Window 3	0.0	0.0	0.0	0.0	cps		
Window 4	0.0	0.0	0.0	0.0	cps		
Long Space	0.0	0.0	0.0	0.0	cps		
Short Space	0.0	0.0	0.0	0.0	cps		
Measured Rho		0.0000	0.0000	0.0000	g/cc		
Measured Correction		0.0000	0.0000	0.0000	g/cc		
Measured Pe			0.0000	0.0000			

After Survey Verification		Performed Wed Dec 31 18:00:00 1969					
	Background	Magnesium	Aluminum	Sandstone			
Window 1	0.0	0.0	0.0	0.0	cps		
Window 2	0.0	0.0	0.0	0.0	cps		
Window 3	0.0	0.0	0.0	0.0	cps		
Window 4	0.0	0.0	0.0	0.0	cps		
Long Space	0.0	0.0	0.0	0.0	cps		
Short Space	0.0	0.0	0.0	0.0	cps		
Measured Rho		0.0000	0.0000	0.0000	g/cc		
Measured Correction		0.0000	0.0000	0.0000	g/cc		
Measured Pe			0.0000	0.0000			

Compensated Neutron Calibration Report

Serial Number: 6I
 Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
1) Short Space	cps		
Long Space	cps	pu	pu
2) Short Space	cps		
Long Space	cps	pu	
3) Short Space	cps		
Long Space	cps	pu	

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
1) Short Space	cps		
Long Space	cps	pu	pu
2) Short Space	cps		
Long Space	cps	pu	pu
3) Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6
 Tool Model: OPEN
 Performed: Wed Jul 03 12:57:34 2019

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 276.0 cps

Sensitivity: 0.5700 GAPI/cps