

DUAL INDUCTION LOG


Company	WOOLSEY OPERATING CO. LLC.	Company	WOOLSEY OPERATING COMPANY, LLC.
Well	MIKITA #2	Well	MIKITA #2
Field	HARDTNER	Field	HARDTNER
County	BARBER	County	BARBER
State	KANSAS	State	KANSAS
Location:	APL # : 15-007-24342-0000 650' FNL & 530' FVL SE - NW - NW - NW	Other Services CDL/CNL/PE	
Permanent Datum	GROUND LEVEL	Elevation	1391
Log Measured From	KELLY BUSHING 12' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 17 TWP 35S RGE 12W			
Date	12/6/18		
Run Number	ONE		
Depth Driller	5307		
Depth Logger	5310		
Bottom Logged Interval	5308		
Top Log Interval	00		
Casing Driller	13 3/8" @ 272'		
Casing Logger	272		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6,000 PPM	
Density / Viscosity	9.3/48		
pH / Fluid Loss	10.5/9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.650 @ 70F		
Rmf @ Meas. Temp	.488 @ 70F		
Rmc @ Meas. Temp	.780 @ 70F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.355 @ 128F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	4:45 A.M.		
Maximum Recorded Temperature	128F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	BILL KLAVER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
HARDTNER, KS., S. ON HWY 281 TO "STATELINE RD.", 1/2W., 1/2N. INTO

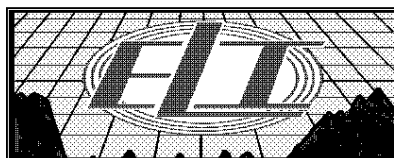

MAIN SECTION

Database File: 3070pe.db
Dataset Pathname: pass3.3
Presentation Format: dil2
Dataset Creation: Thu Dec 06 07:33:14 2018
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1


0	RLL3 (Ohm-m)	50
---	--------------	----

0	RILD (Ohm-m)	50
---	--------------	----



1000	CILD (mmho/m)	0
------	---------------	---


50	RILD X10 (Ohm-m)	500
----	------------------	-----

50	RLL3 X10 (Ohm-m)	500
----	------------------	-----

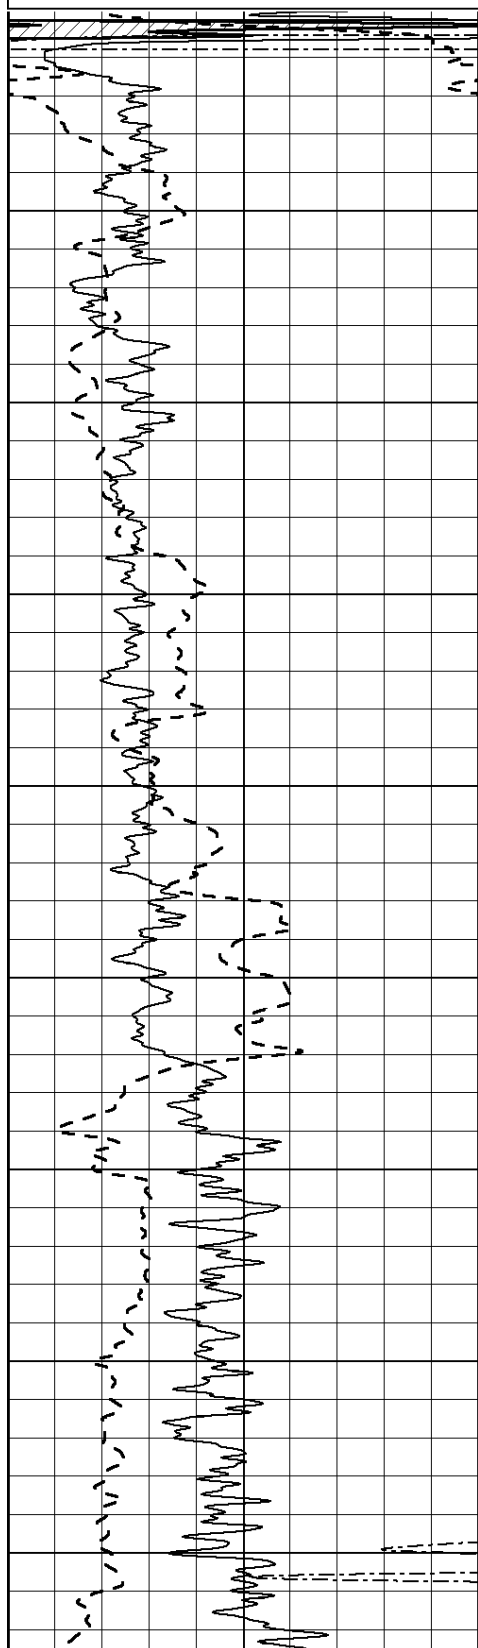

0
50
100
150
200
250
300
350
400

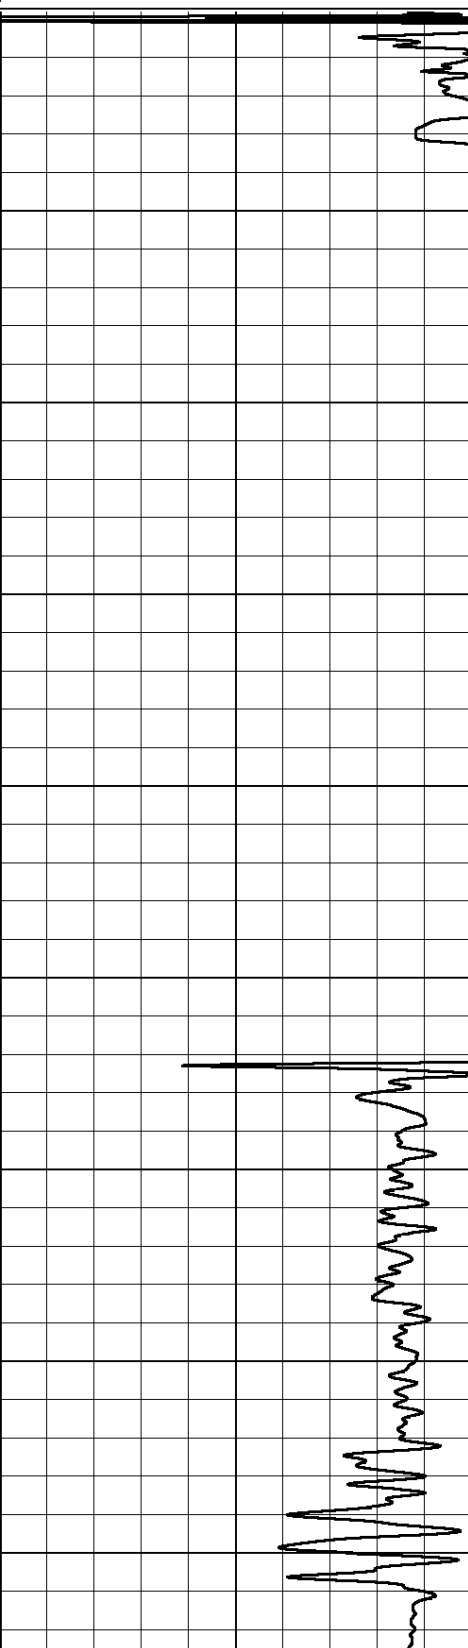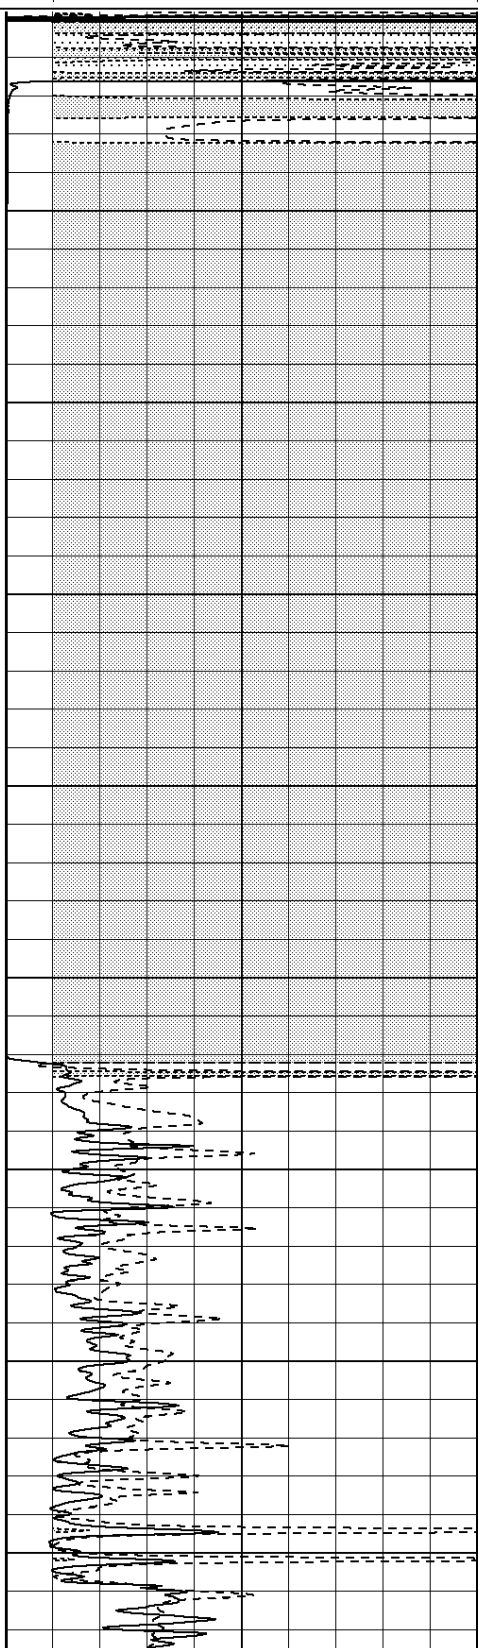

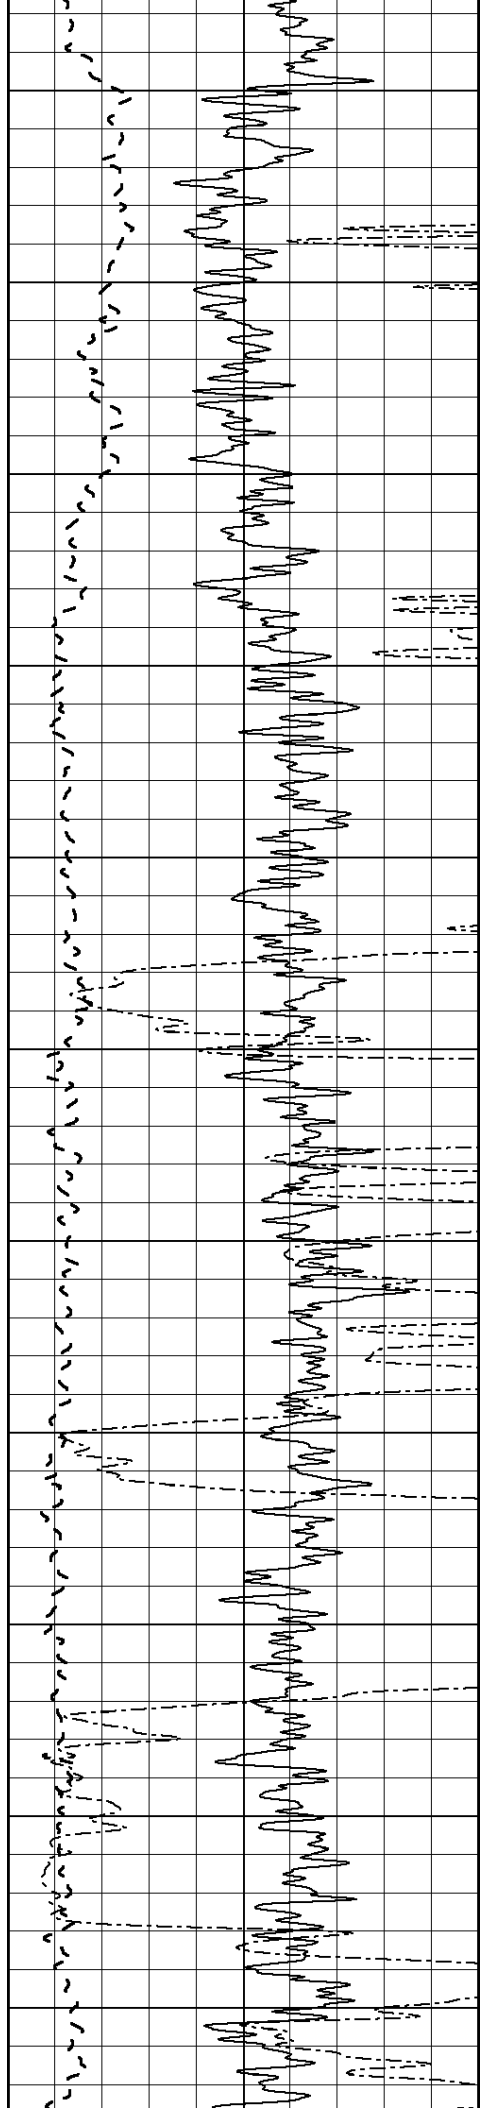

450

500

550

600

650

700


750



800


850

900

950

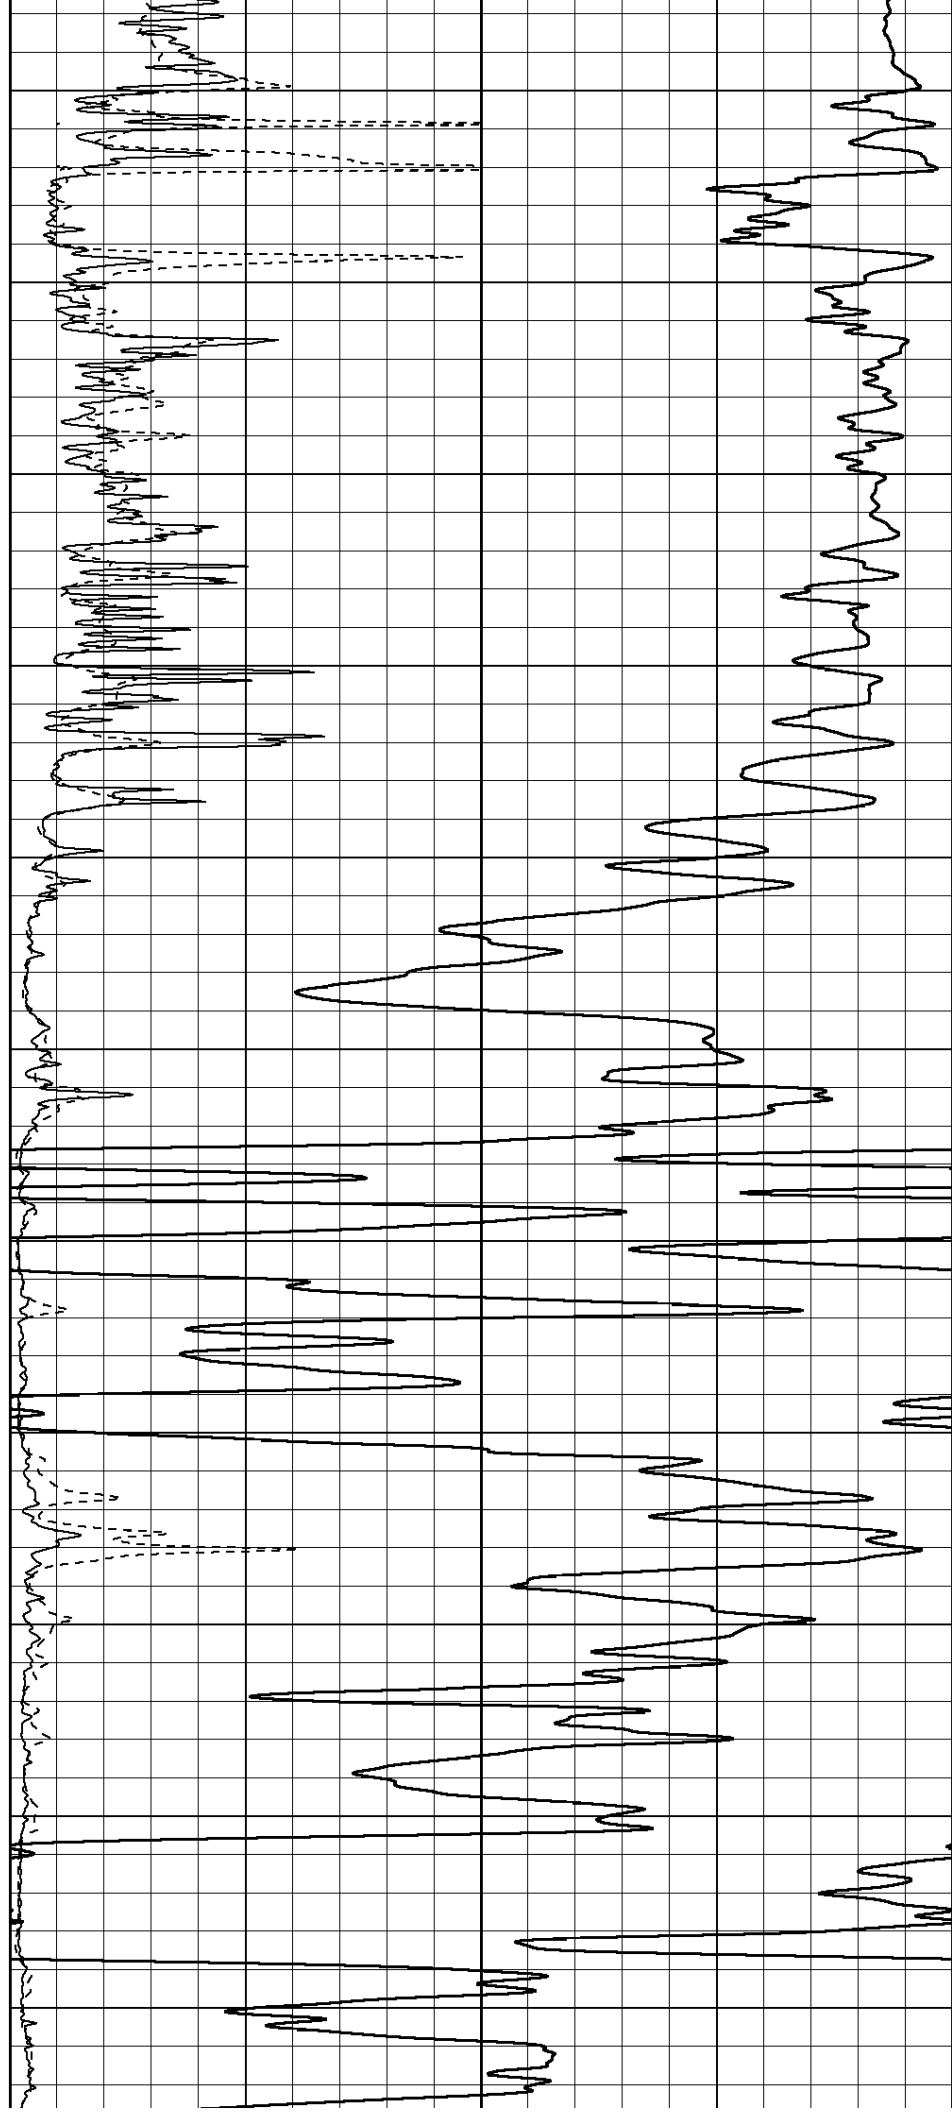

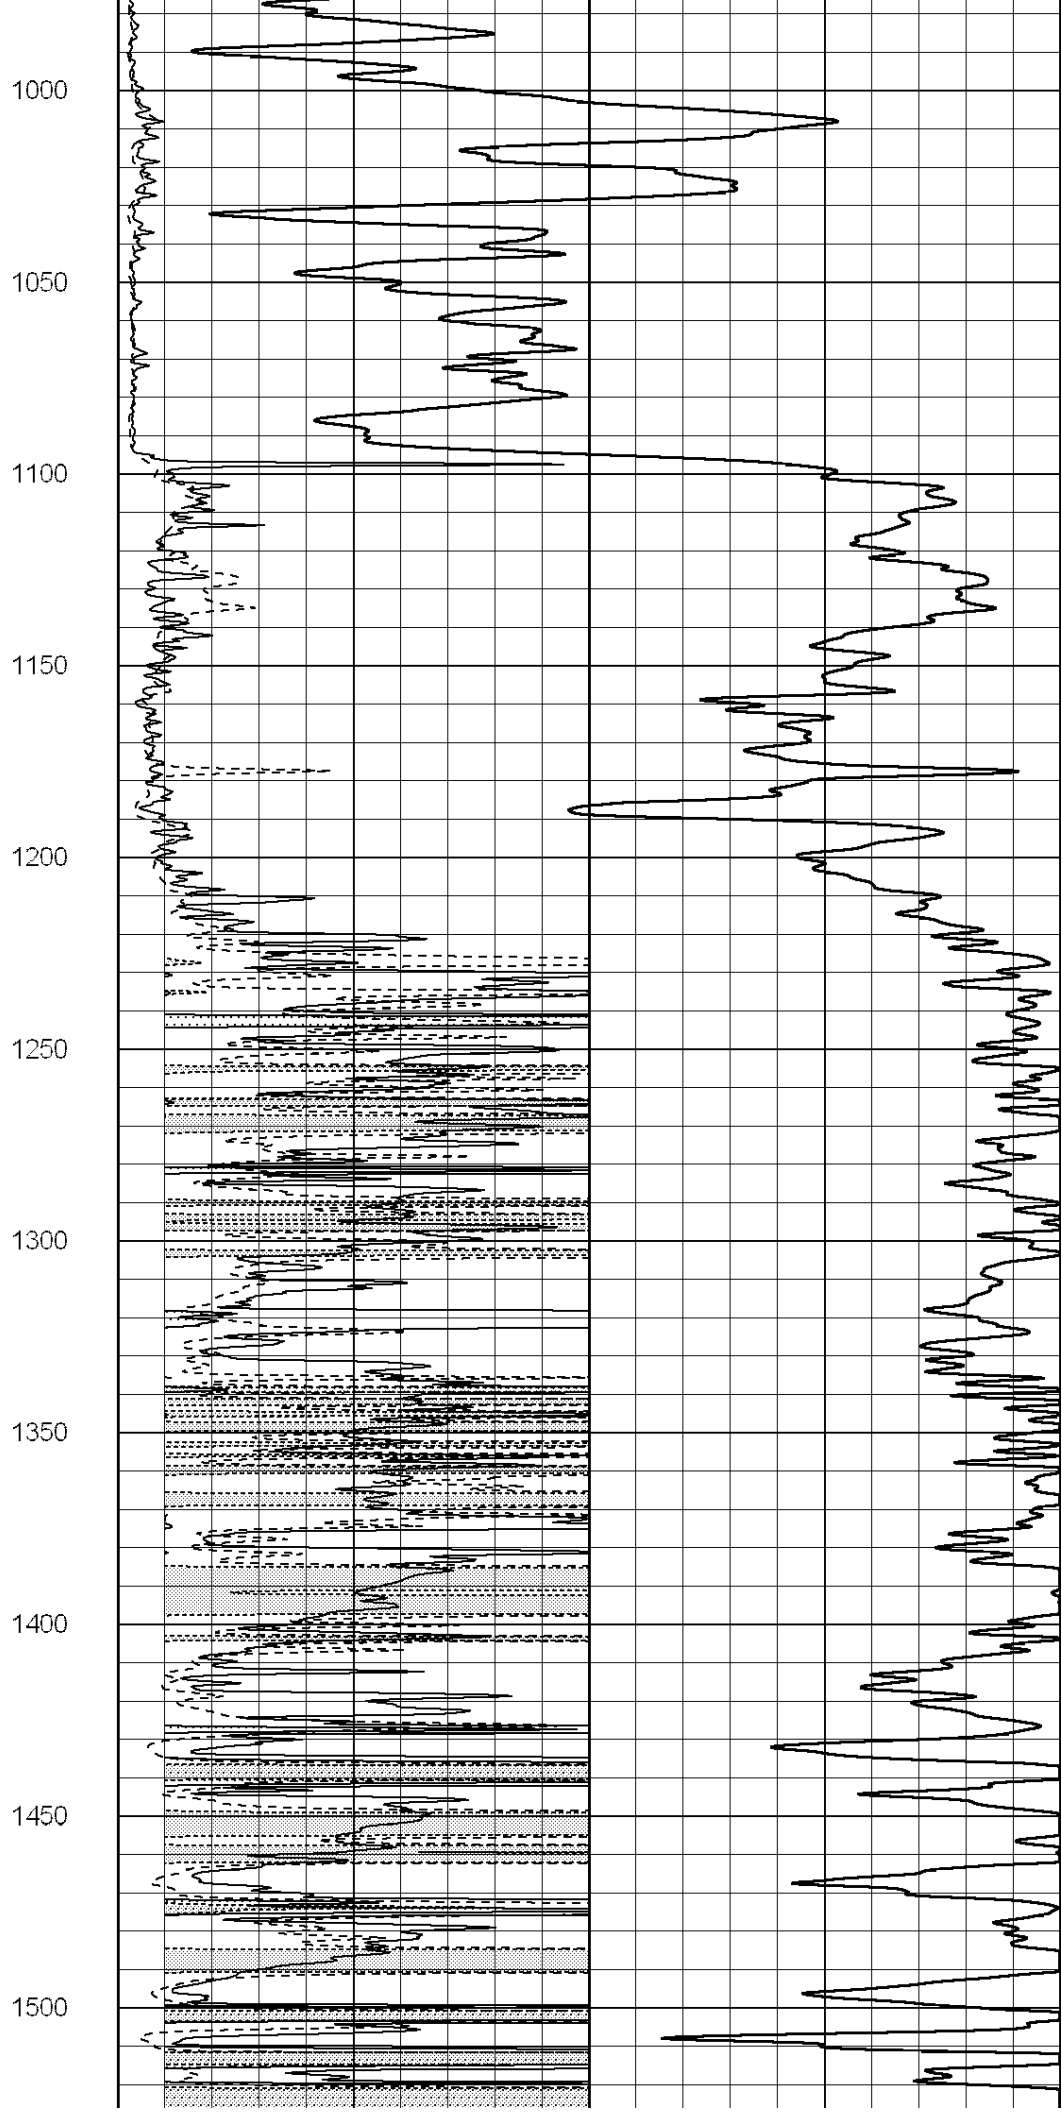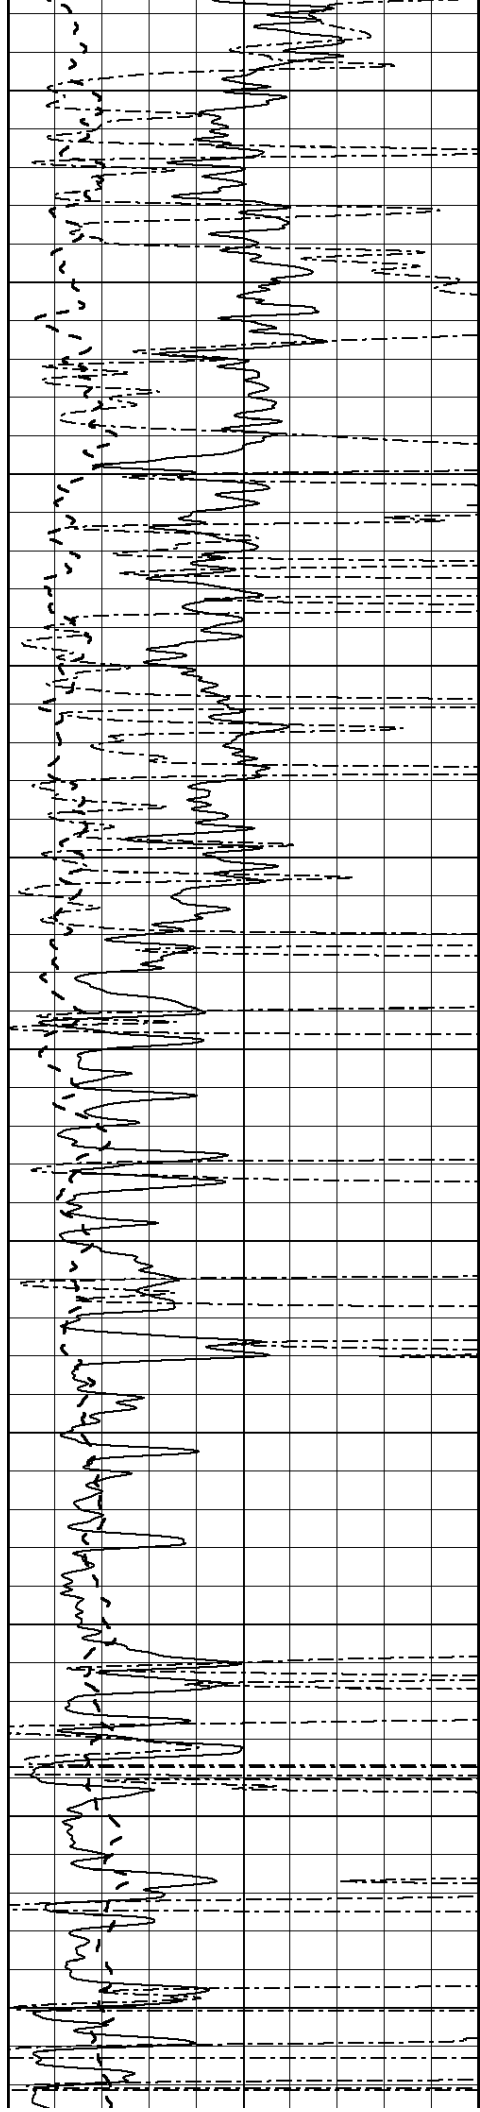

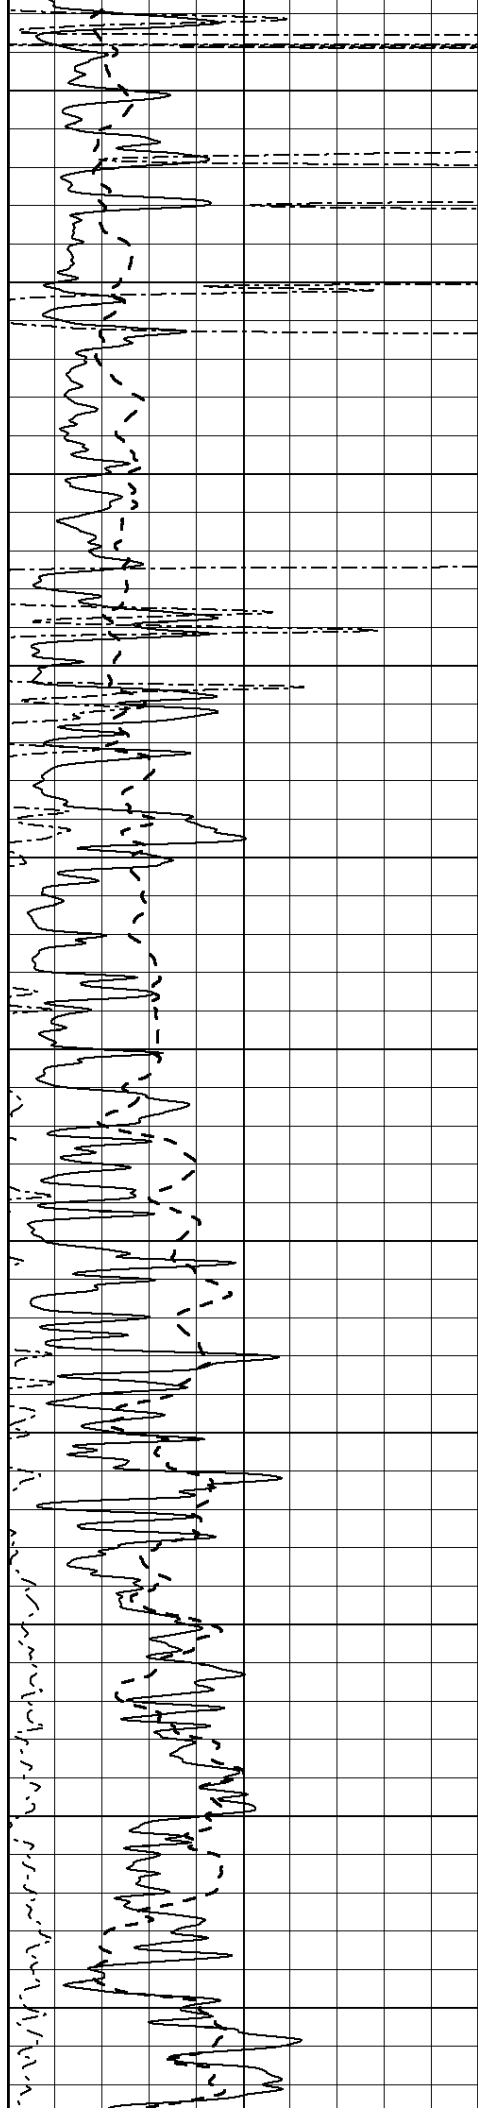

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

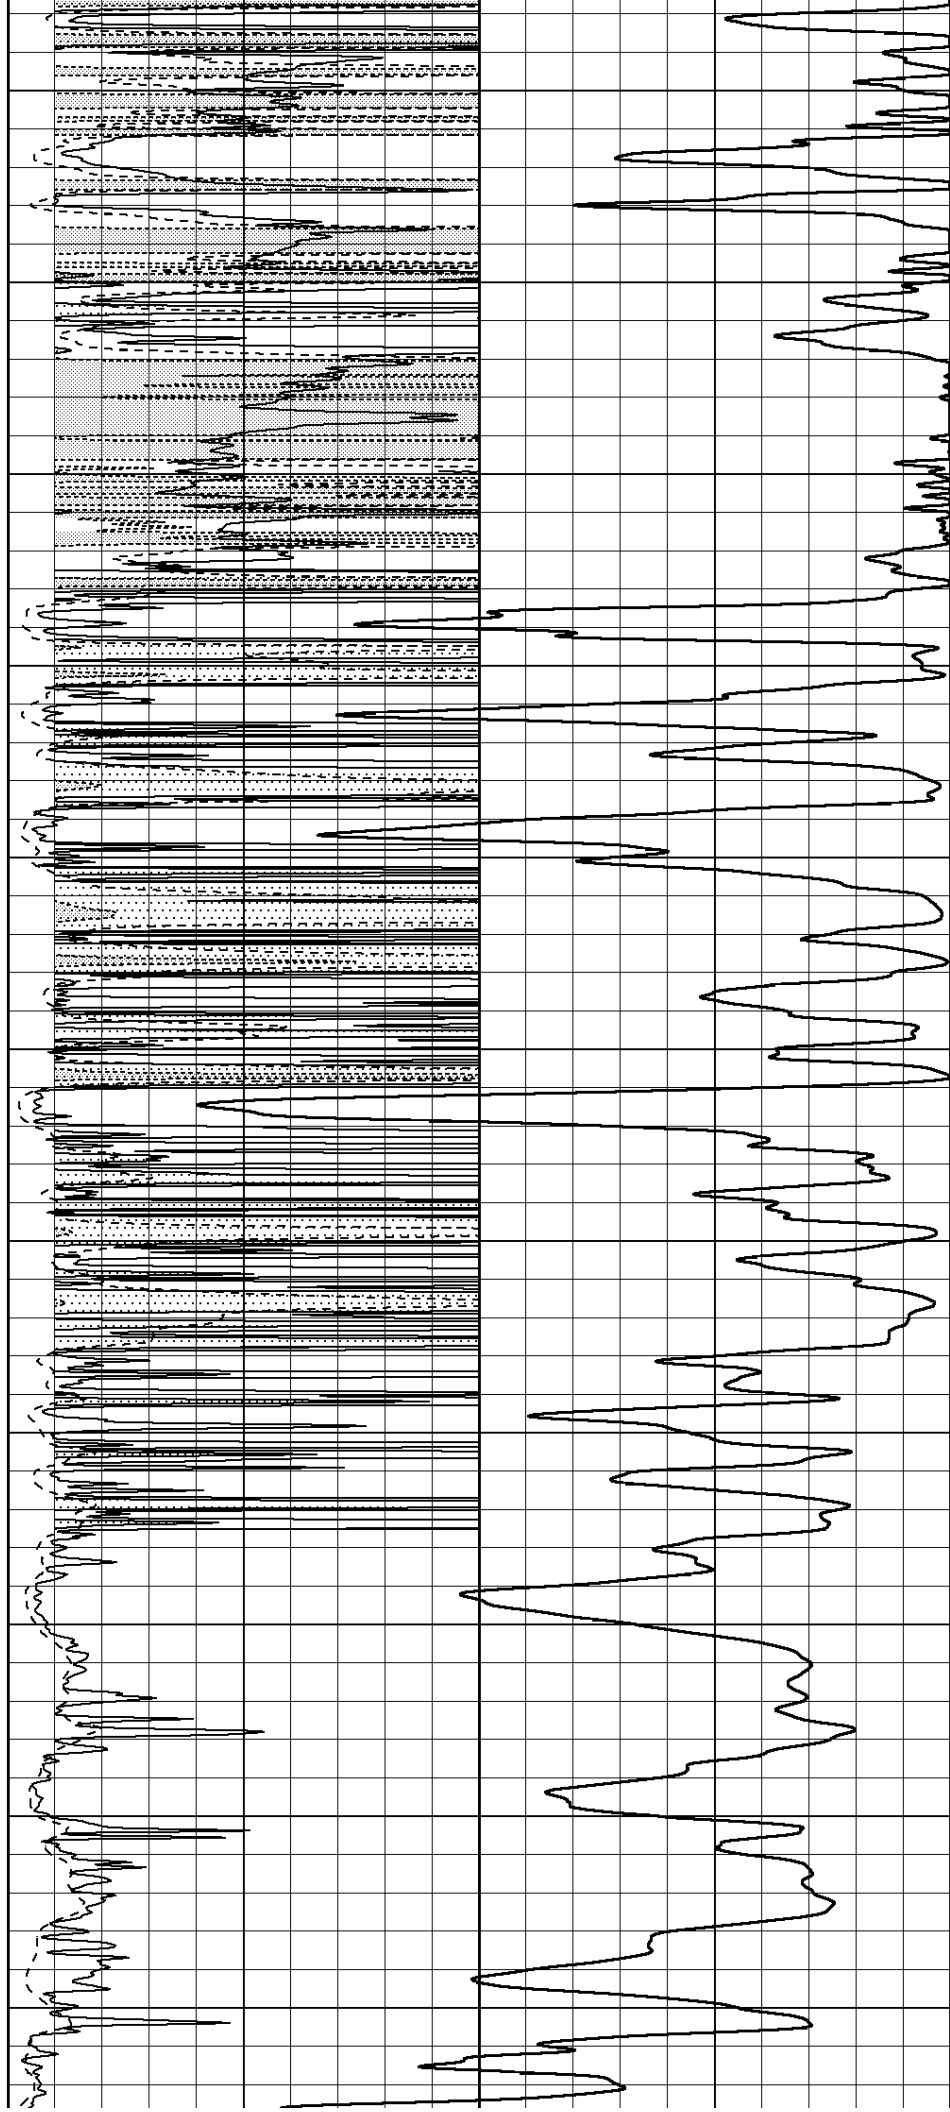

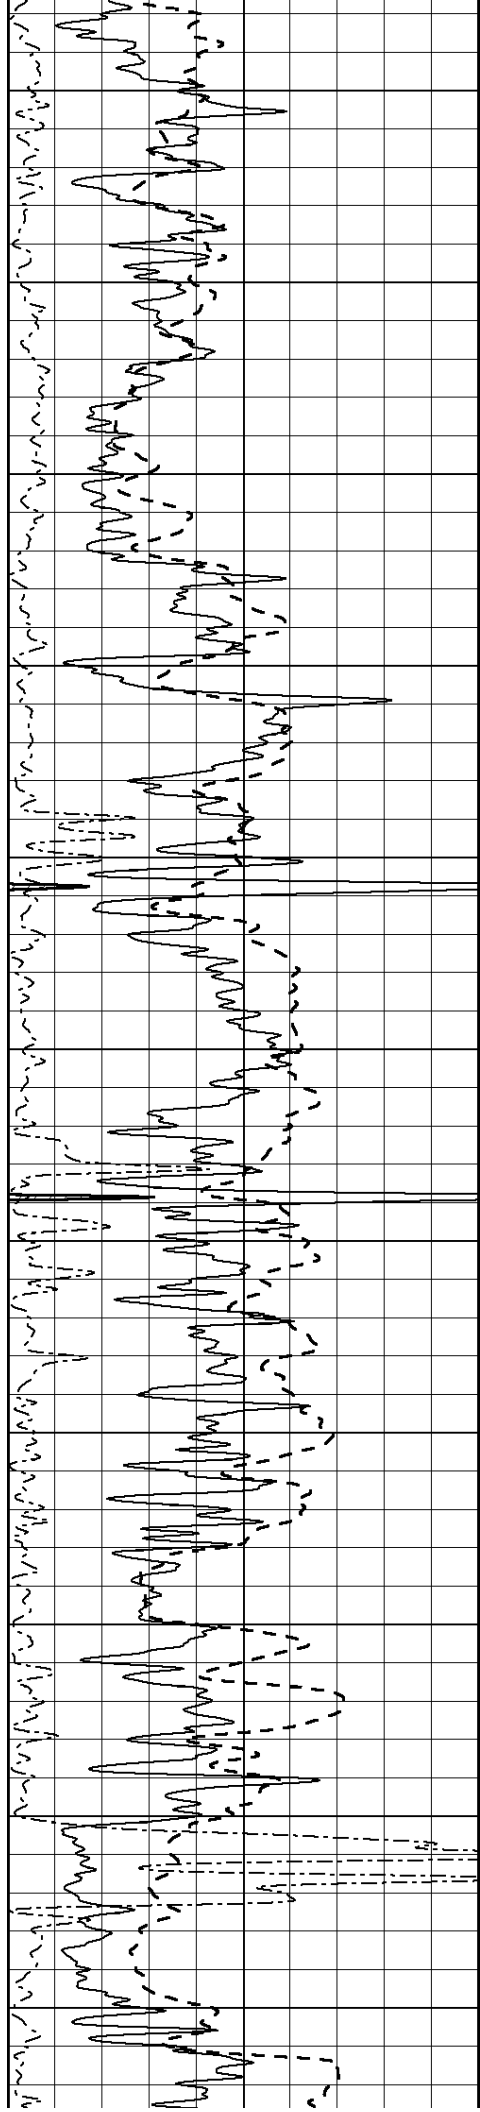

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

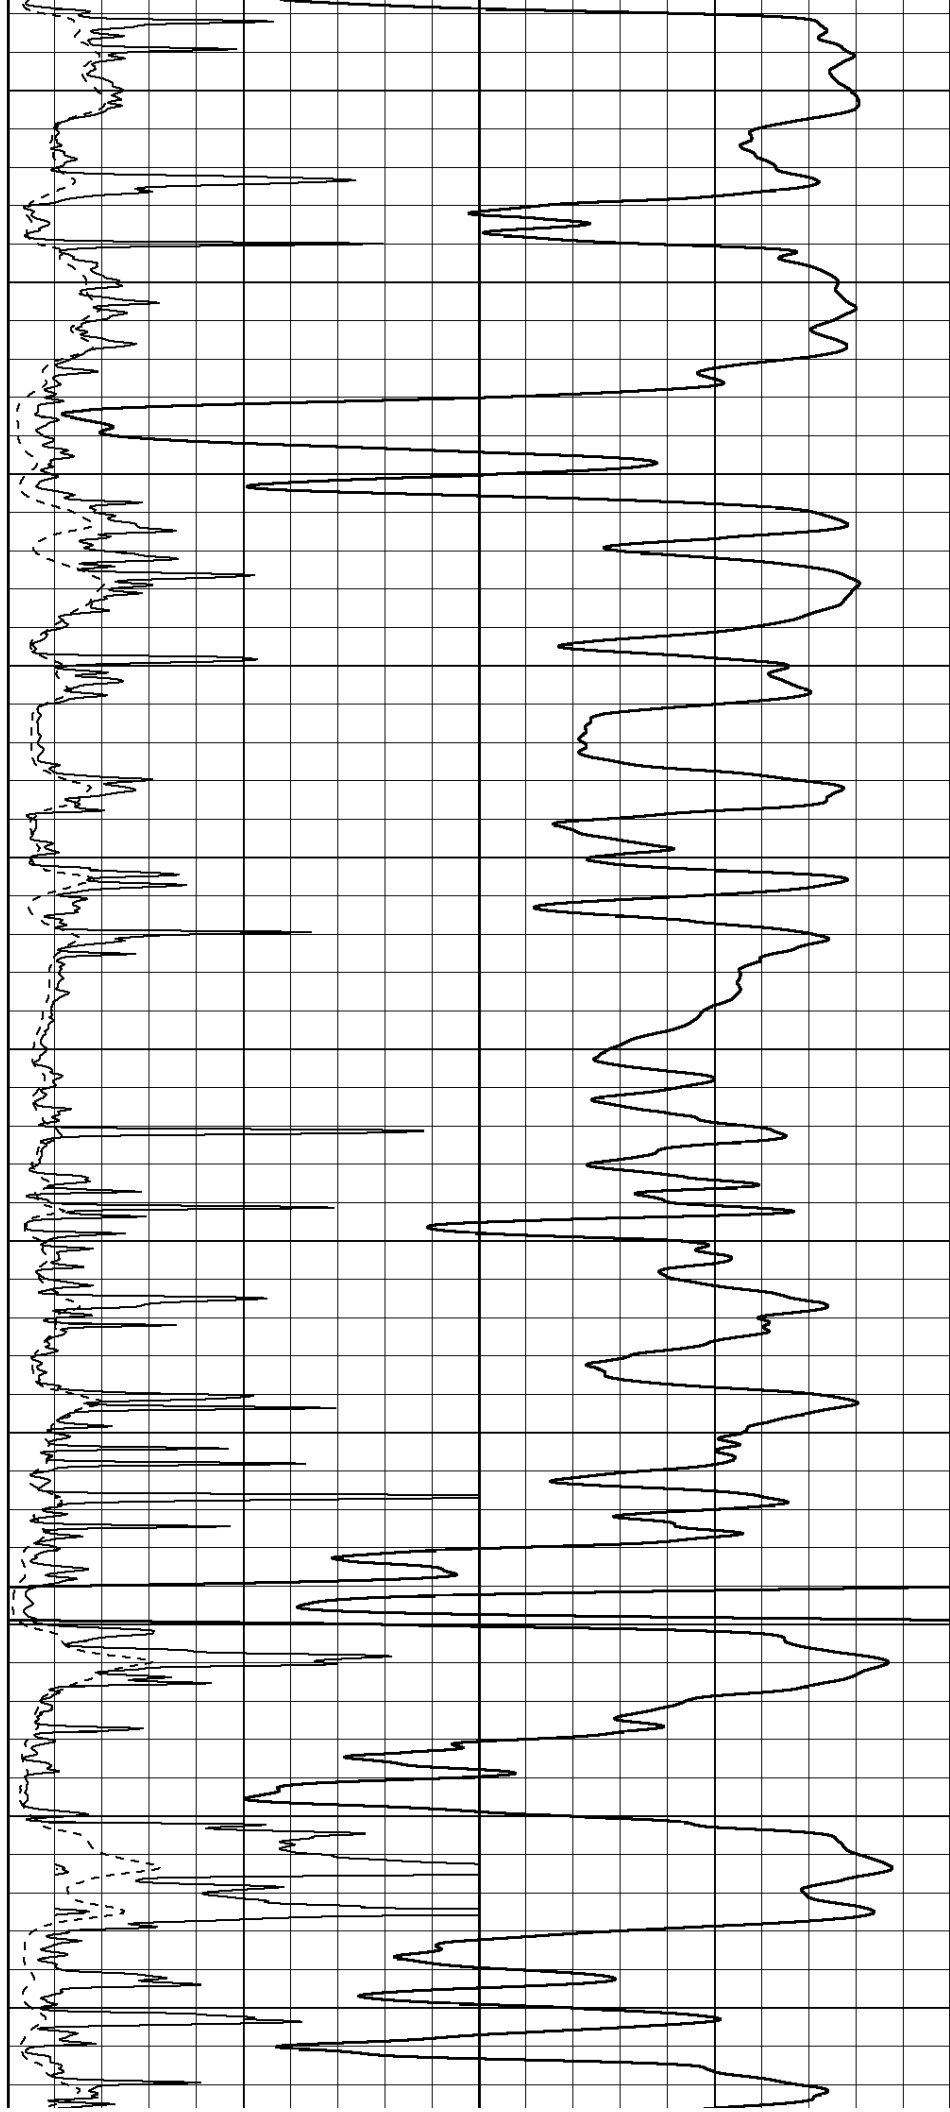

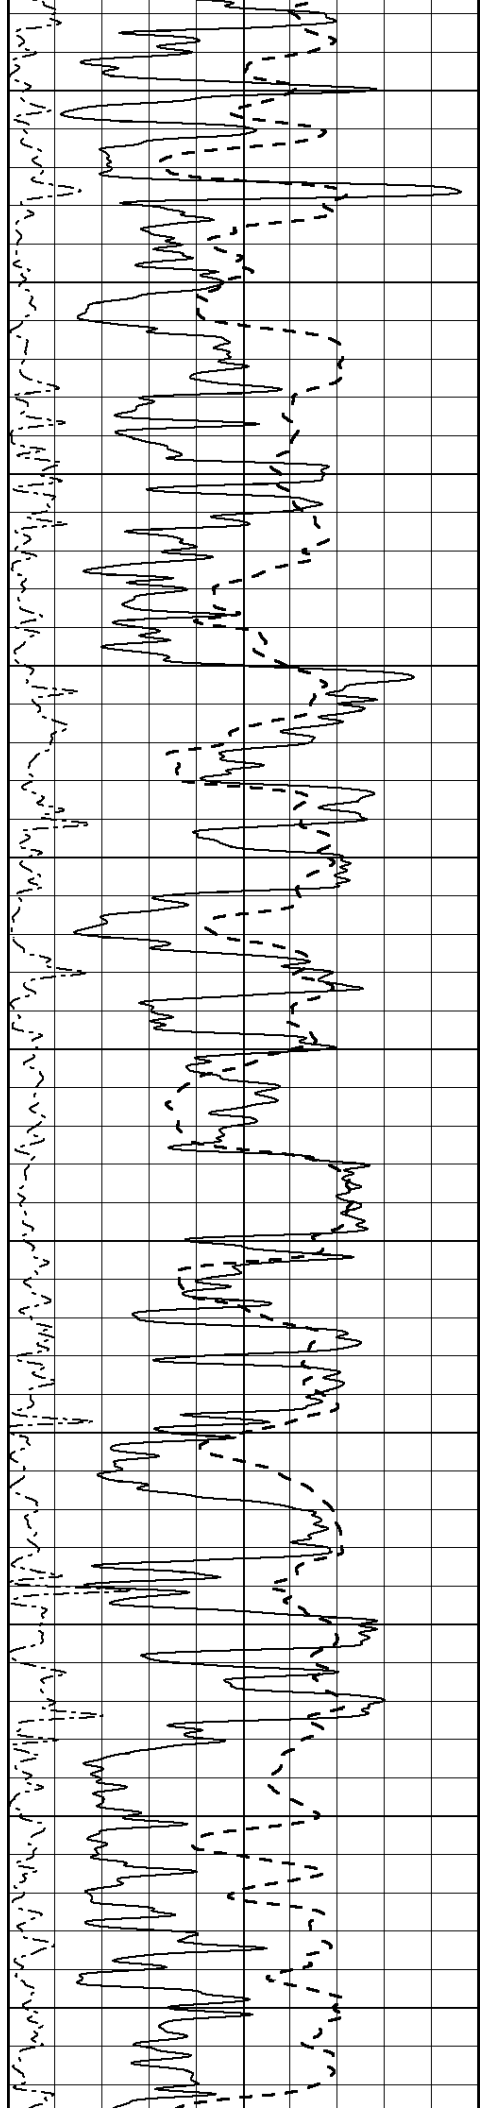

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

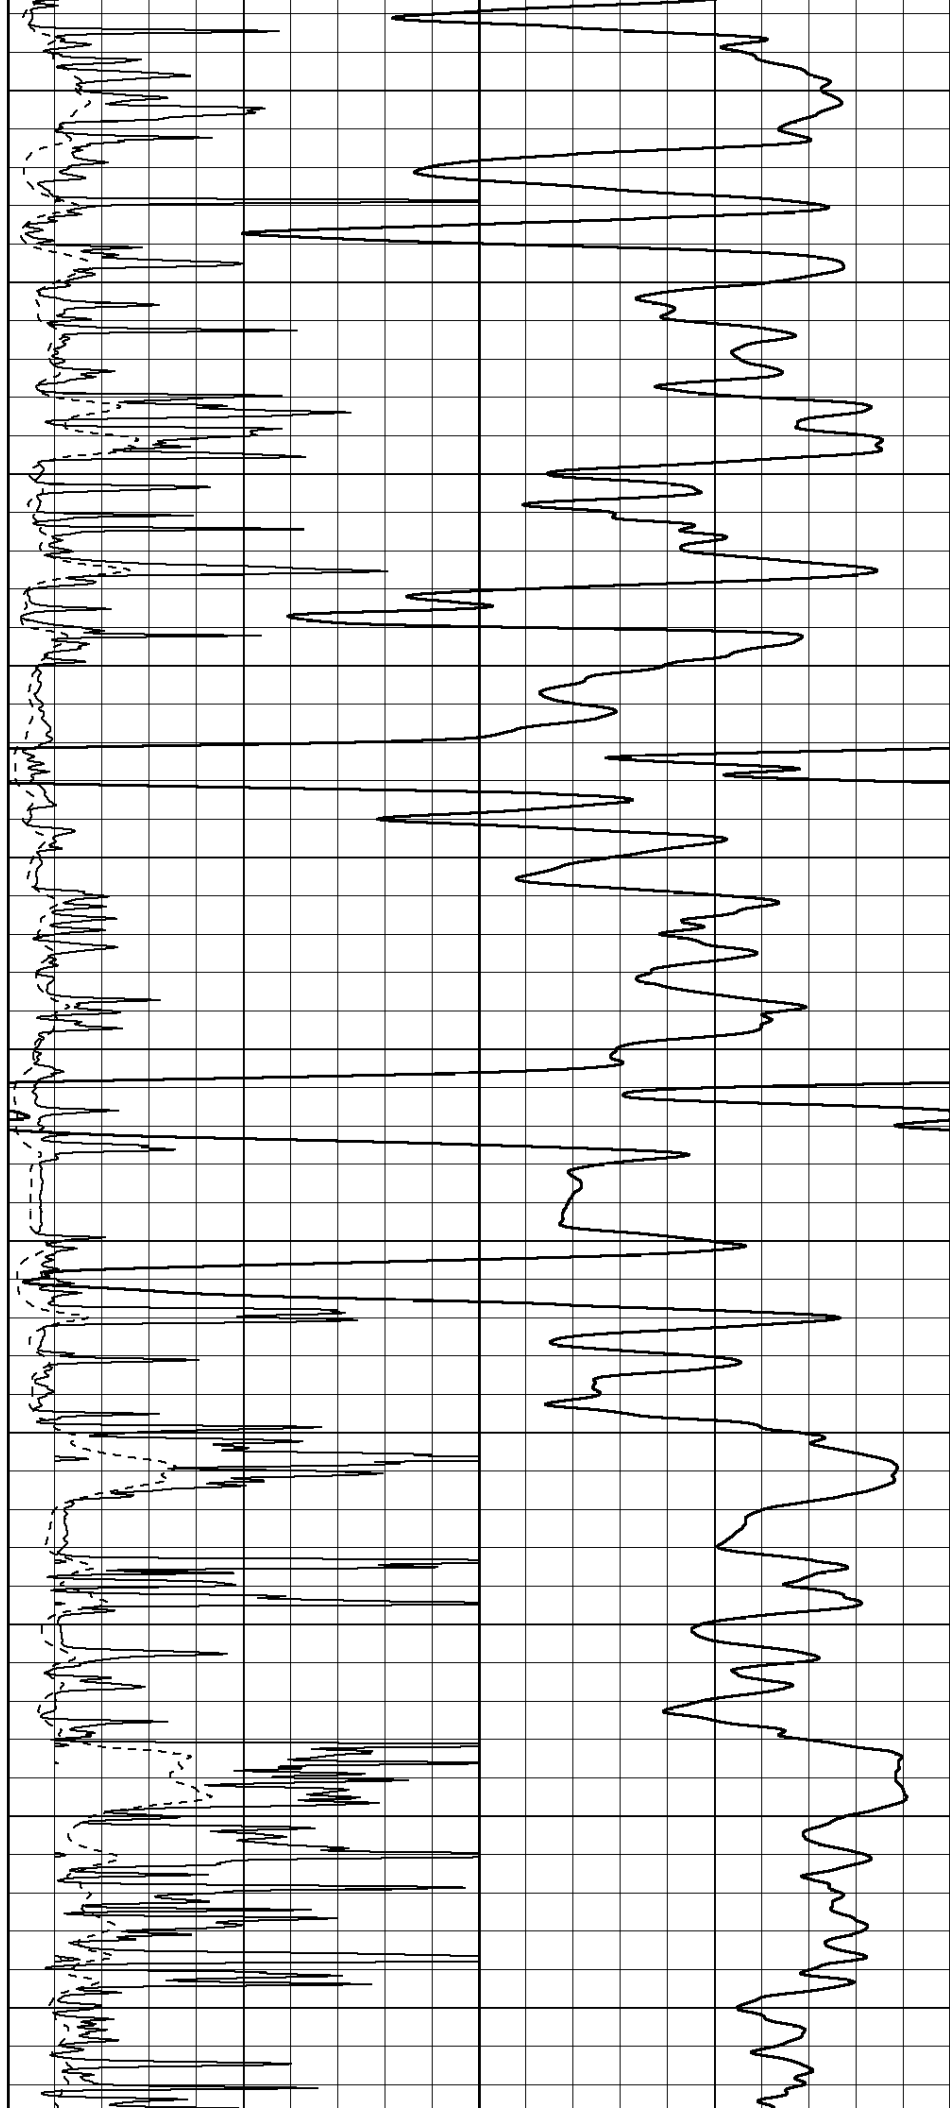

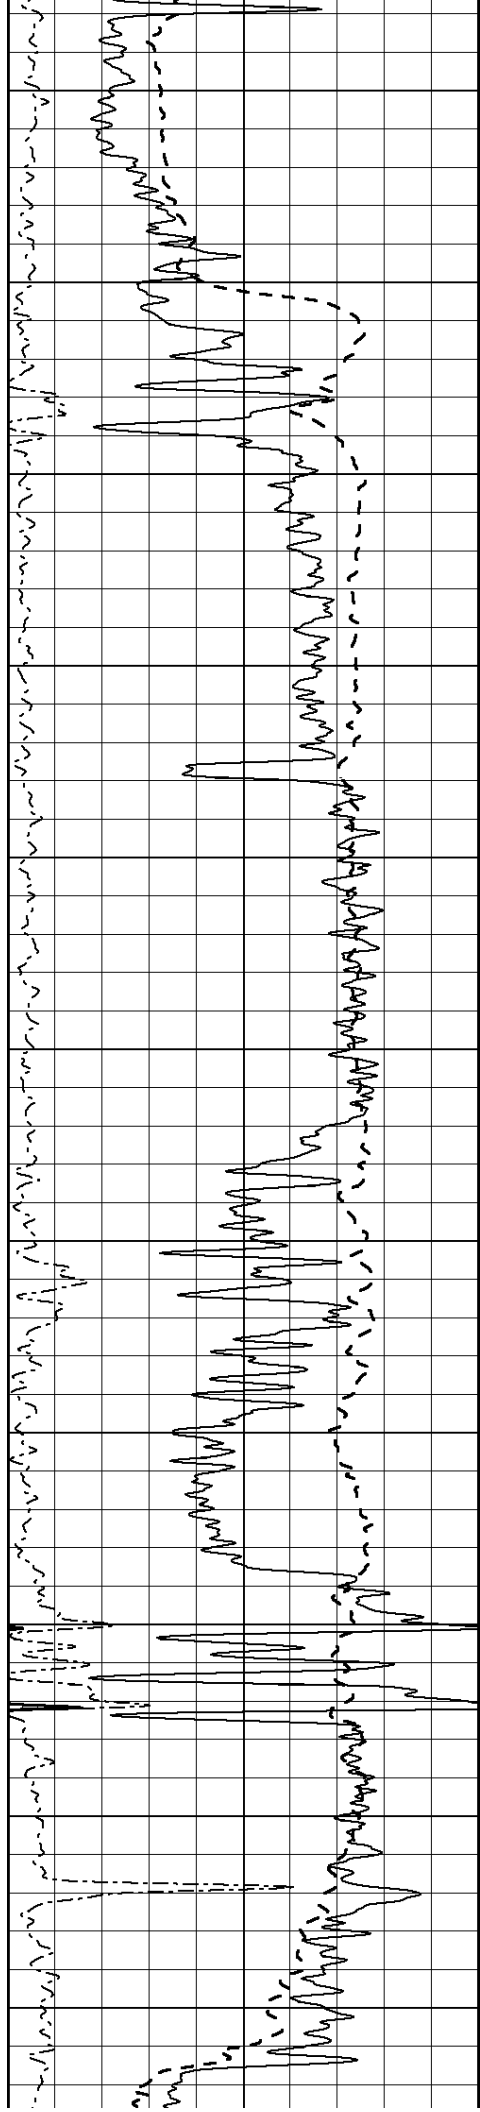

3200

3250

3300

3350

3400

3450


3500

3550

3600

3650

3700

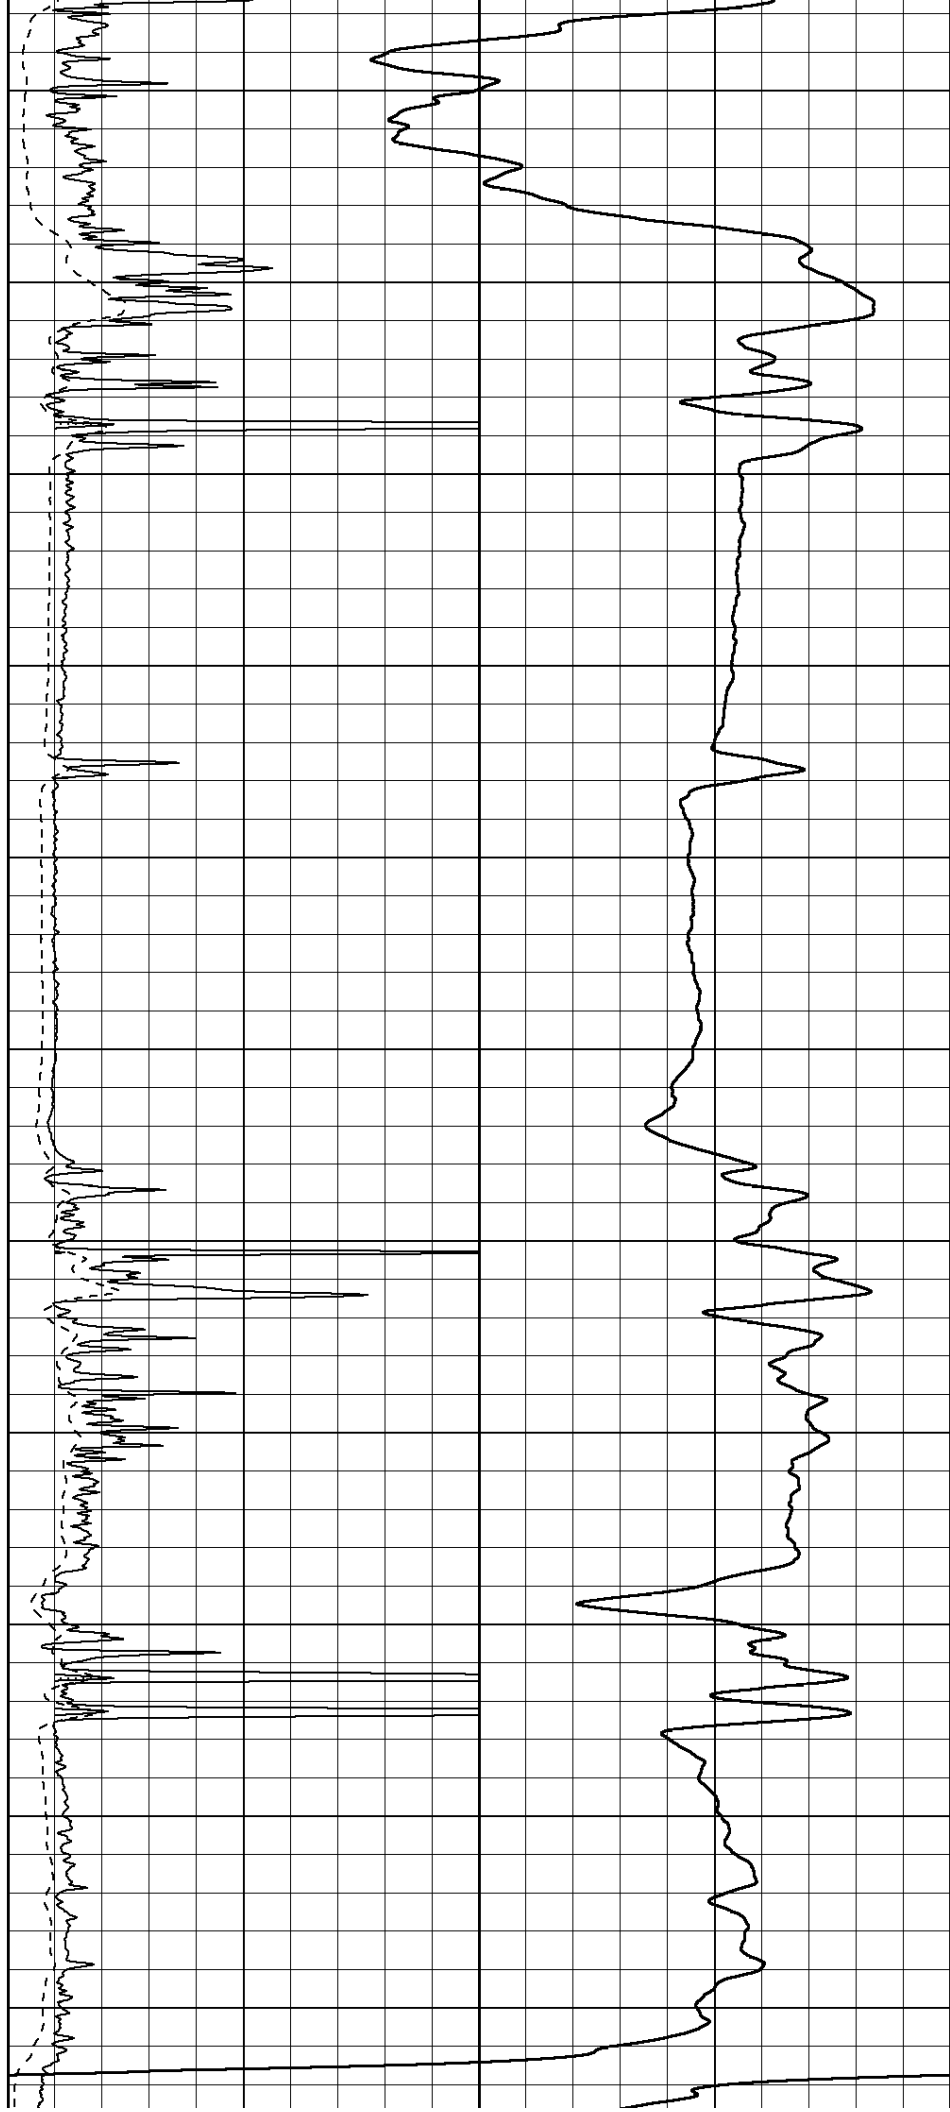

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

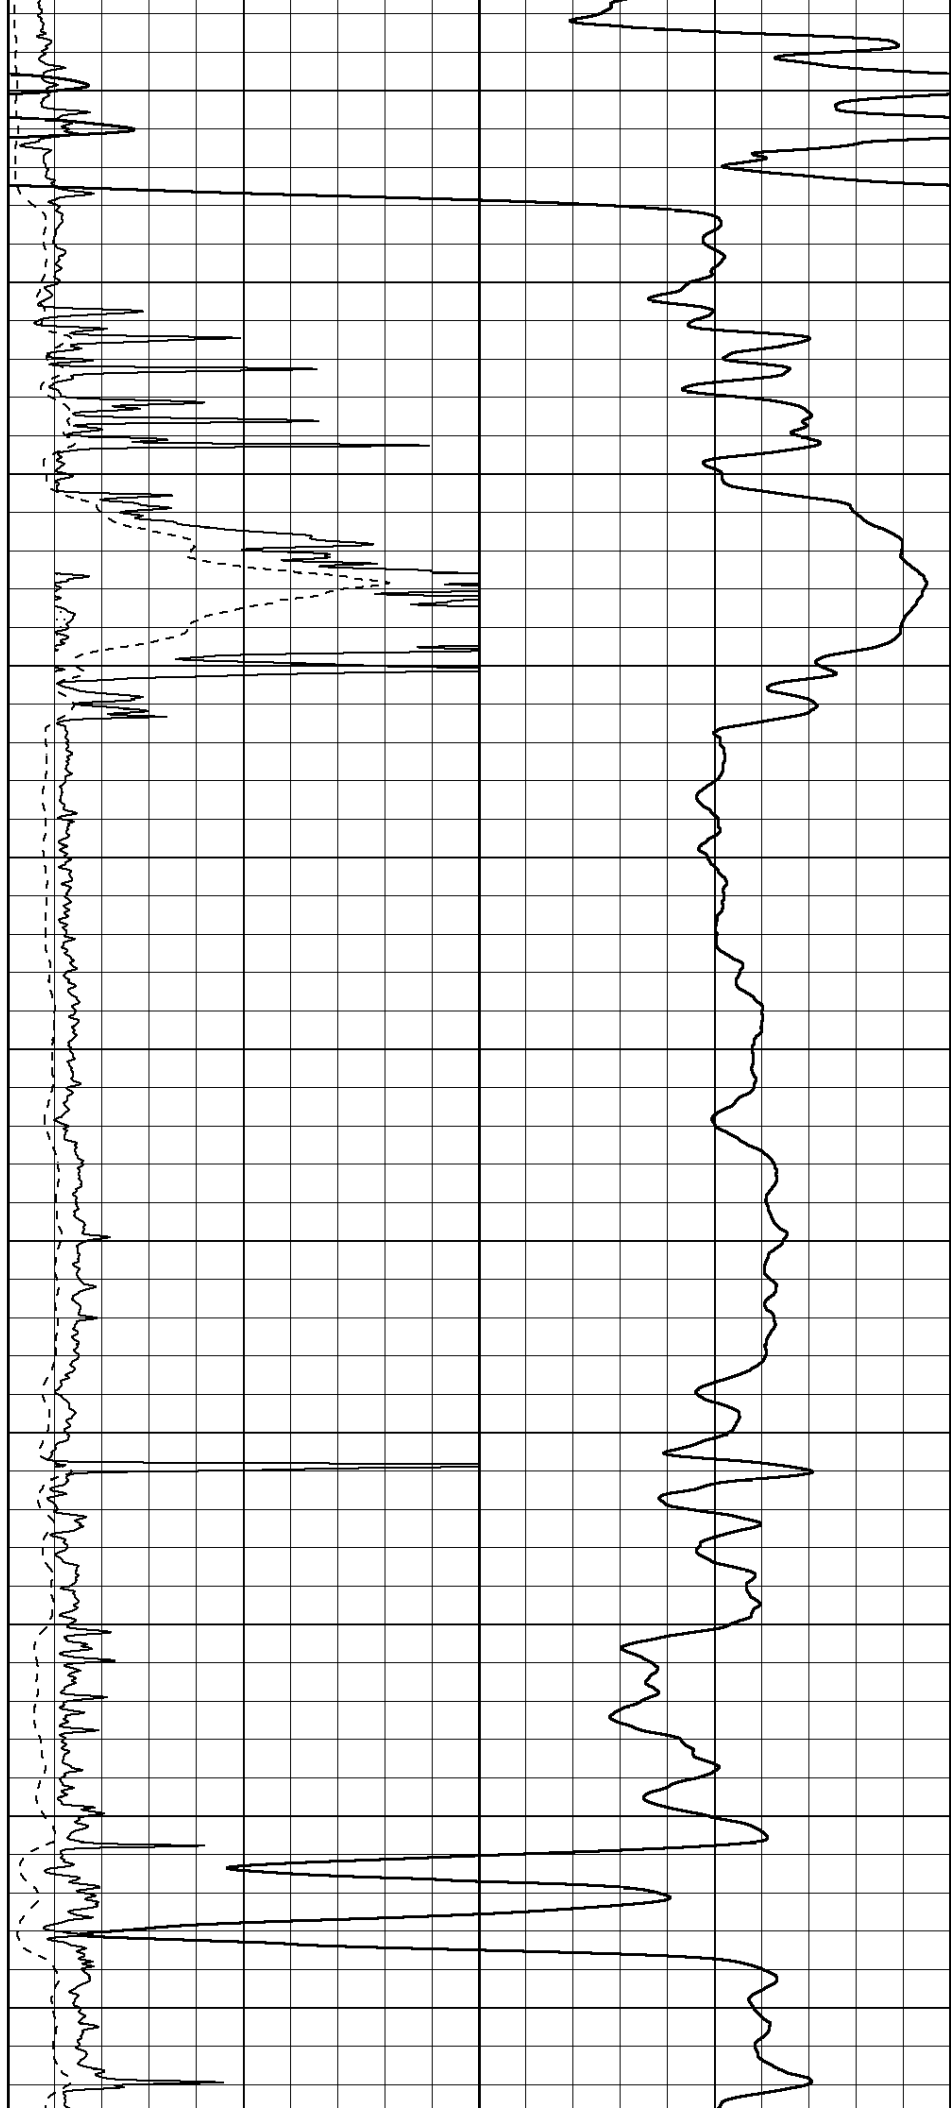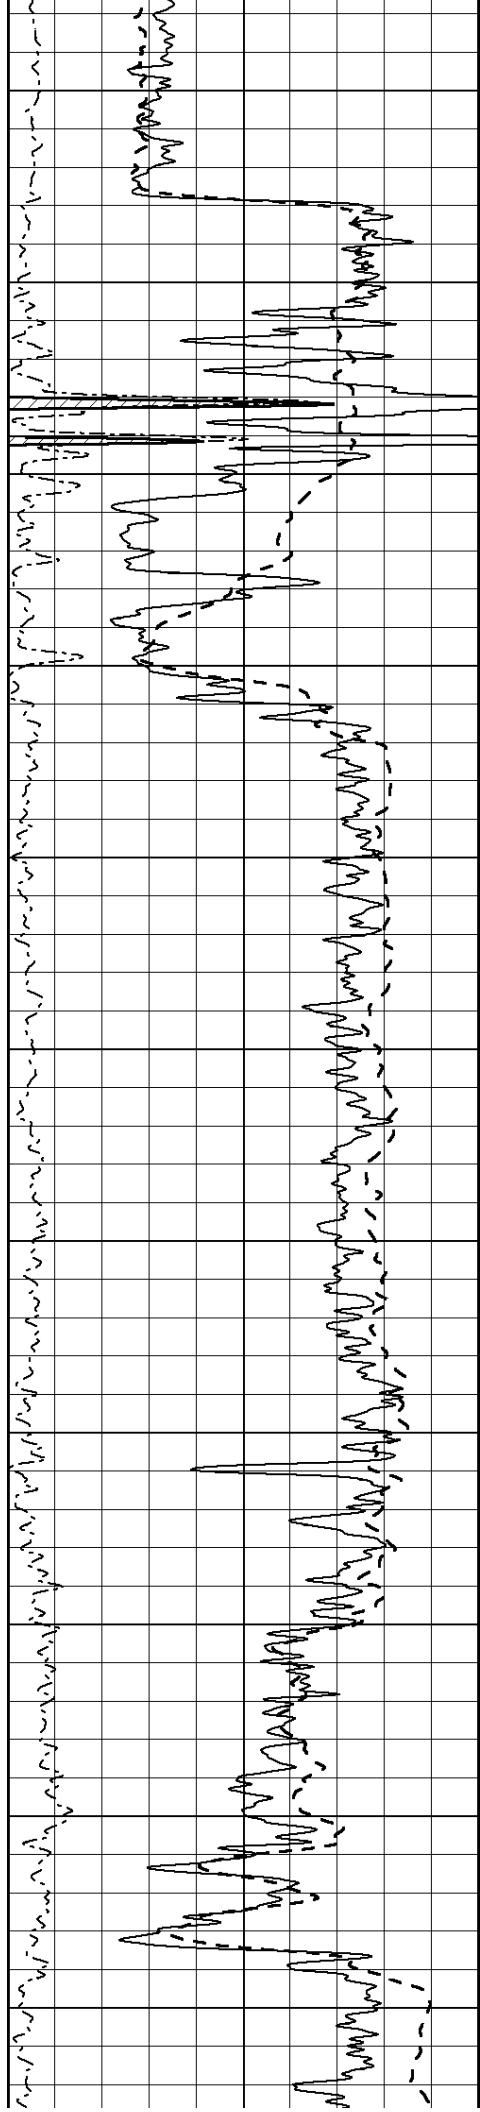

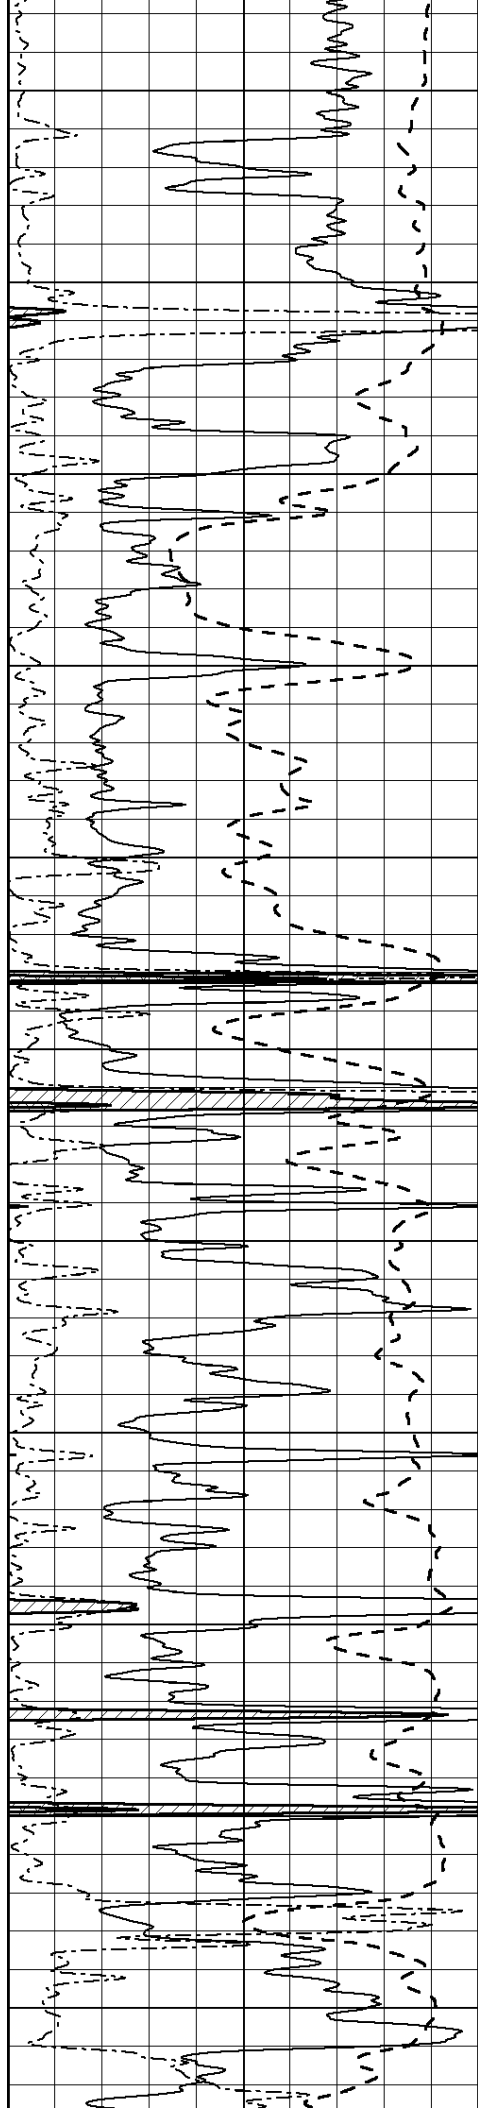

4300

4350

4400

4450

4500

4550



4600


4650

4700


4750

4800

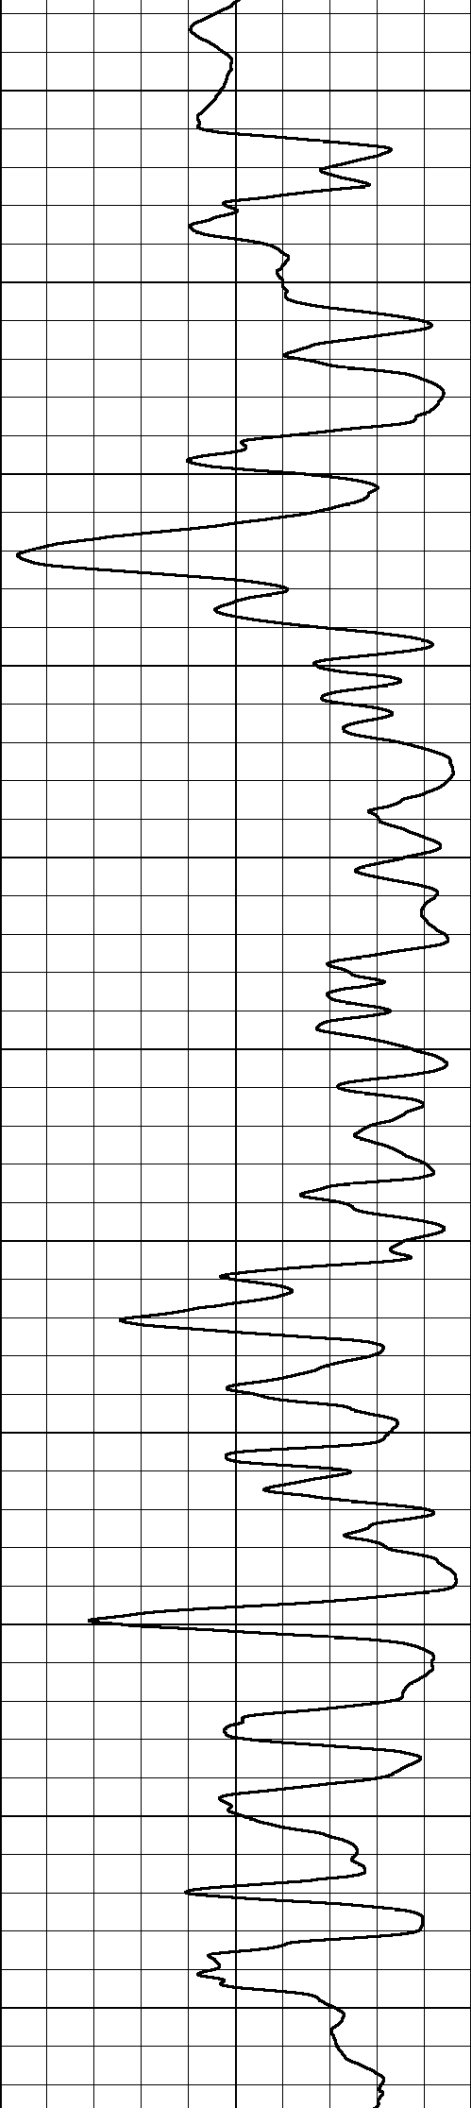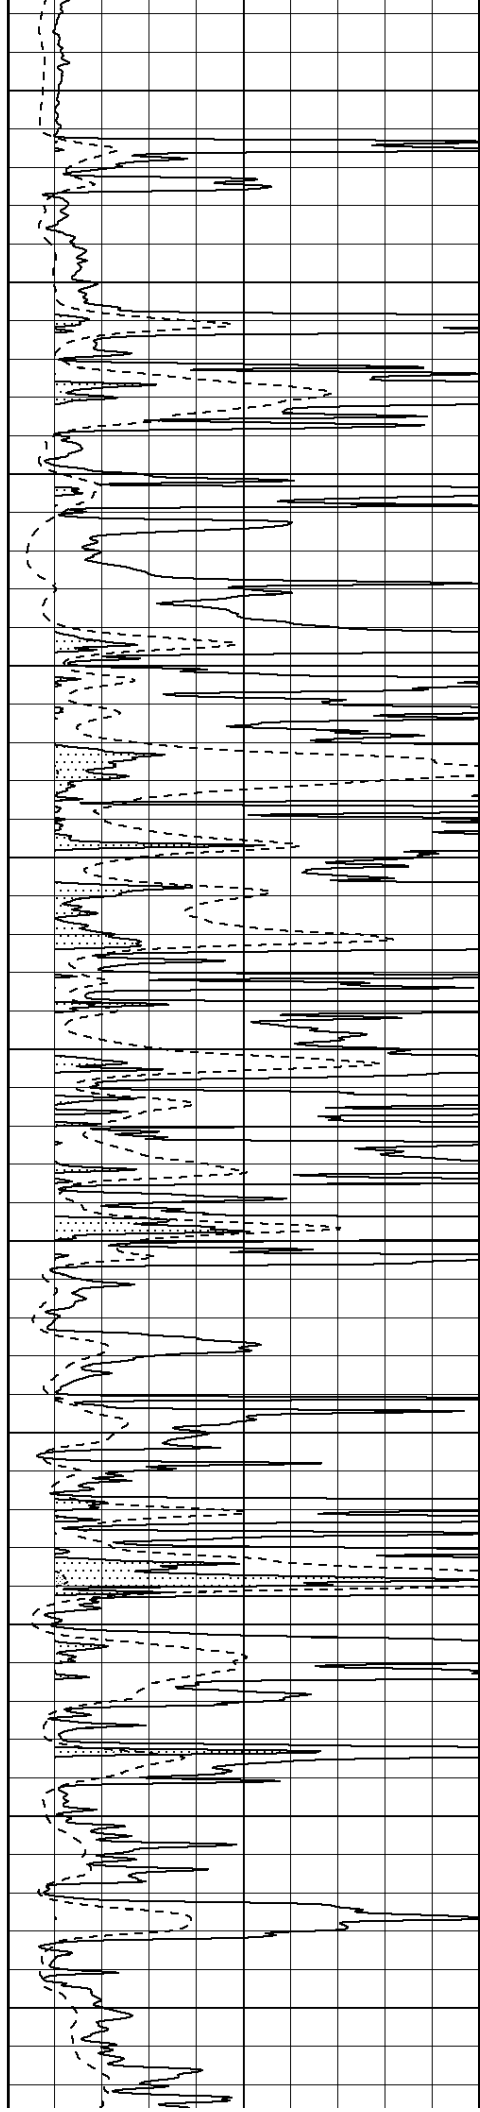

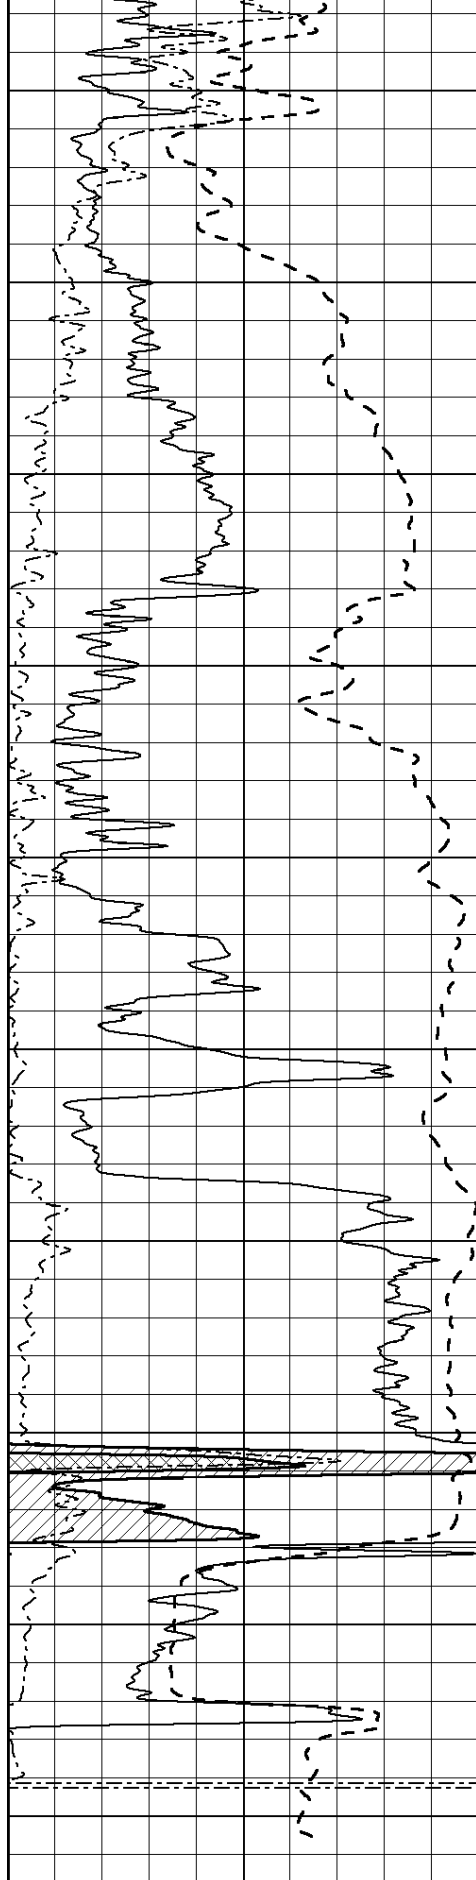


0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

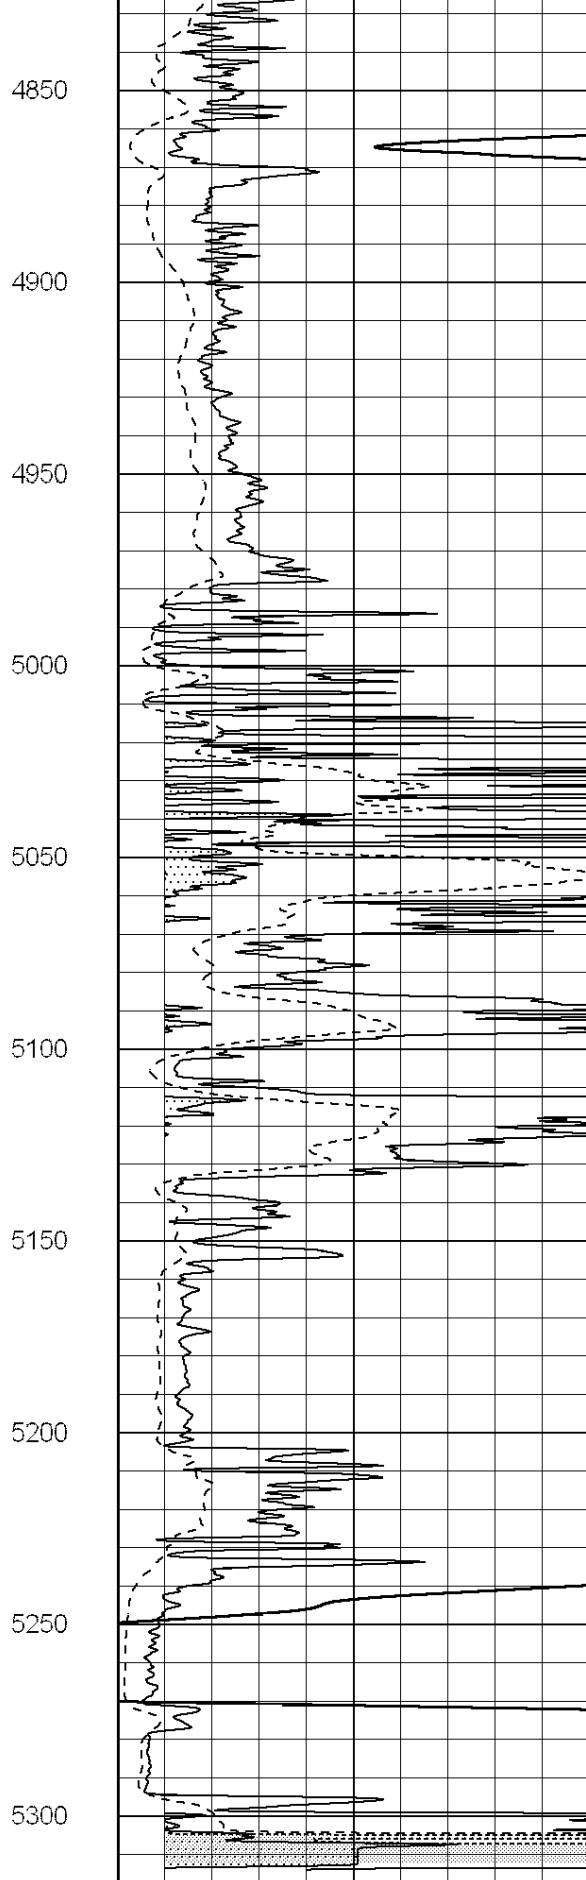


0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

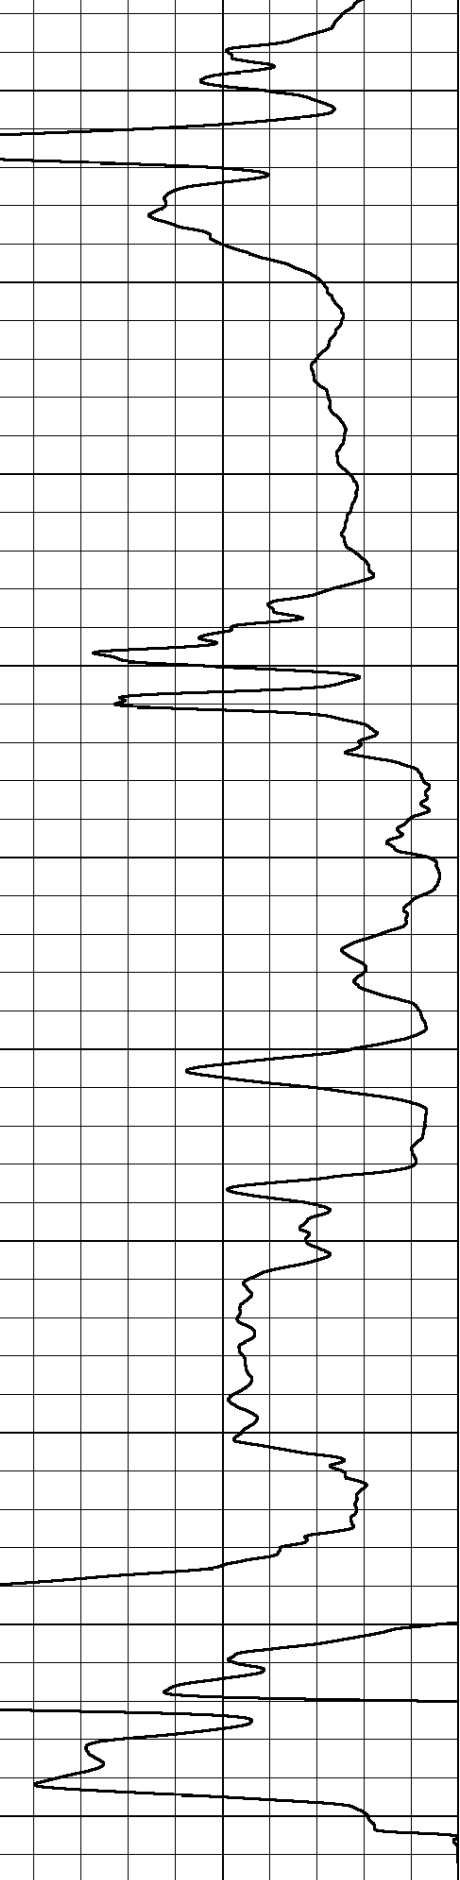

0		0
---	--	---

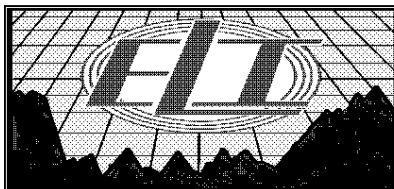


MAIN SECTION

Database File: 3070pe.db
Dataset Pathname: pass3.3
Presentation Format: _dil
Dataset Creation: Thu Dec 06 07:33:14 2018
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

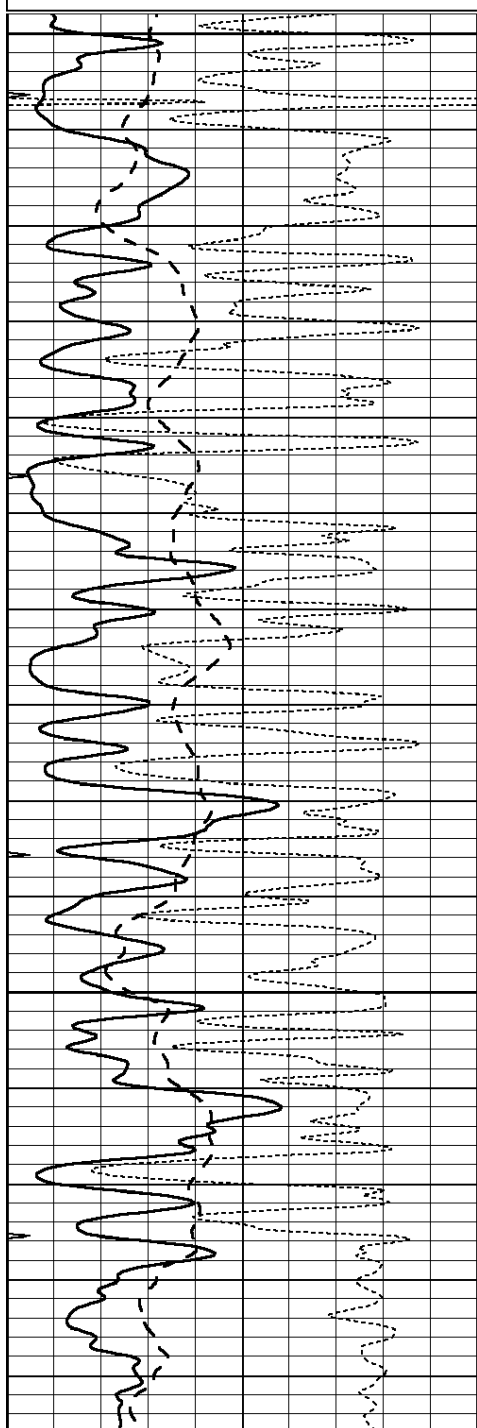


1800

1850

1900

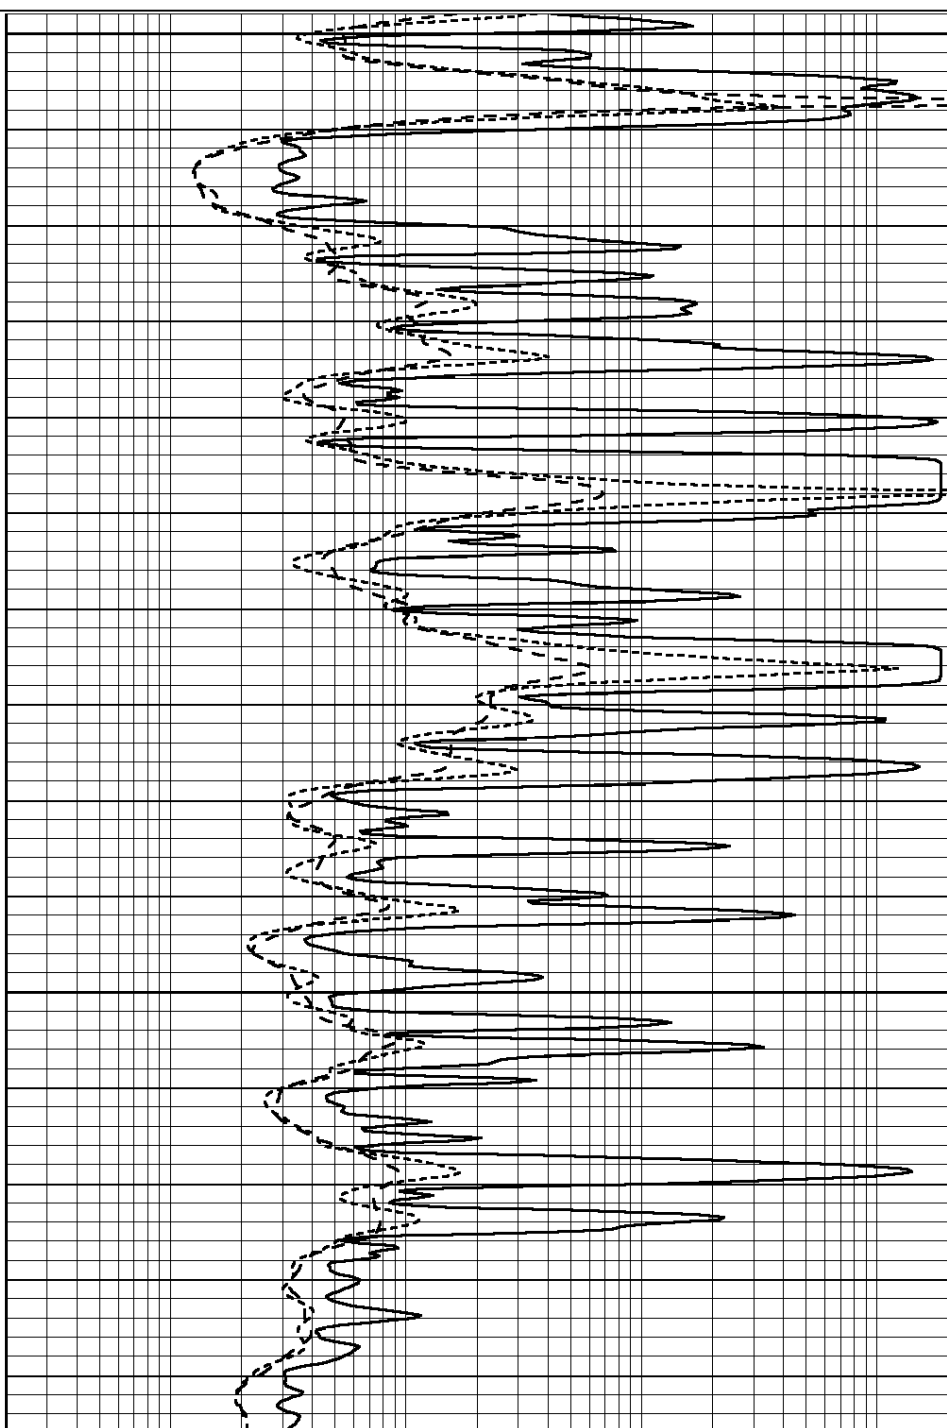

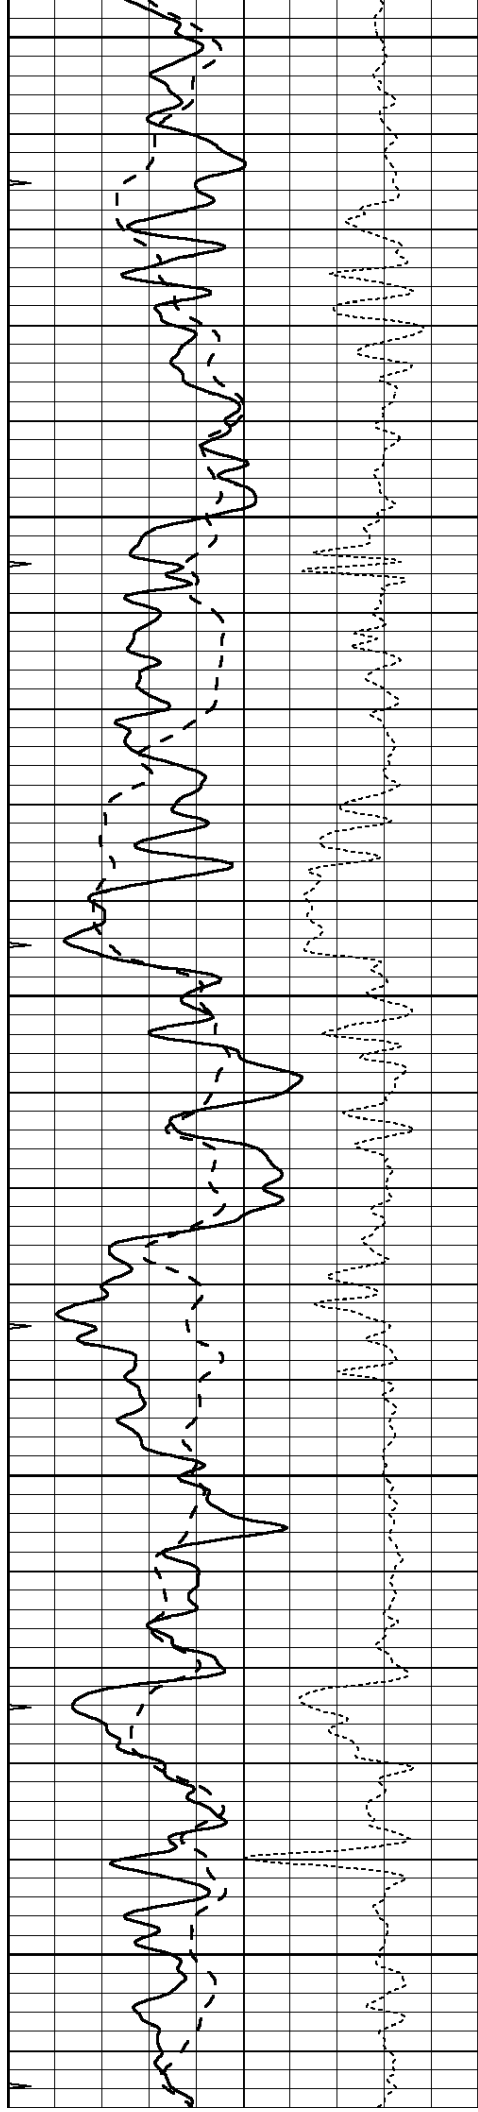


1950


2000

2050

2100

2150

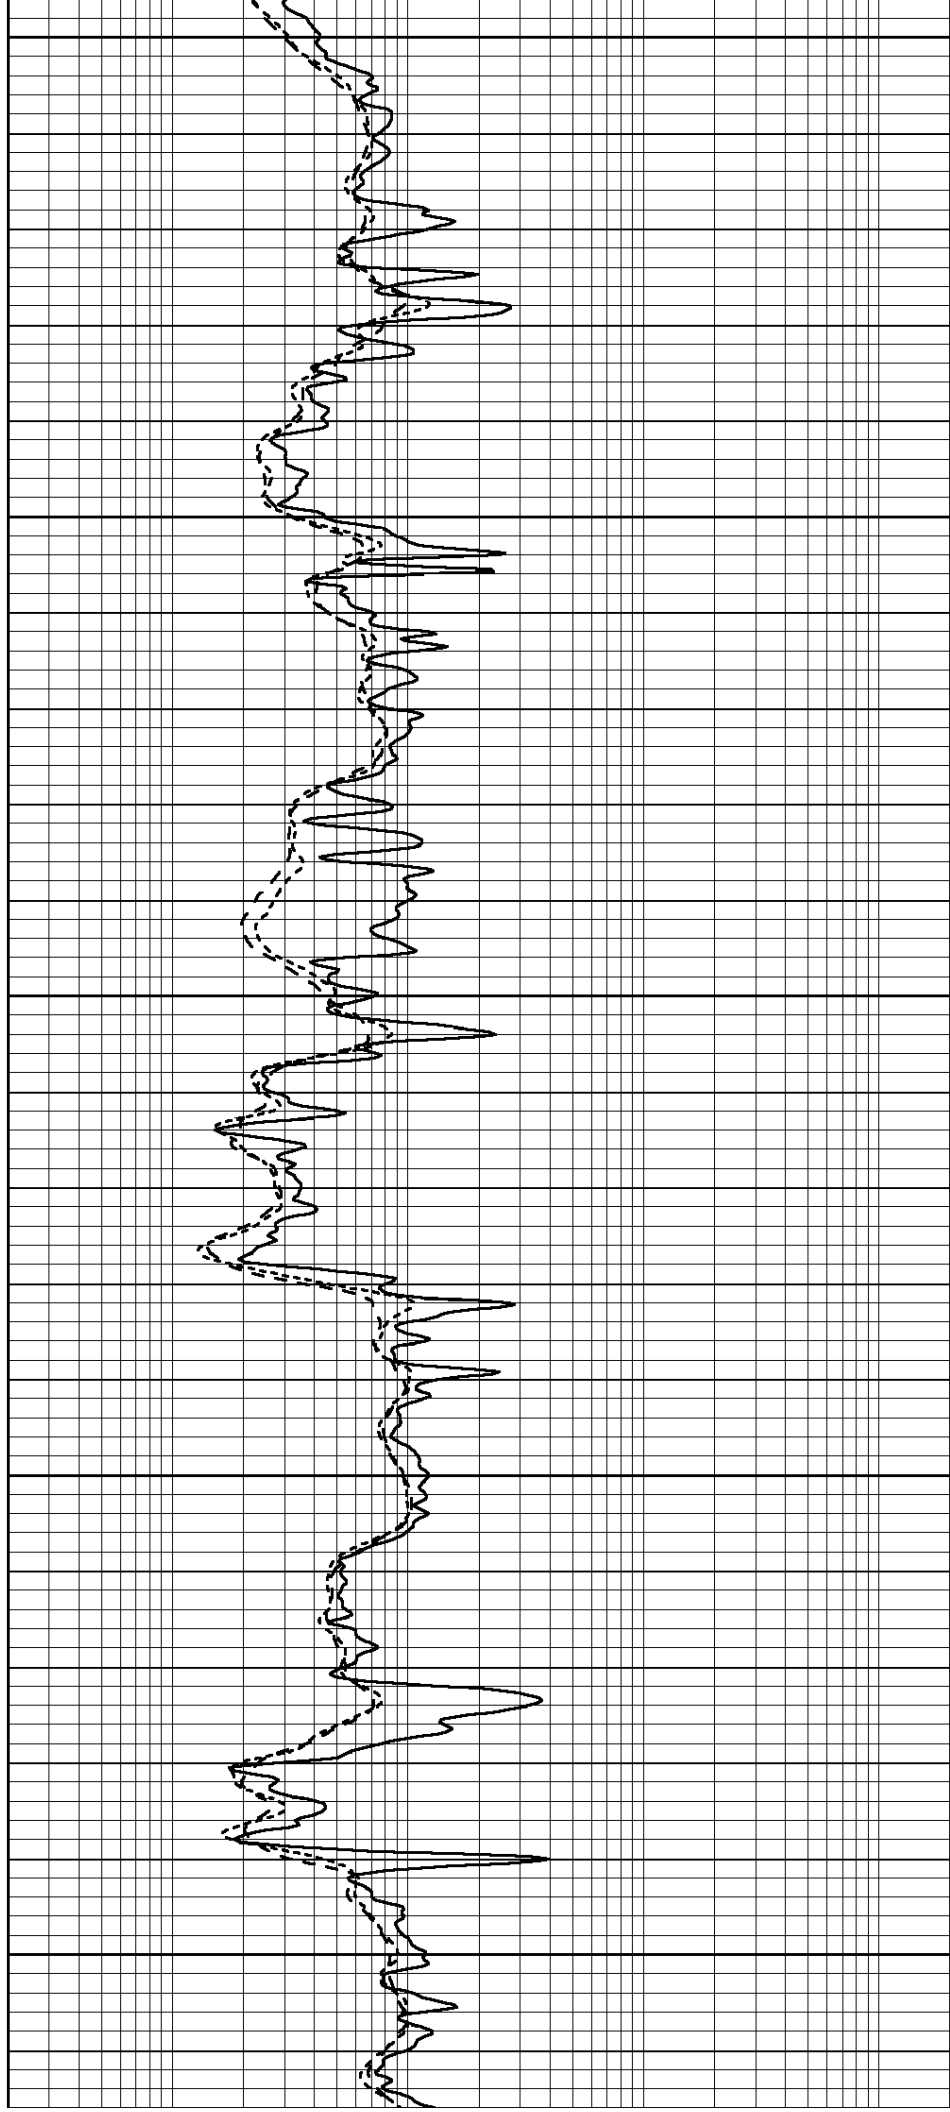

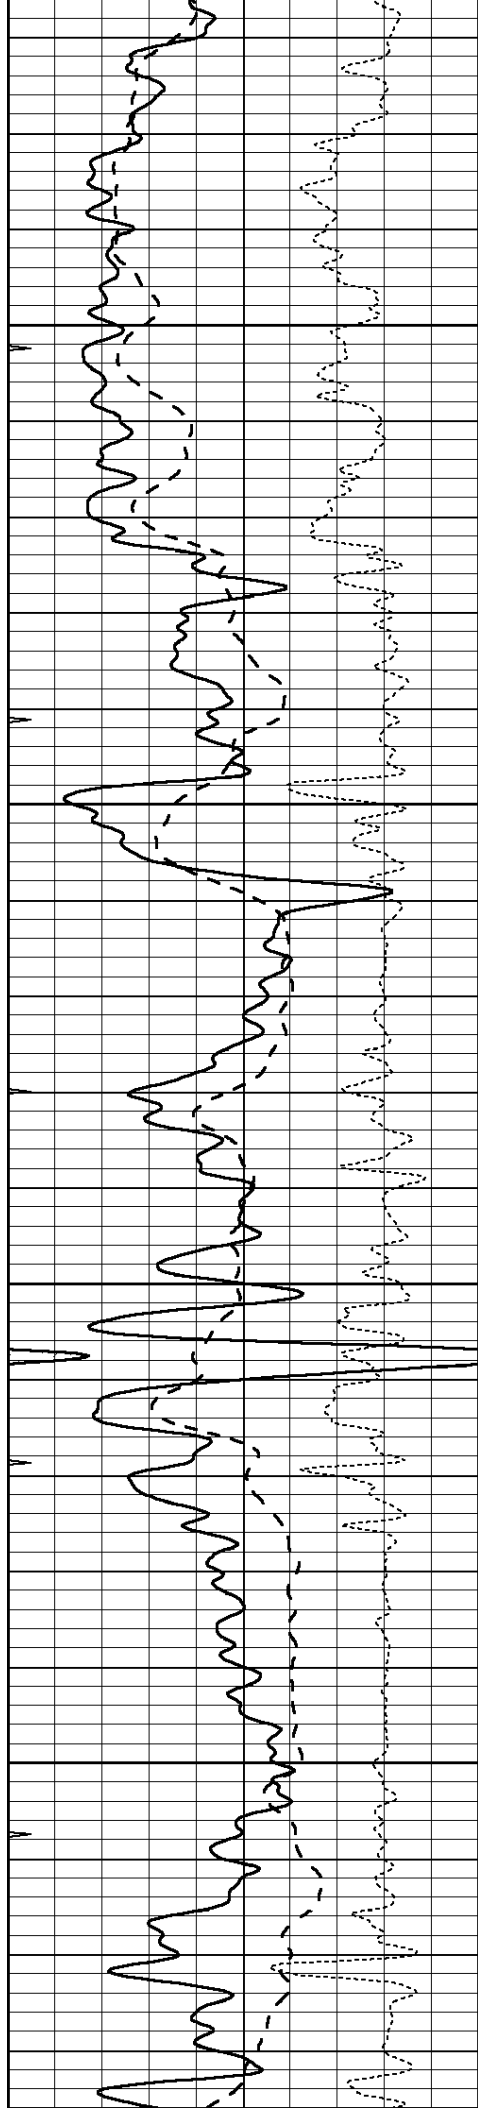



2200

2250

2300

2350

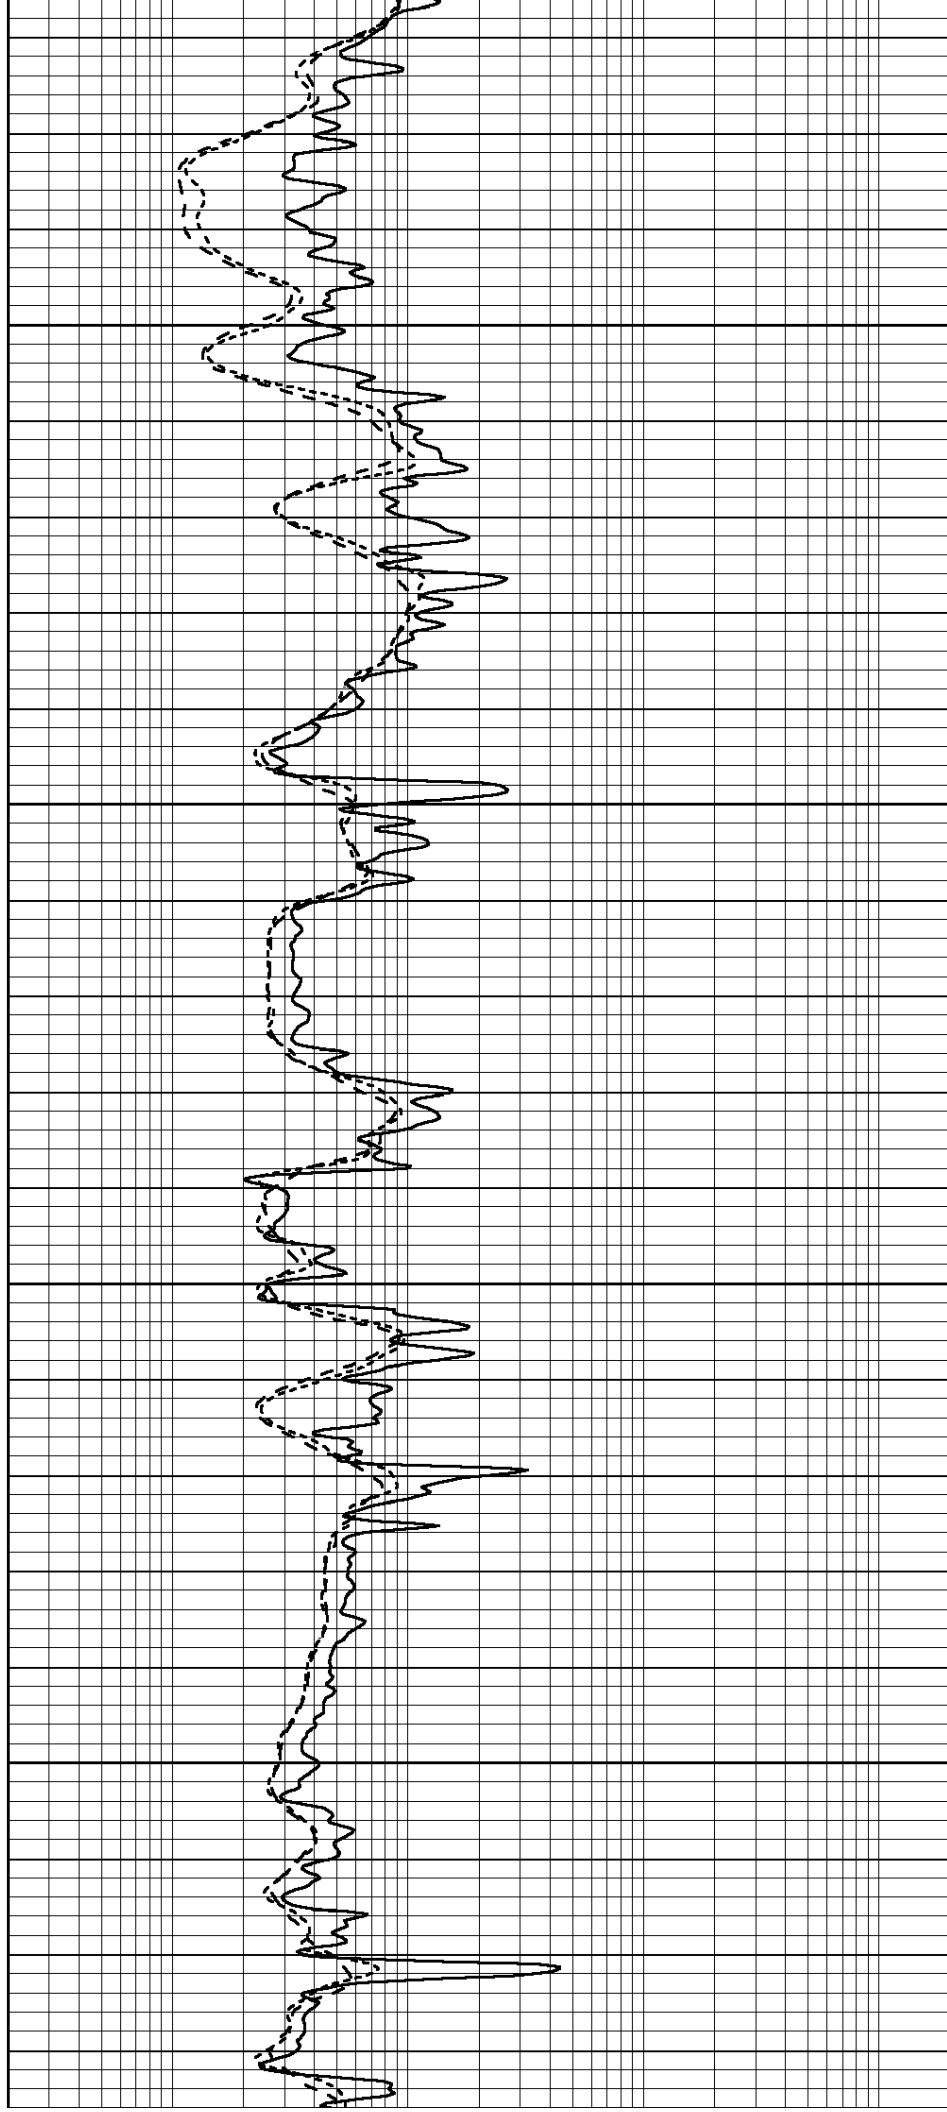

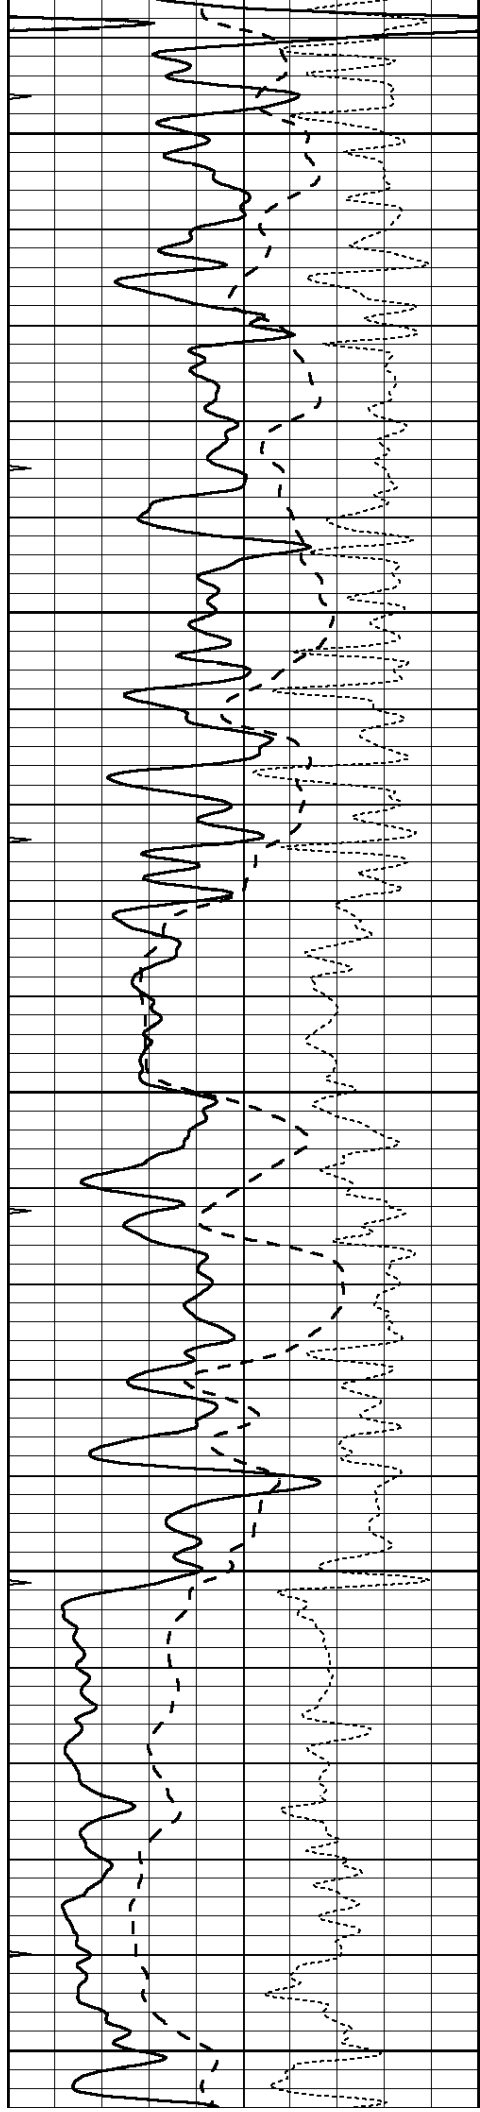


2400


2450

2500

2550

2600

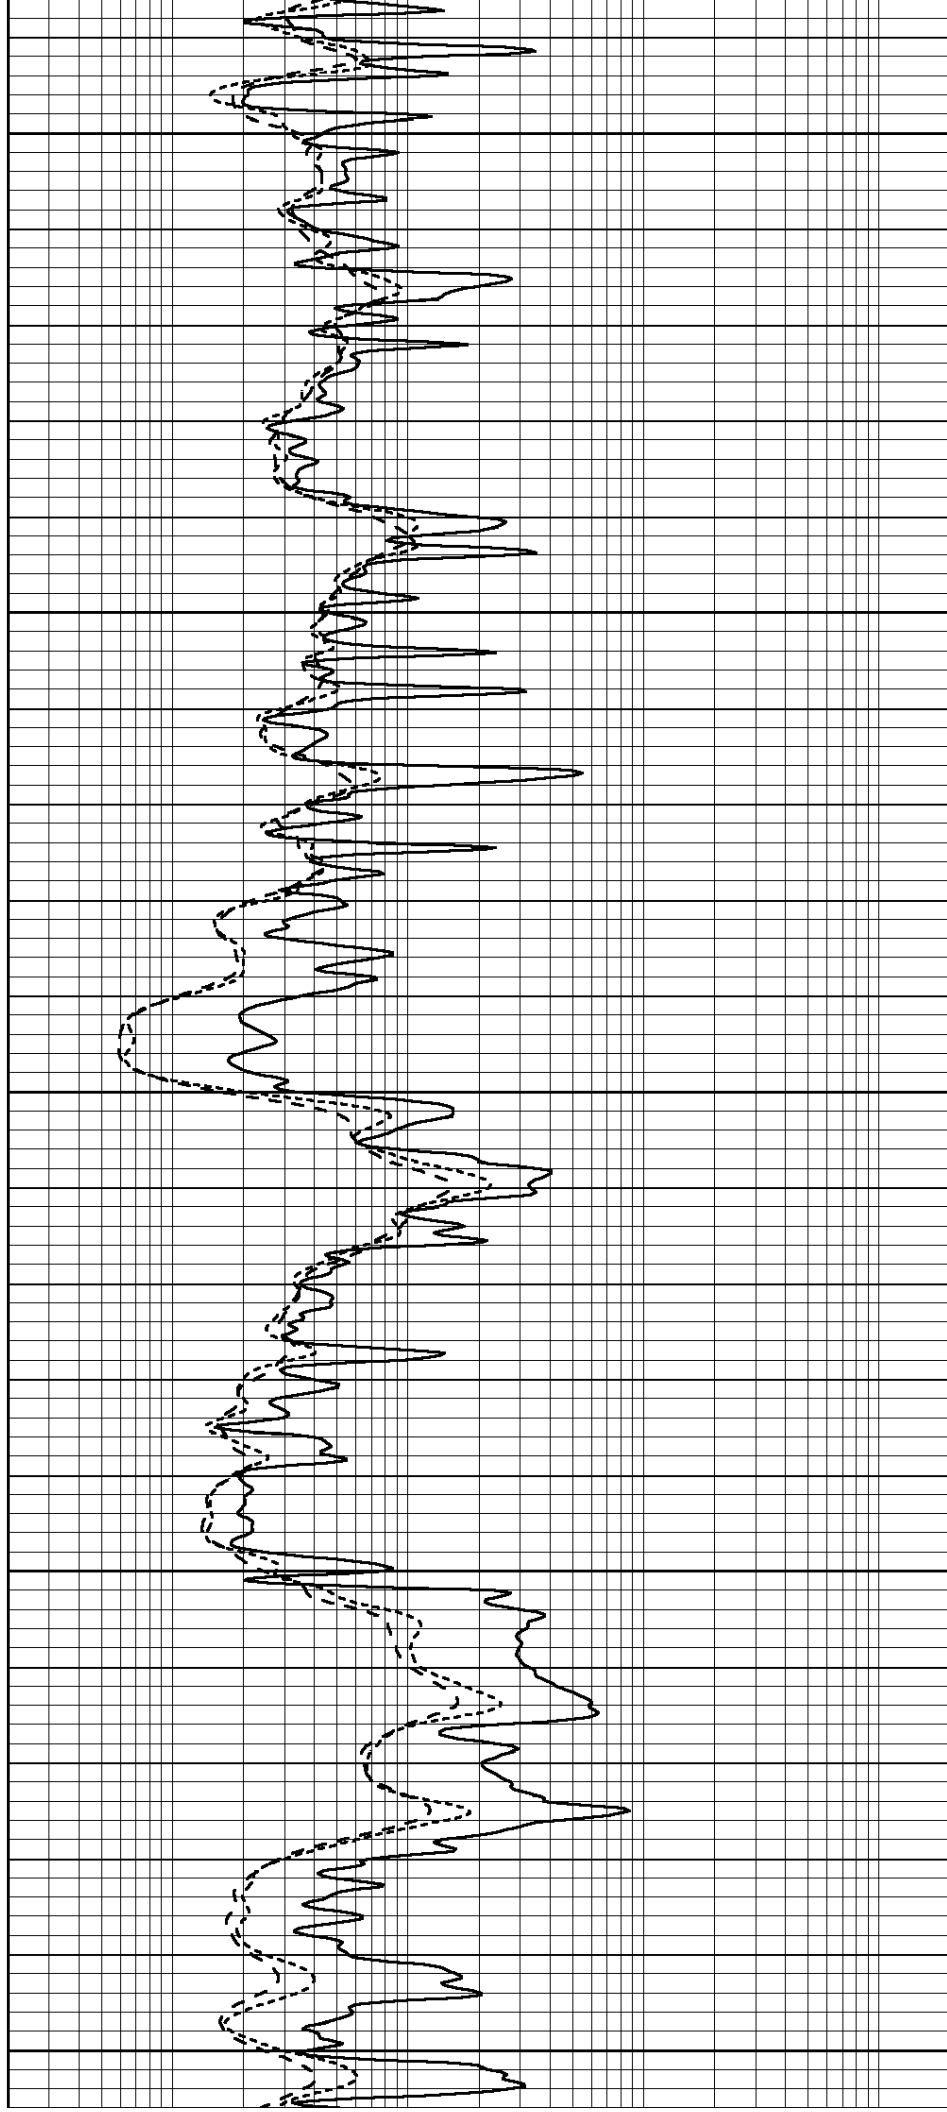

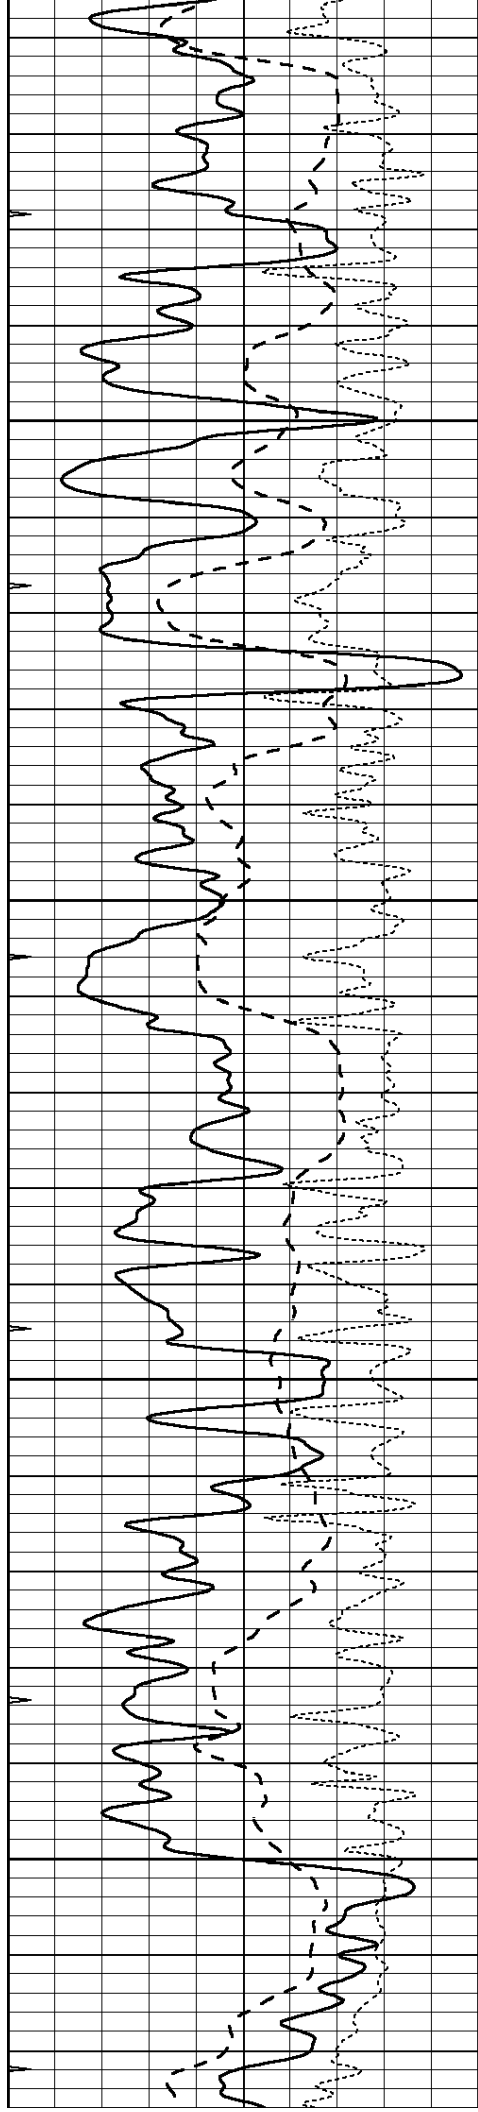



2650

2700

2750

2800

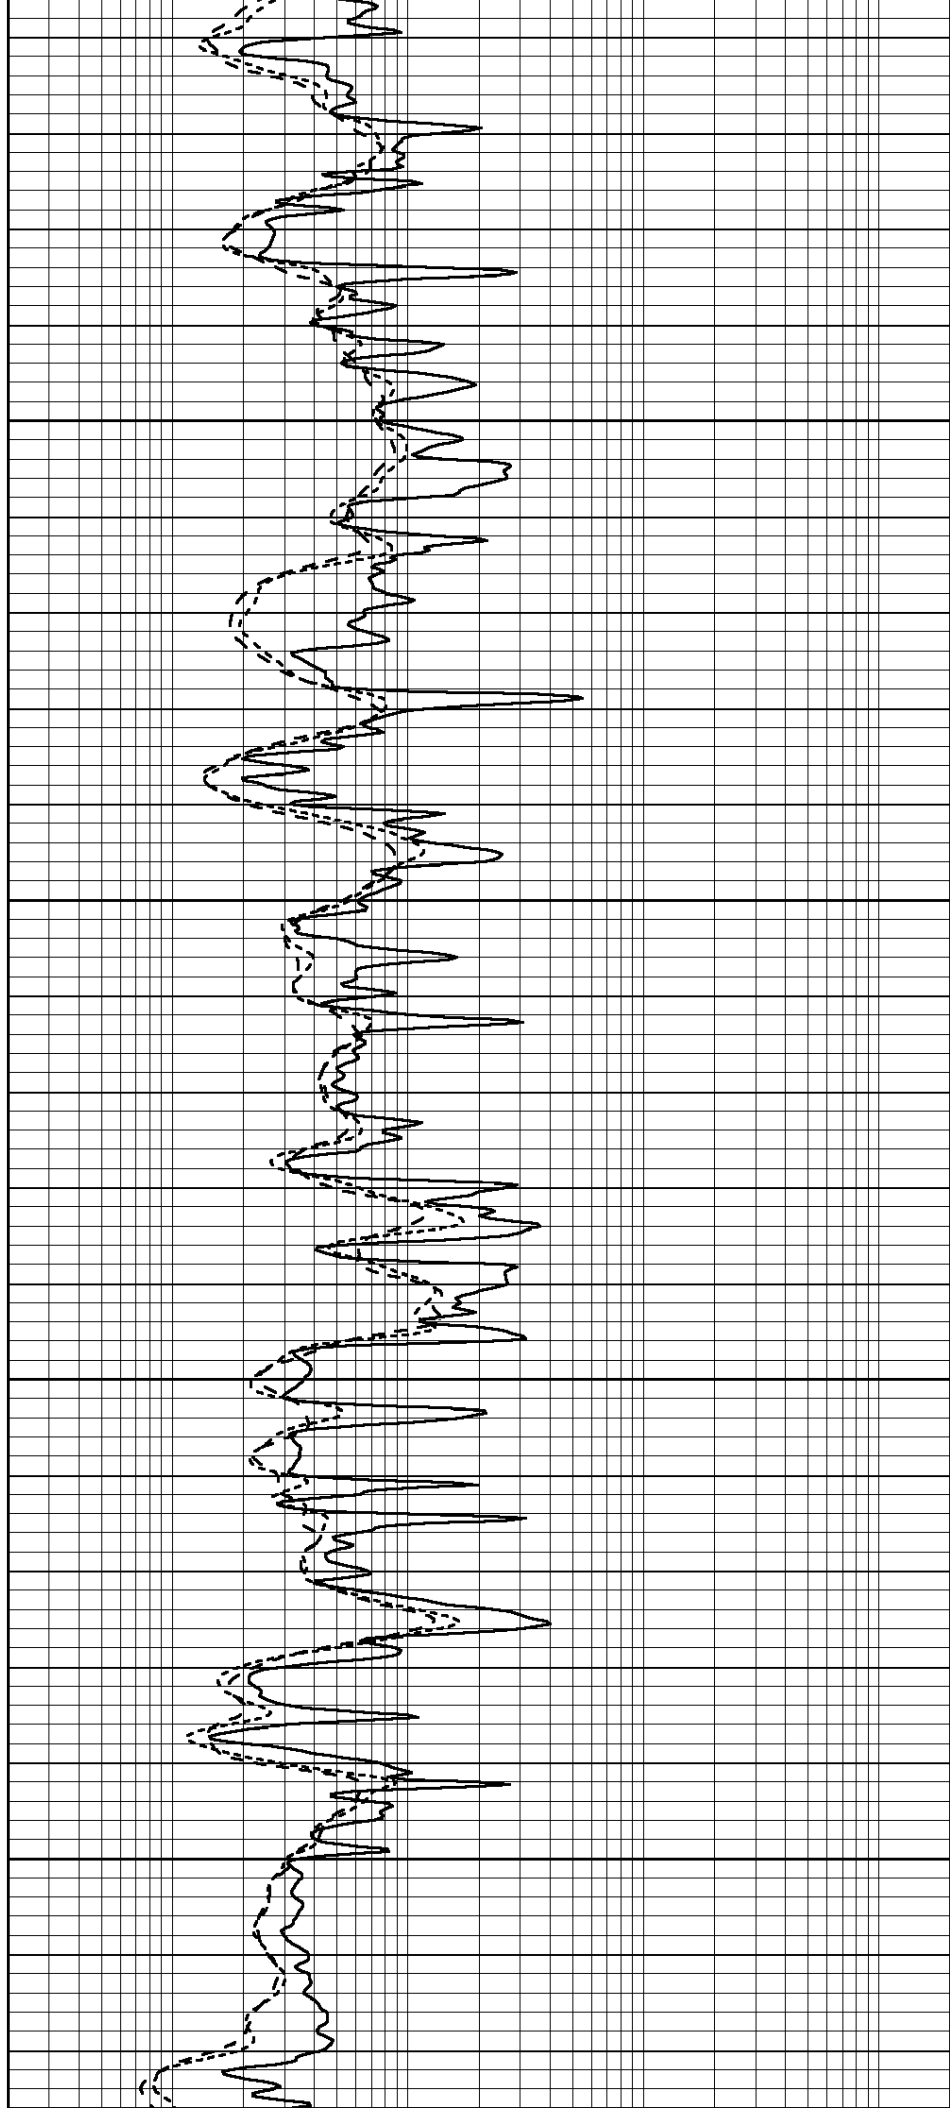

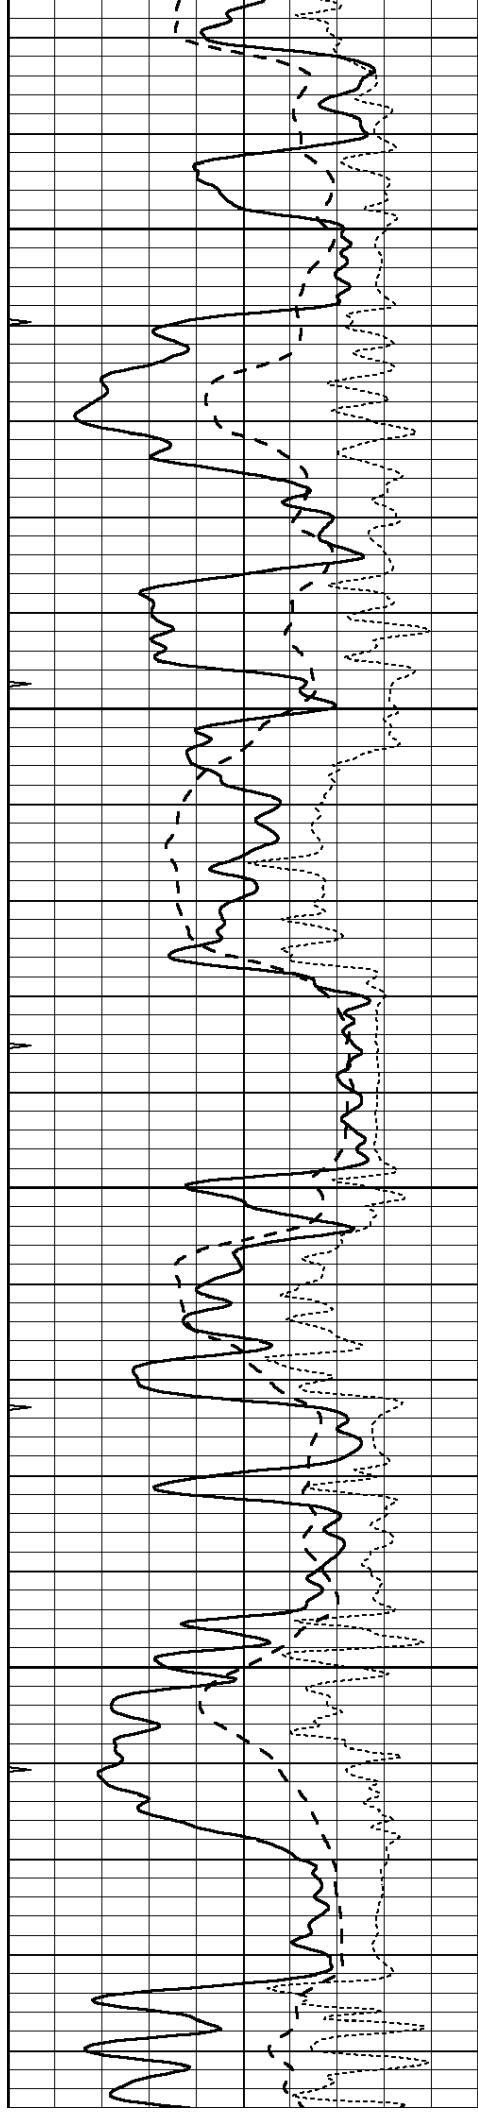



2850

2900

2950

3000

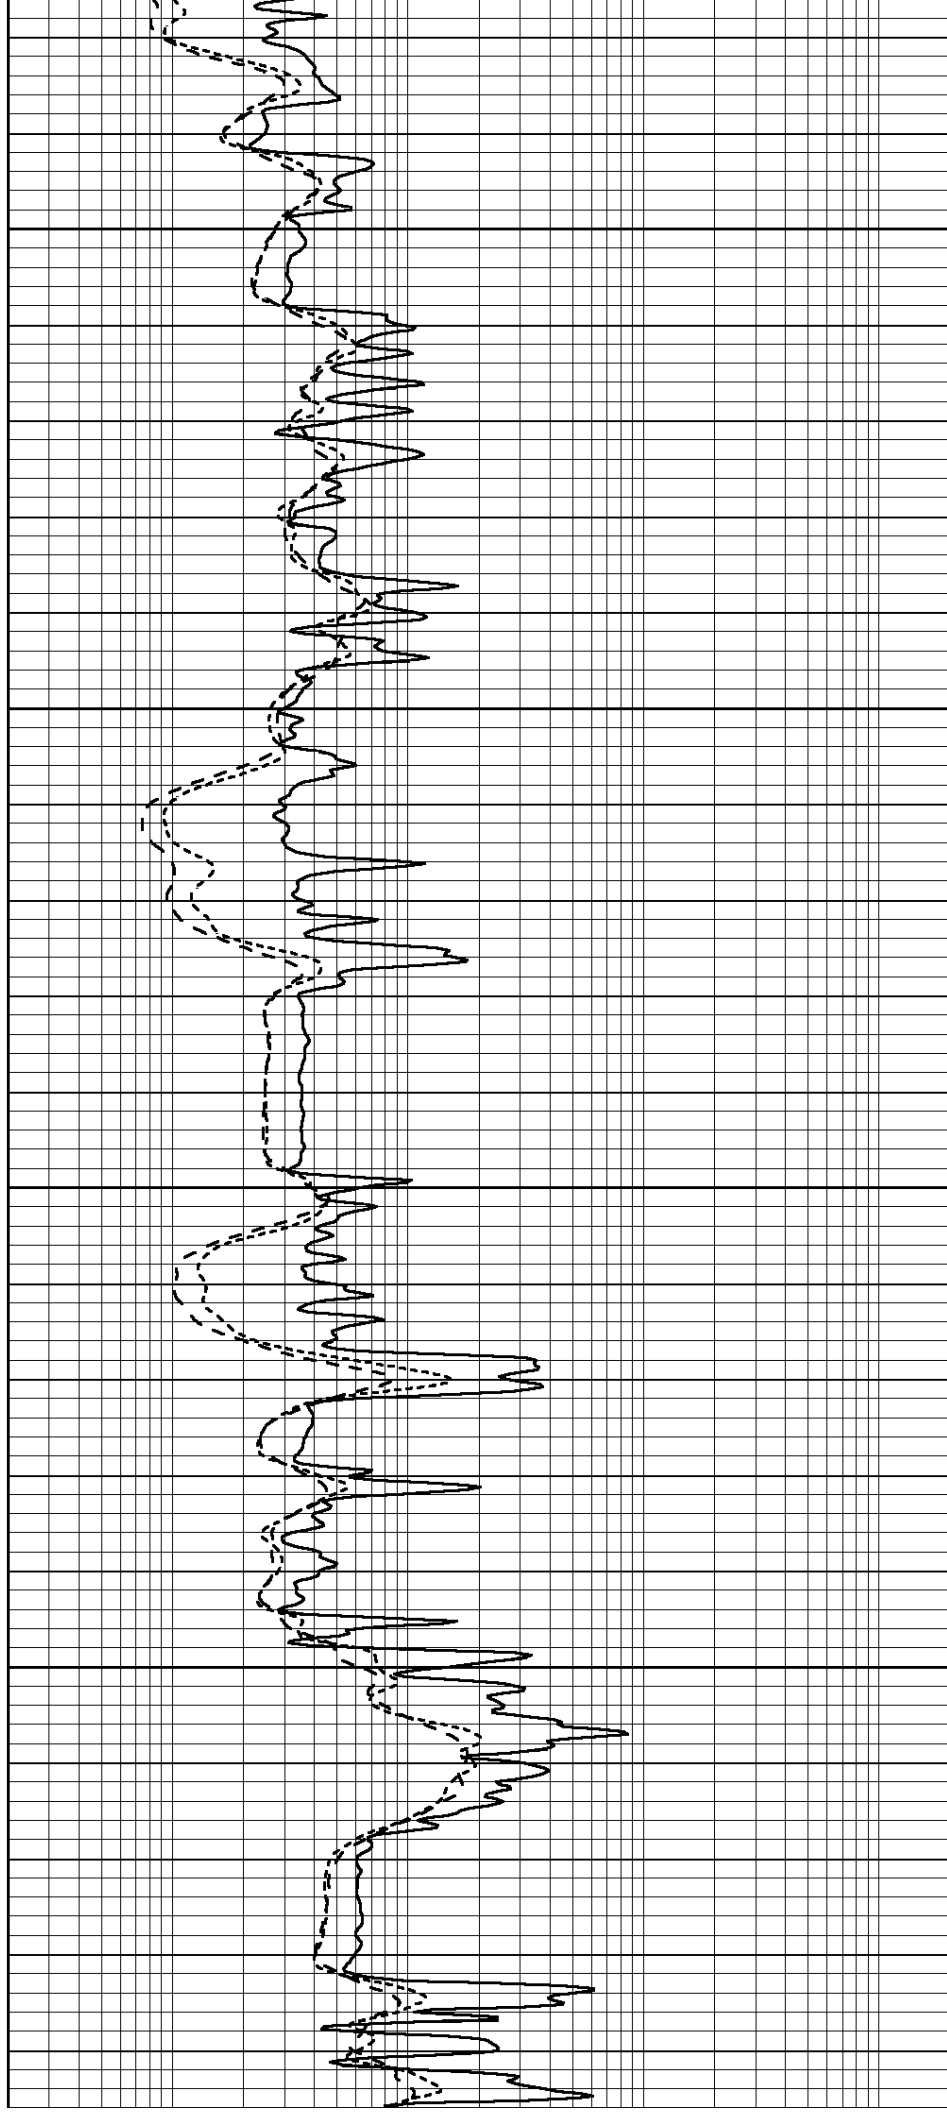

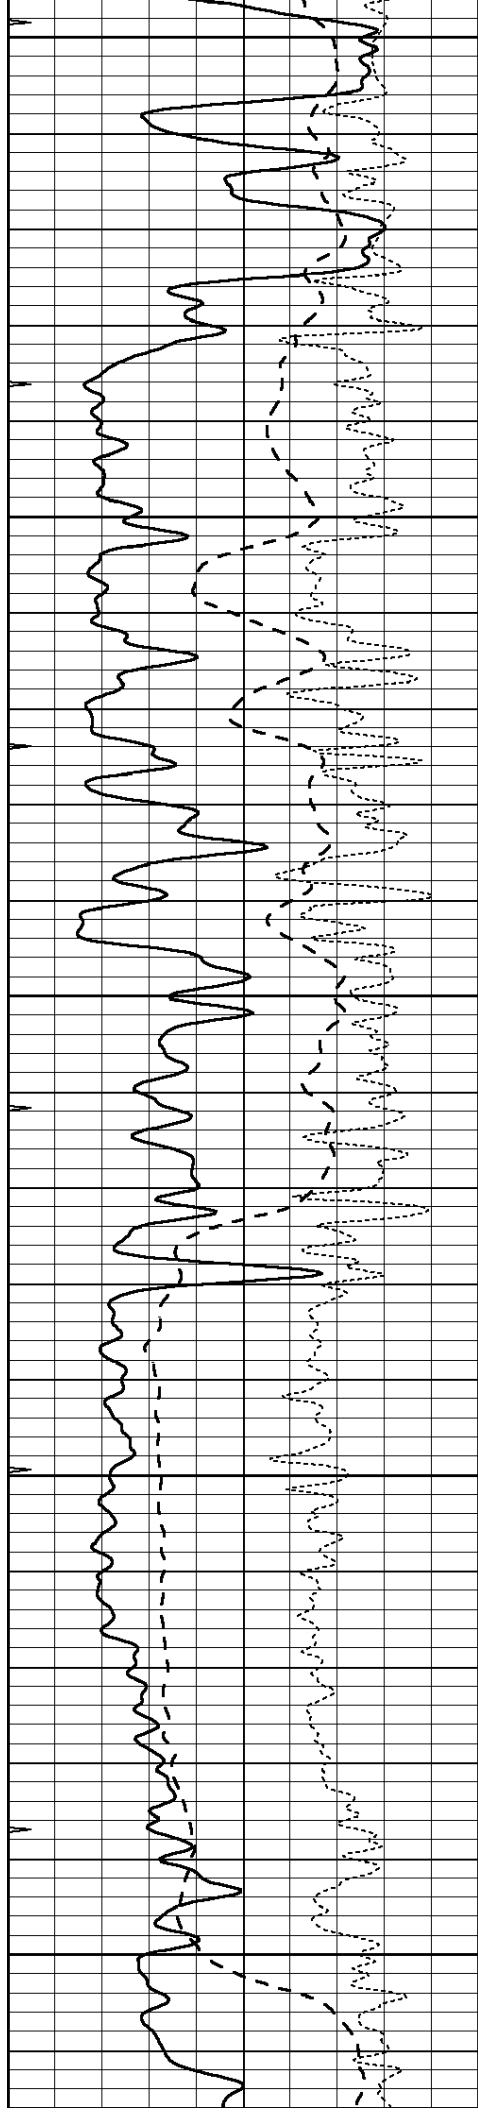


3050


3100

3150

3200

3250

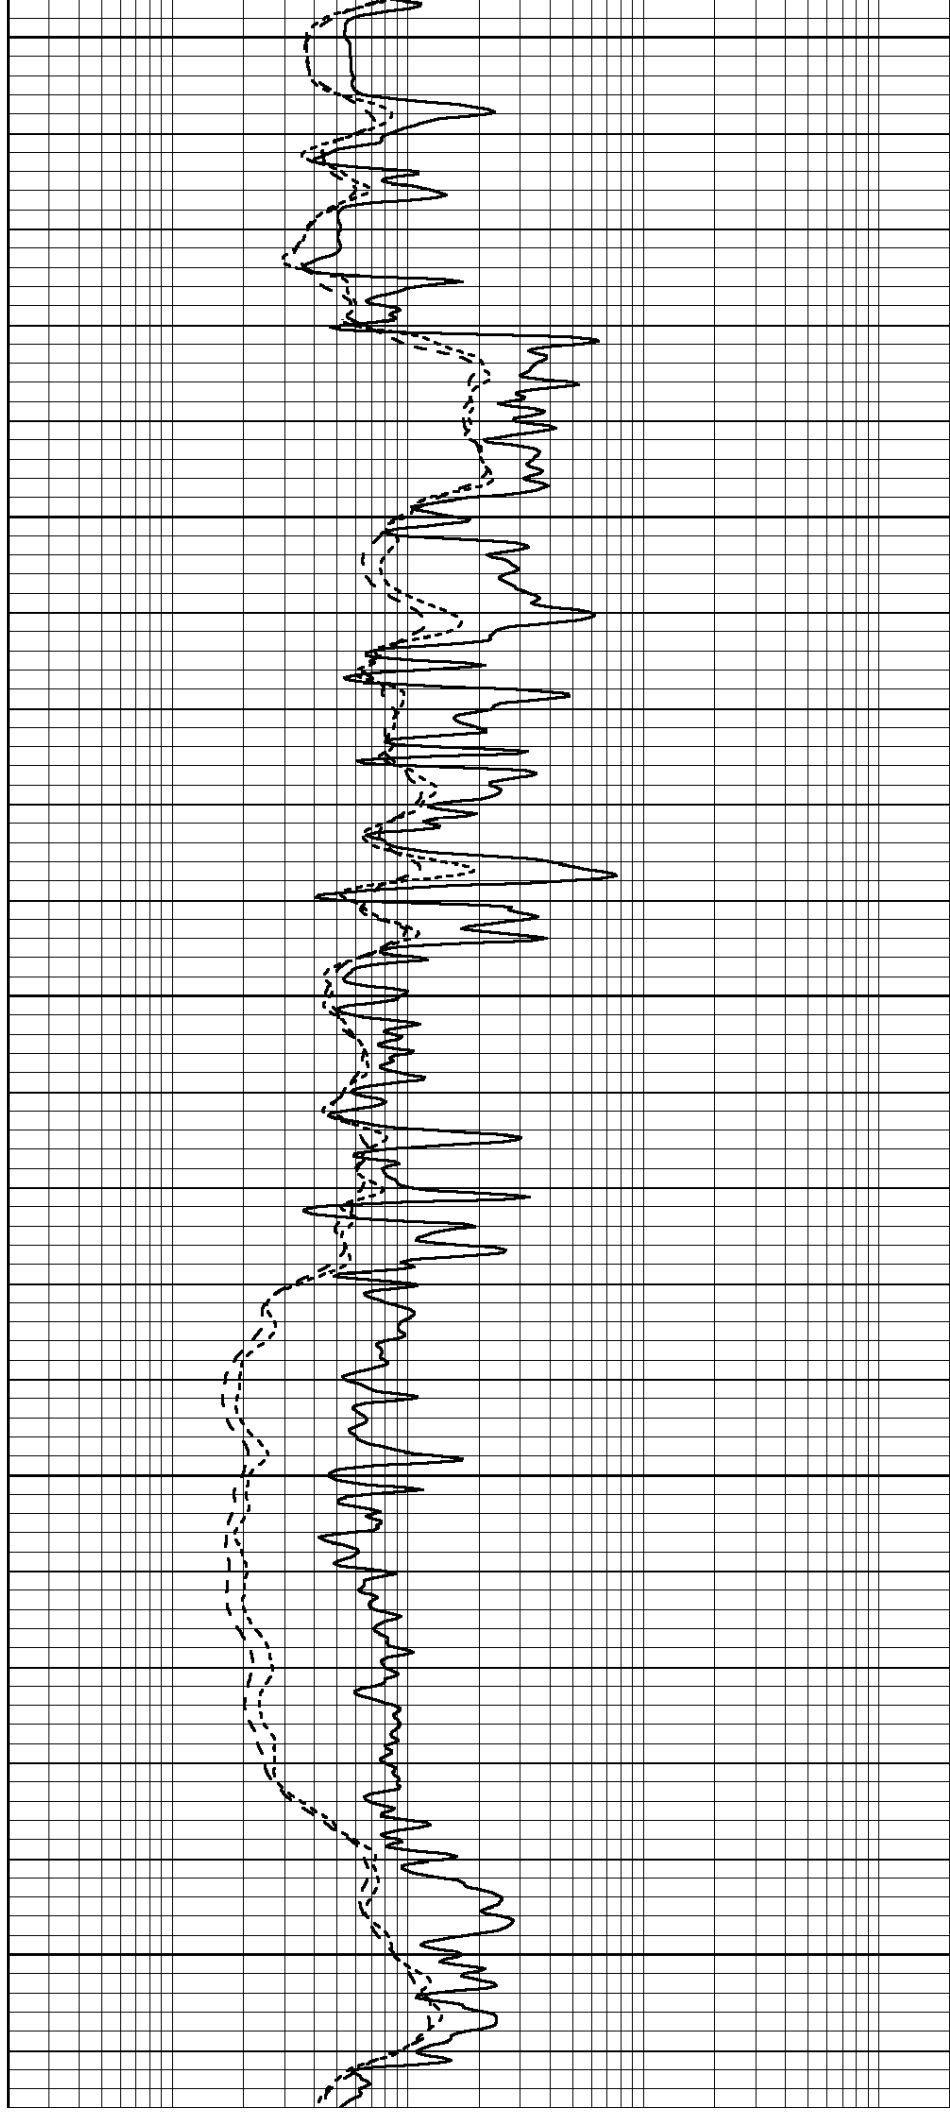

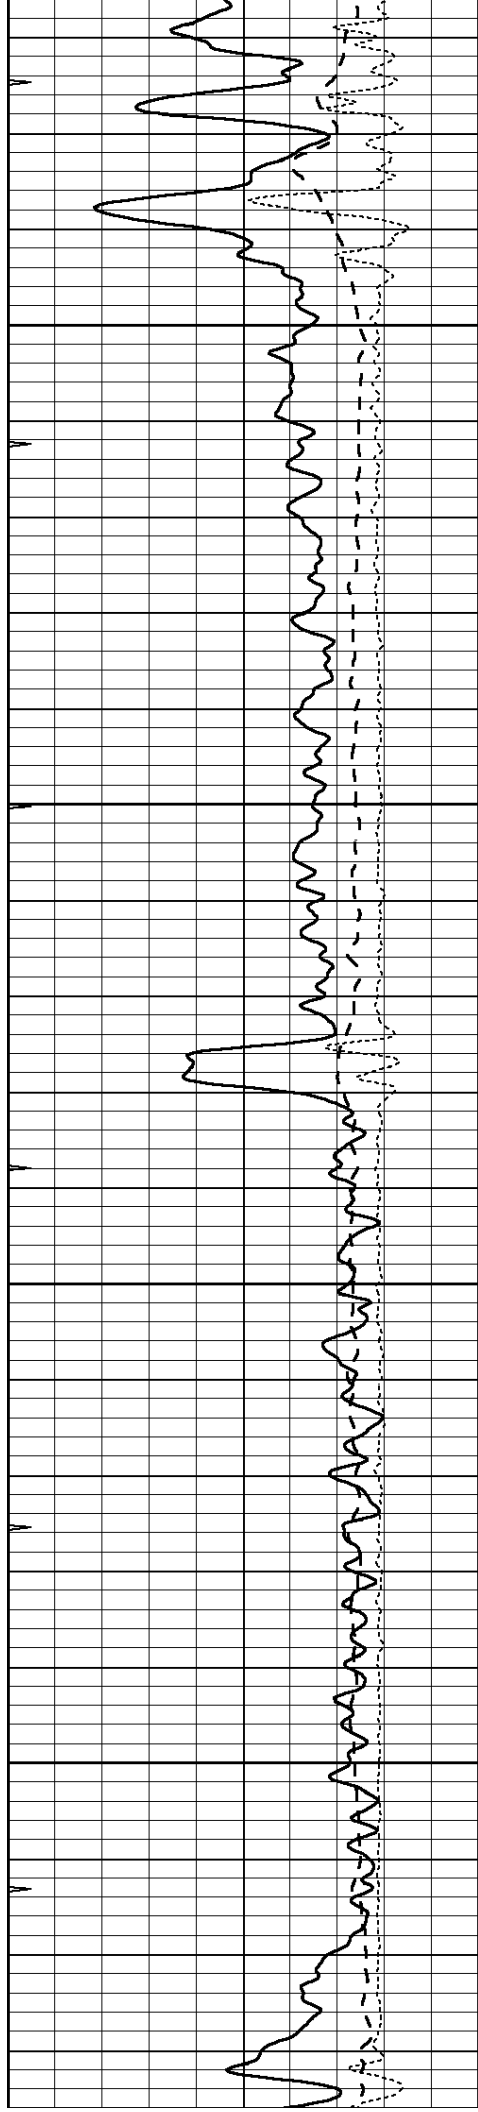



3300

3350

3400

3450

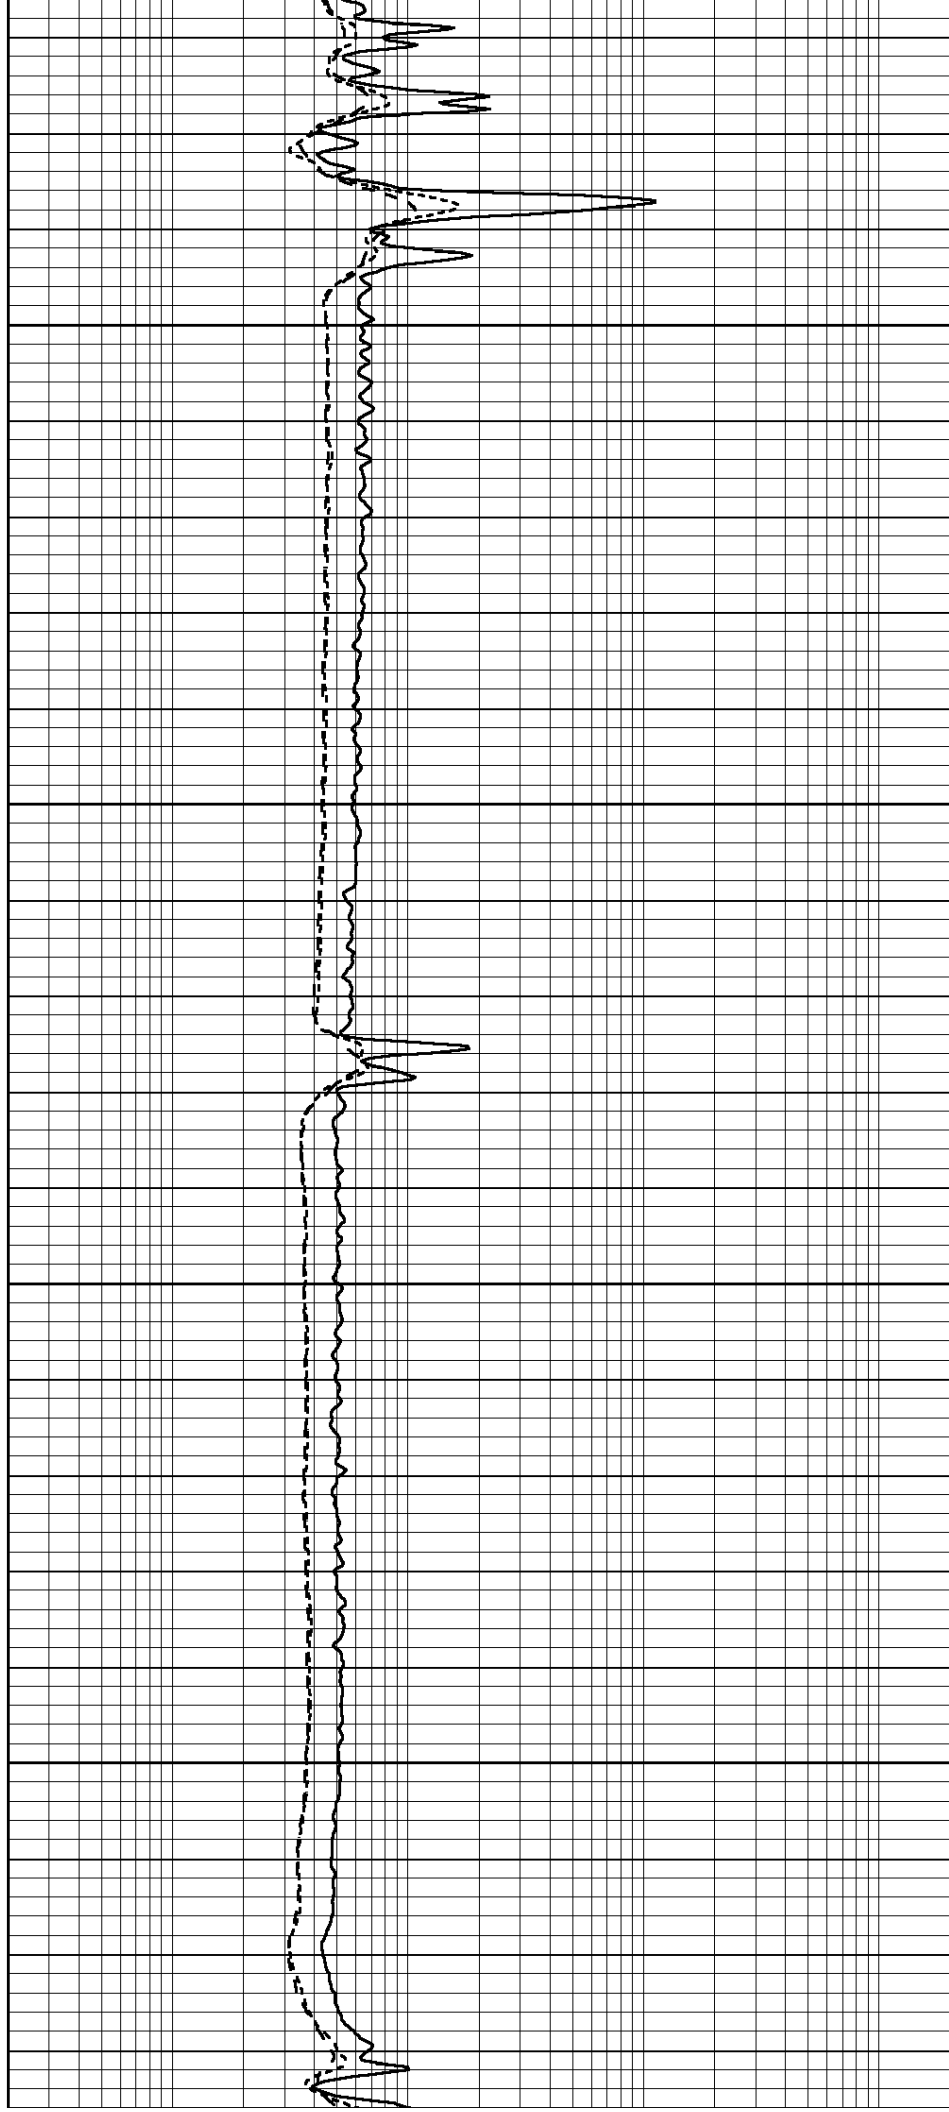

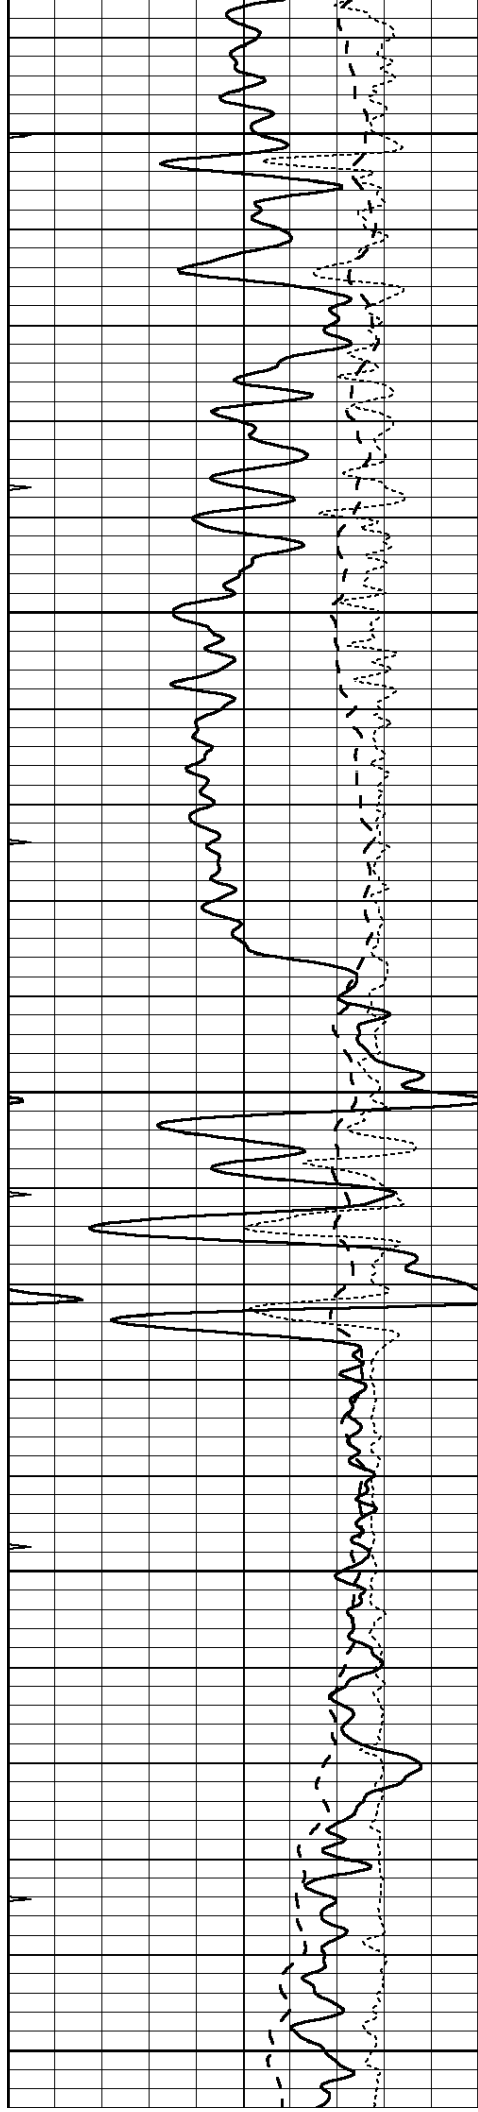


3500


3550

3600

3650

3700

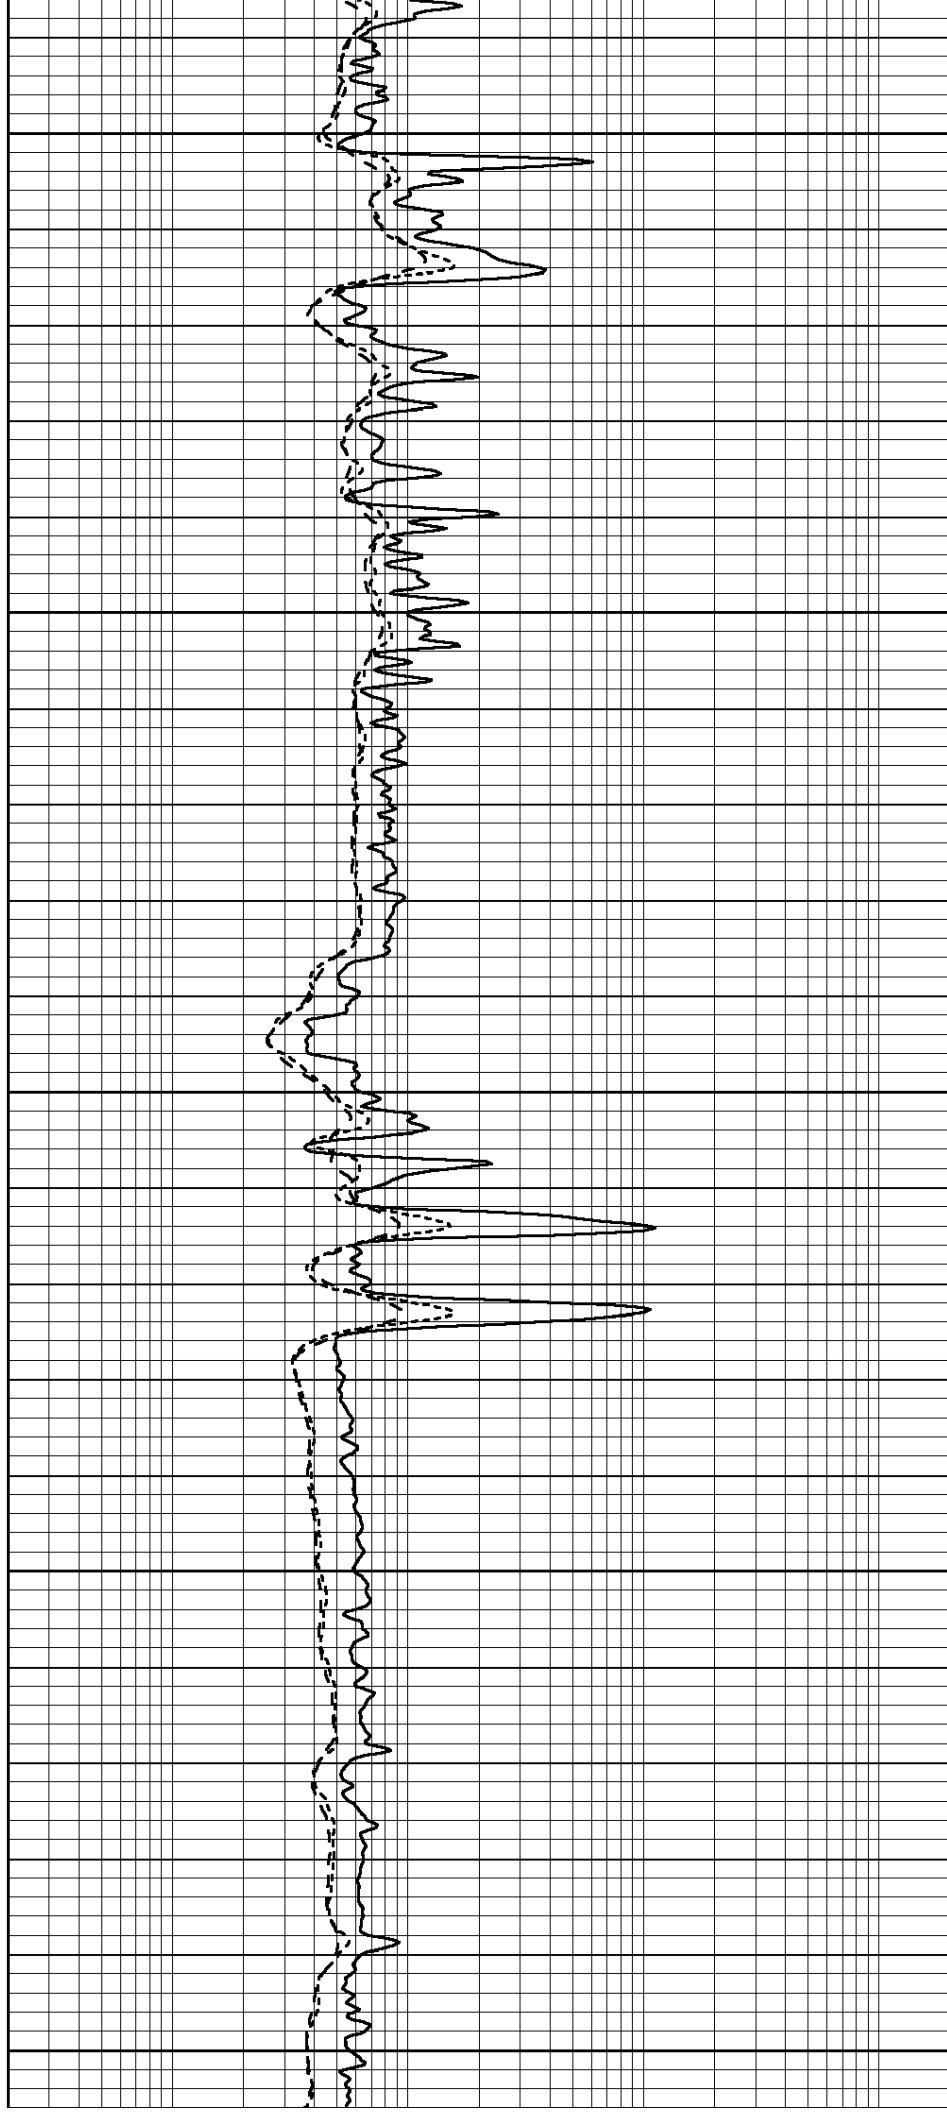

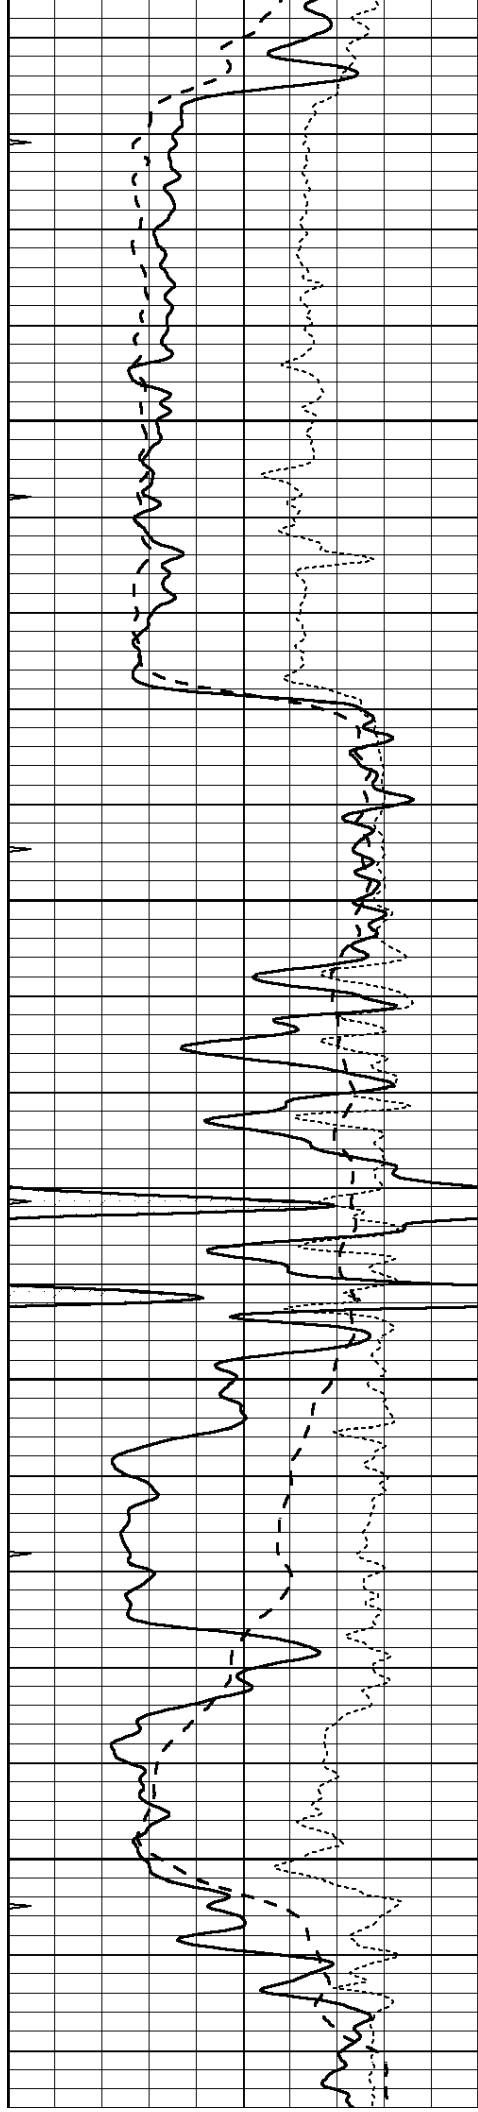



3750

3800

3850

3900

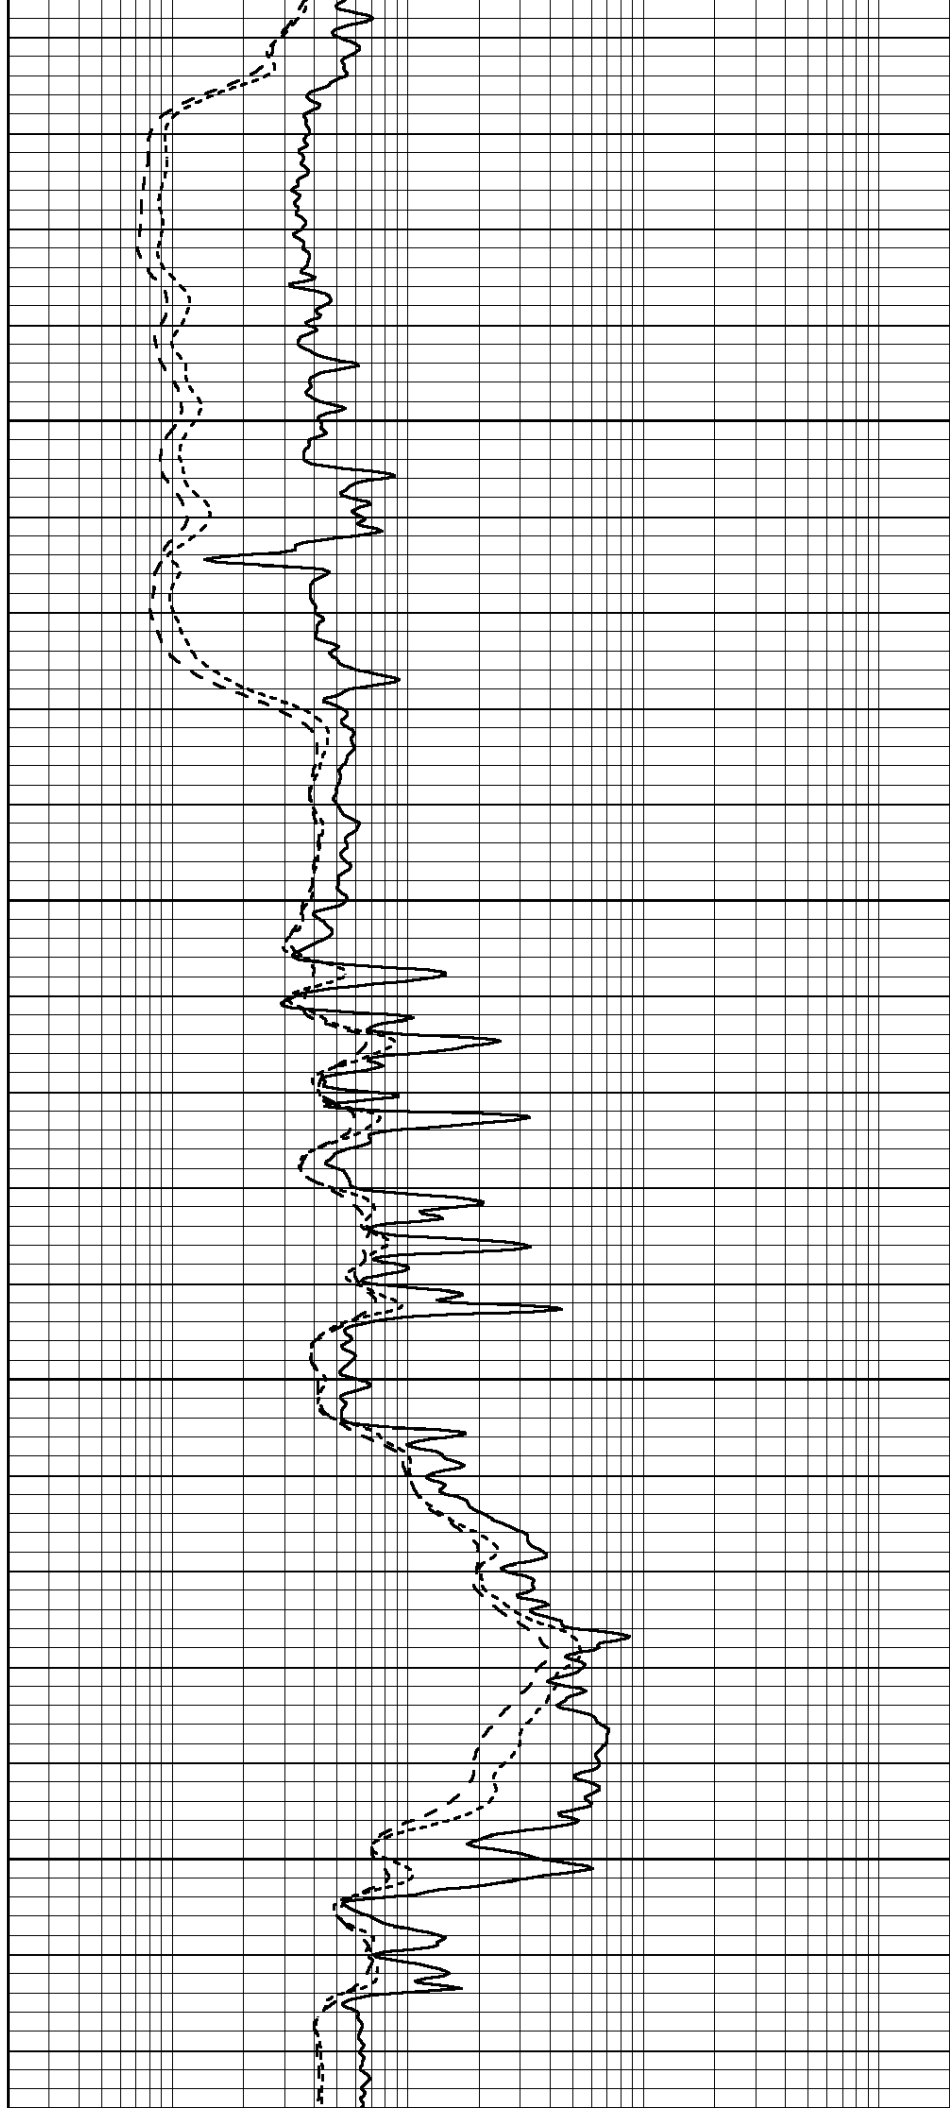

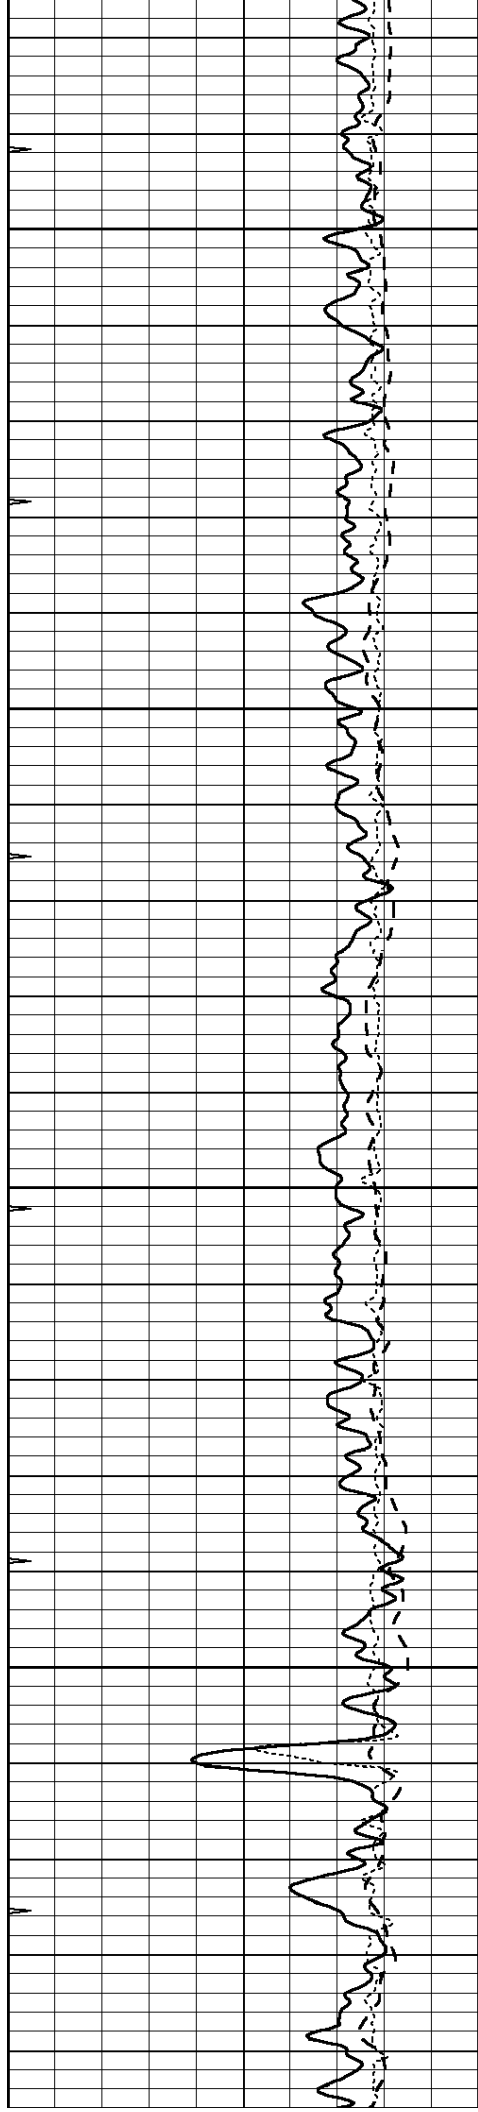



3950

4000

4050

4100

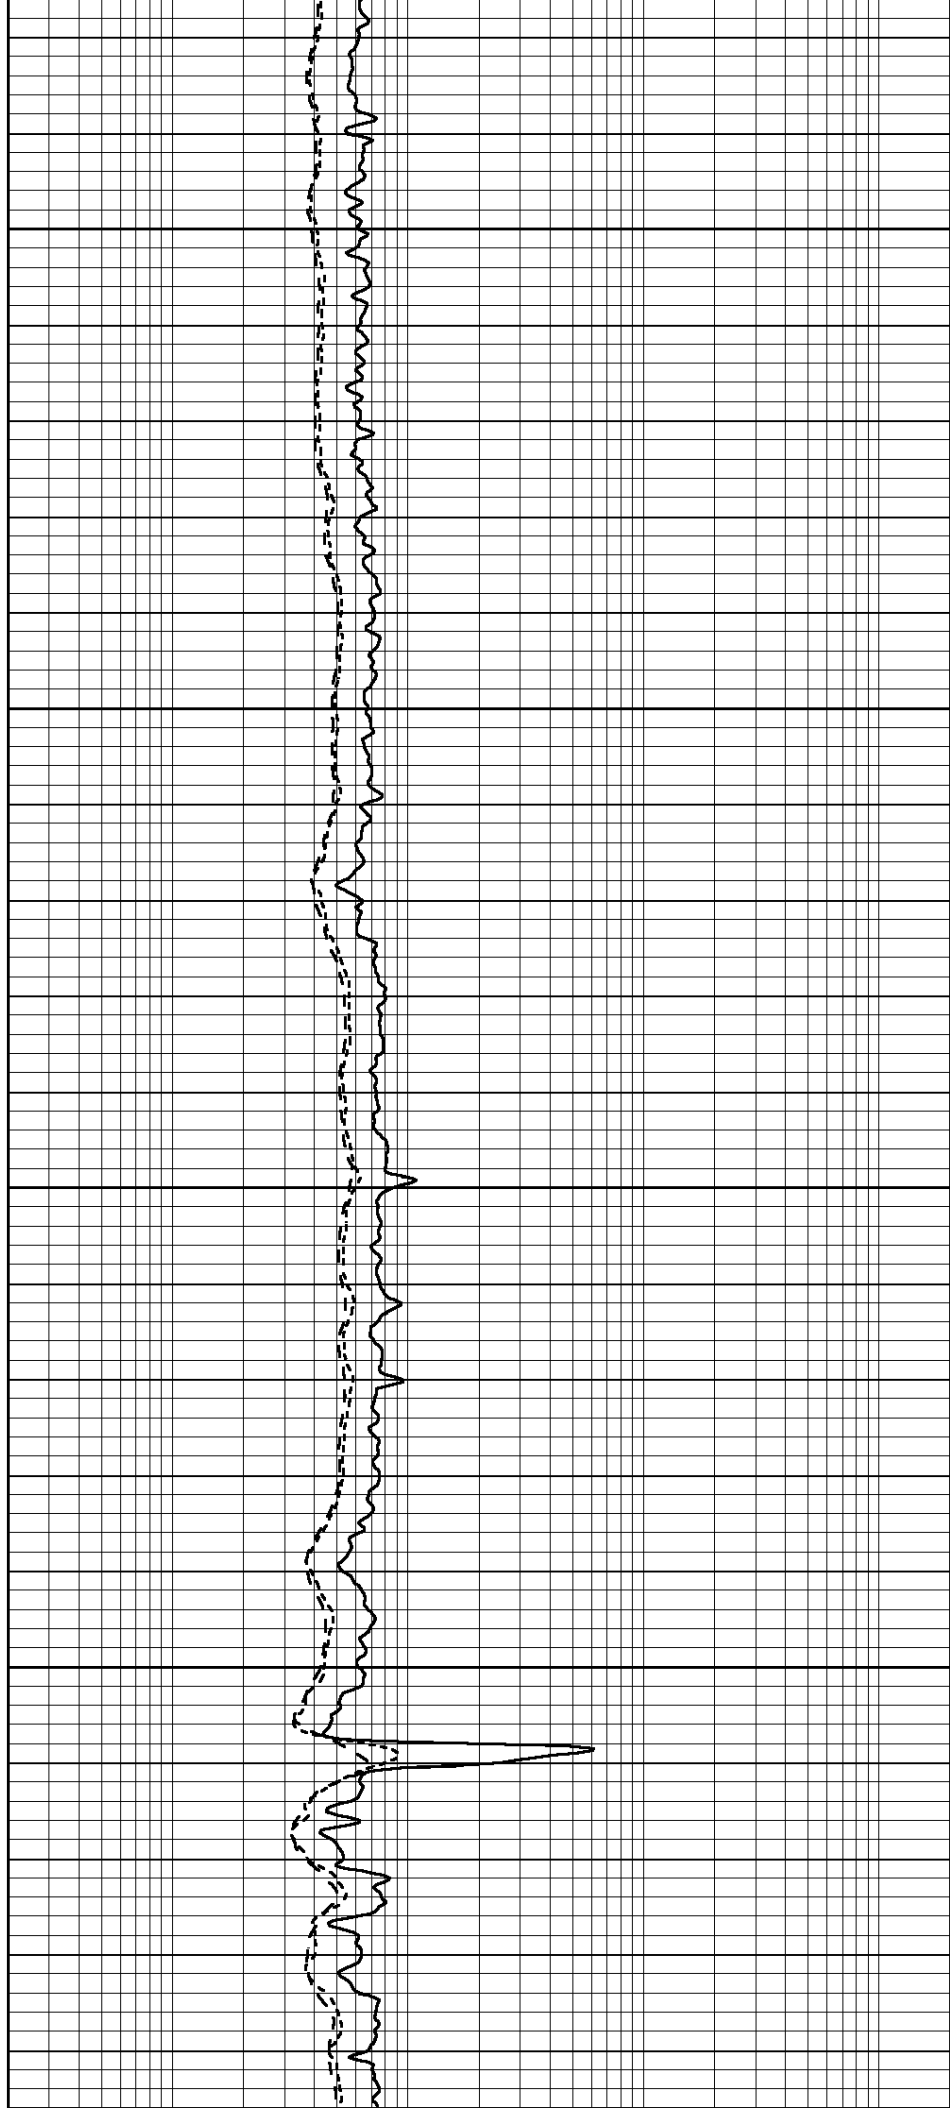

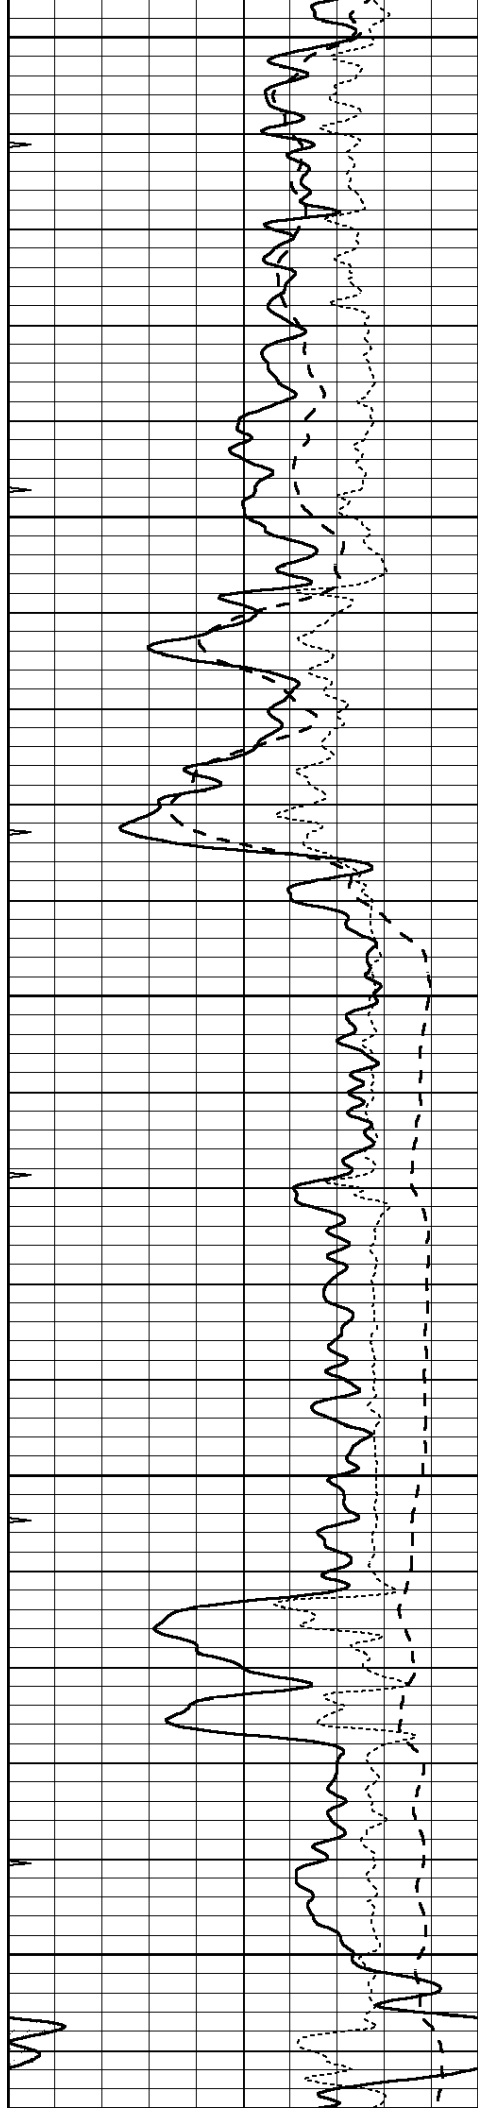


4150


4200

4250

4300

4350

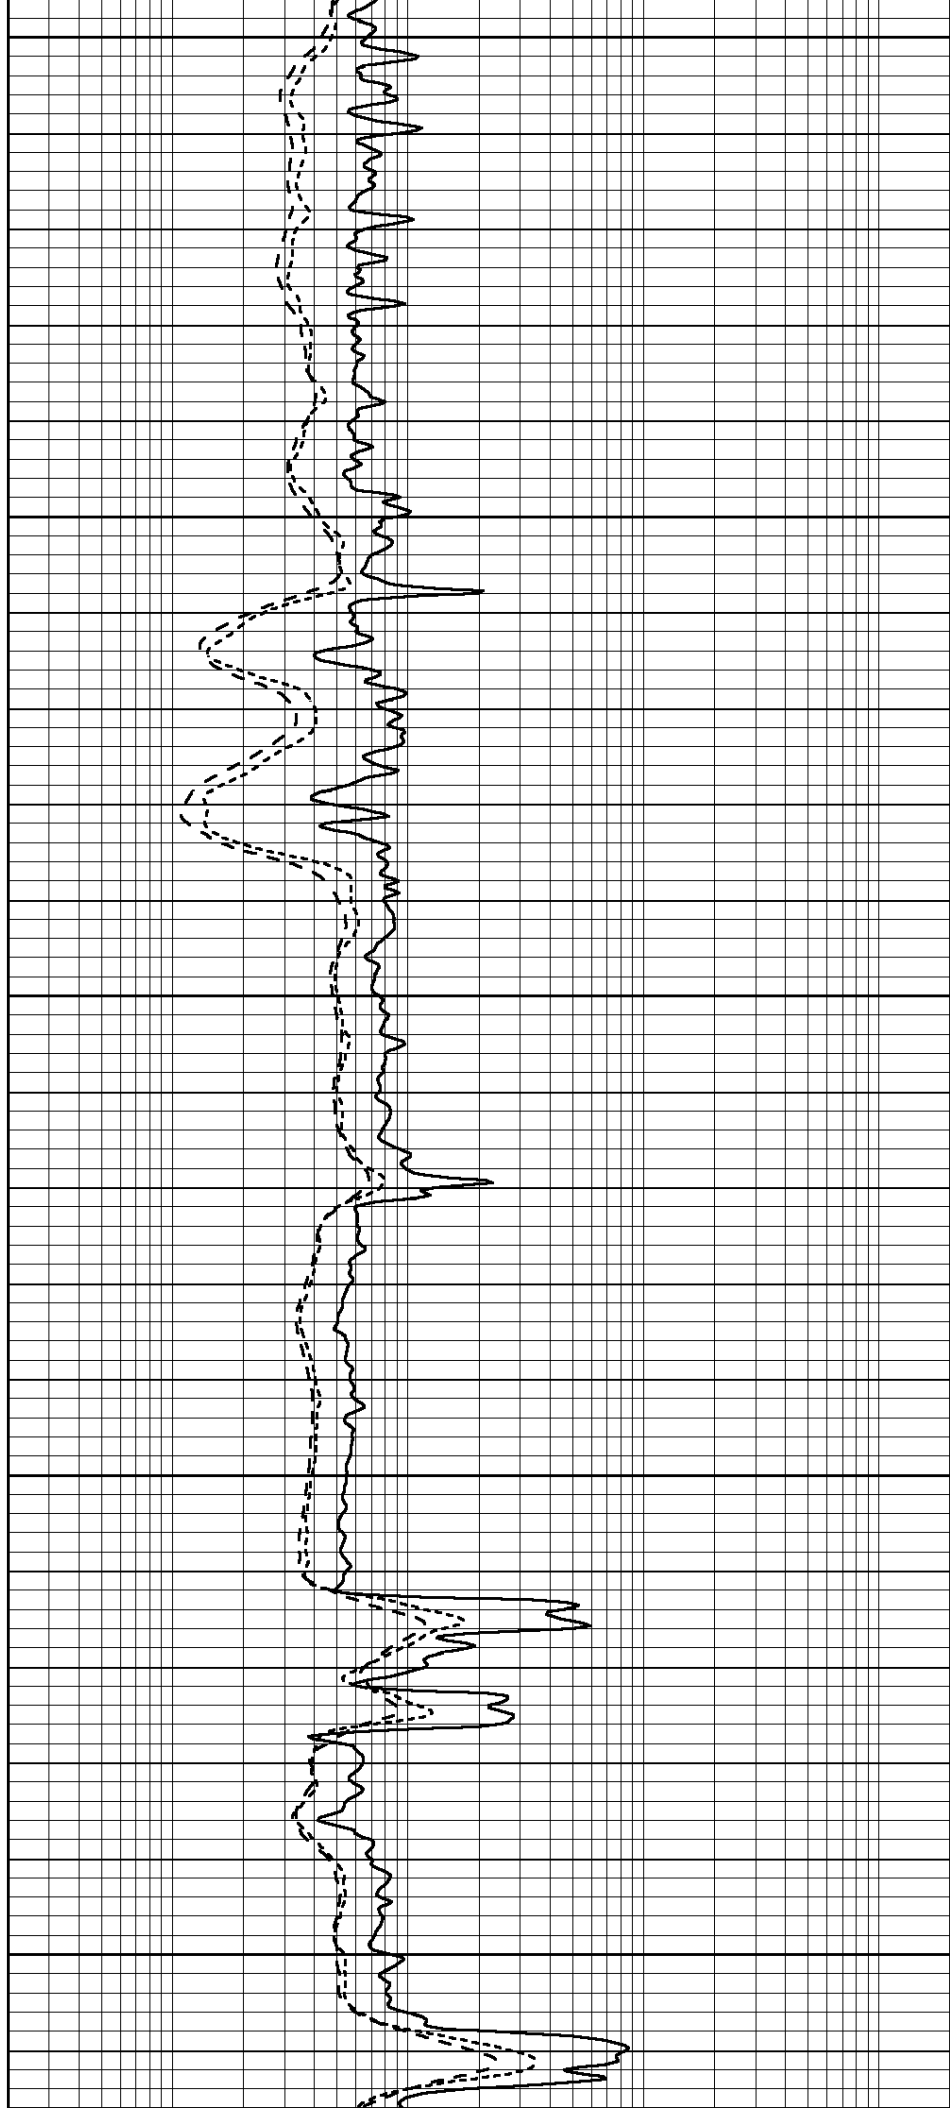

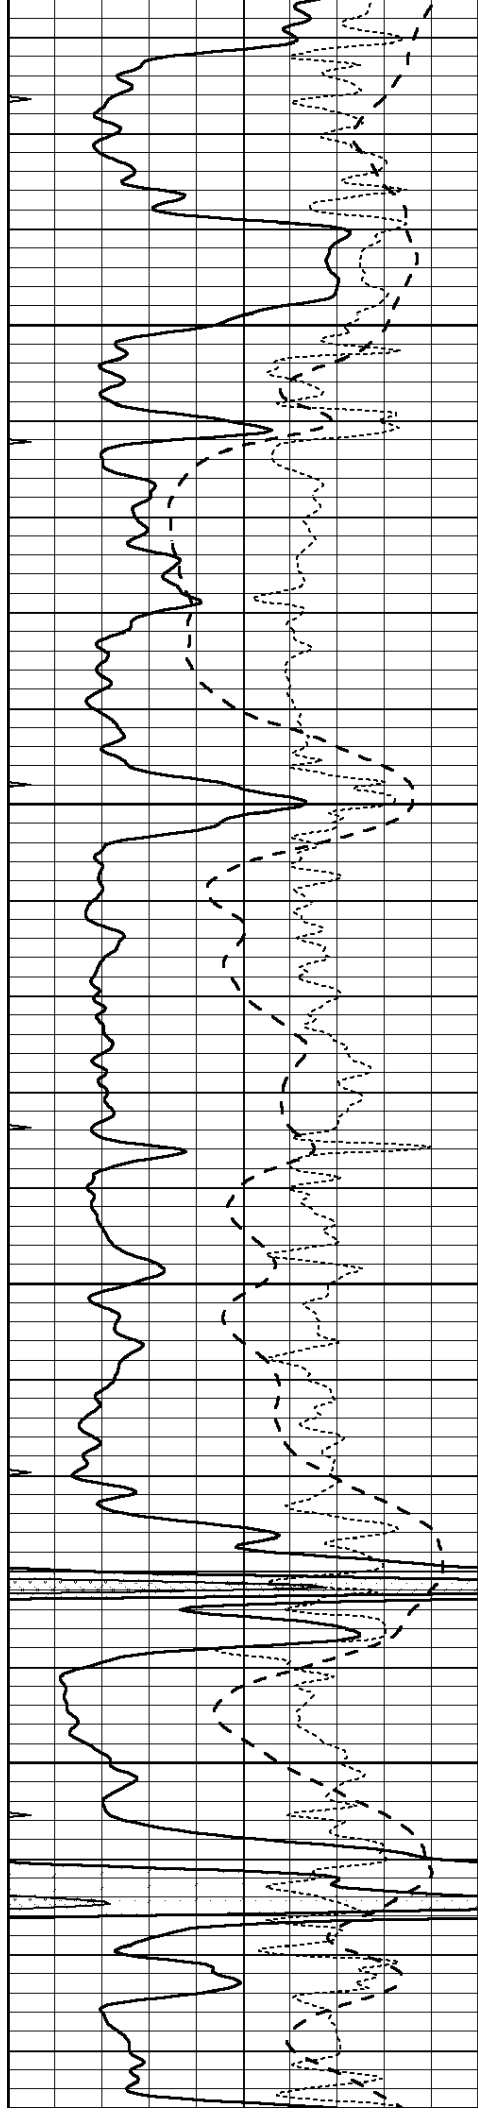



4400

4450

4500

4550

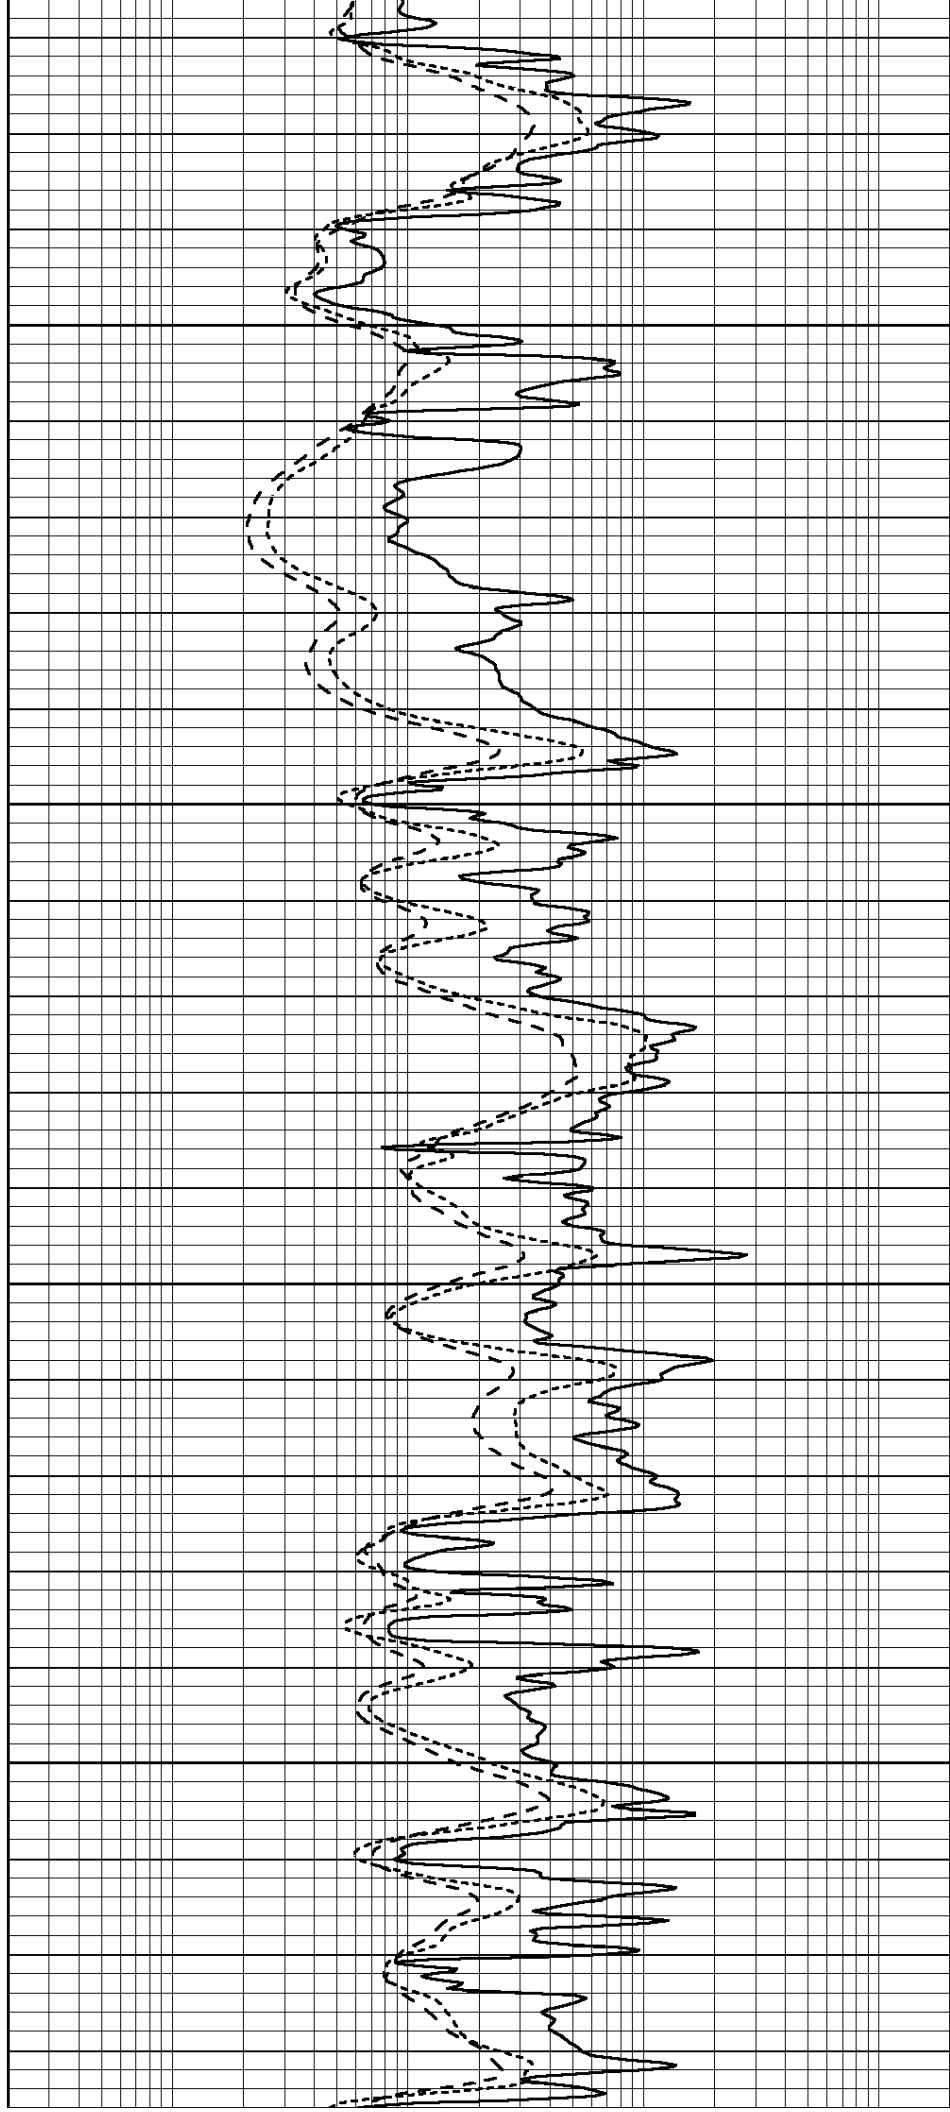

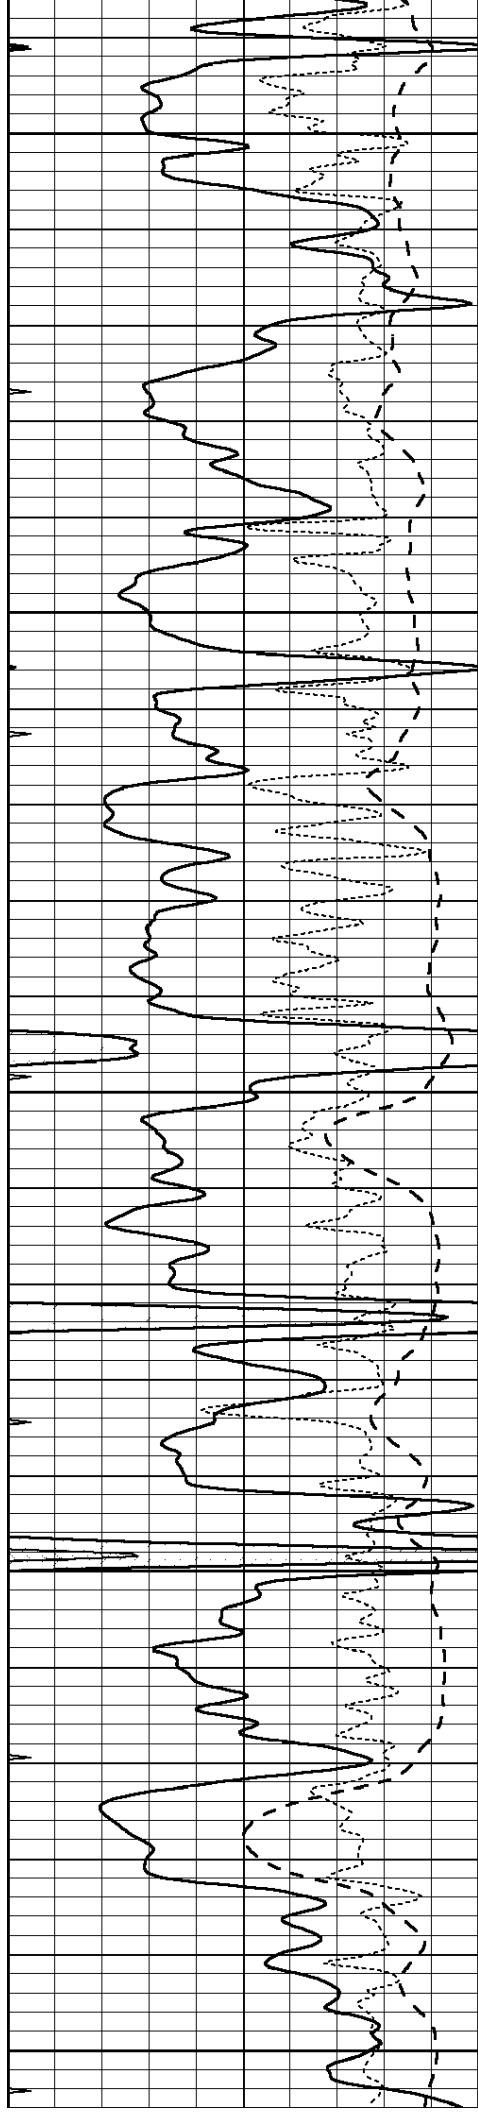


4600


4650

4700

4750

4800

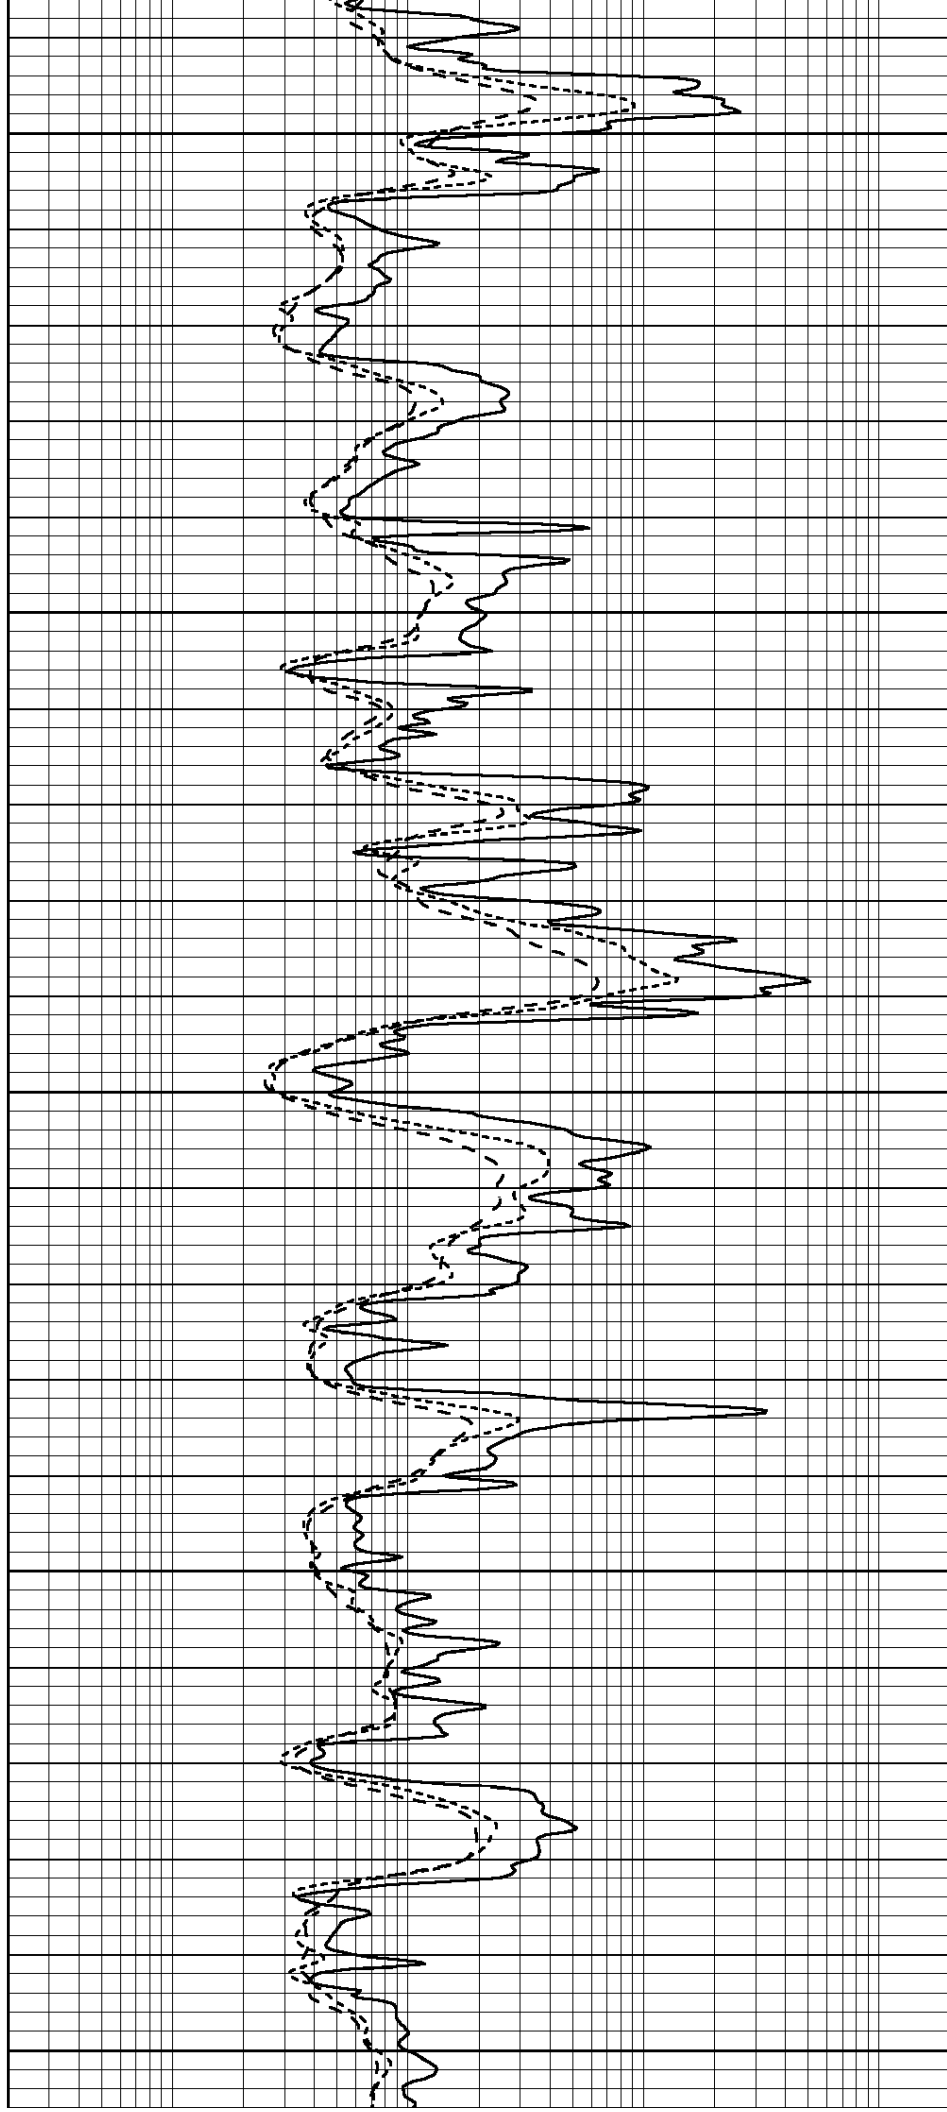

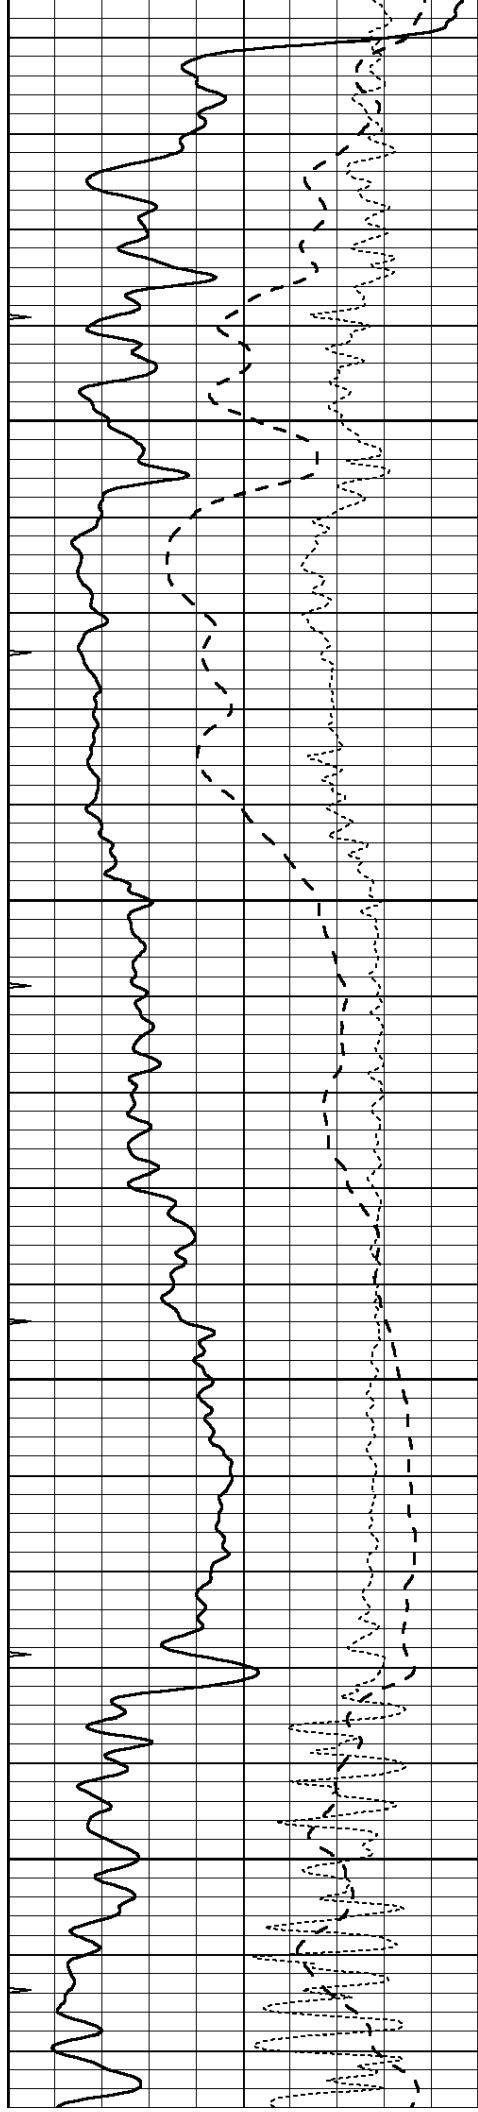



4850

4900

4950

5000

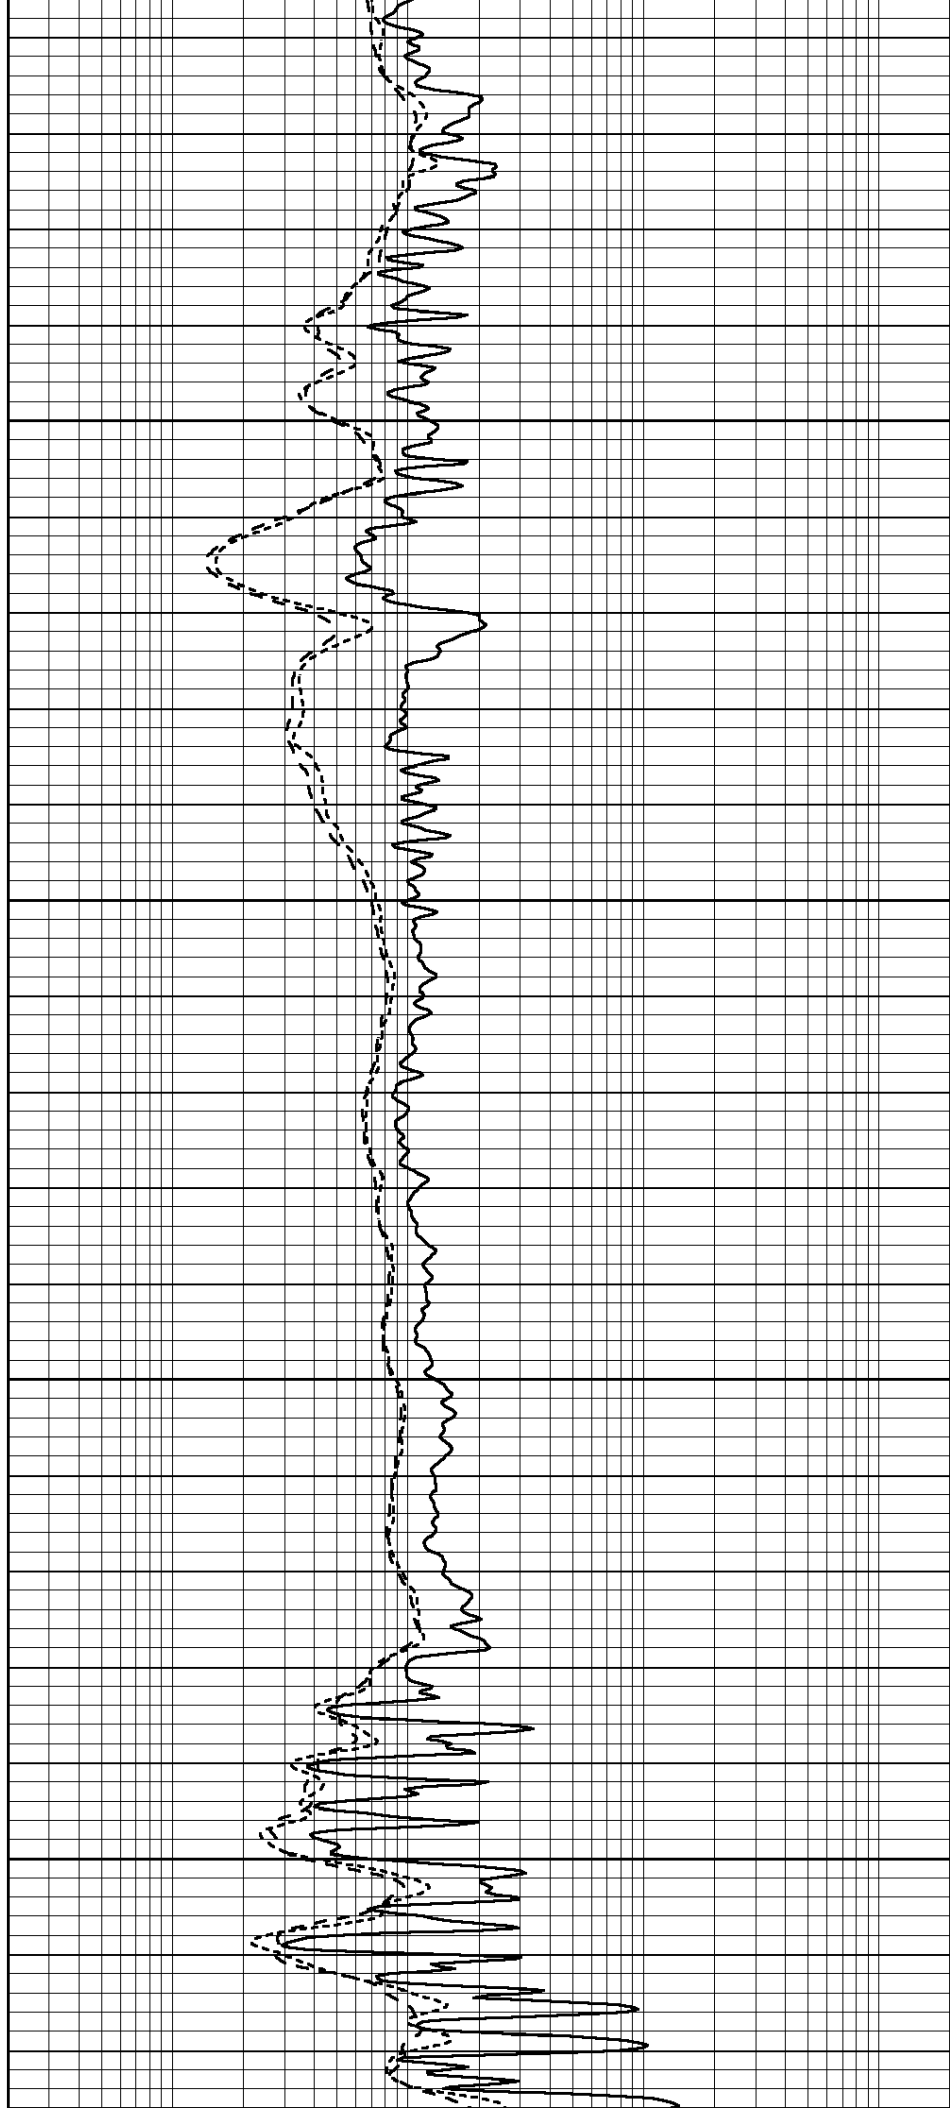

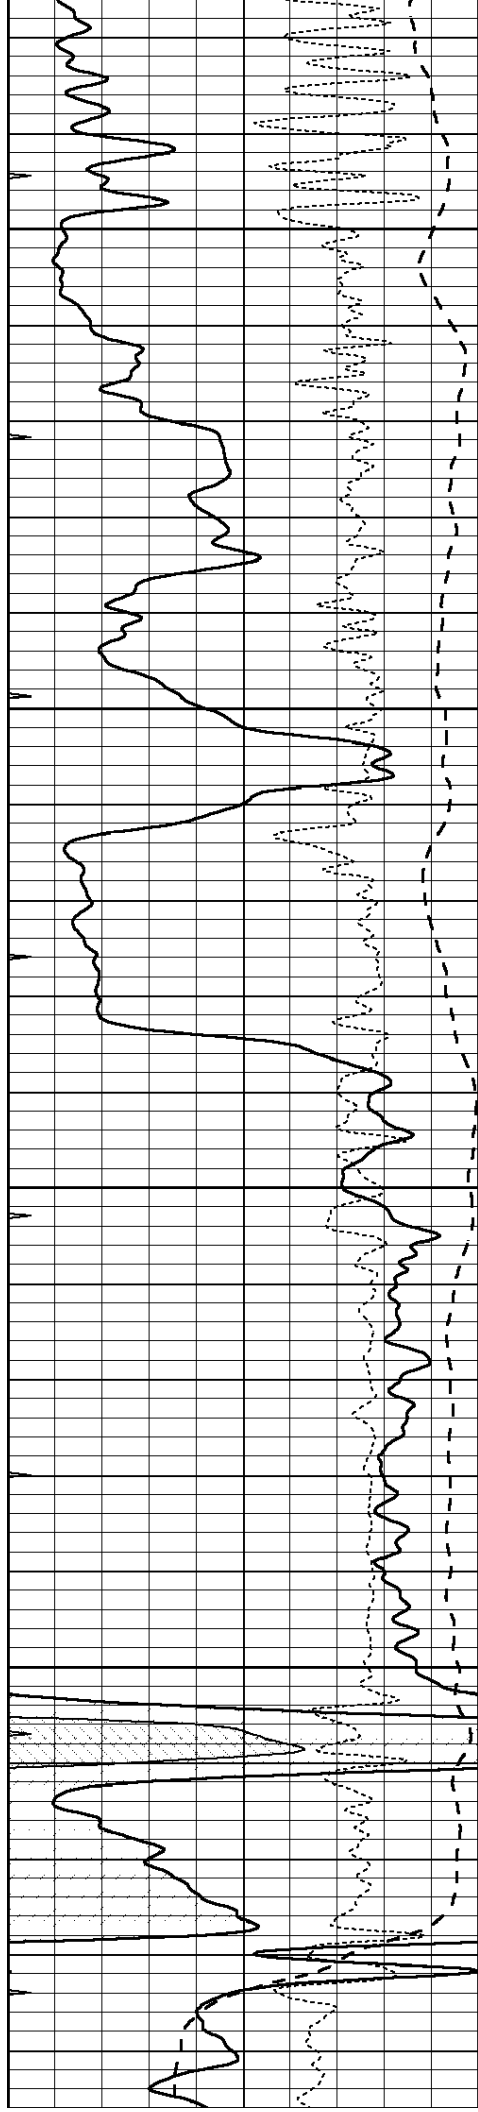



5050

5100

5150

5200

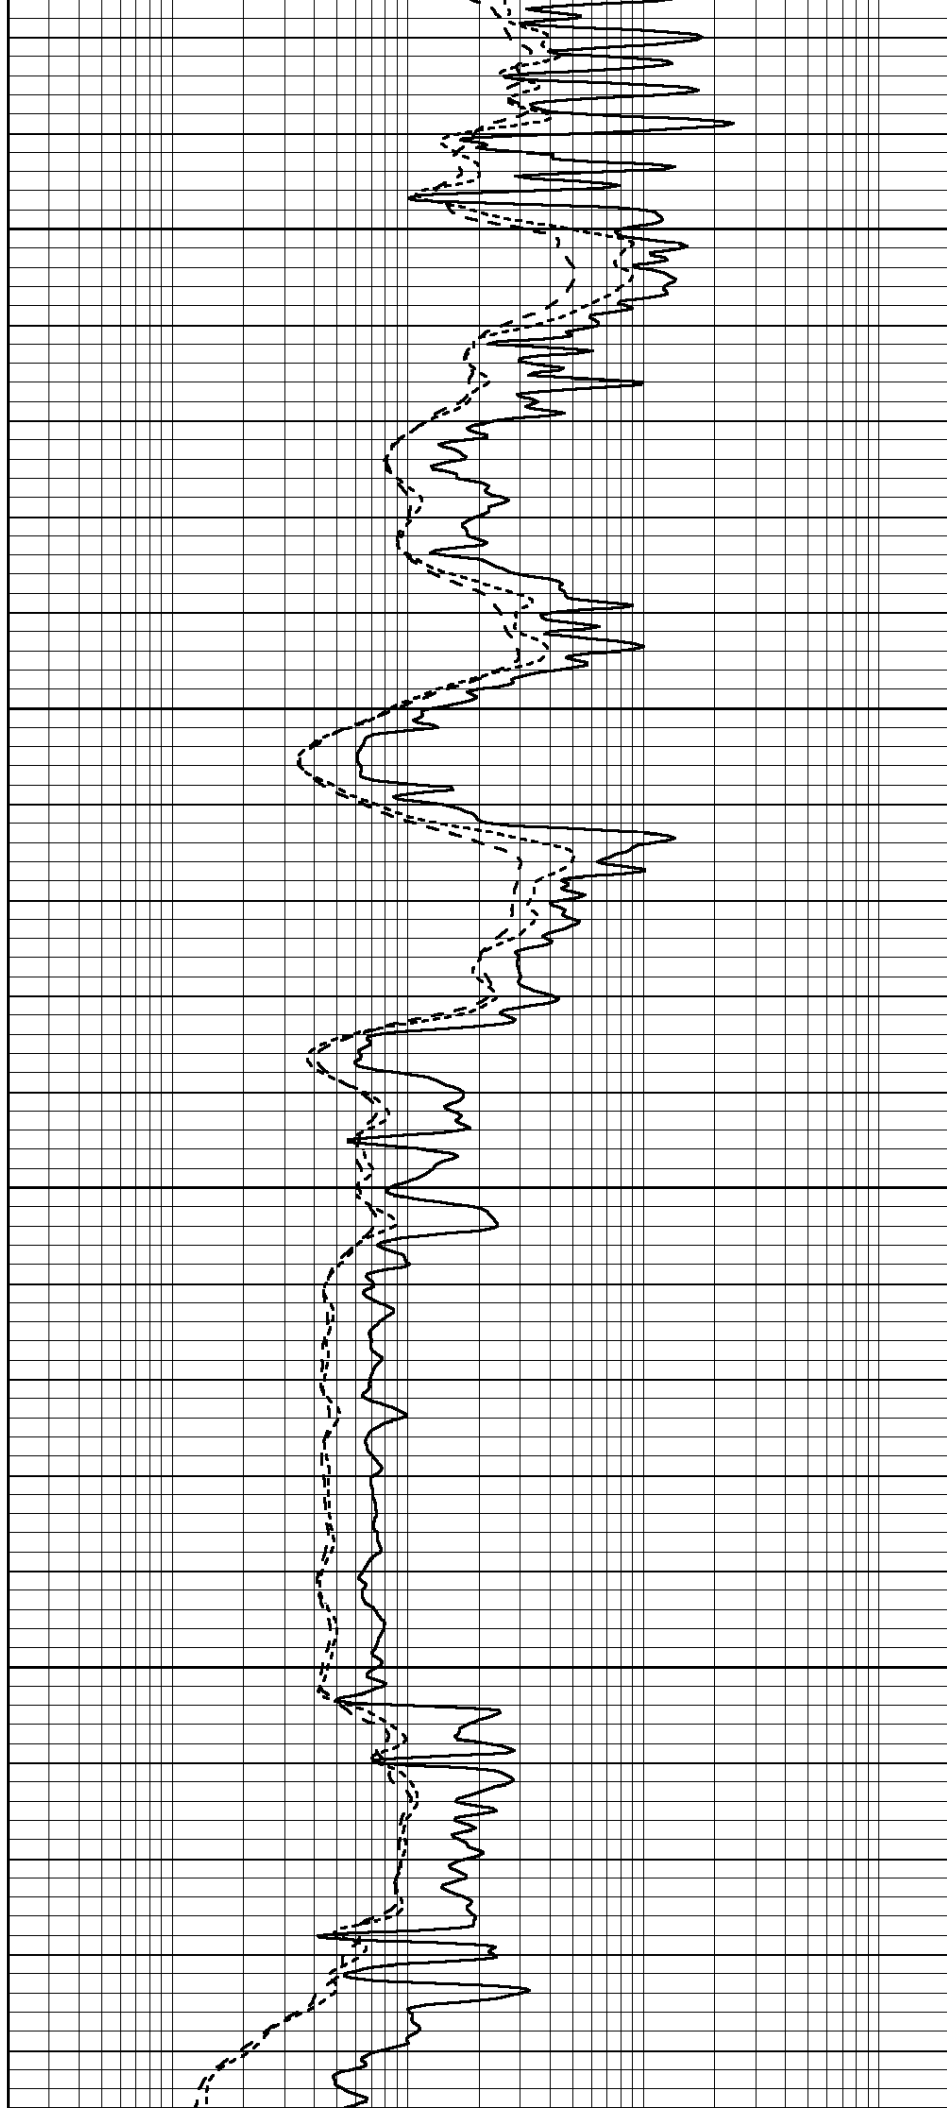

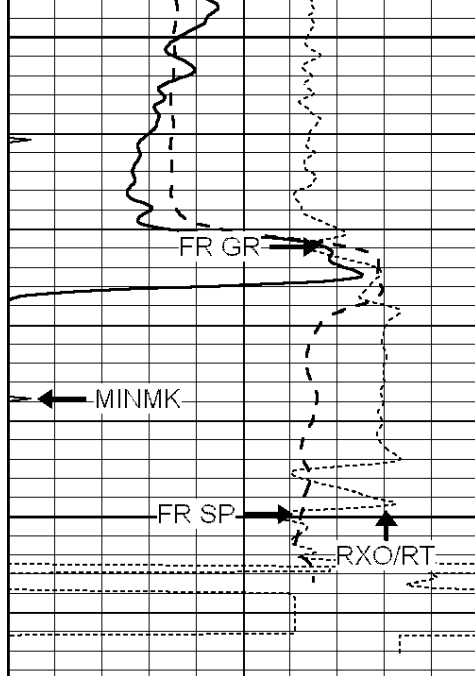


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


5250

5300

LTD 5310

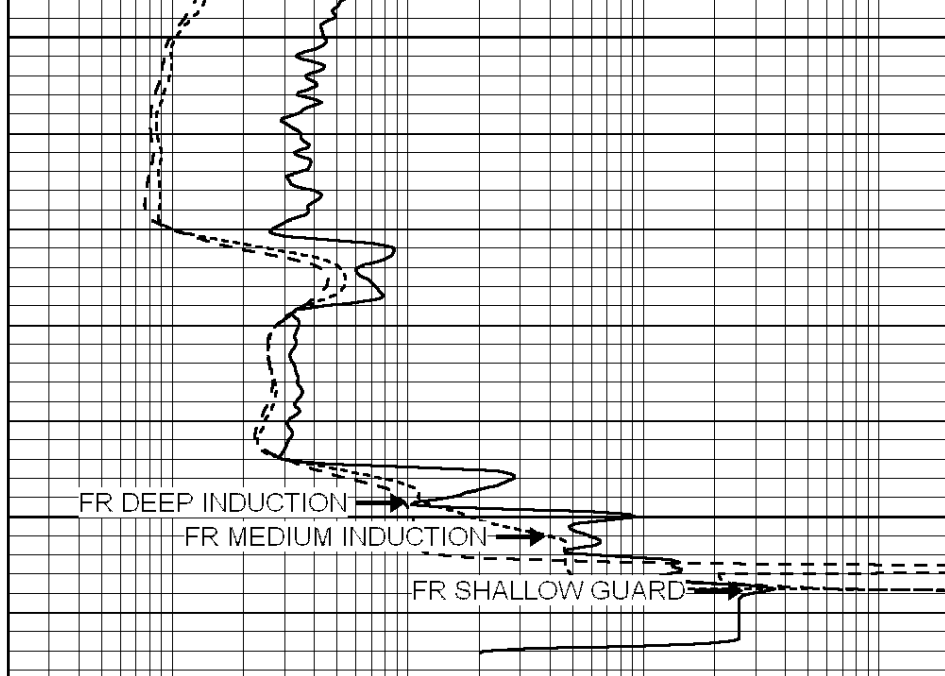

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

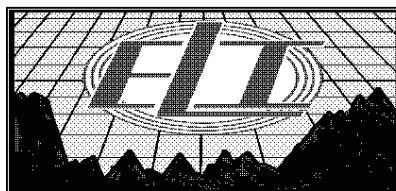


REPEAT SECTION

Database File: 3070pe.db
 Dataset Pathname: pass2.1
 Presentation Format: _dil
 Dataset Creation: Thu Dec 06 05:10:52 2018 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

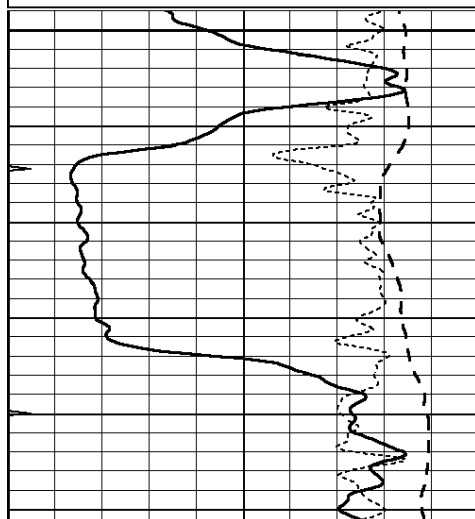

5100

5150

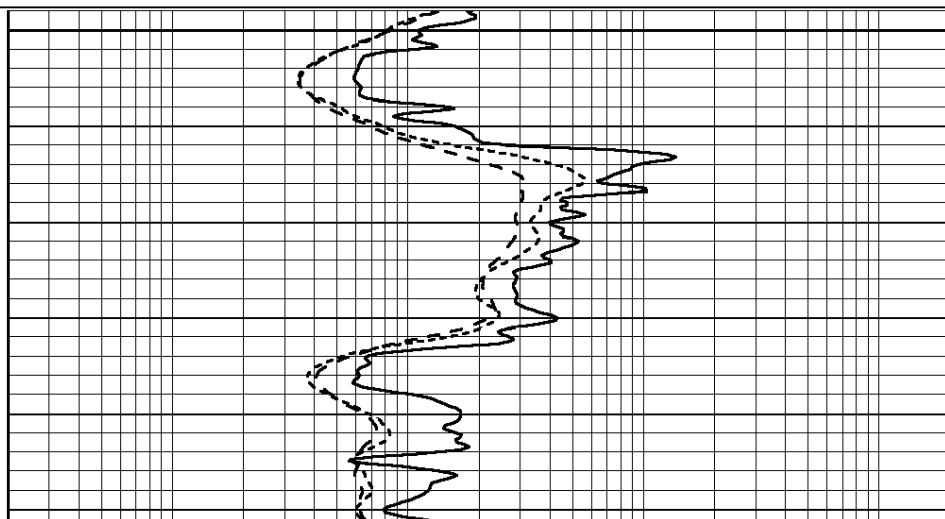


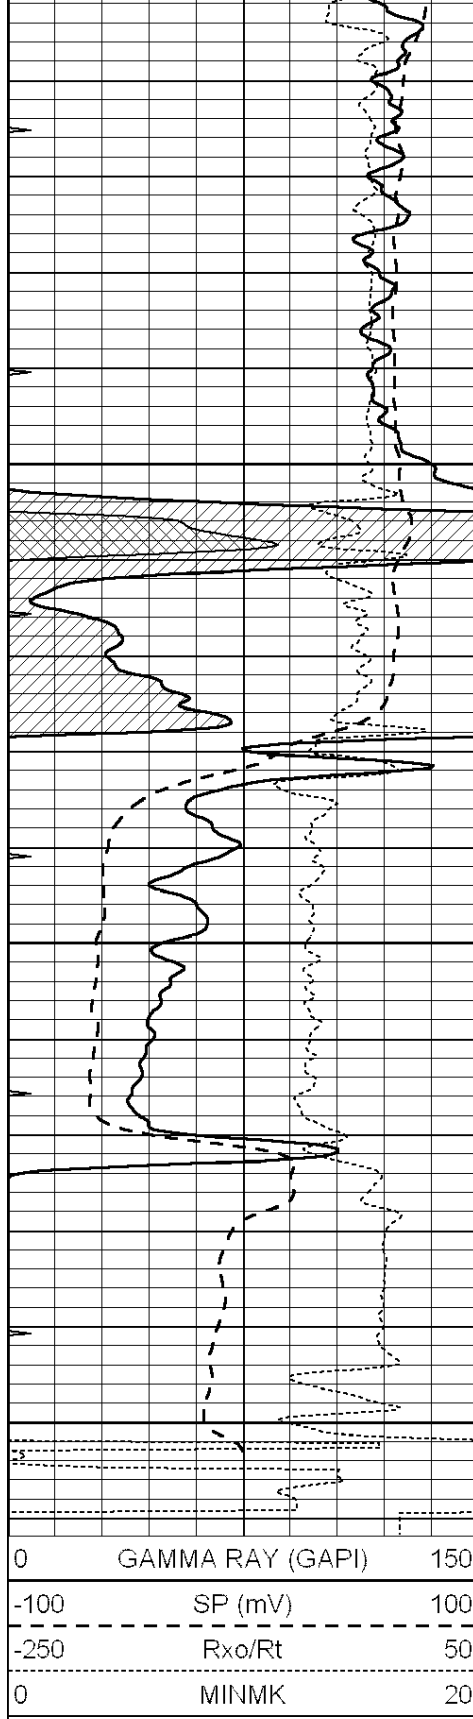

5200

5250

5300

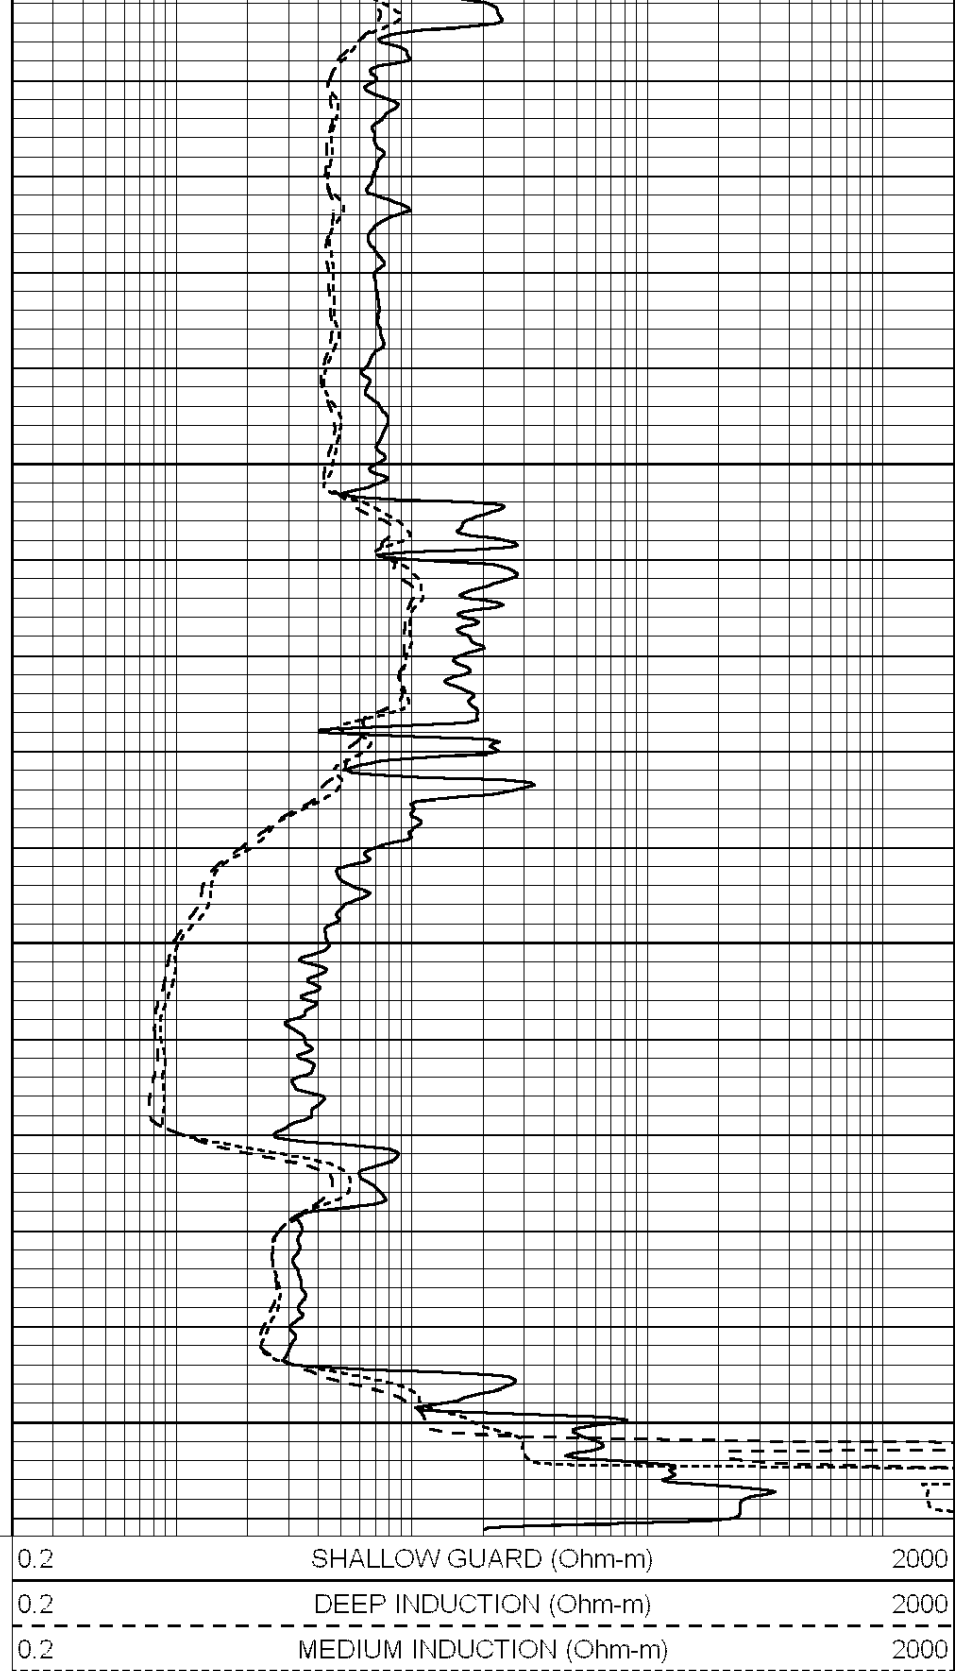

Calibration Report

Database File: 1598ddn.db
Dataset Pathname: pass4
Dataset Creation: Wed Aug 30 02:13:00 2017 by Log SOC 120430

Dual Induction Calibration Report

Serial-Model:
Surface Cal Performed:

PROBE7-DILG
Wed Aug 30 00:06:33 2017

Surface Calibration								
Readings			References				Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	675.000	-44.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration								
Readings			References				Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification								
Readings			Targets				Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report								
Serial: 002			Model: PRB					

Master Calibration					Performed Mon Aug 21 11:27:42 2017			
	Background	Magnesium	Aluminum	Sandstone				
Window 1	837.1	10632.5	2945.1	12110.1				cps
Window 2	772.0	9117.4	2570.1	10197.3				cps
Window 3	631.7	4669.0	1481.9	5042.9				cps
Window 4	187.0	187.5	185.9	189.9				cps
Long Space	0.0	8345.4	1798.1	9425.3				cps
Short Space	1.1	1927.9	1285.9	2050.2				cps
Rho		1.7100	2.5960	1.3800				g/cc
Pe		0.0000	2.5700	1.5500				
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio				: 0.558
Spine Angle	: 75.2	Spine Slope	: 3.790	Spine Intercept				: -19.6

Before Survey Verification					Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0				cps
Window 2	0.0	0.0	0.0	0.0				cps
Window 3	0.0	0.0	0.0	0.0				cps
Window 4	0.0	0.0	0.0	0.0				cps
Long Space	0.0	0.0	0.0	0.0				cps
Short Space	0.0	0.0	0.0	0.0				cps
Measured Rho		0.0000	0.0000	0.0000				g/cc
Measured Compaction		0.0000	0.0000	0.0000				wt%

Measured Correction	0.0000	0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	
After Survey Verification				
Performed Wed Dec 31 18:00:00 1969				
Window 1	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	g/cc
Measured Pe		0.0000	0.0000	

Compensated Neutron Calibration Report				
Serial Number:		070808		
Tool Model:		Probe		
PRE-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
POST-SURVEY VERIFICATION				
Detector	Readings	Measured	Target	
Short Space	cps			
Long Space	cps	pu	pu	
Gamma Ray Calibration Report				
Serial Number:		070558		
Tool Model:		OPEN_GR		
Performed:		Wed May 31 00:09:32 2017		
Calibrator Value:		1.0	GAPI	
Background Reading:		0.0	cps	
Calibrator Reading:		1.0	cps	
Sensitivity:		0.2800	GAPI/cps	