



**Gamma Ray
Ccl/Radial
Cement Bond
Log**

Company: **Jone Oil Exploration, LLC.**
 Well: **Butcher # 30**
 Field: **Peru-Sedan**
 County: **Chautauqua** State: **Kansas**

Location: **SEC 25 TWP 33S RGE 10E** API #: **15-019-27674-0000**

Permanent Datum	Ground Level	Elevation	941'	Other Services
Log Measured From	Ground Level			
Drilling Measured From	Ground Level			

Company	Jone Oil Exploration, LLC.		
Well	Butcher # 30		
Field	Peru-Sedan		
County	Chautauqua		
State	Kansas		
Date	18 Oct 2019		
Run Number	One		
Depth Driller	1390'		
Depth Logger	1366'		
Bottom Logged Interval	1365'		
Top Log Interval	Surface		
Open Hole Size	6 3/4"		
Type Fluid	Water		
Consistency / Viscosity			
Estimated Cement Top	Surface		
Time Well Ready	Upon Arrival		
Equipment Number	OW 4		
Location	Hornity Mears	Oklahoma	
Accessed By	Mr. Jones		
Run Number	Borehole Record		Tubing Record
Bit	From	To	Size
Weight	From	To	Weight
Wgt/Ft	From	To	From
Size	From	To	Bottom
Top			
Bottom			
Surface			
T.D.			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

File #5438rbl-ow4
 Thank You for using Osage Wireline!!
 Crew: T. Ferguson, A. Mackey





Gr/Ccl/Radial

Database File: 5438rbl-ow4 jpnes oil butcher 30.db
 Dataset Pathname: pass1
 Presentation Format: Ow4 crbt
 Dataset Creation: Fri Oct 18 11:34:00 2019
 Charted by: Depth in Feet scaled 1:240



30 Casing Collar -6.5	0 Pipe Bond (mV) 100	0 Sector 1	100	Variable Density (usec) 1200	1 Radial Map	8
Gamma Ray (GAPI) 150	Pipe Bond x5 (mV) 20	0 Sector 2	100			
	Travel Time (usec) 220	0 Sector 3	100			
		0 Sector 4	100			
		0 Sector 5	100			
		0 Sector 6	100			
		0 Sector 7	100			




0	(mV)	20	0	Sector 3	100
Travel Time			0	Sector 4	100
1000	(usec)	220	0	Sector 5	100
			0	Sector 6	100
			0	Sector 7	100
			0	Sector 8	100

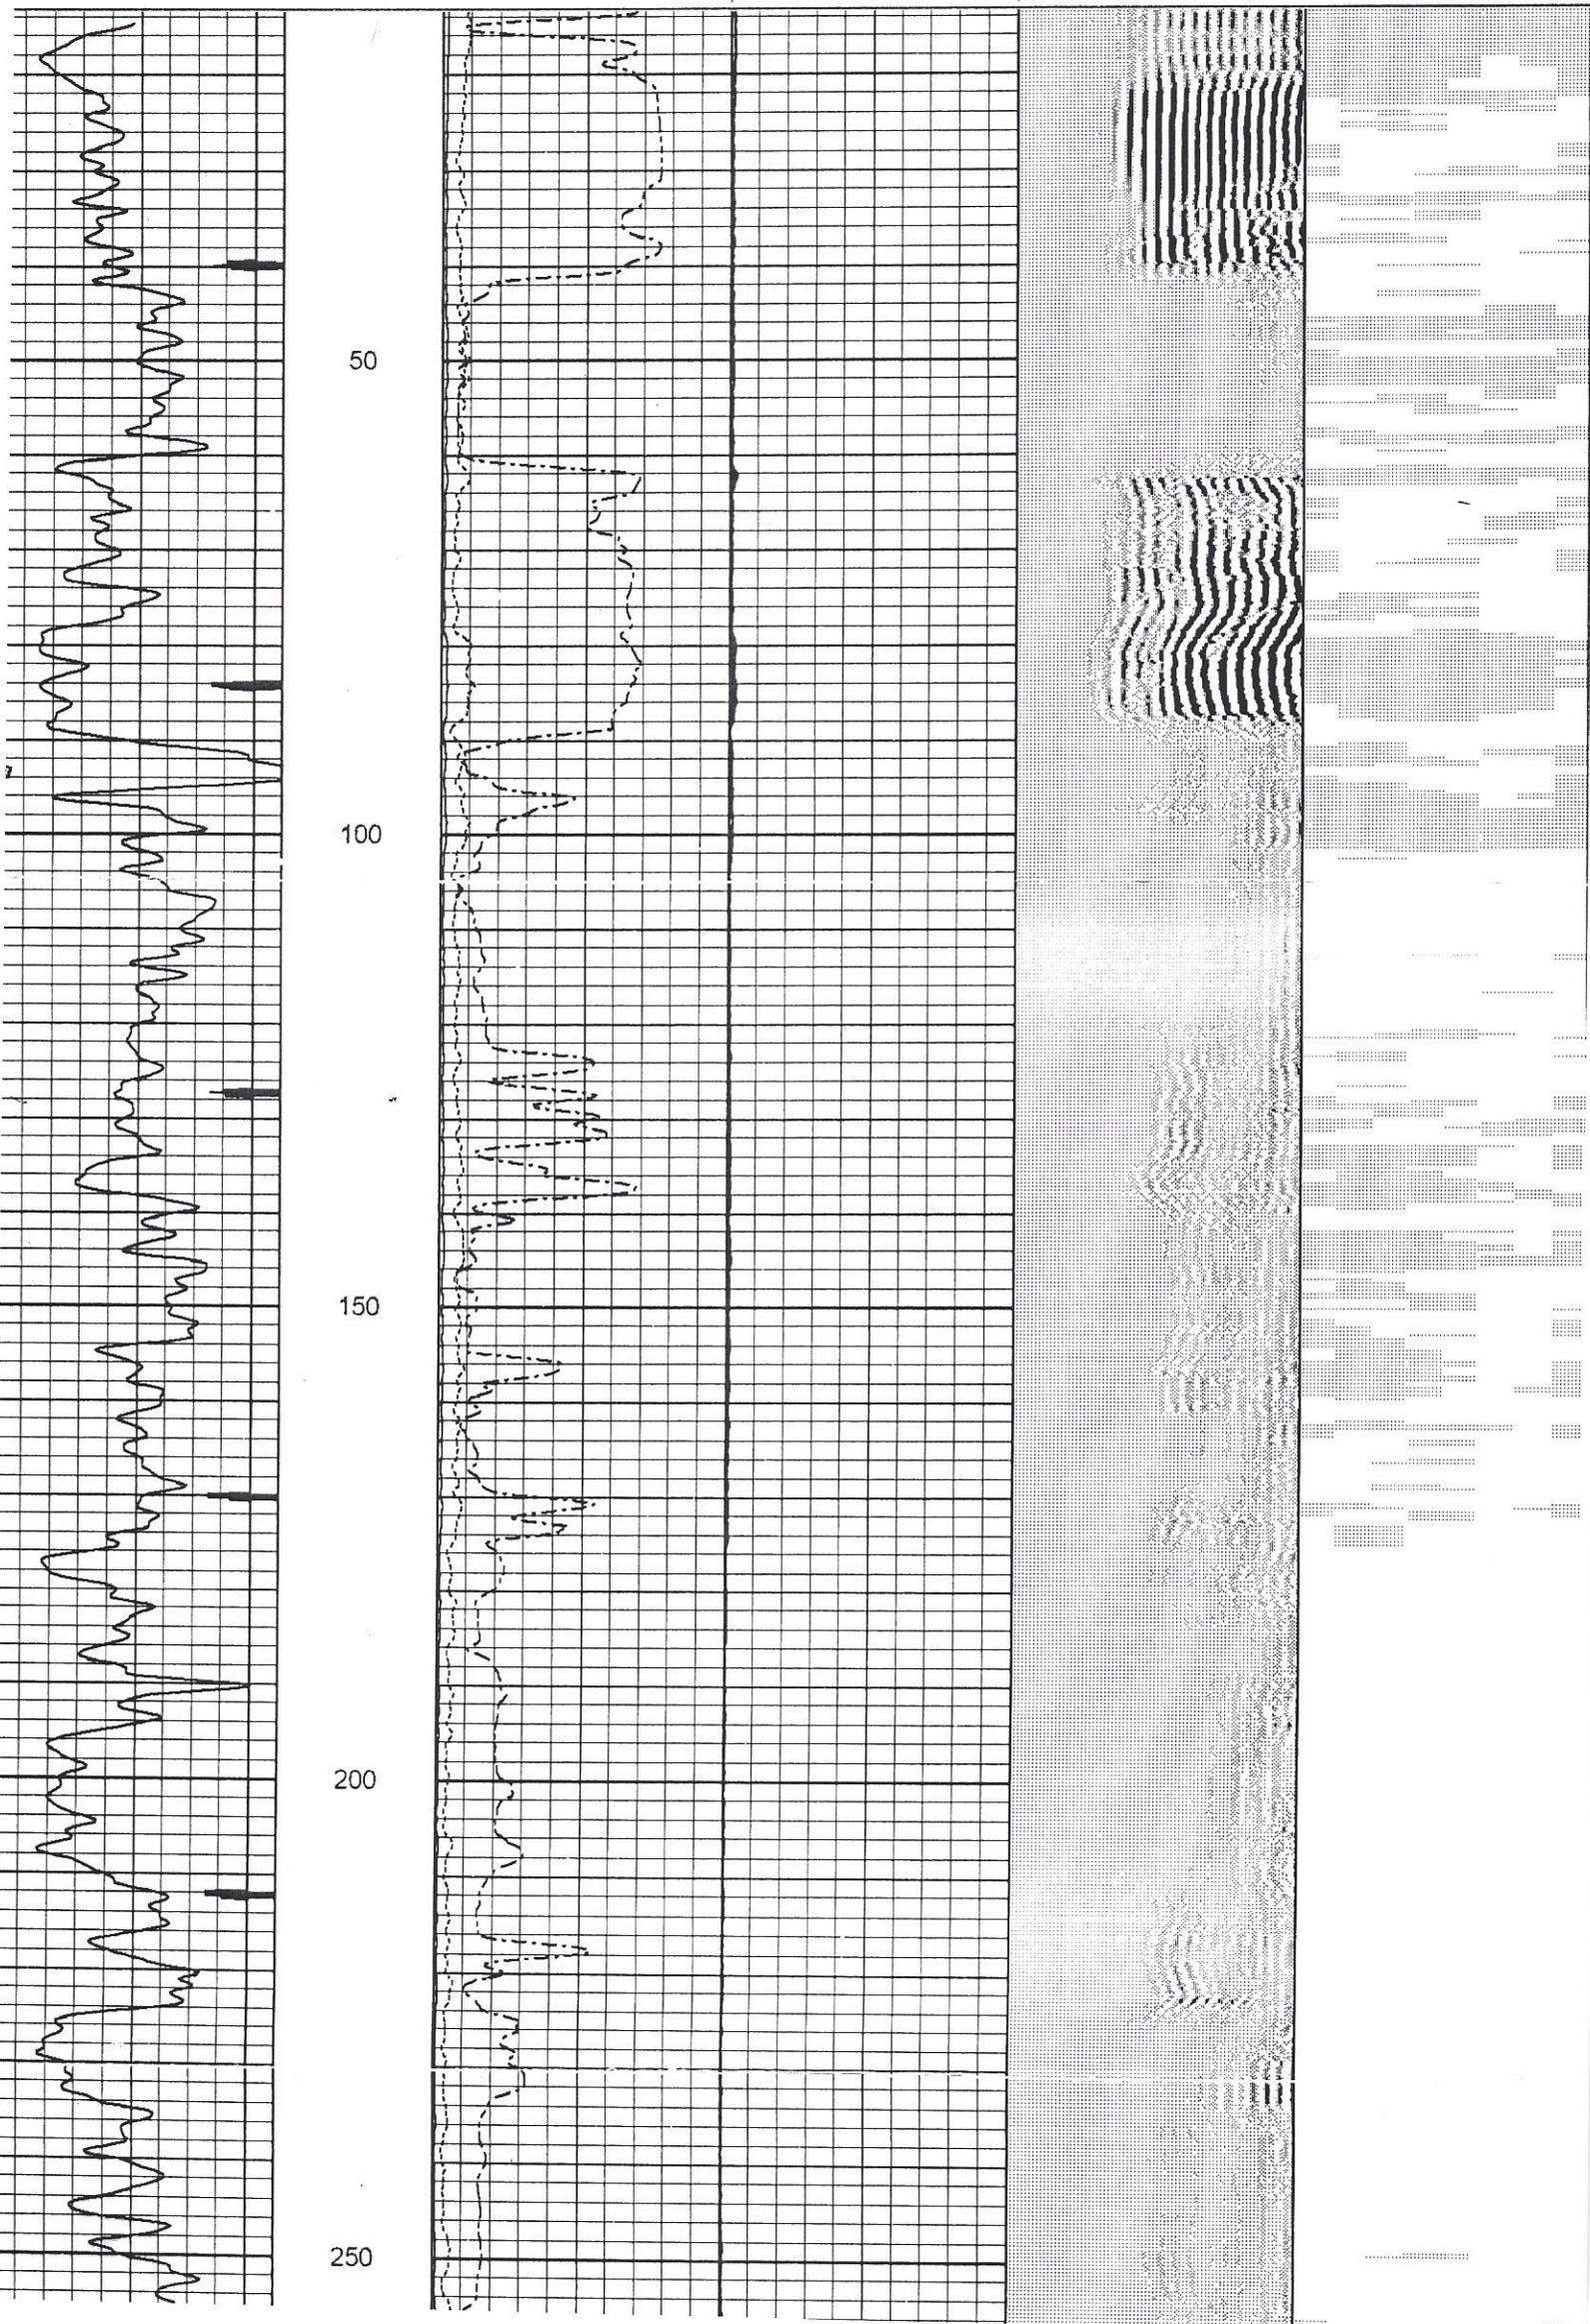


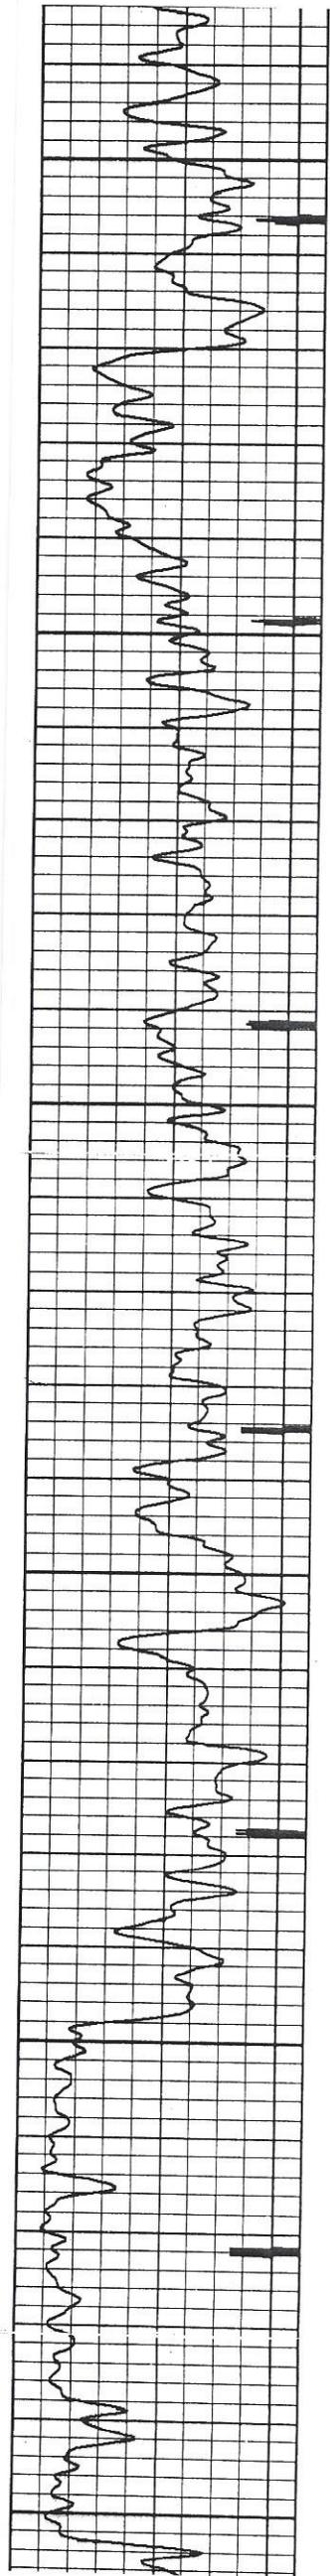



250
300
350
400
450
500

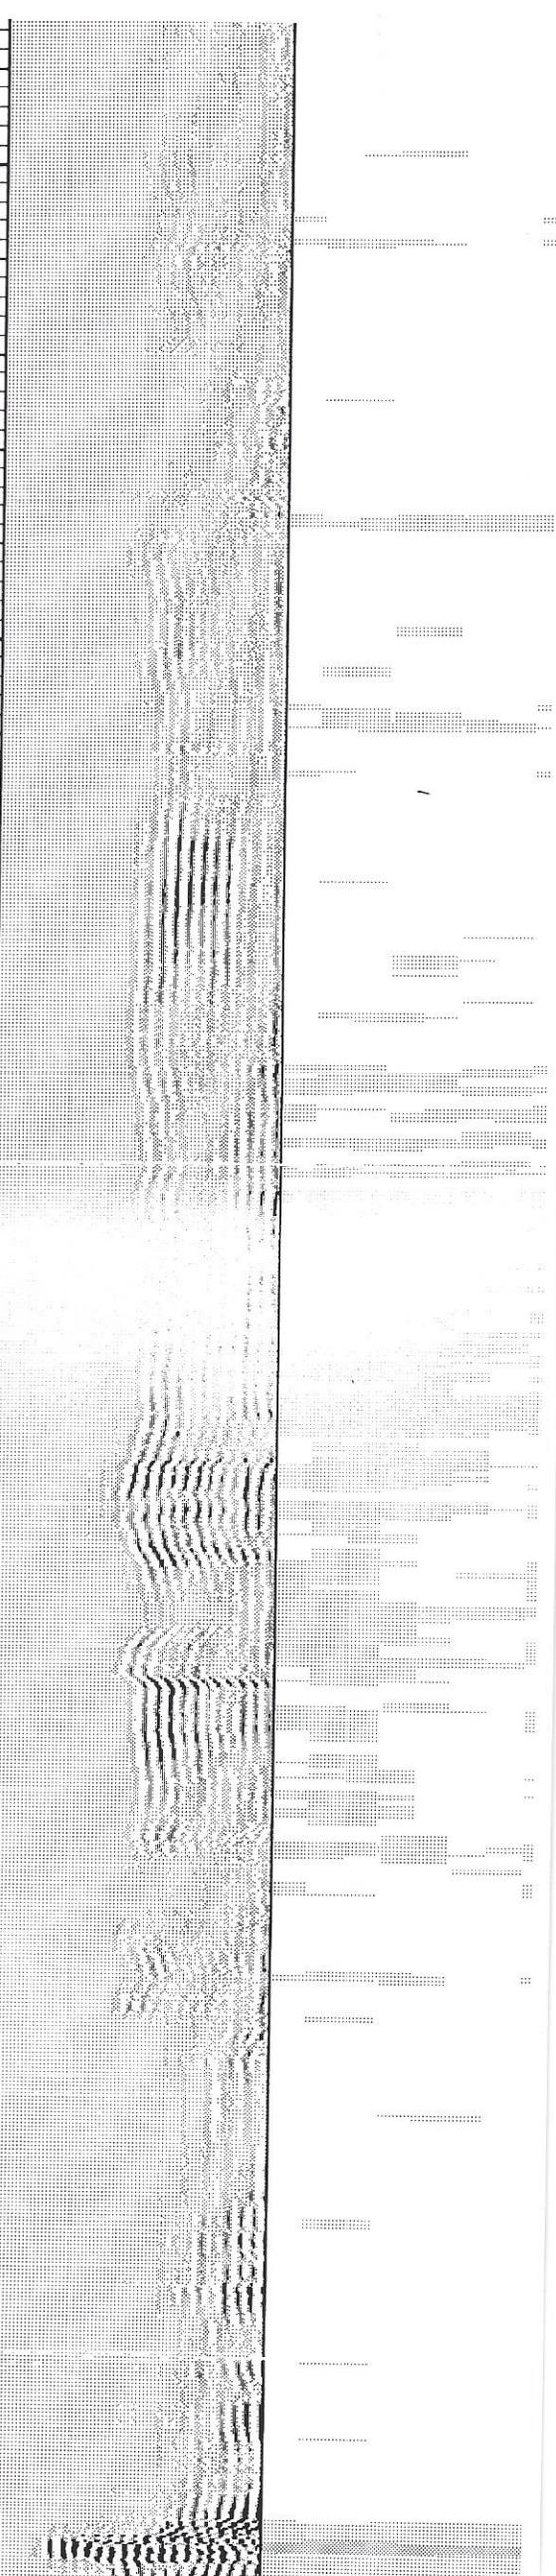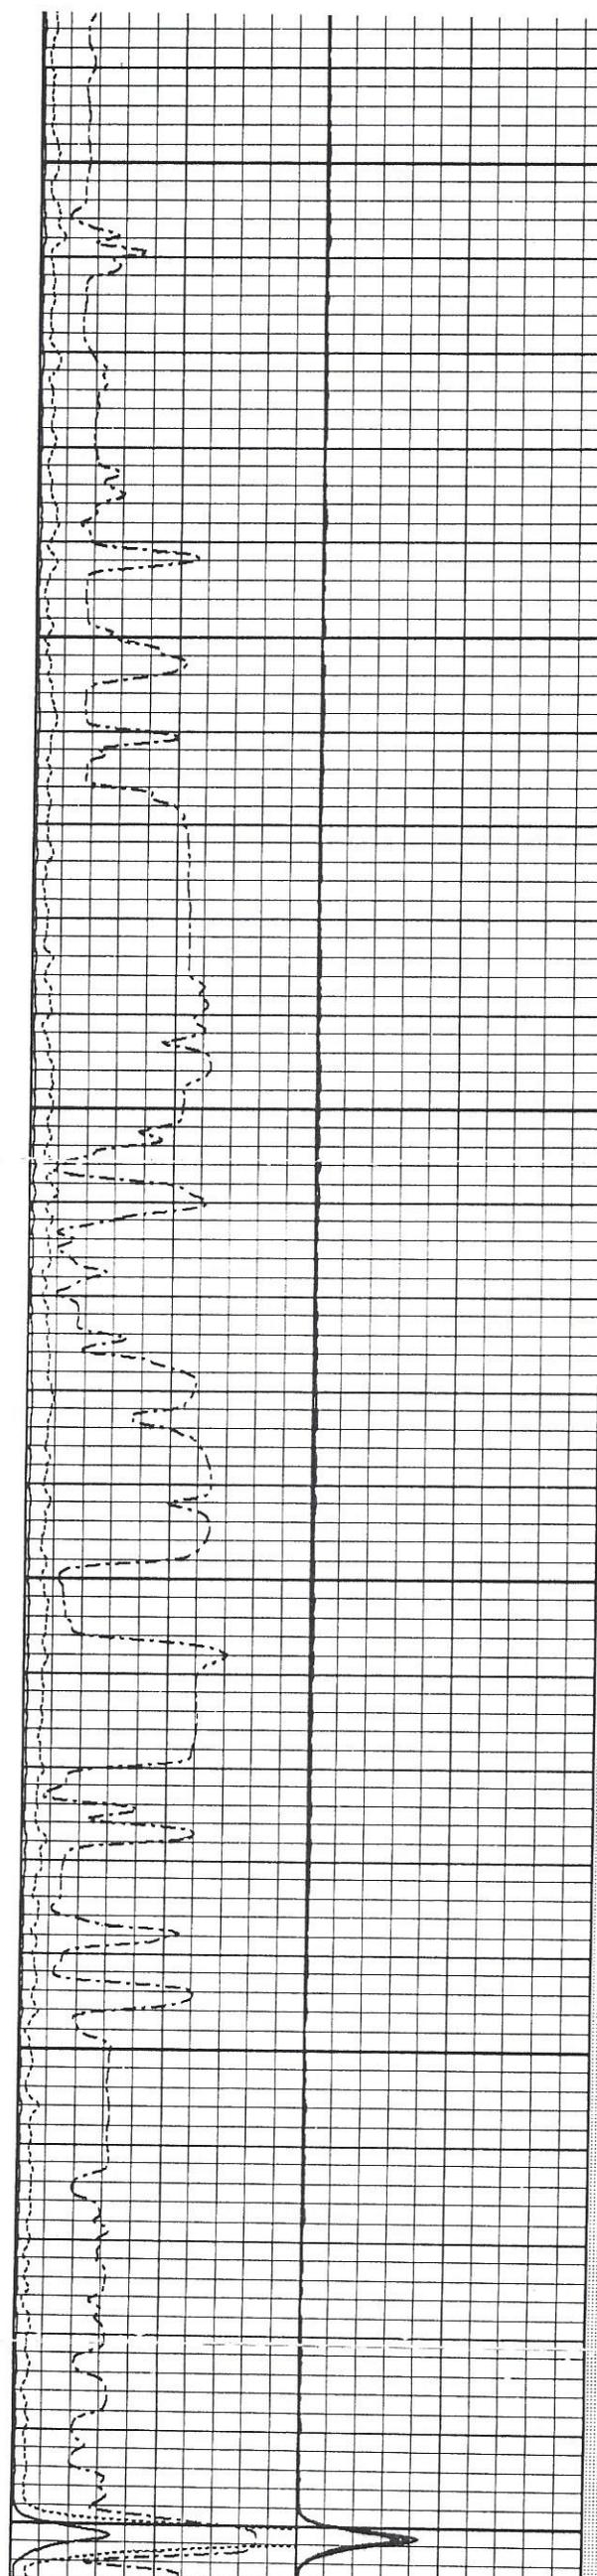

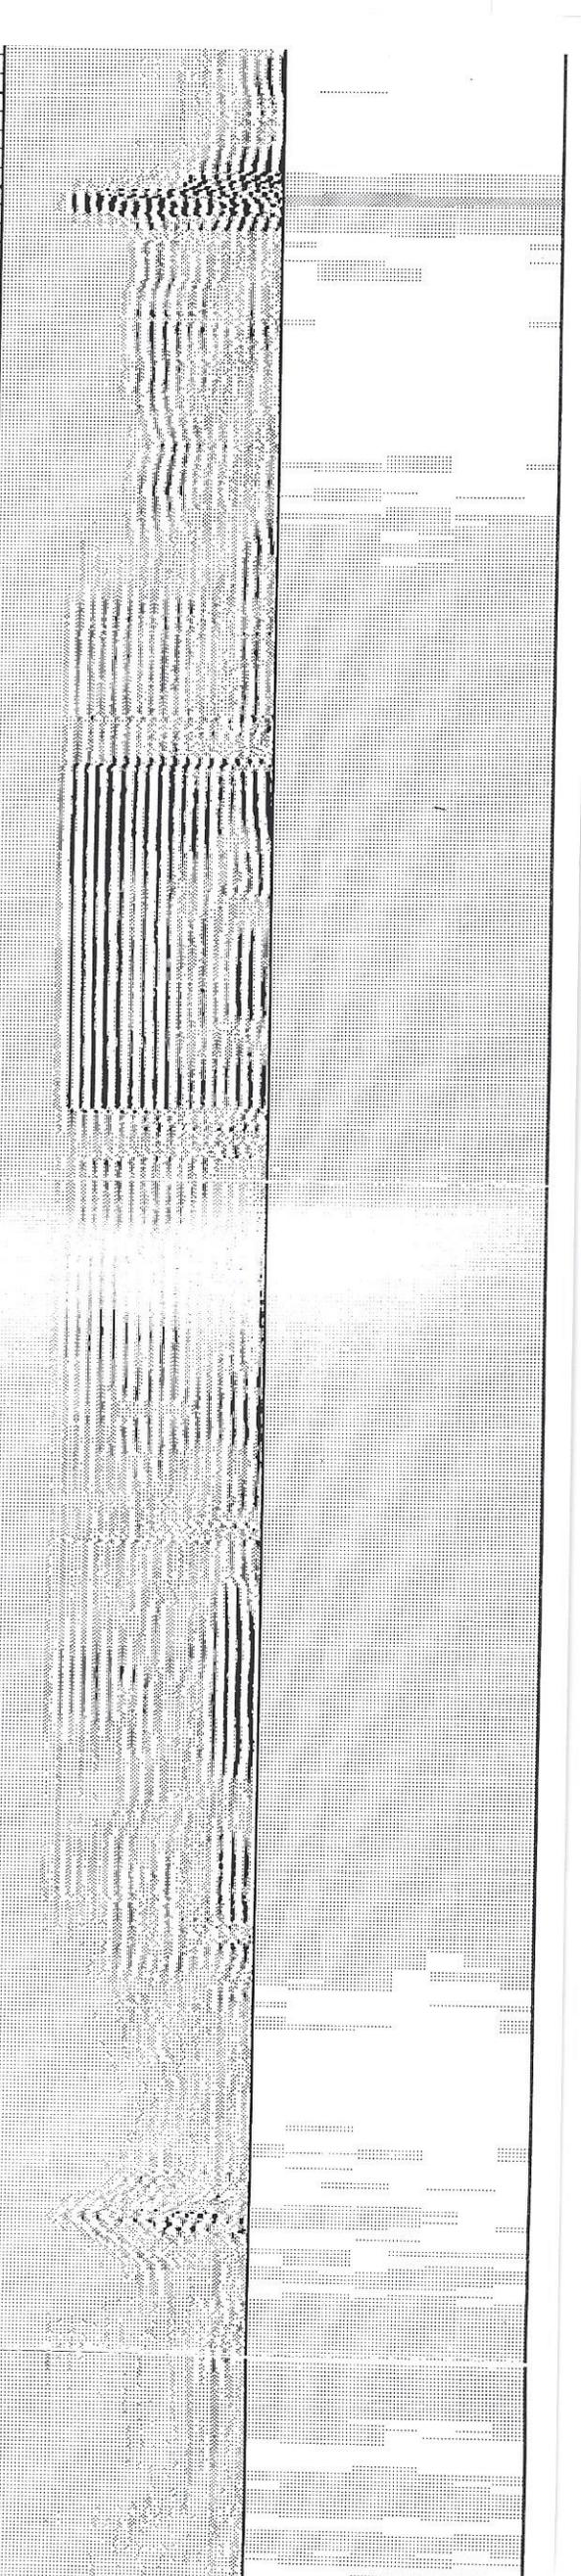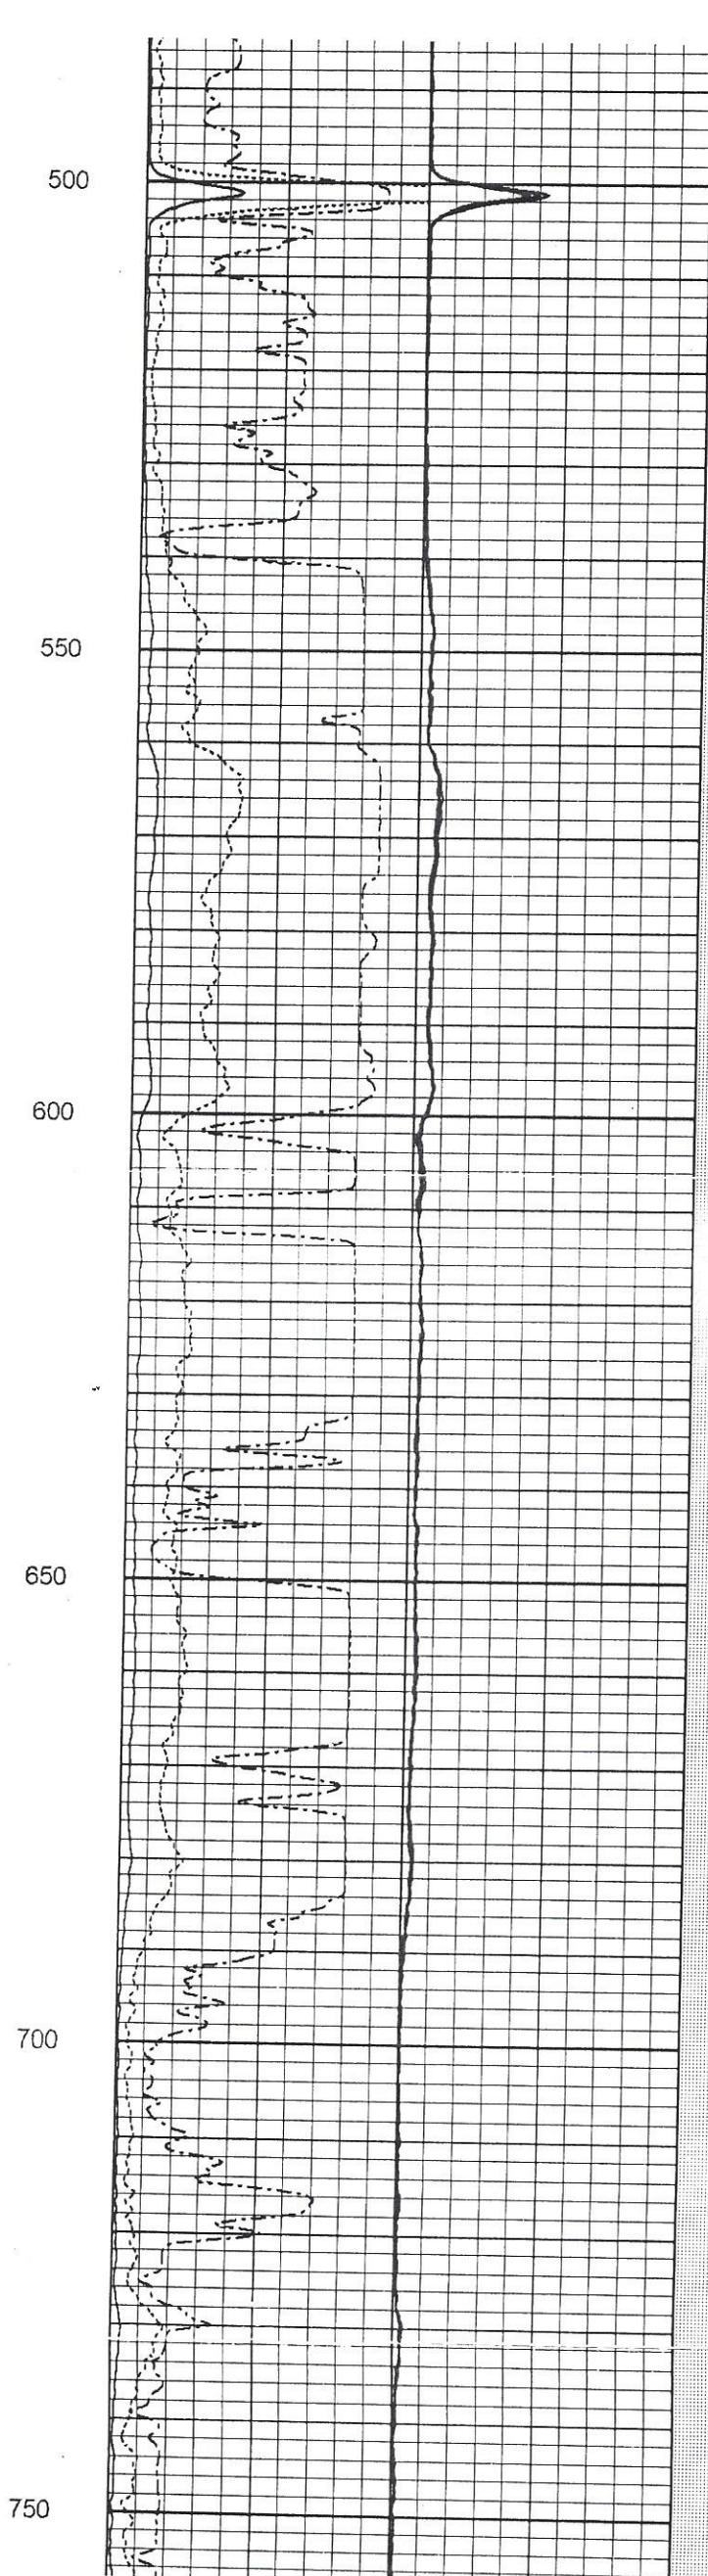
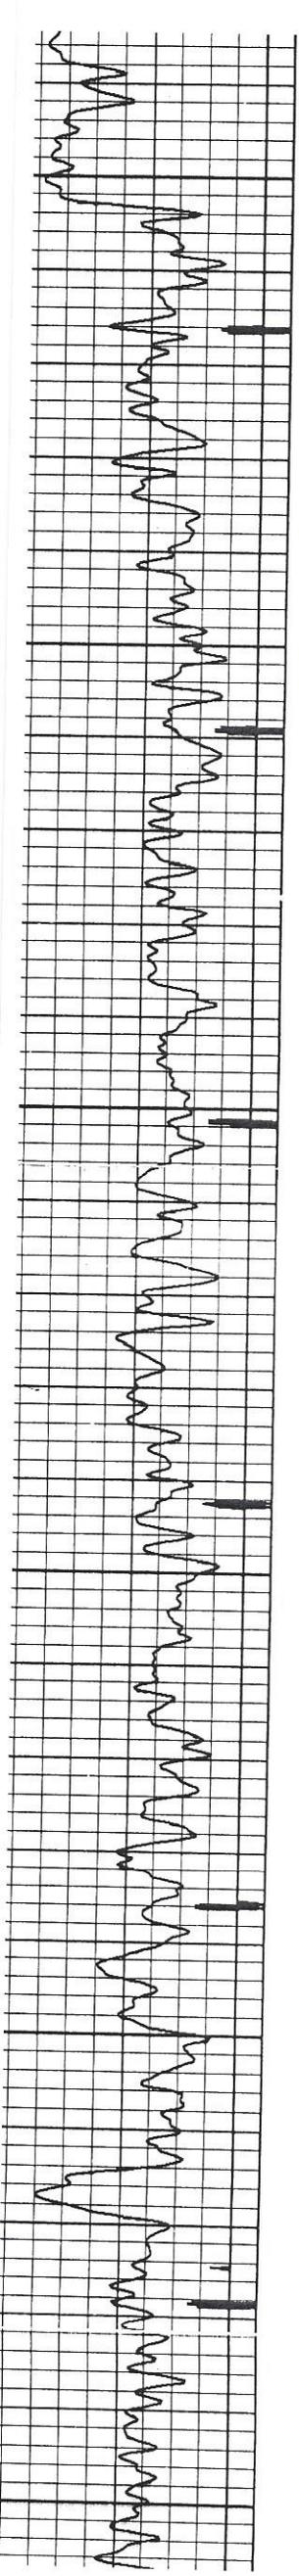


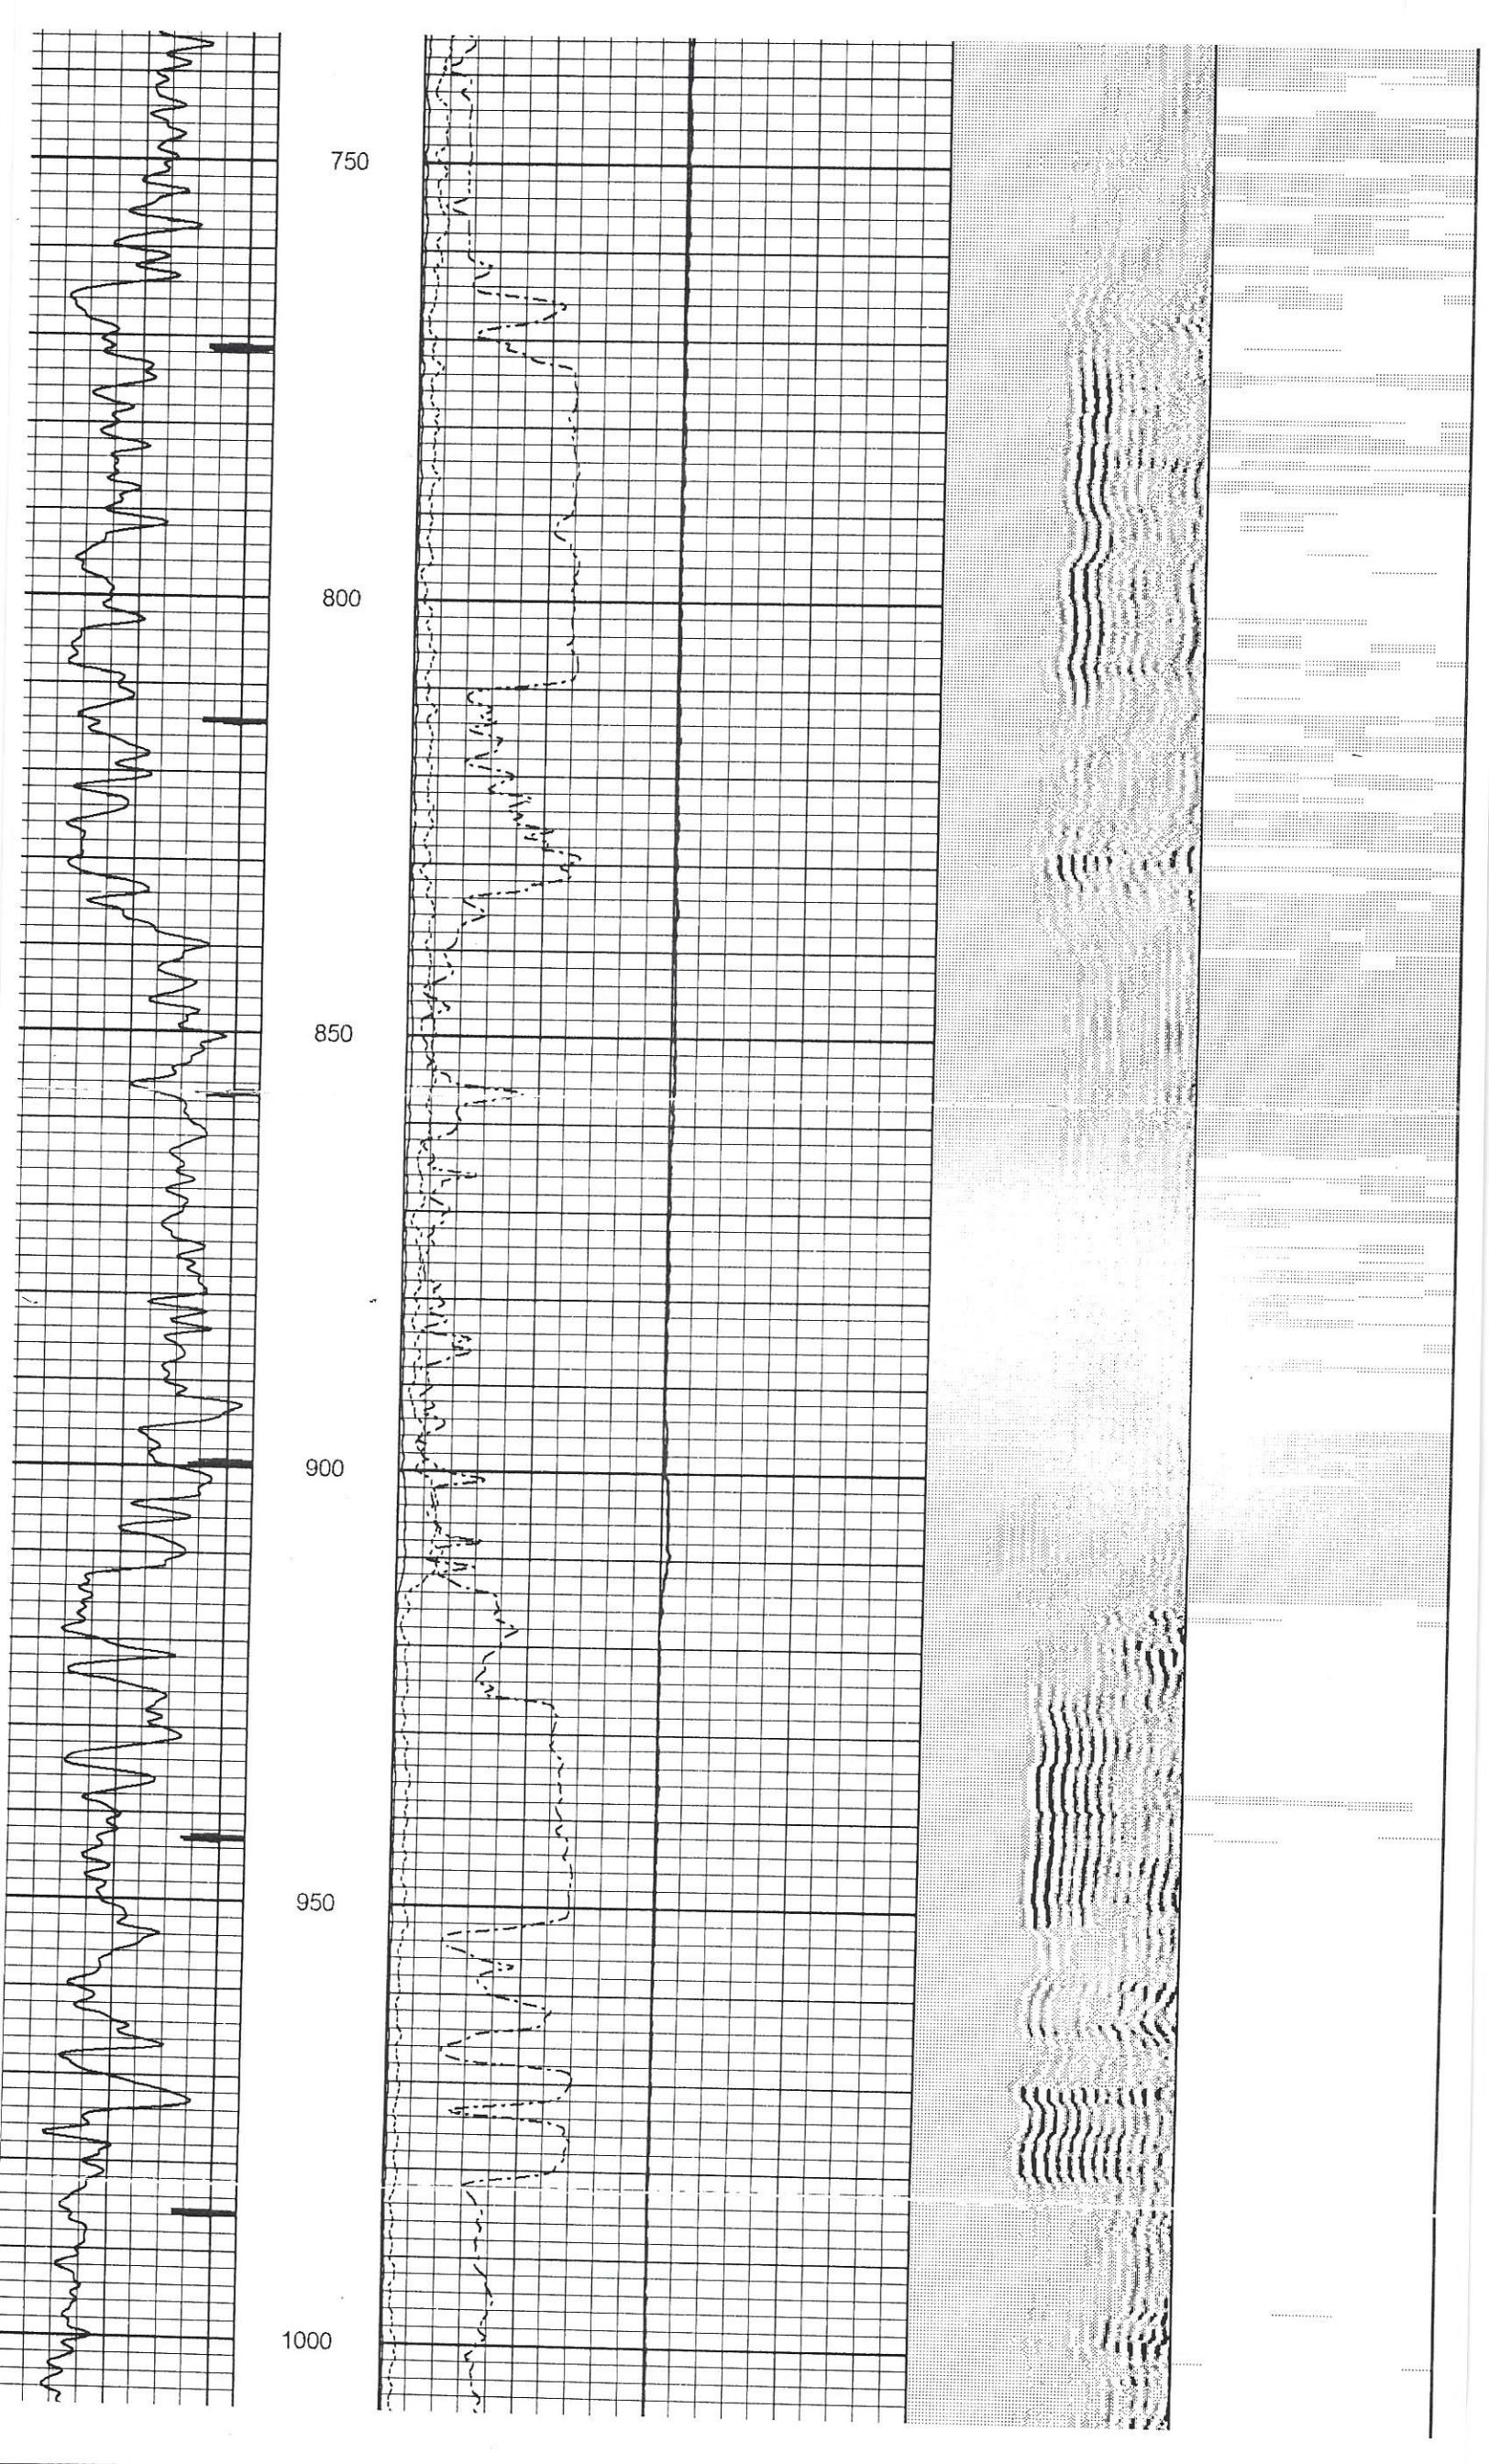

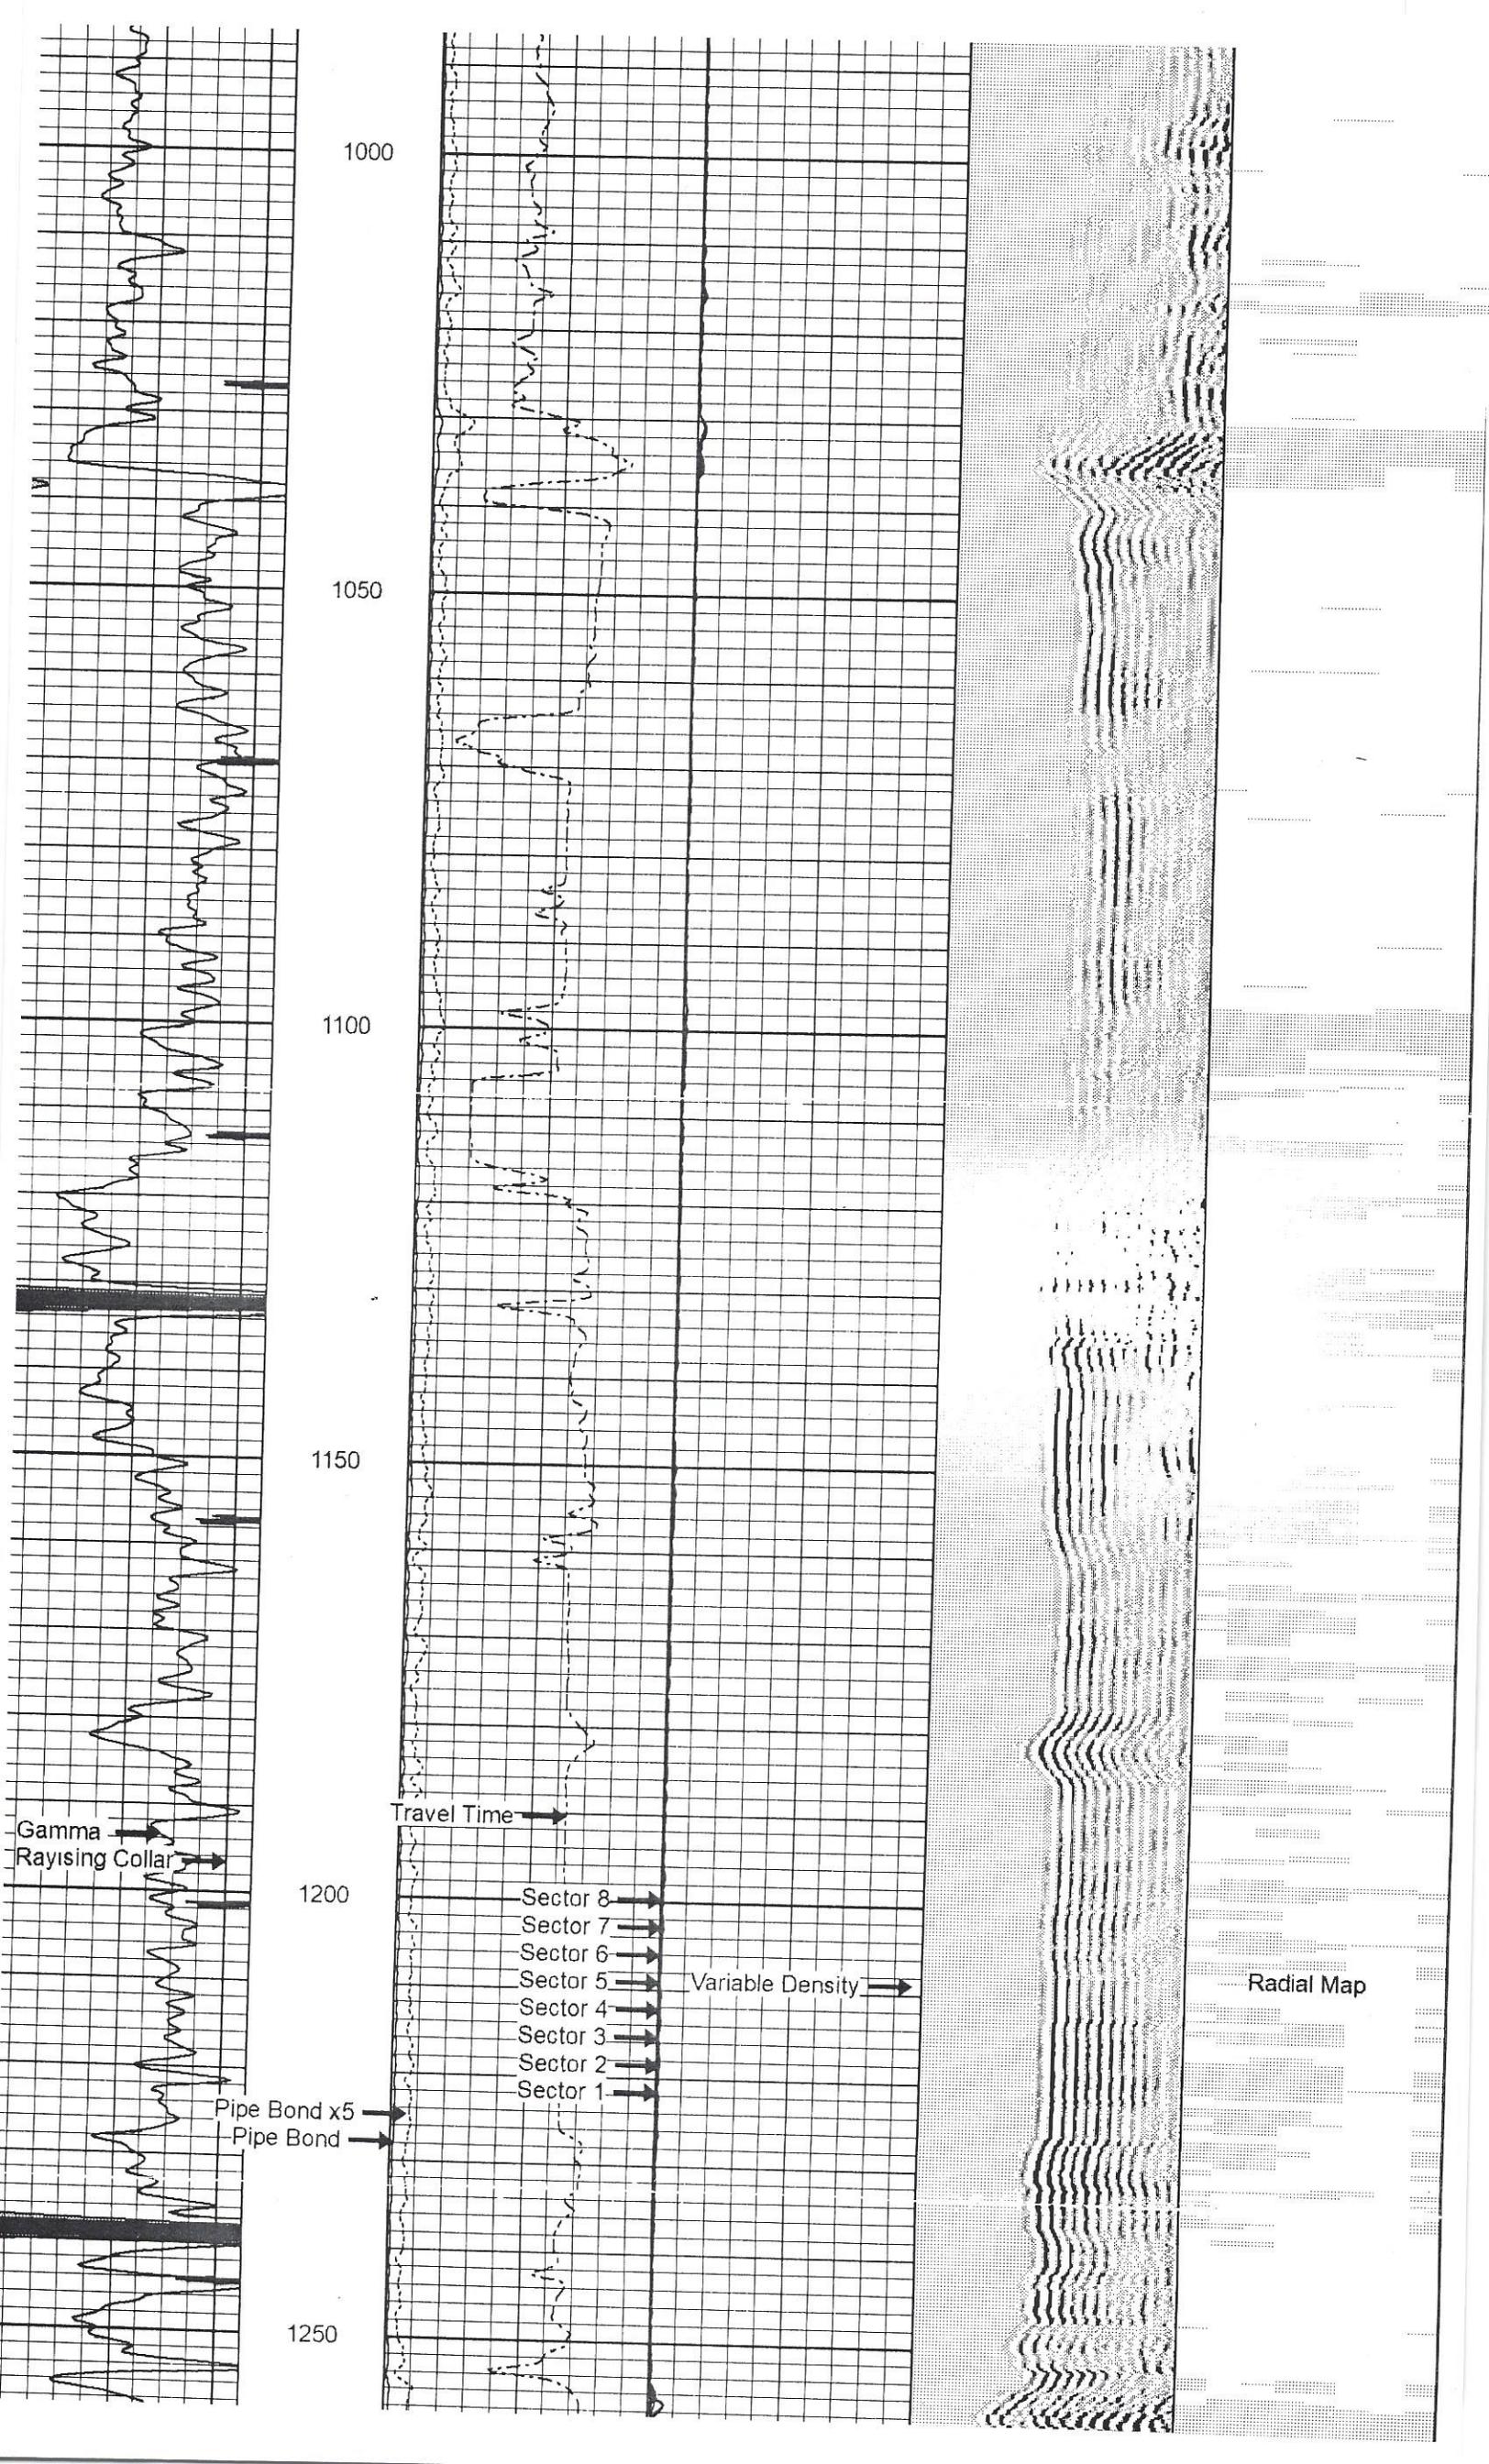

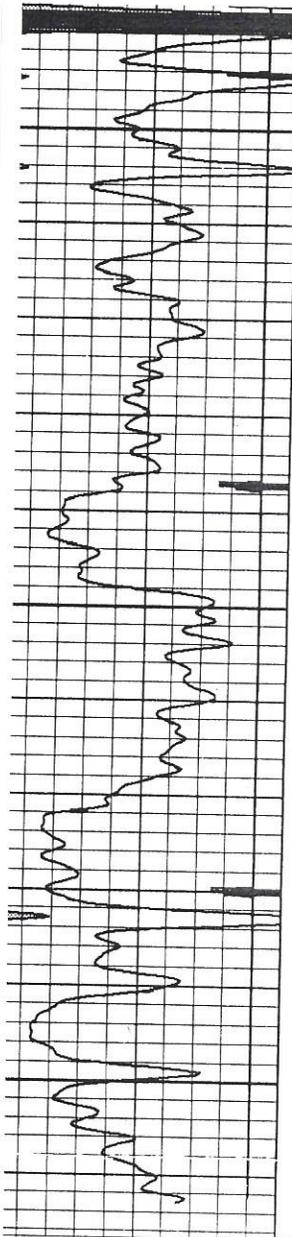

1250
1300
1350

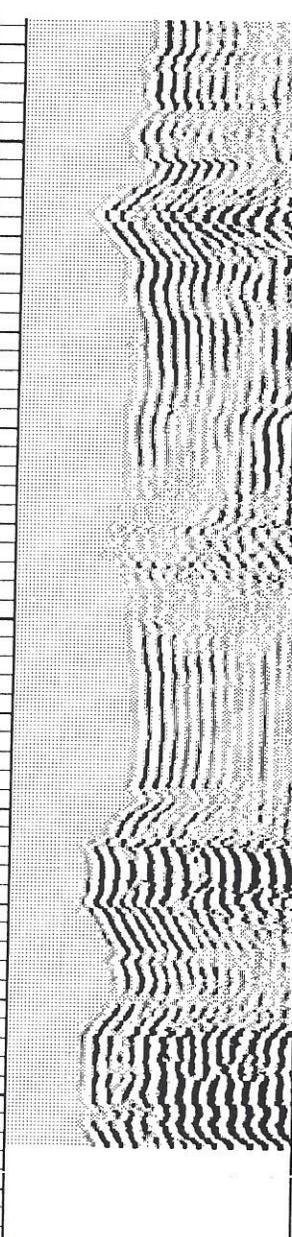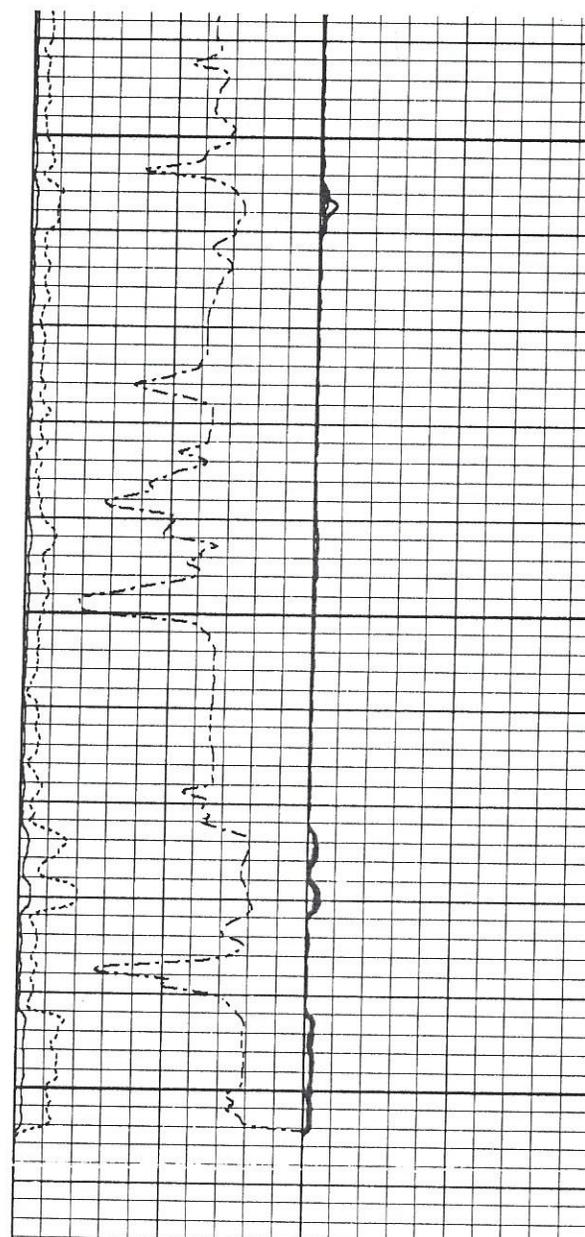

0 Casing Collar -6.5
Gamma Ray
(GAPI) 150

0	Pipe Bond (mV)	100	0	Sector 1	100
0	Pipe Bond x5	20	0	Sector 2	100
0	(mV)	20	0	Sector 3	100
0	Travel Time	220	0	Sector 4	100
1000	(usec)	220	0	Sector 5	100
			0	Sector 6	100
			0	Sector 7	100
			0	Sector 8	100

Variable Density 1
200 (usec) 1200
Radial Map 8



Gr/Ccl/Radial

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)	
			CHD-STNDRD Standard Cable Head	1.00	1.69	10.00	
			CENT-SDSCENT Centralizer	3.00	3.25	20.00	
WVFS8	11.73			RBT-Probe (070566) Prototype Probe Radli Bond Tool with Digital Telemetry	8.75	2.75	90.00
WVFS7	11.73						
WVFS6	11.73						
WVFS5	11.73						
WVFS4	11.73						
WVFS3	11.73						
WVFS2	11.73						
WVFS1	11.73		CENT-SDSCENT Centralizer	3.00	3.25	20.00	
WVFCAL	11.73						