

MICRO LOG

Company	JOLEN OPERATING COMPANY	Company	JOLEN OPERATING COMPANY
Well	CARTER #1-6	Well	CARTER #1-6
Field	WILDCAT	Field	WILDCAT
County	CLARK	County	CLARK
State	KANSAS	State	KANSAS
Location:	API # : 15-025-21611-0000	Other Services	CDL/CNL/DIL SON
Permanent Datum	SEC 6 TWP 33S RGE 23W	Elevation	
Log Measured From	1360' FNL & 975' FEL	KB. 2175	
Drilling Measured From	GROUND LEVEL	D.F. 2173	
	KELLY BUSHING 9' A.G.L.	G.L. 2166	
Date	10/04/19		
Run Number	TWO		
Depth Driller	5600		
Depth Logger	5600		
Bottom Logged Interval	5580		
Top Log Interval	3000		
Casing Driller	13 3/8" @ 242		
Casing Logger	242		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2/49		
pH / Fluid Loss	10.0/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.30 @ 72F		
Rmt @ Meas. Temp	.23 @ 72F		
Rmc @ Meas. Temp	.36 @ 72F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.16 @ 130F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	130F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	KEN LeBlanc		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
ASHLAND WEST 4 MILES, NORTH 1/2 ,
WEST INTO.


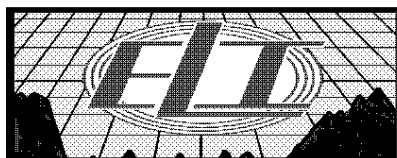



MAIN PASS


Database File: 4097pe.db
Dataset Pathname: pass8MIC
Presentation Format: _micro
Dataset Creation: Fri Oct 04 21:42:05 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

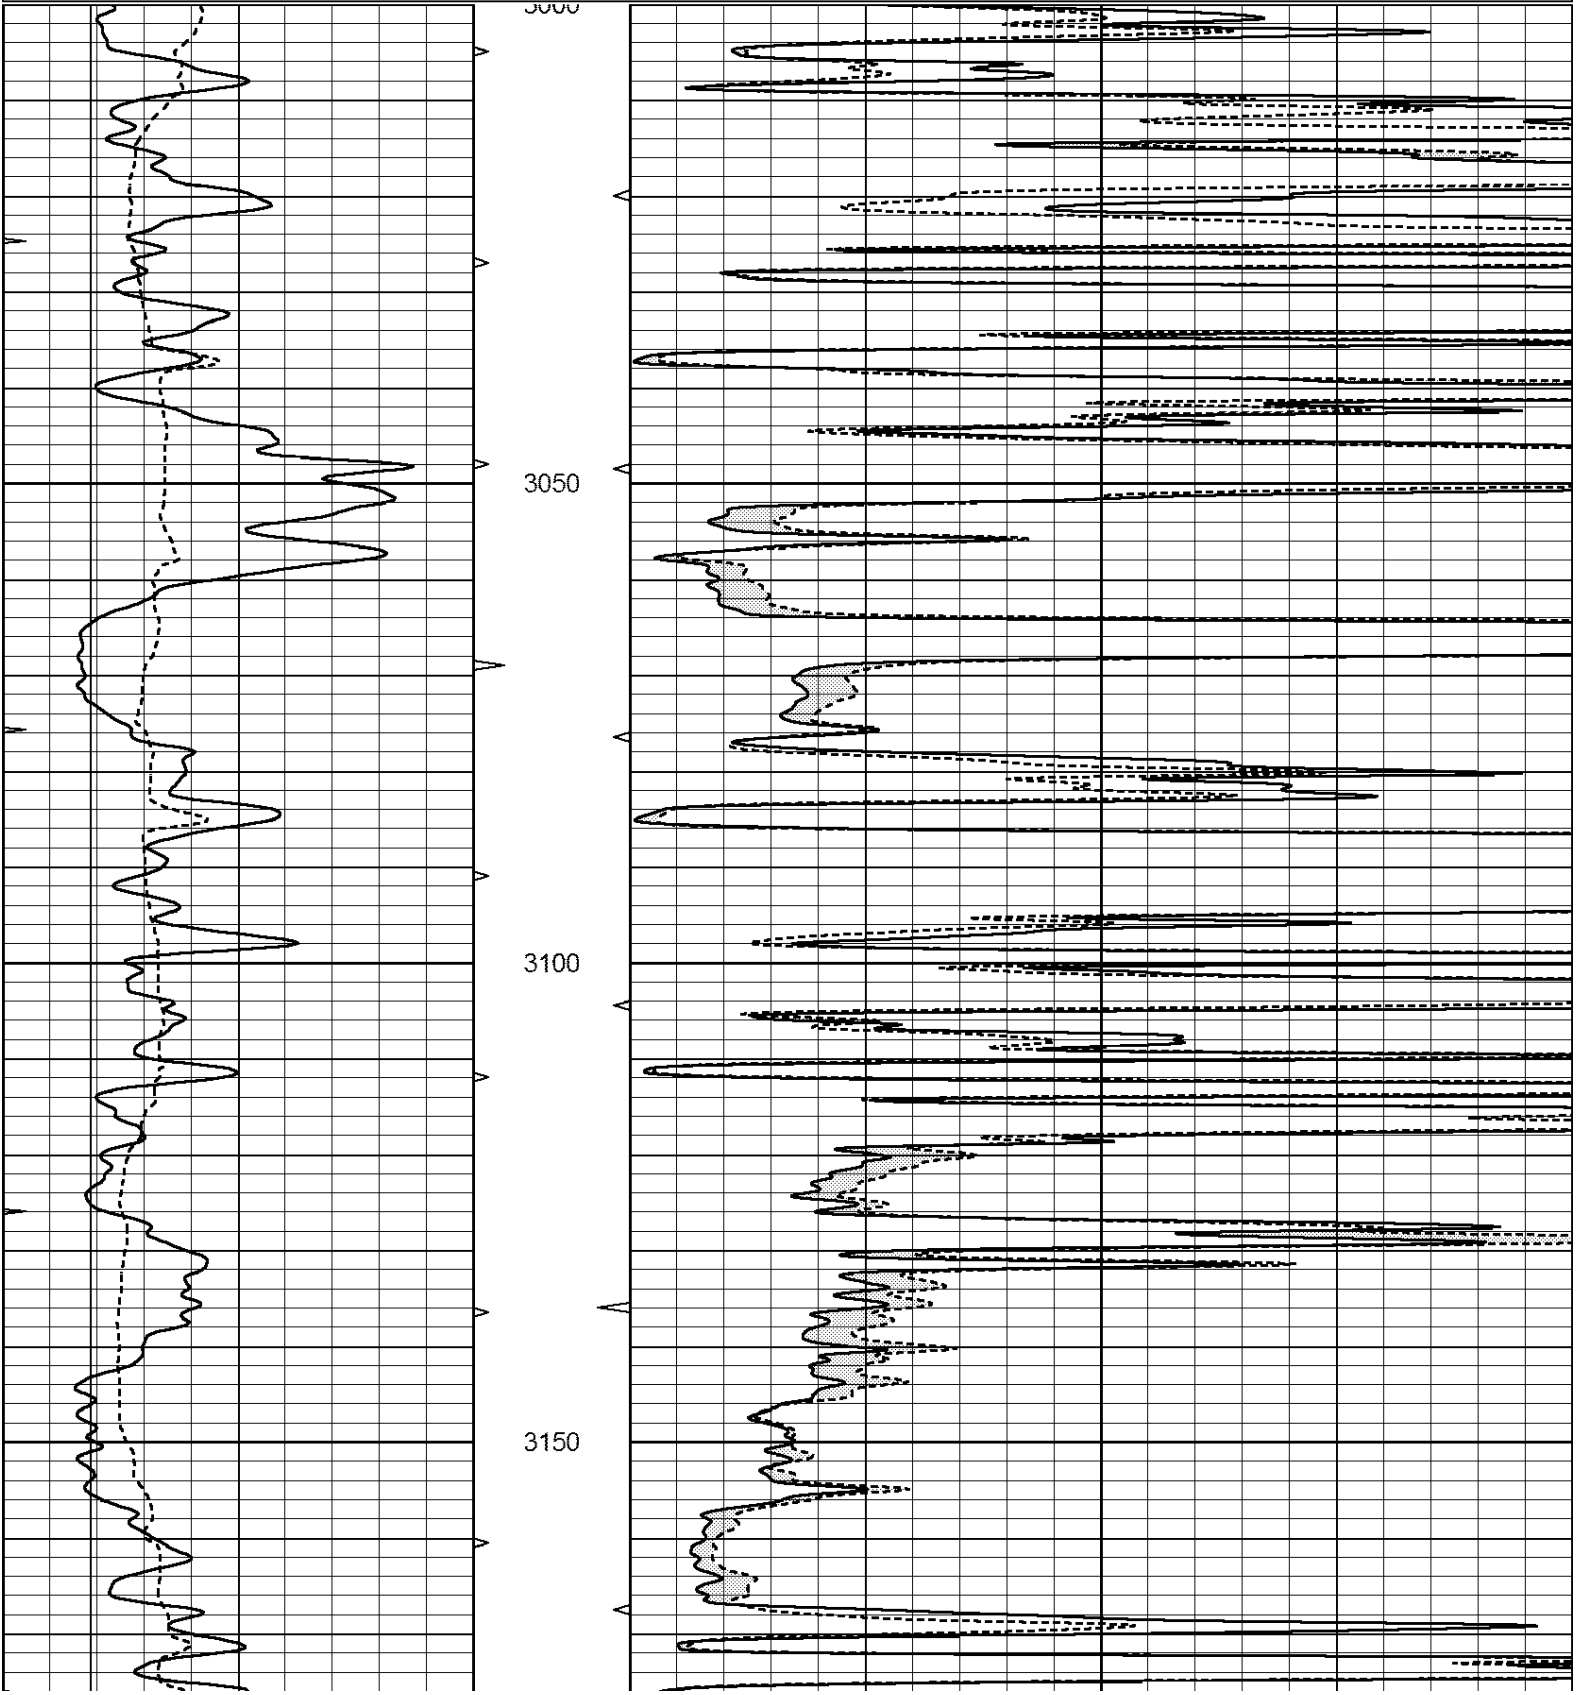

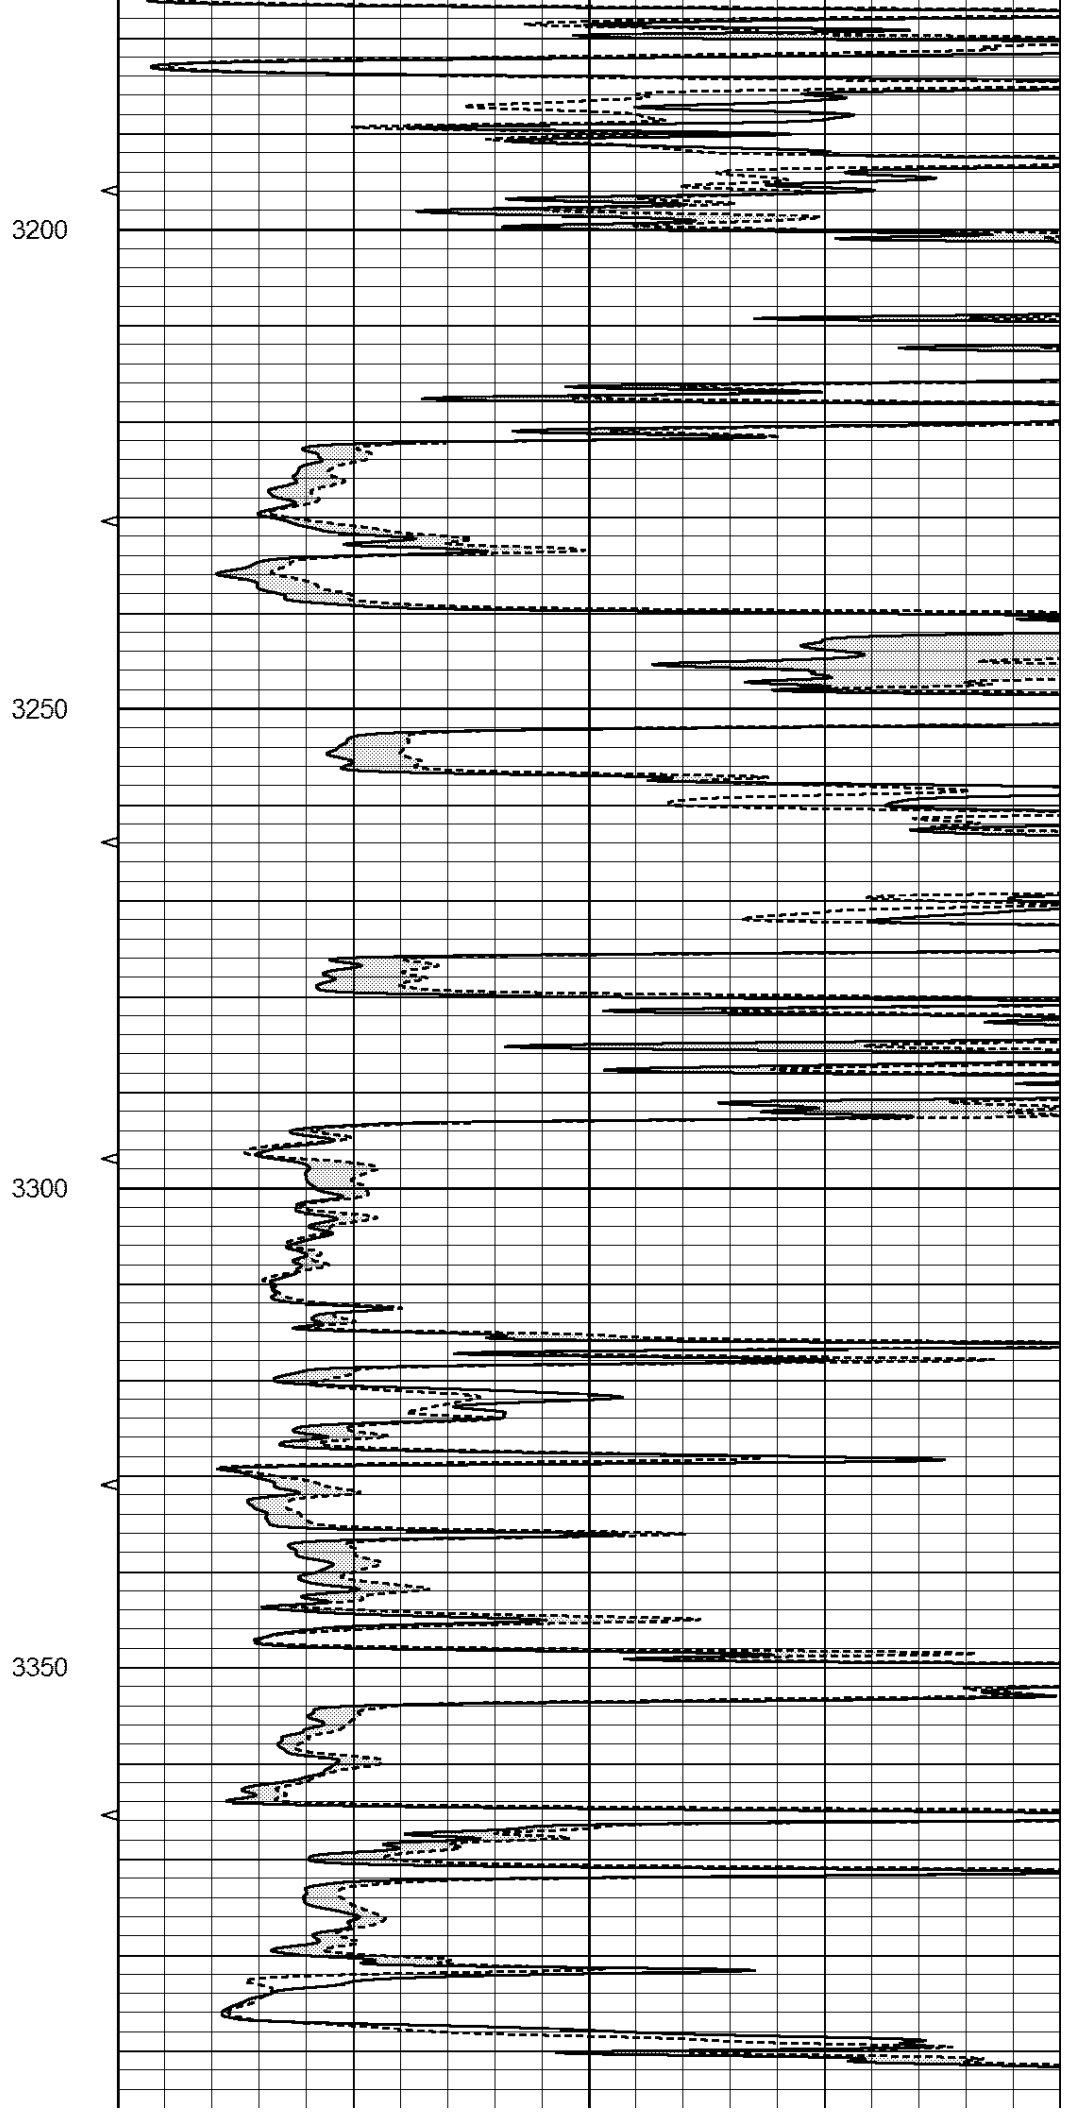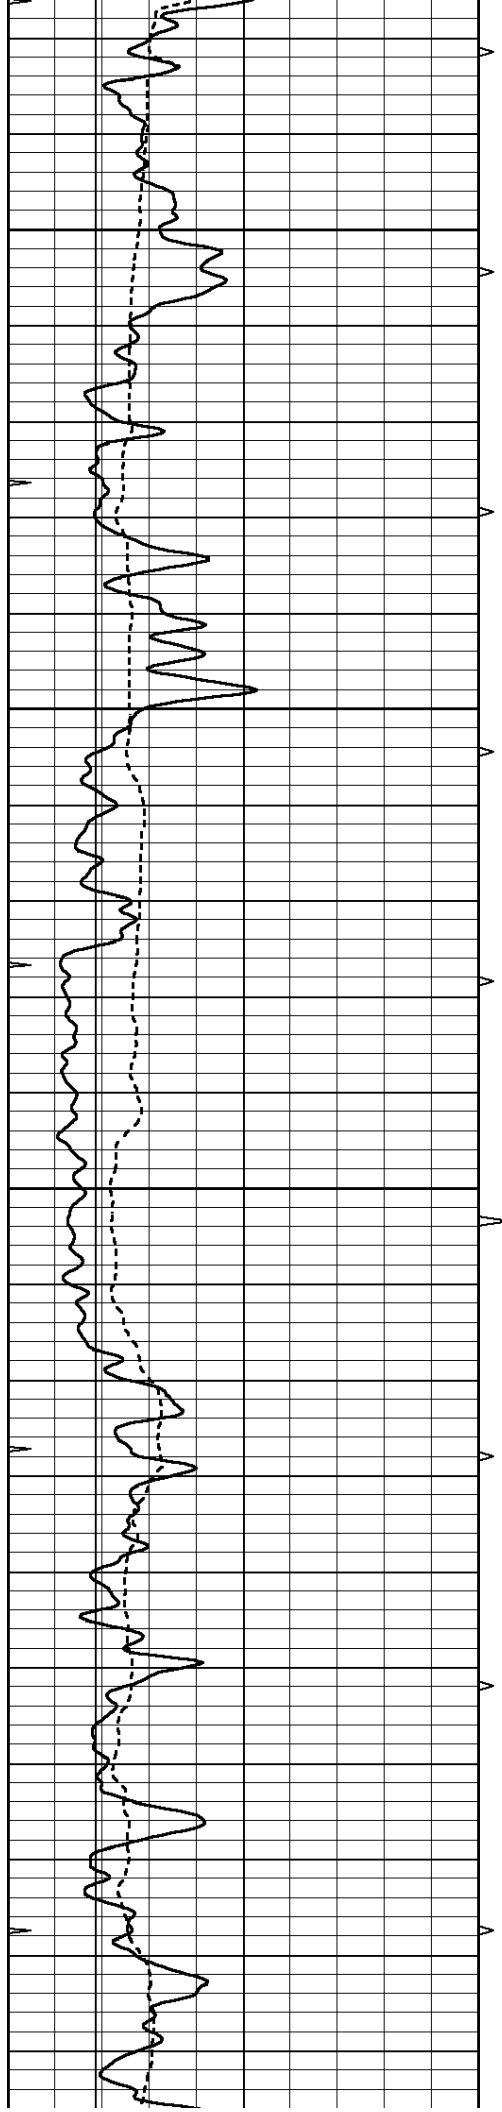

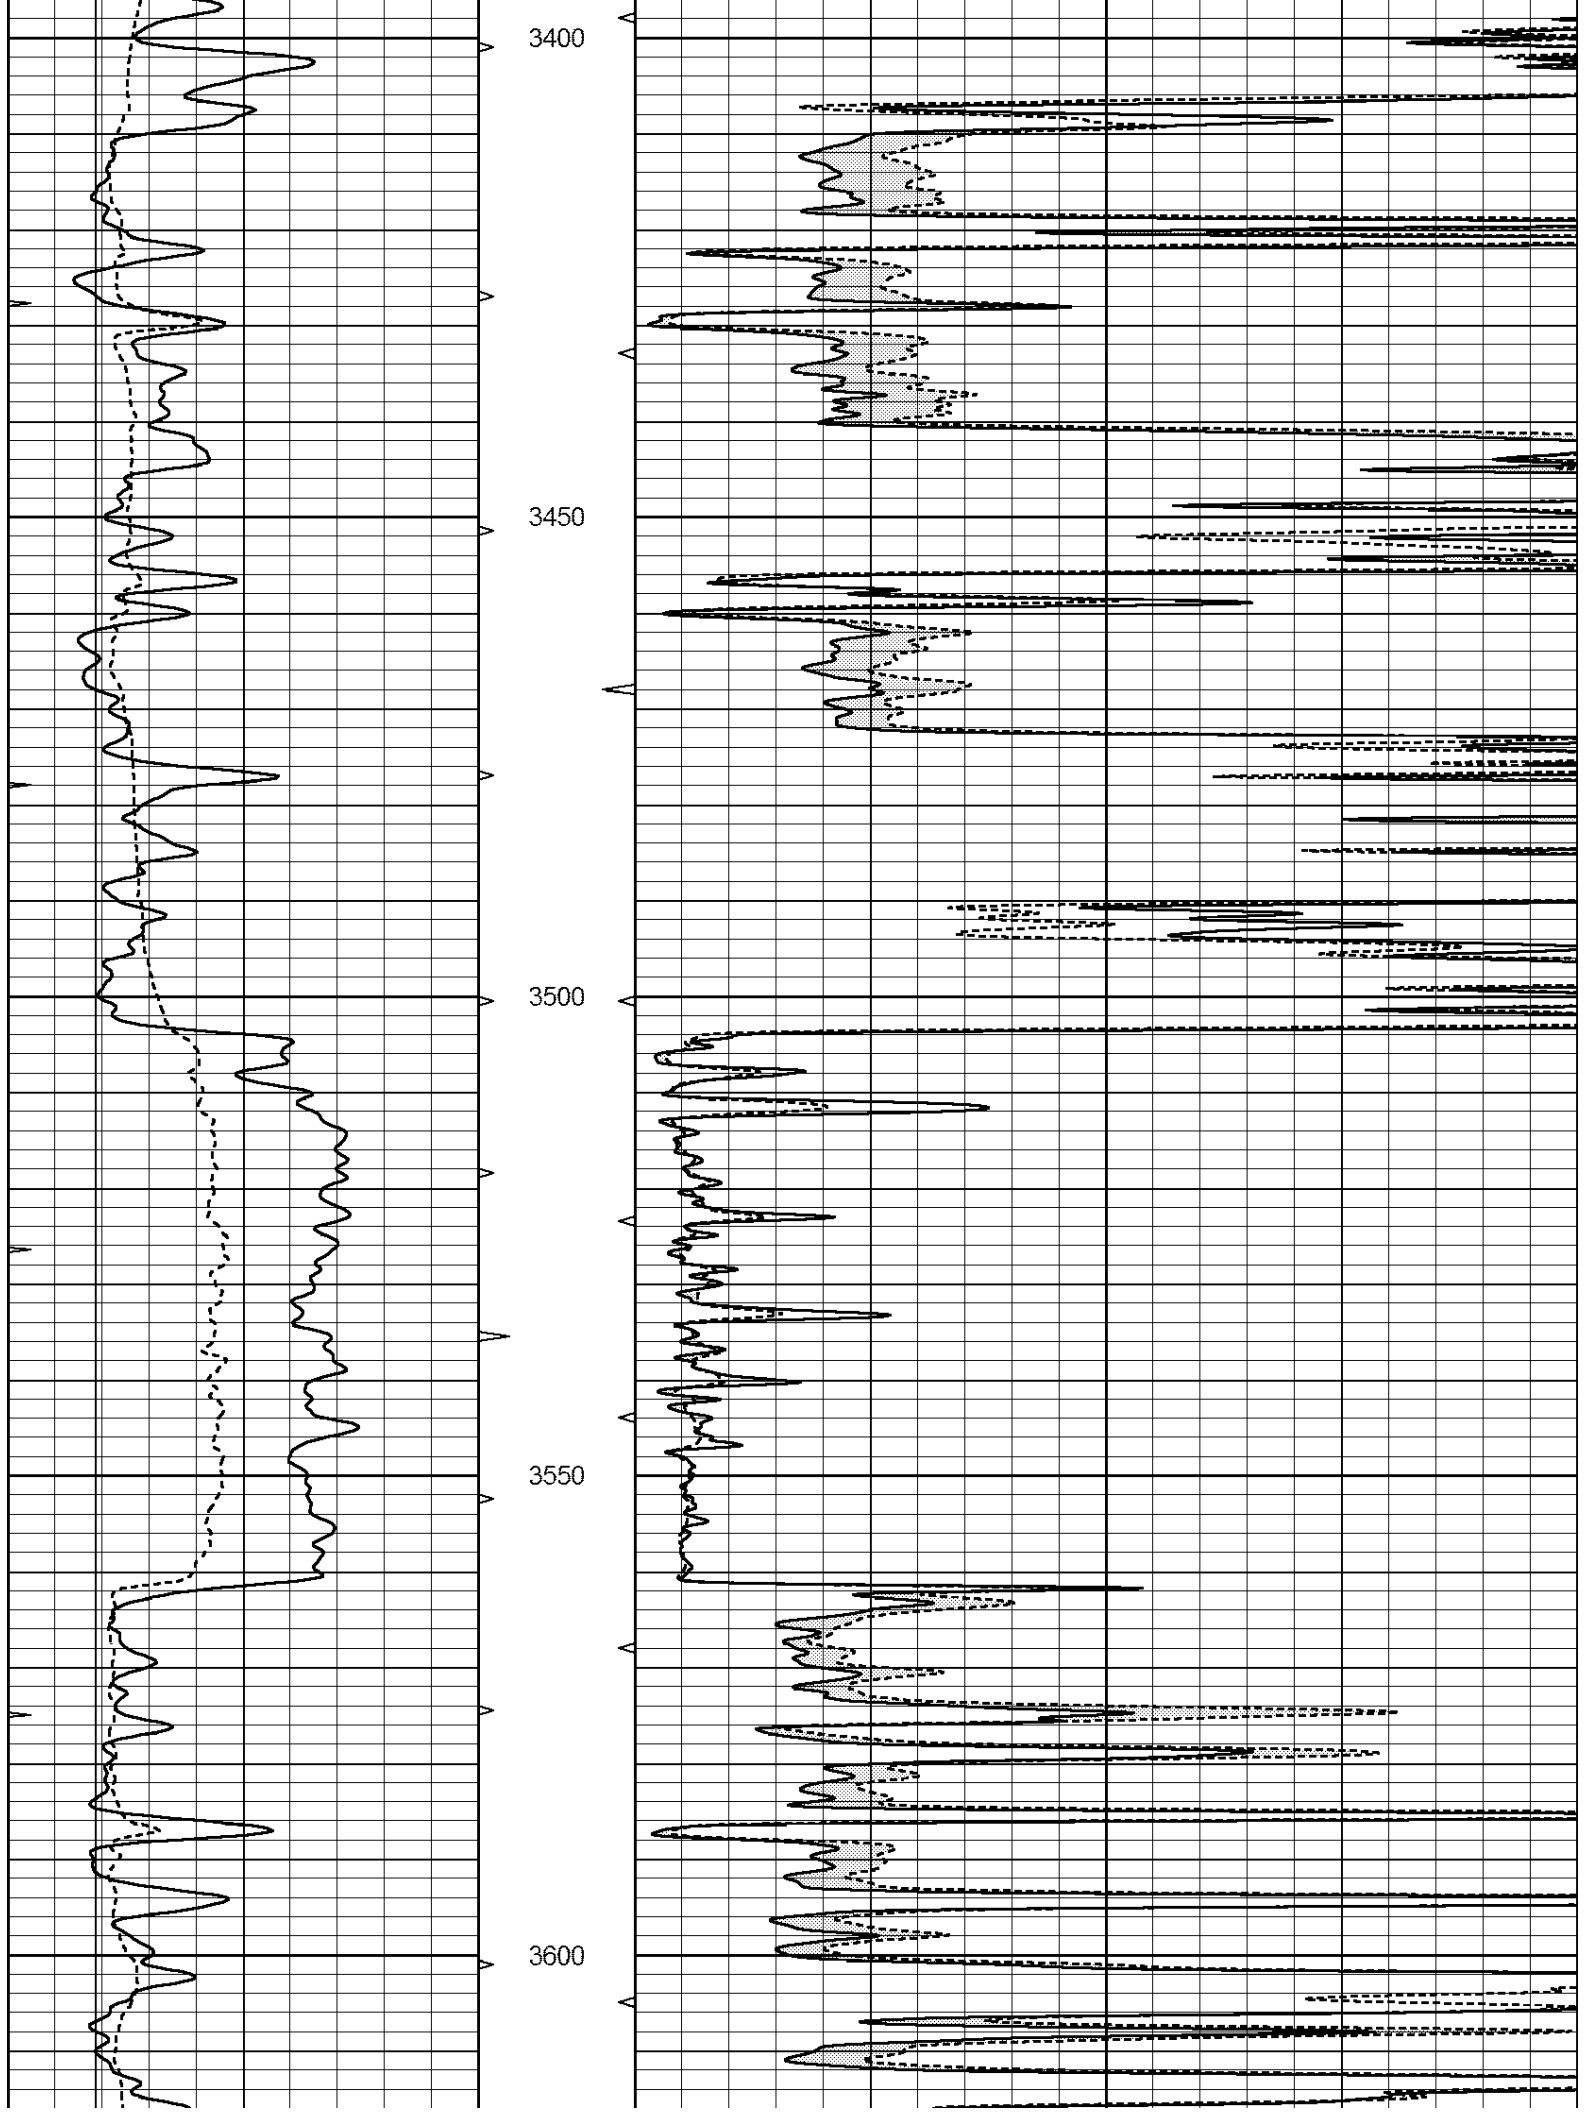

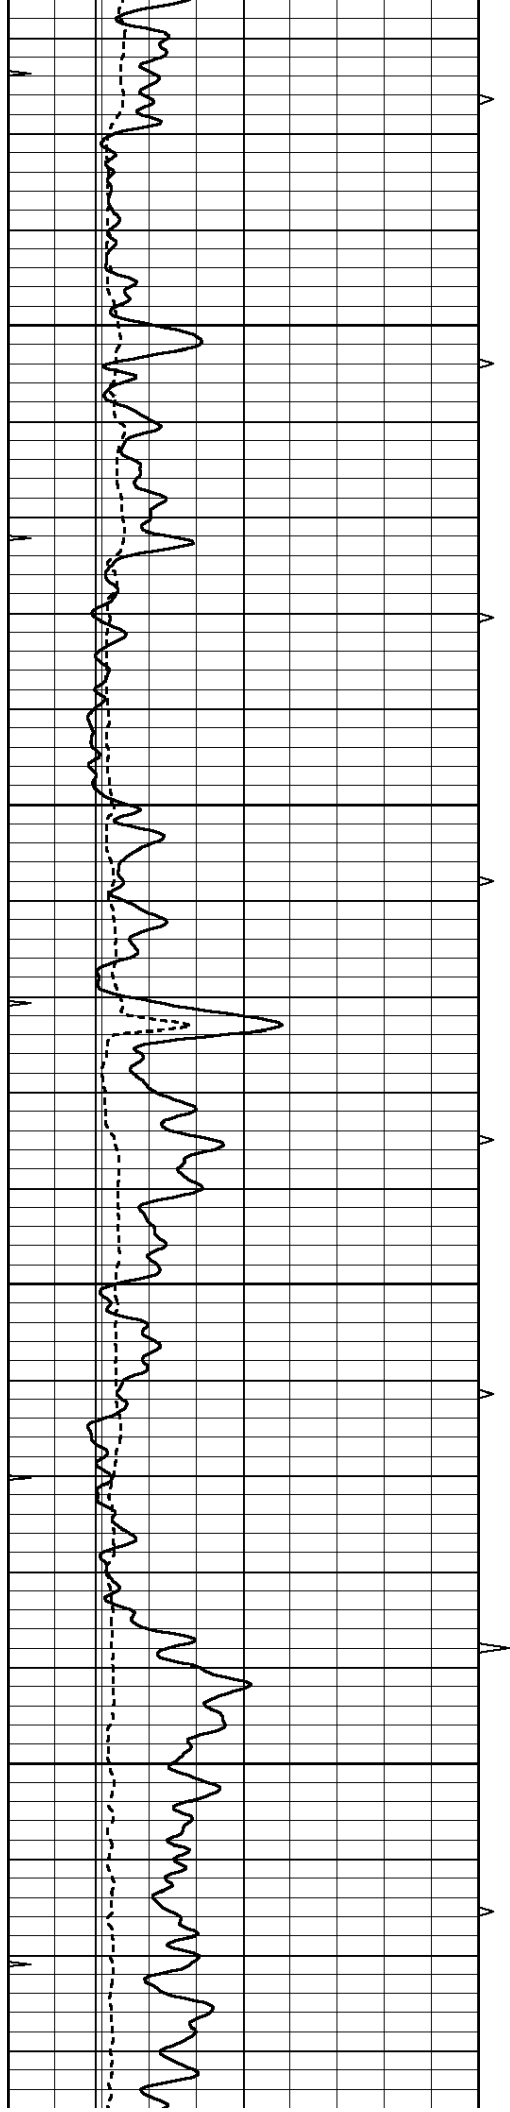




3650


3700

3750

3800

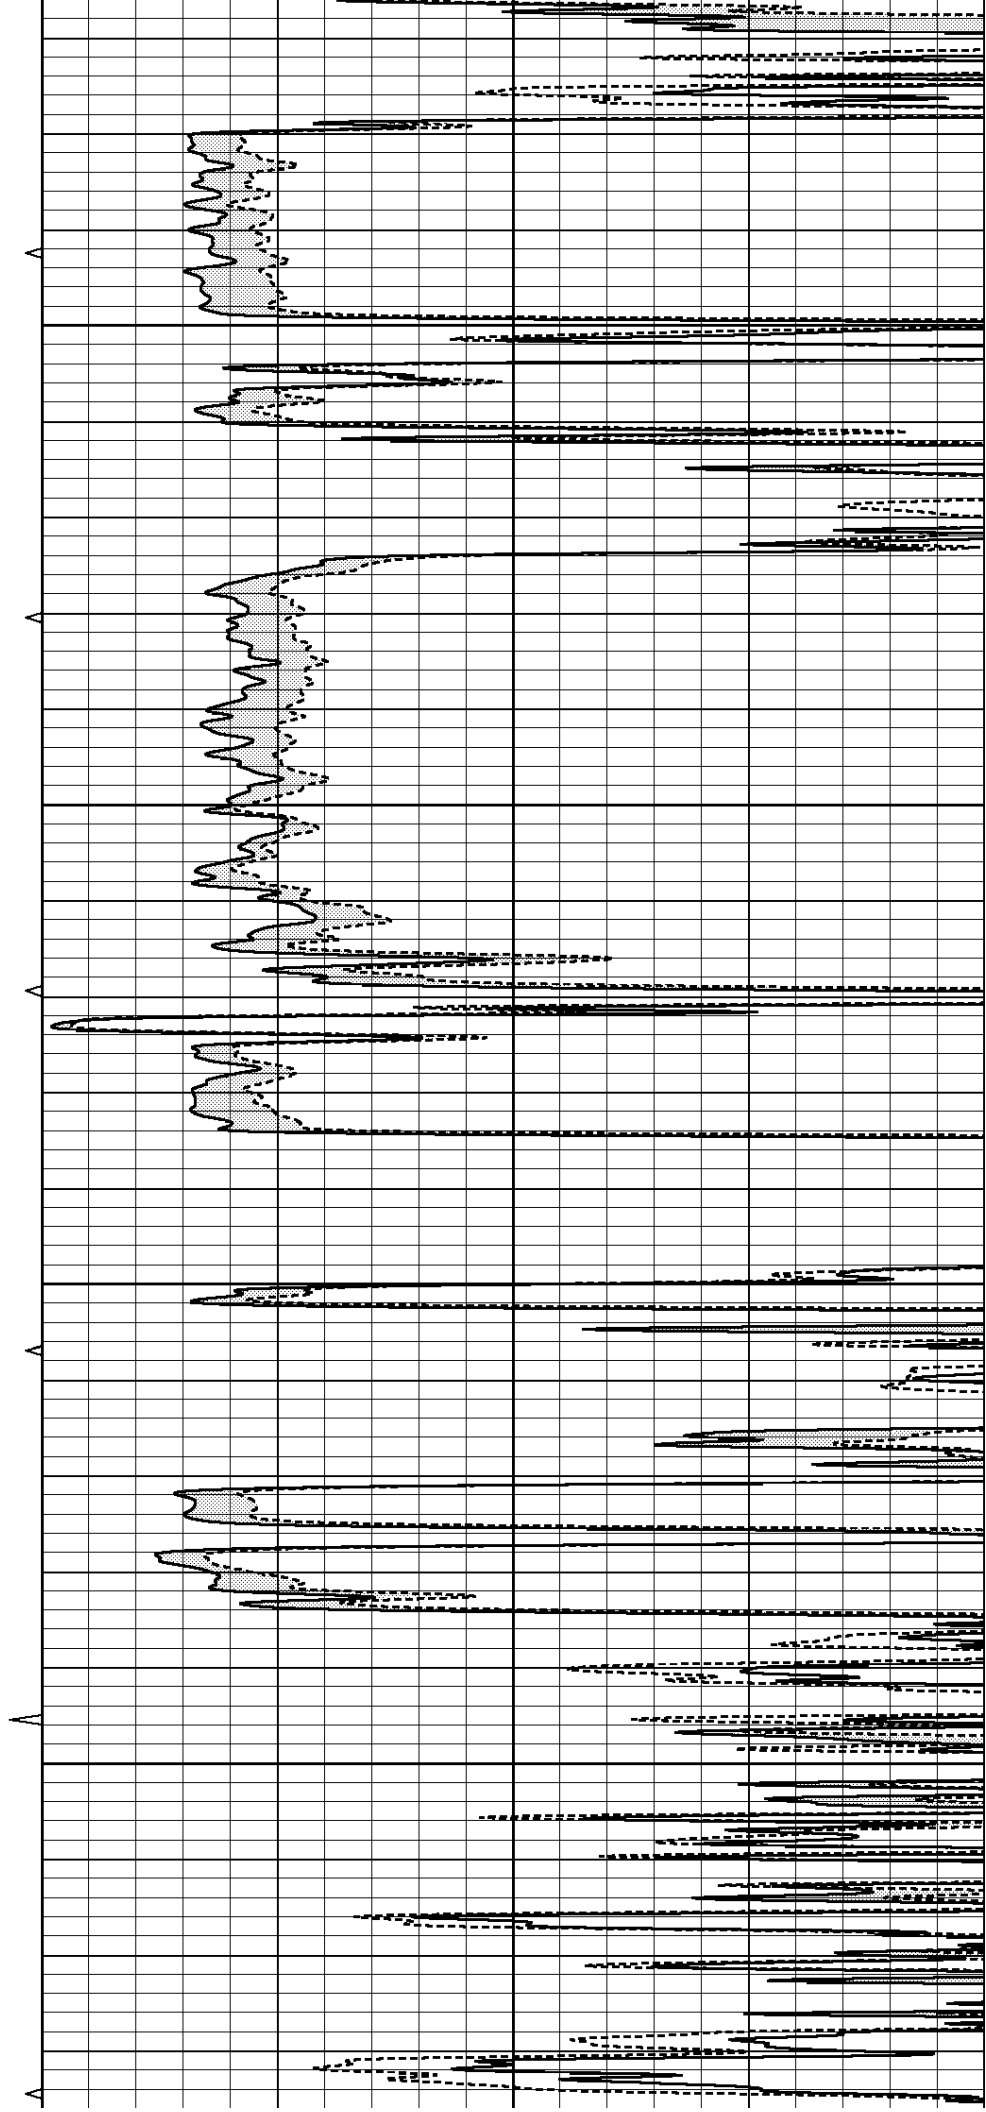

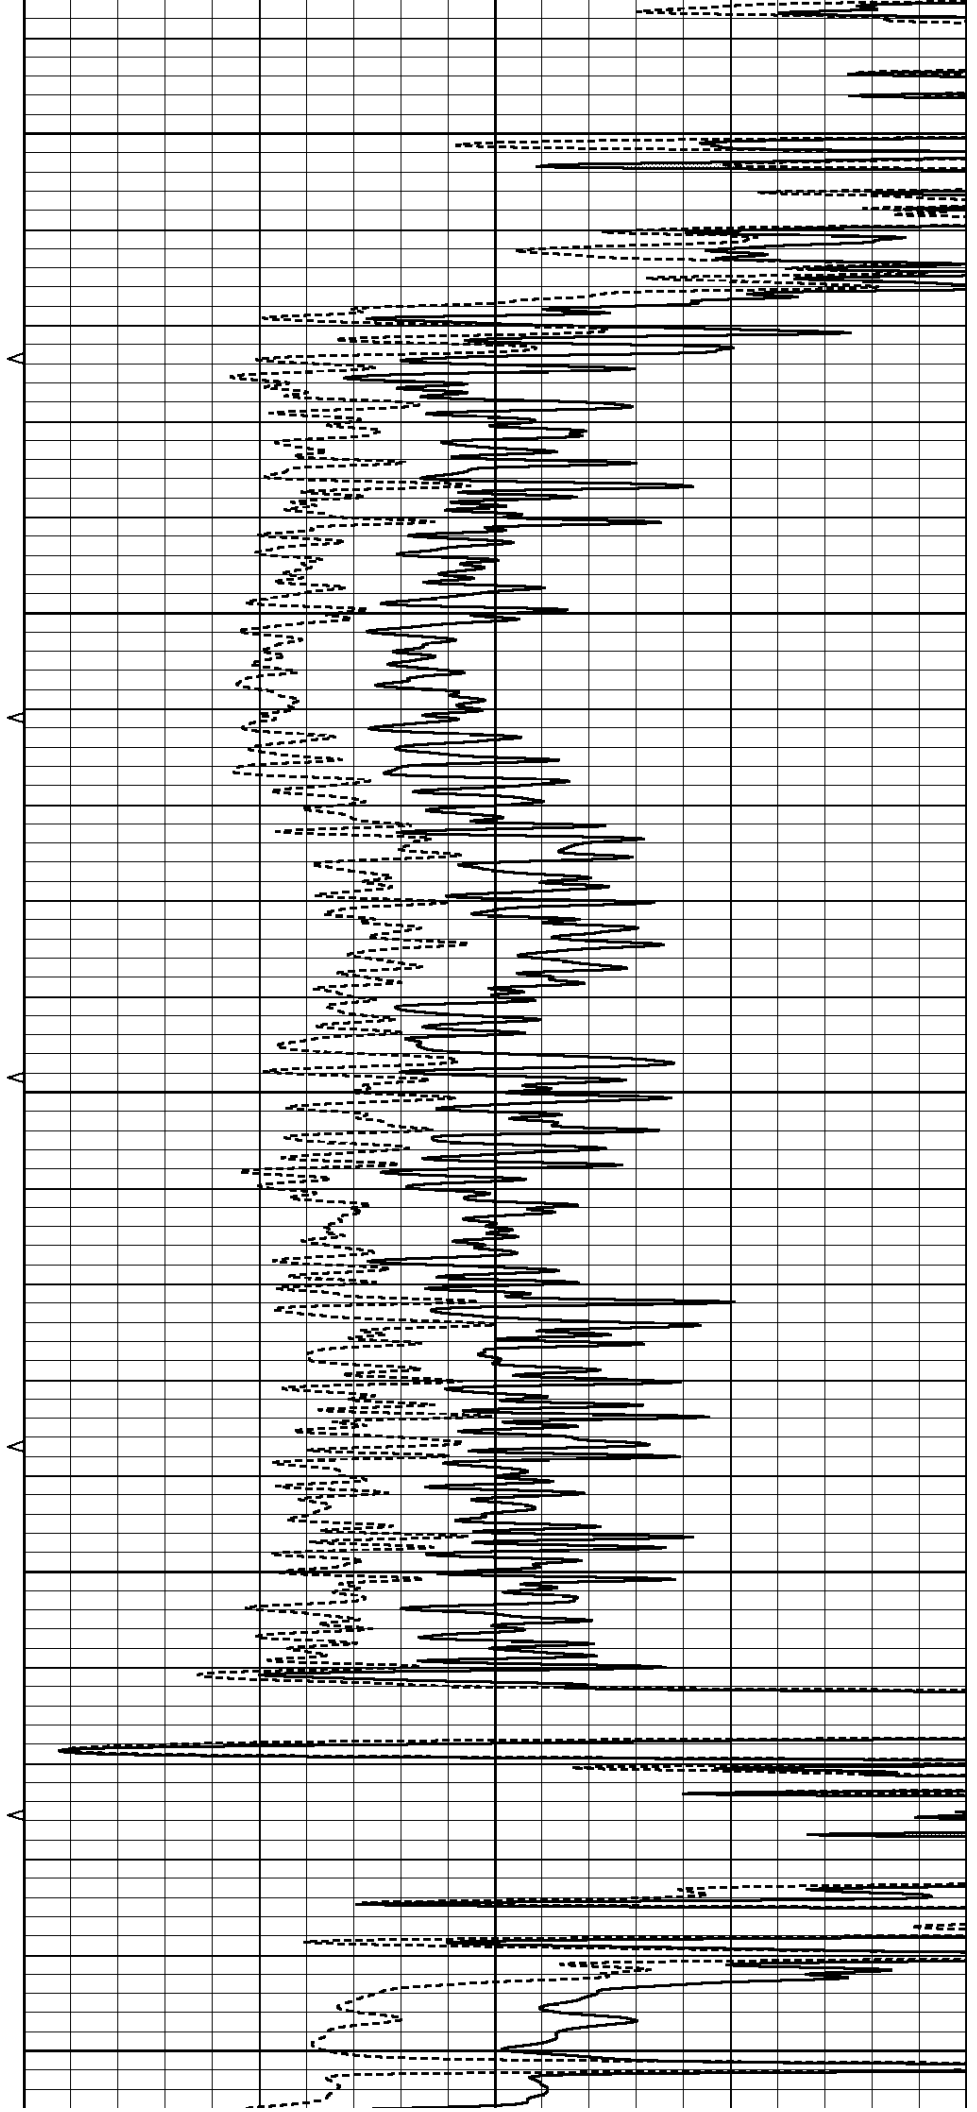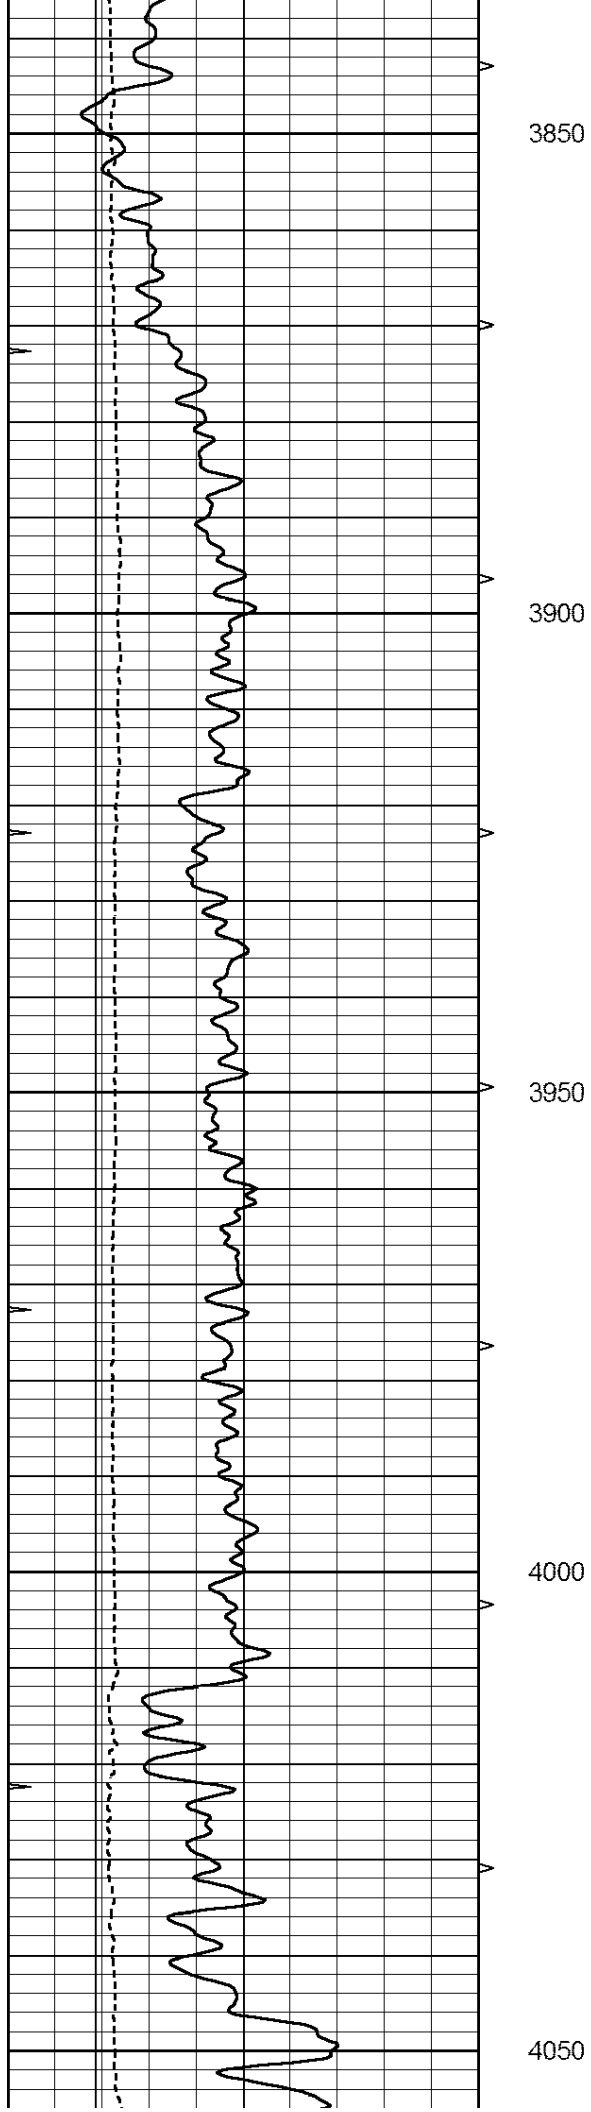

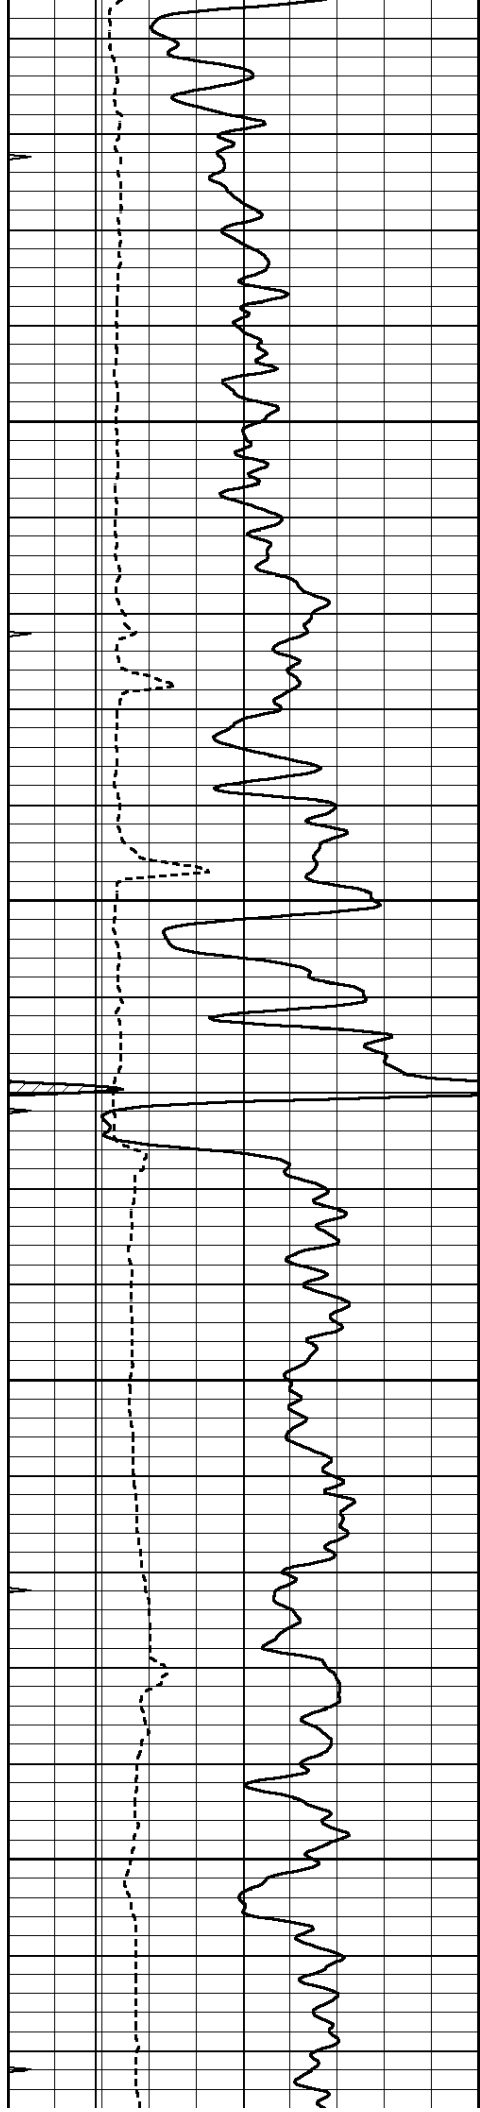



4100


4150

4200

4250

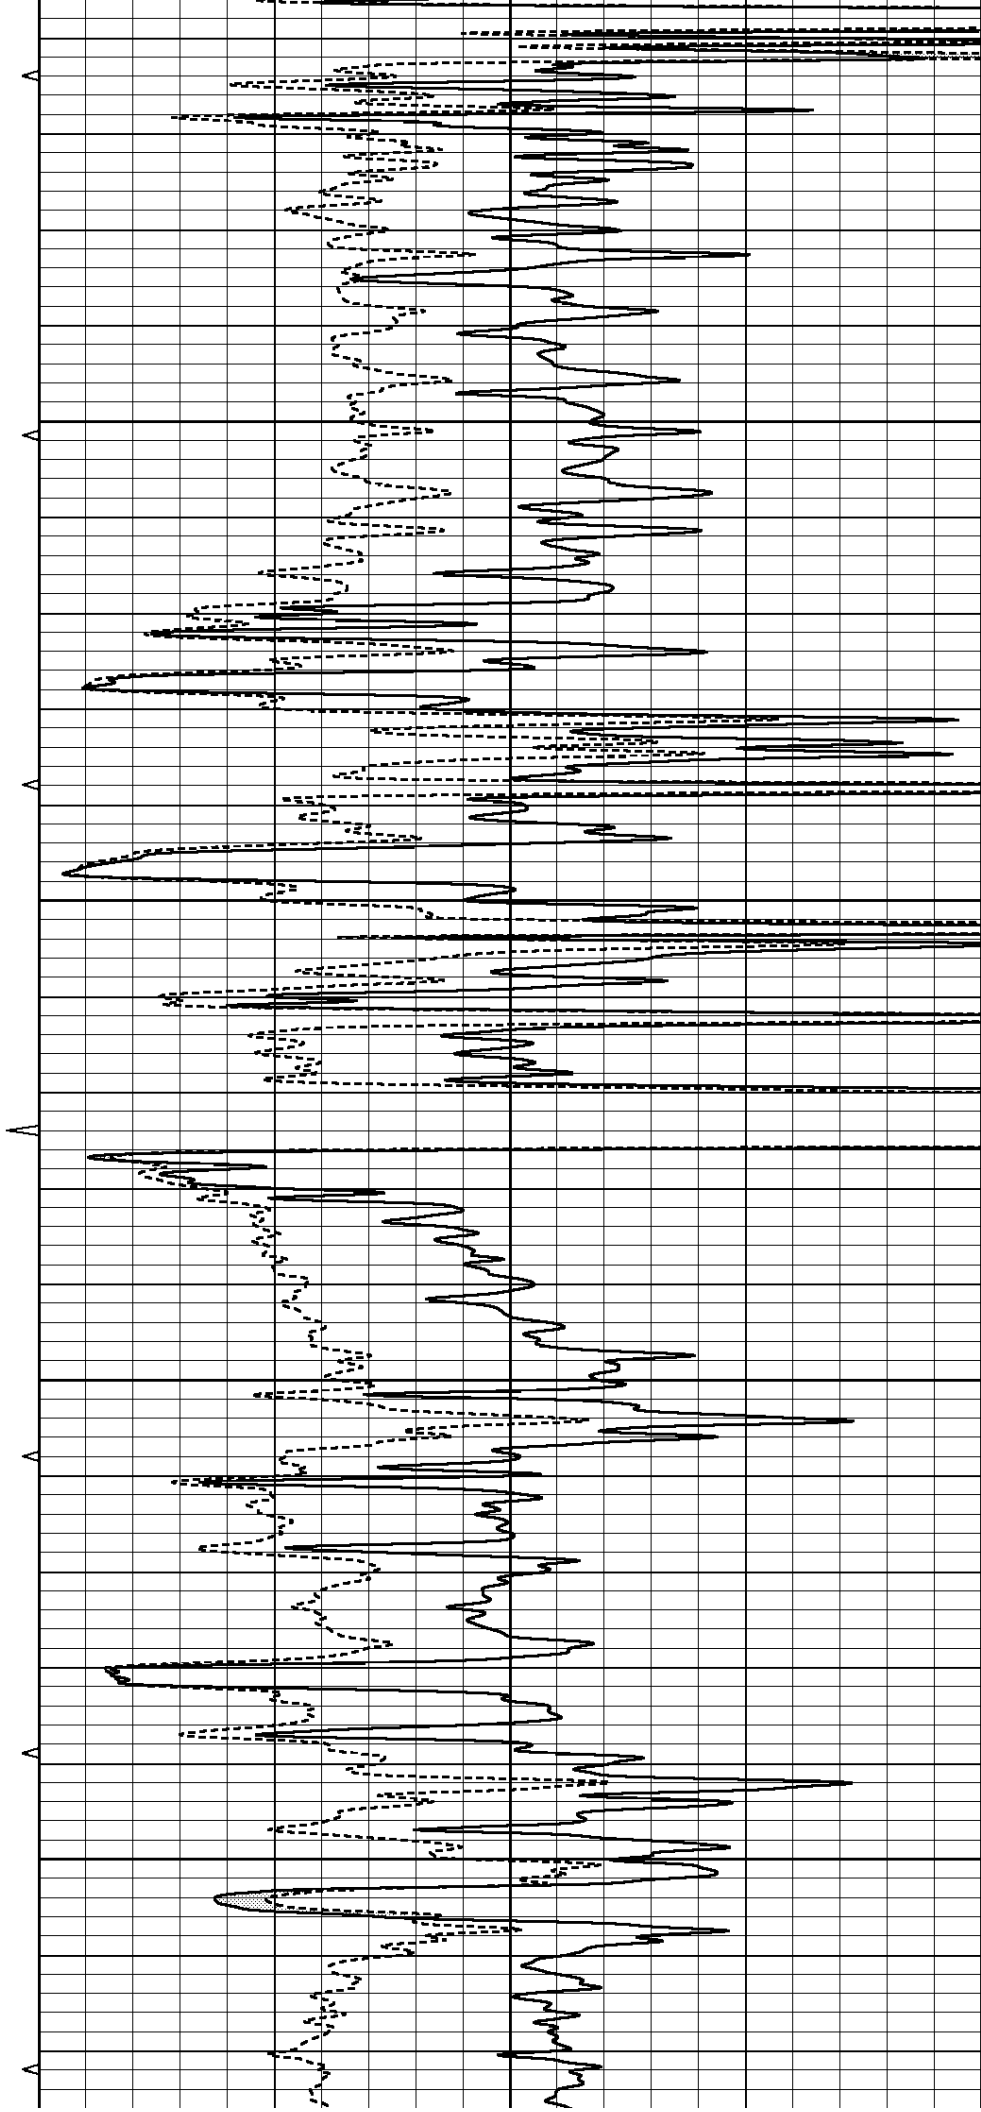

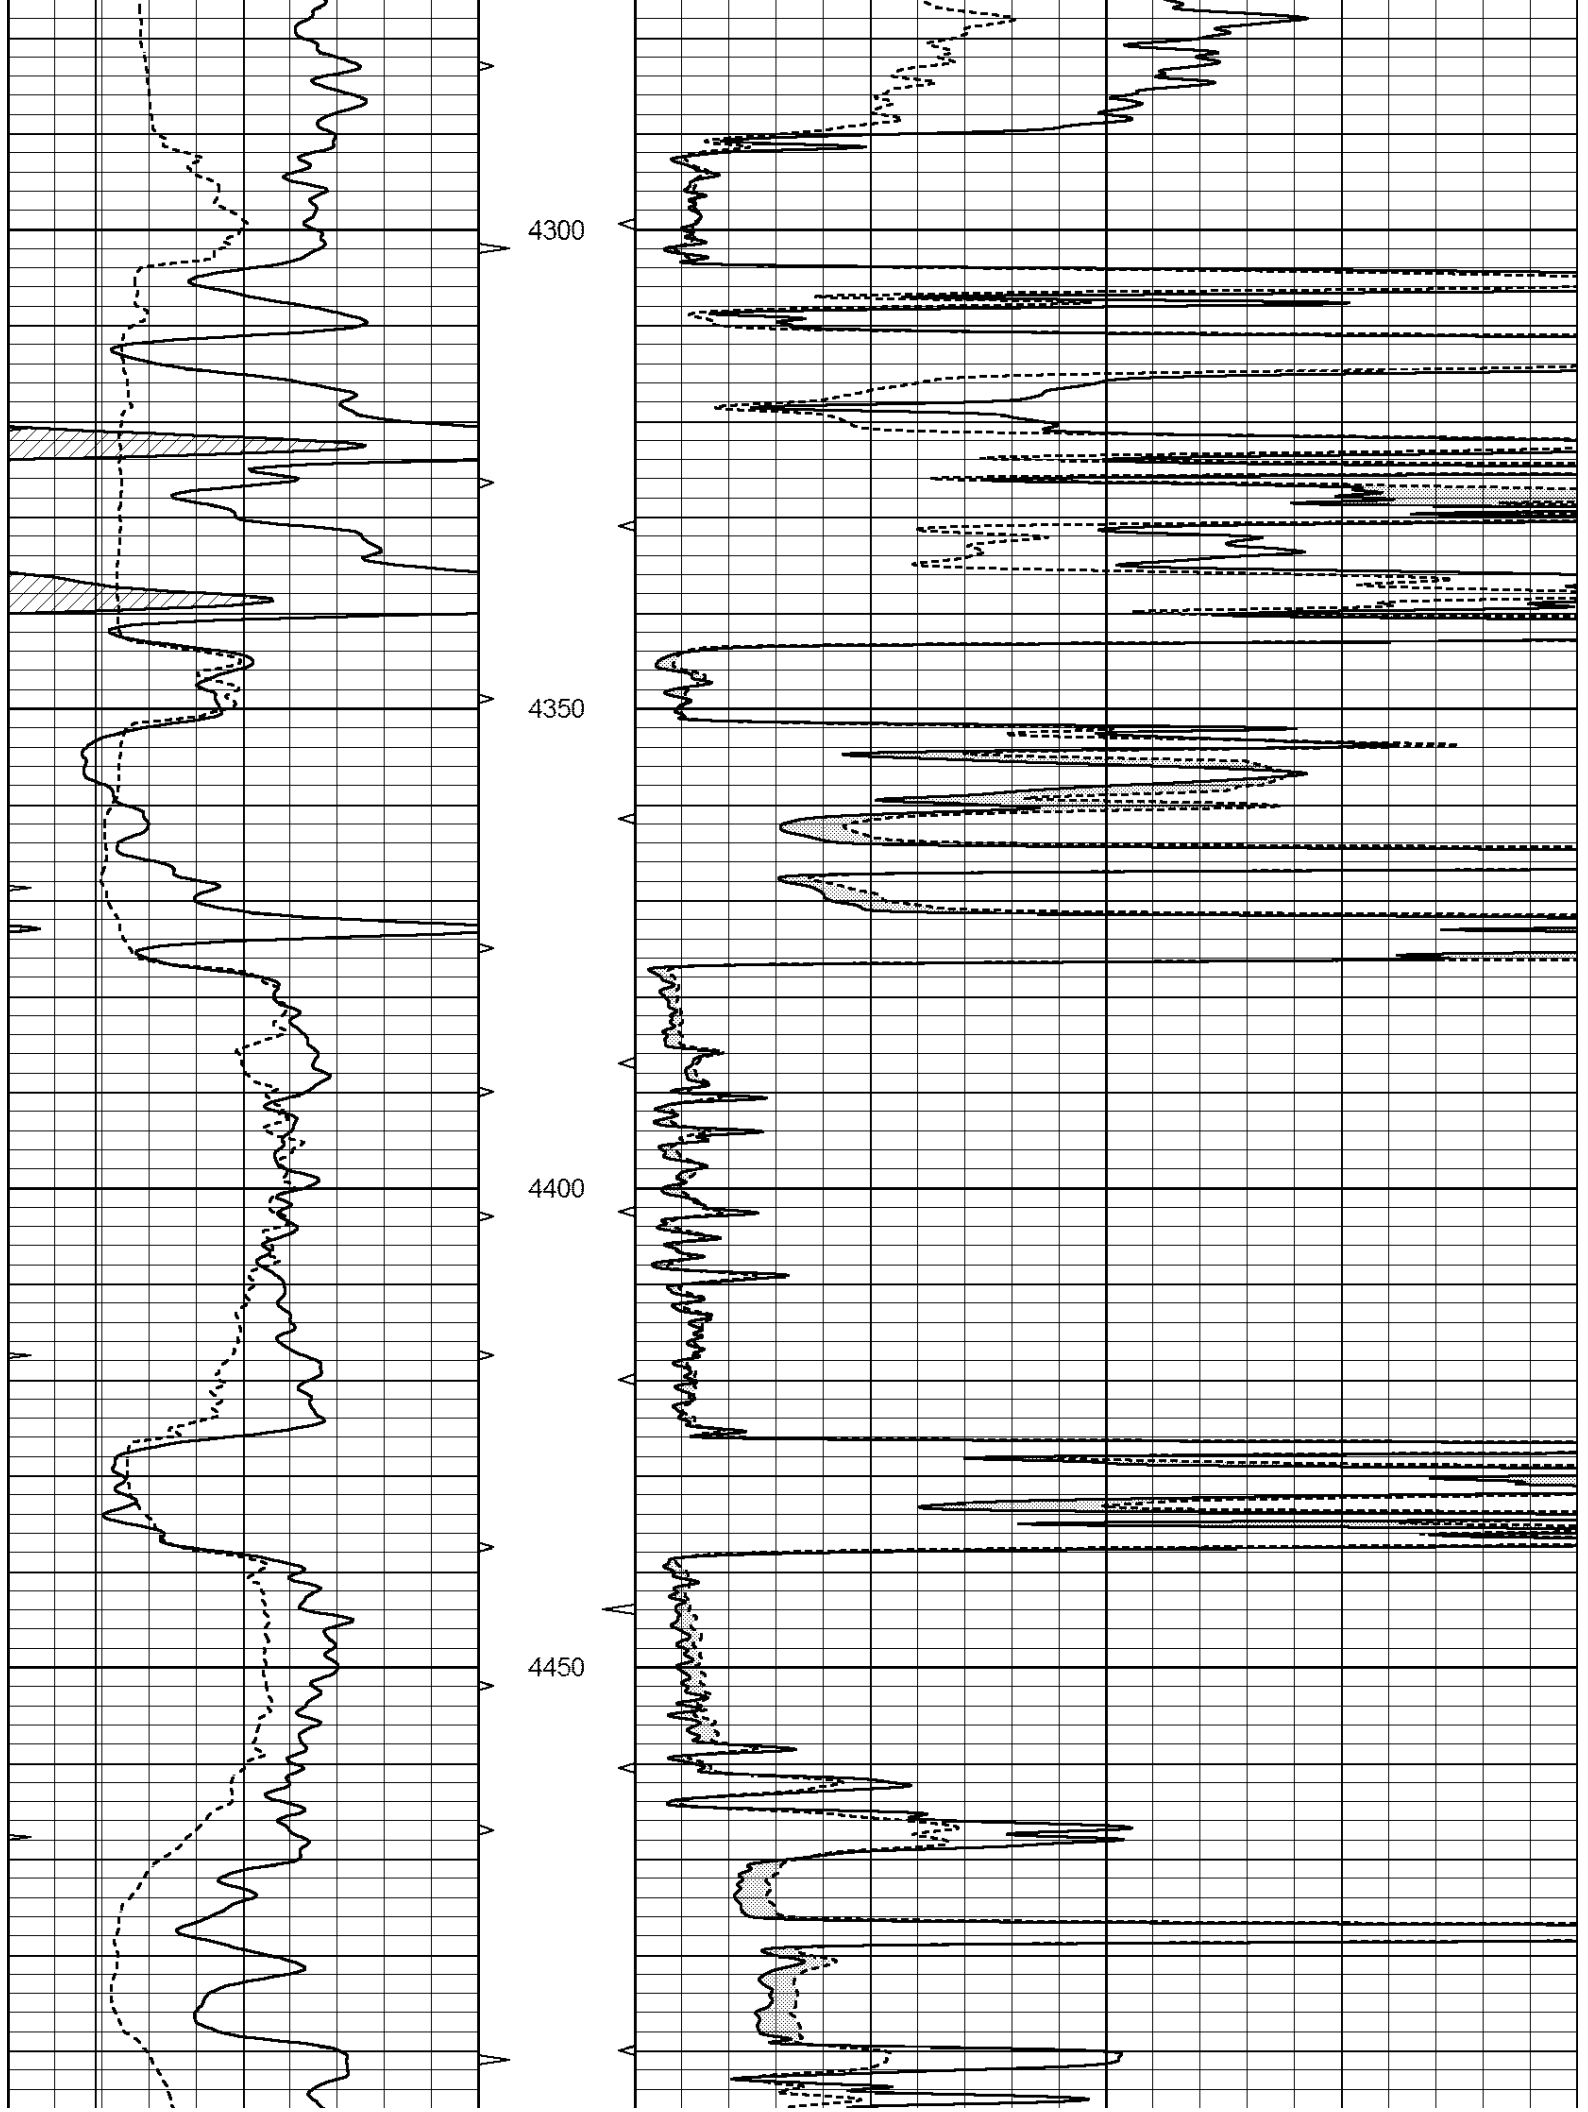

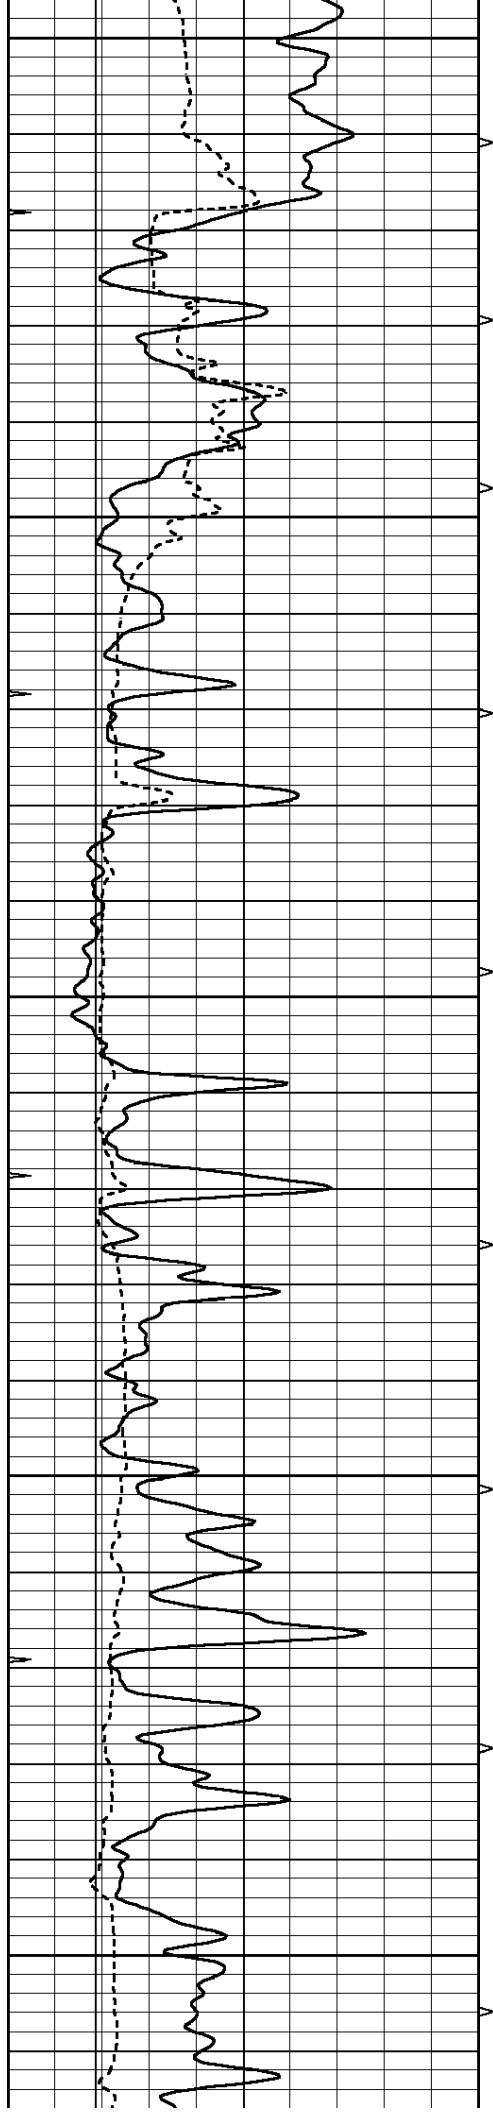


4500



4550


4600


4650

4700

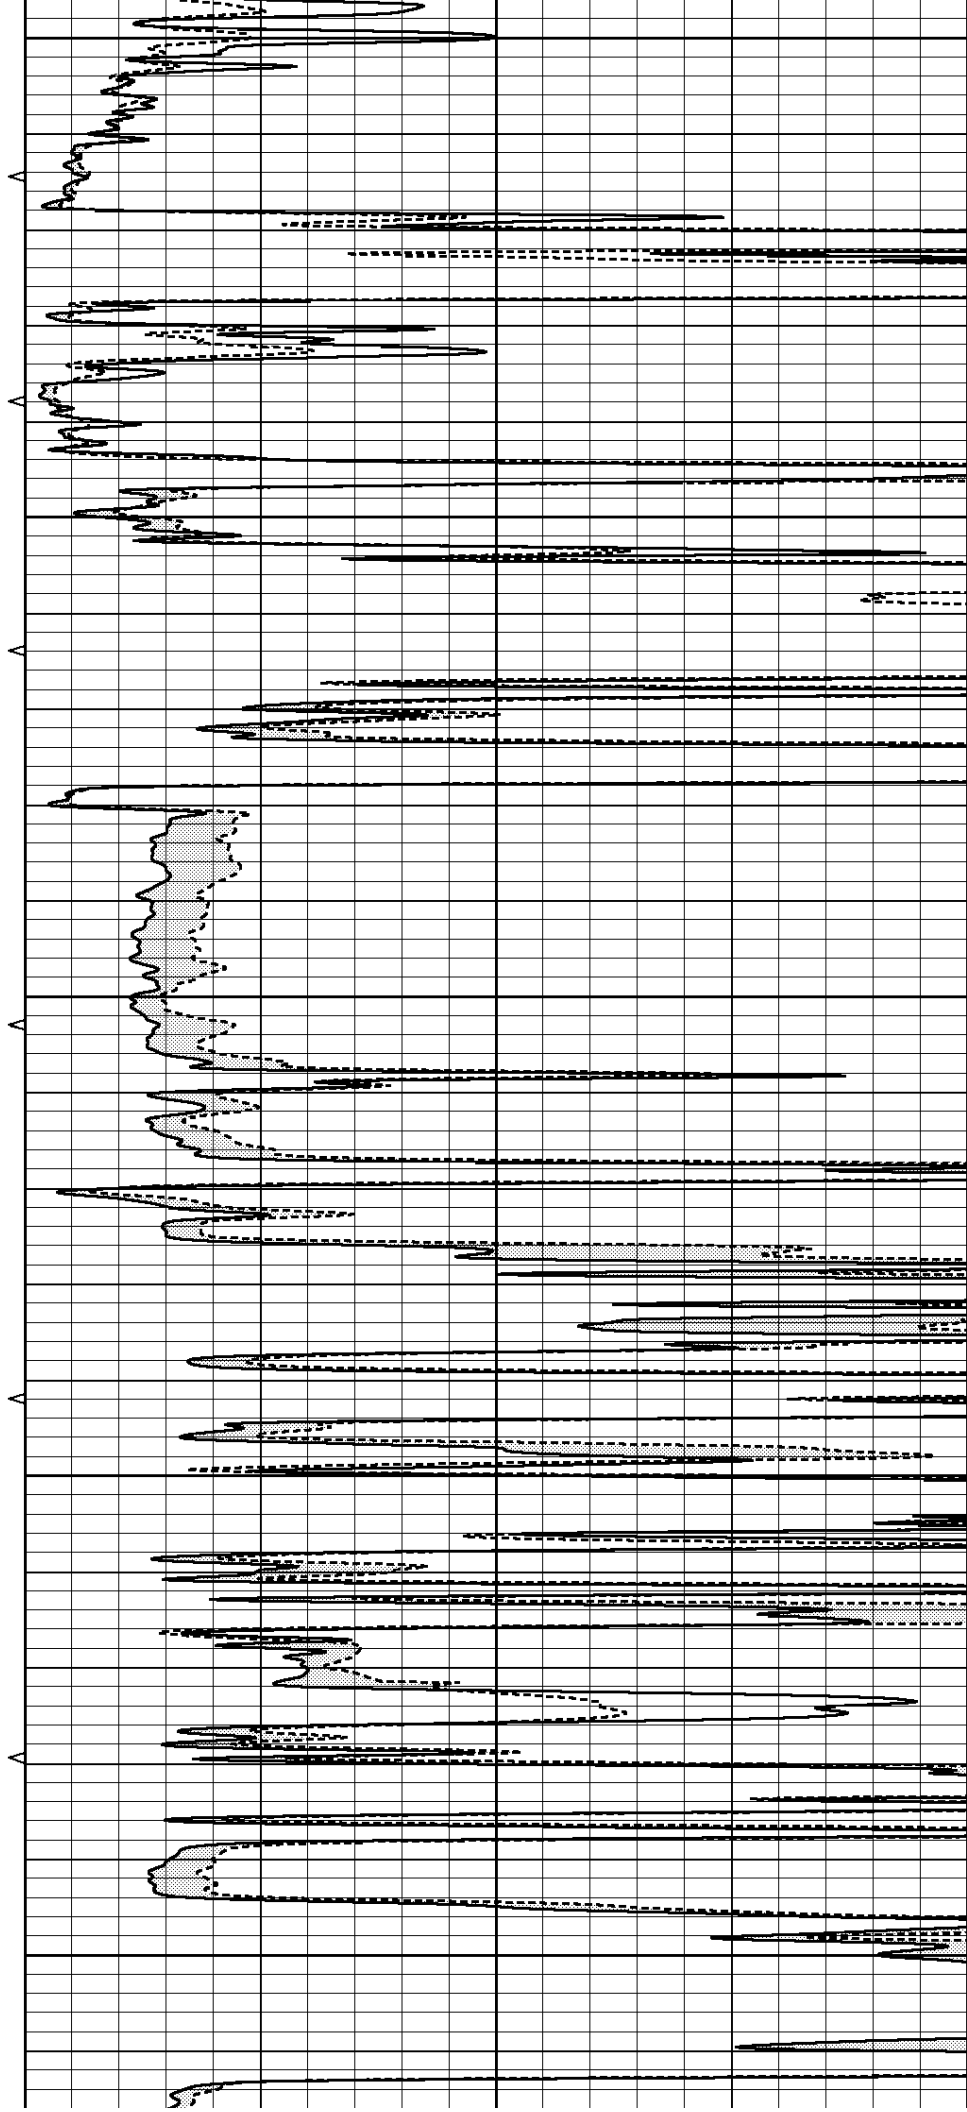

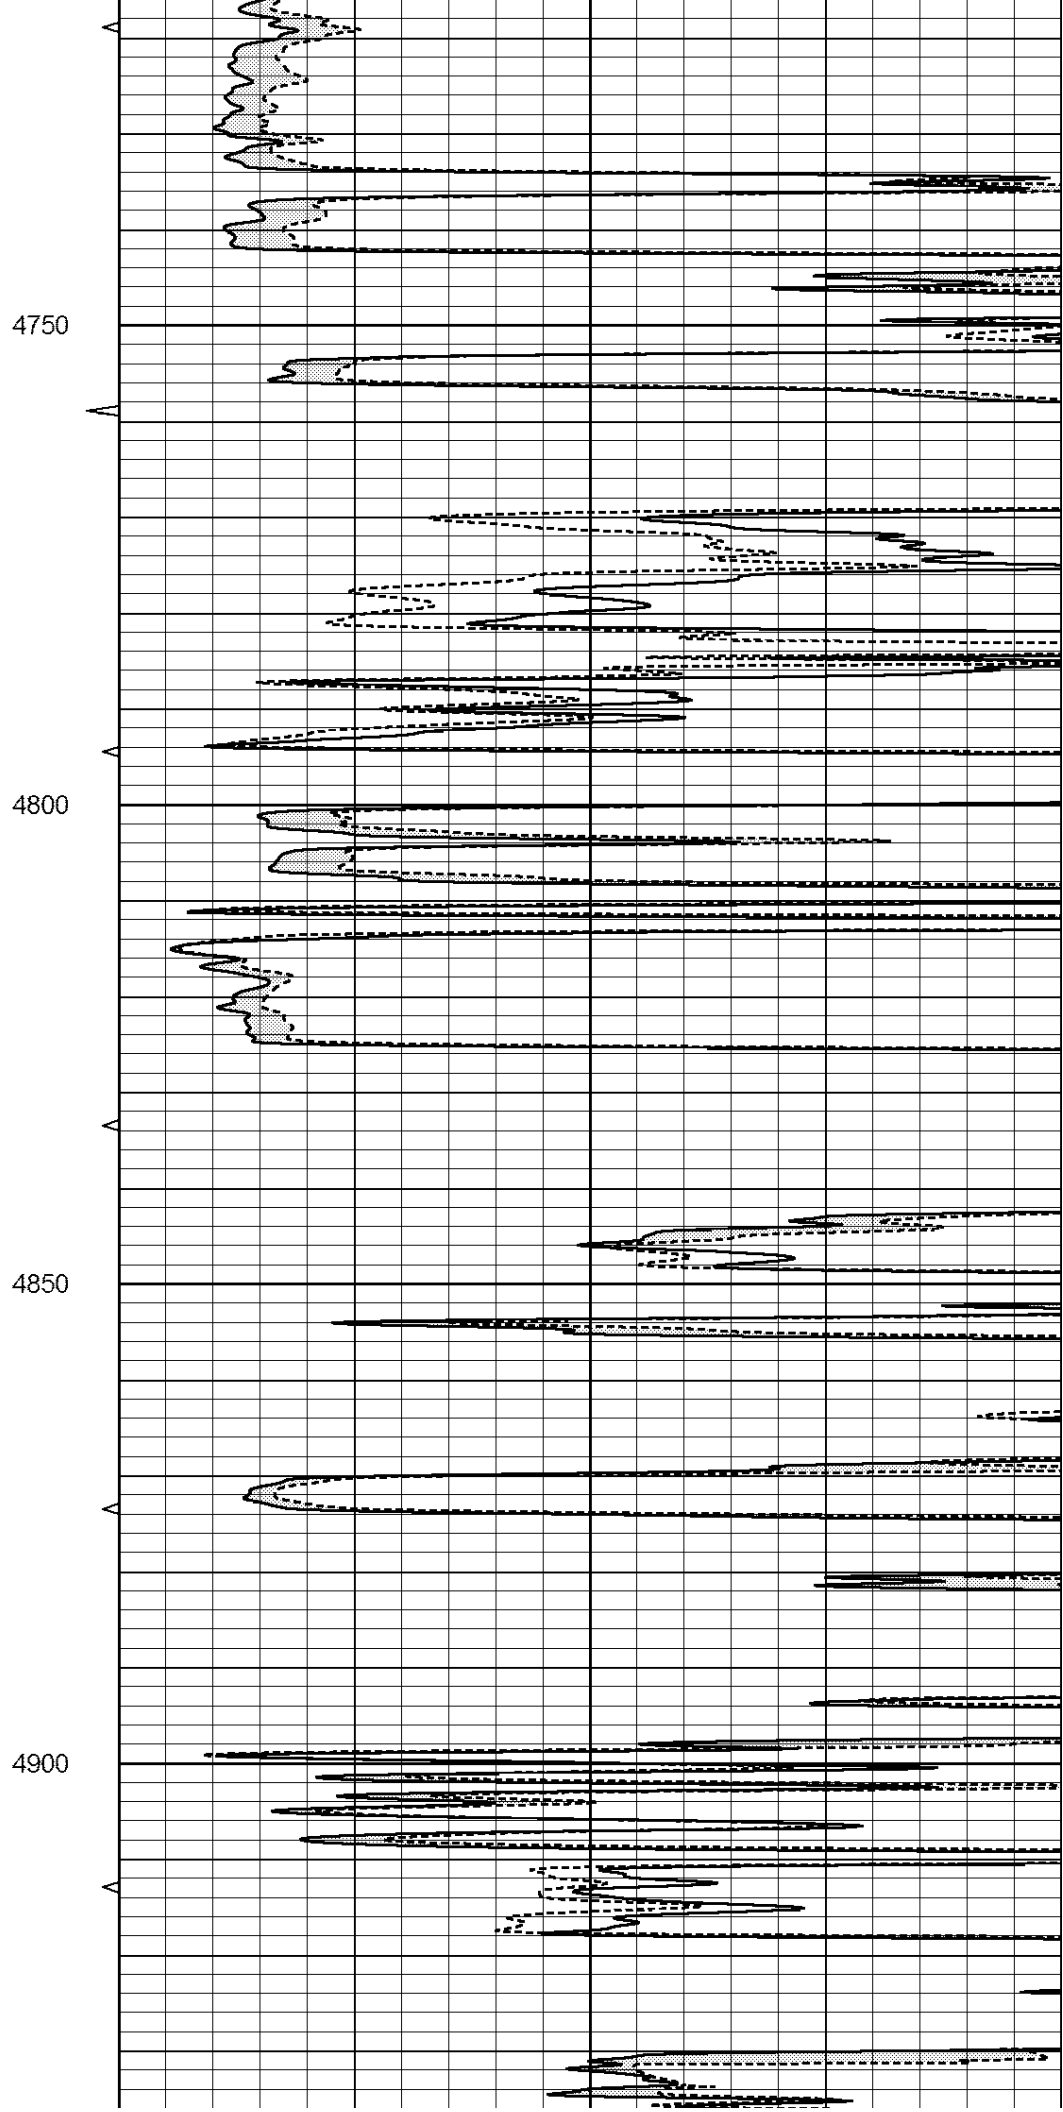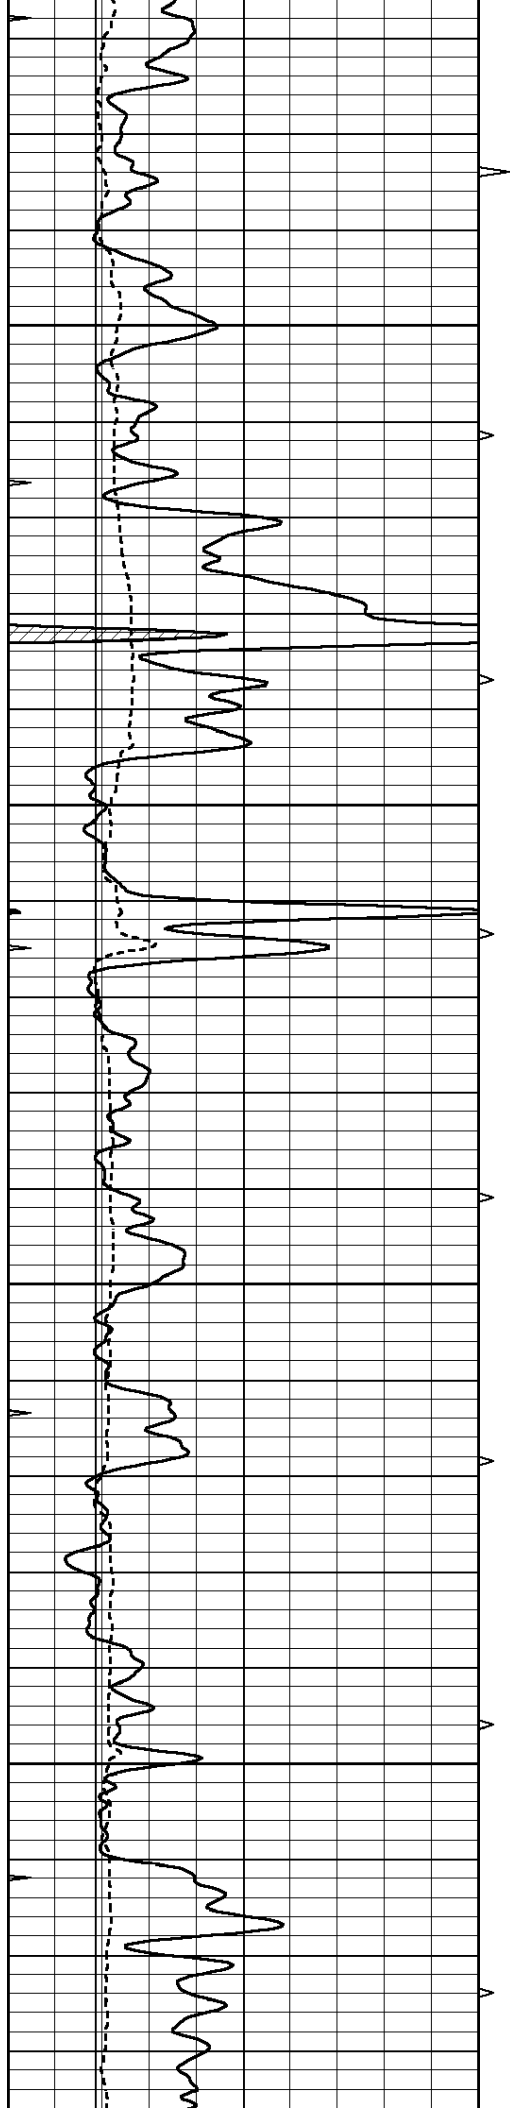

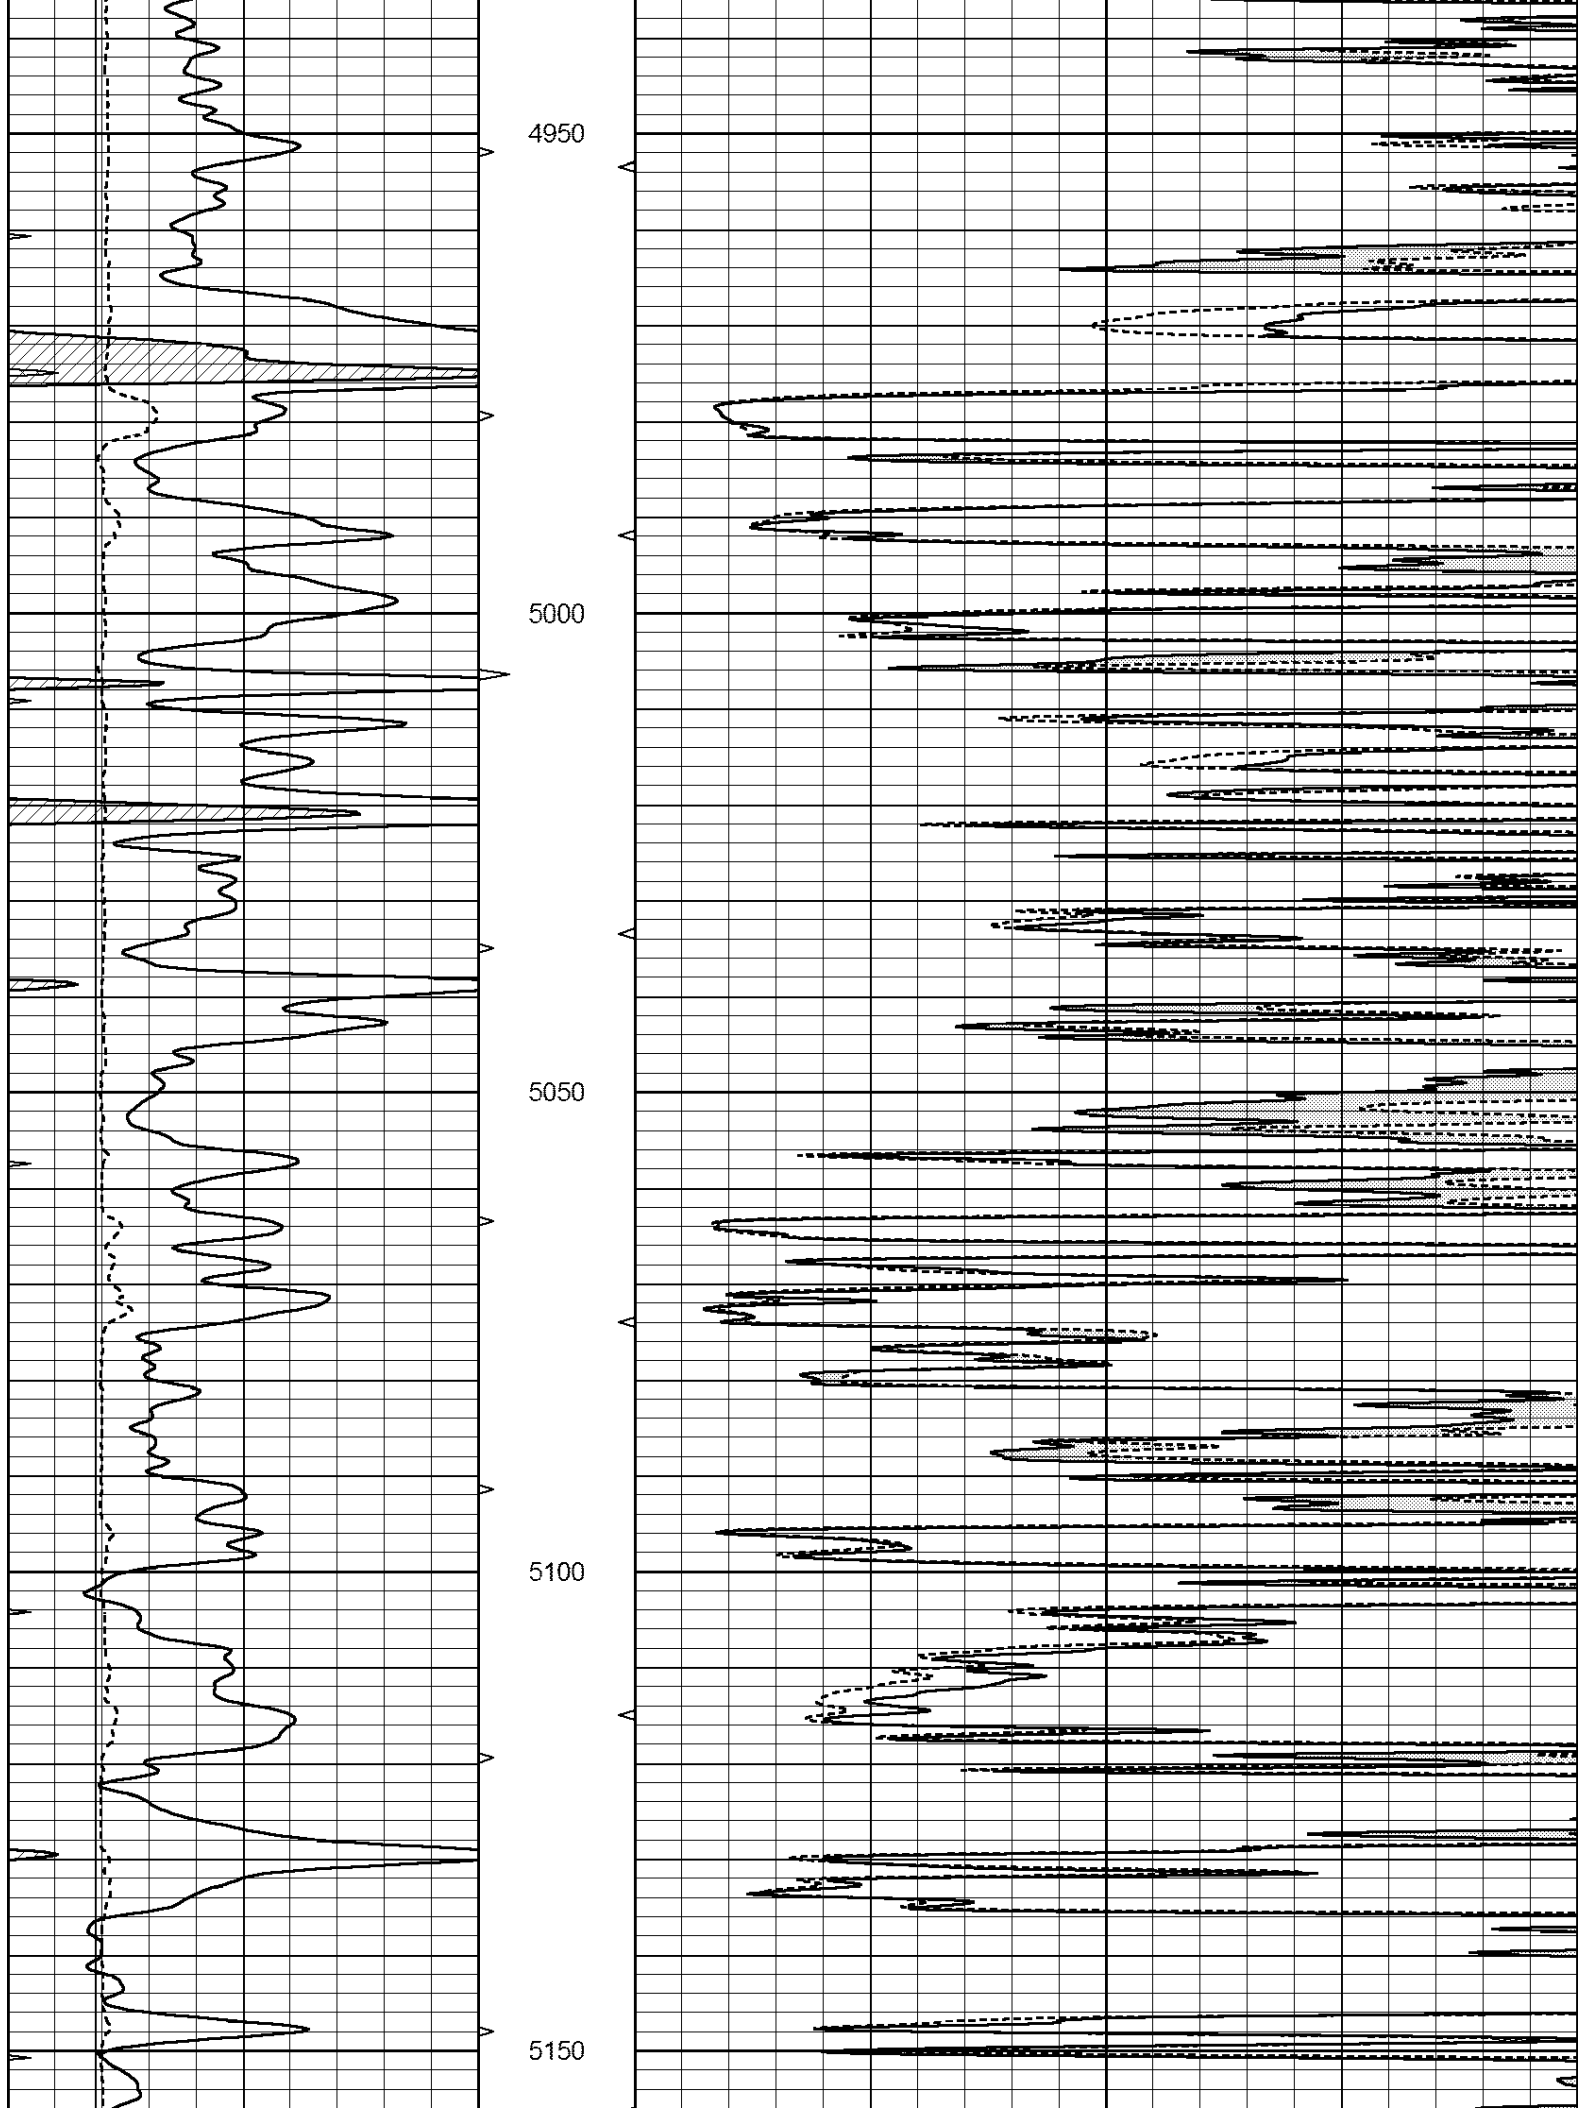

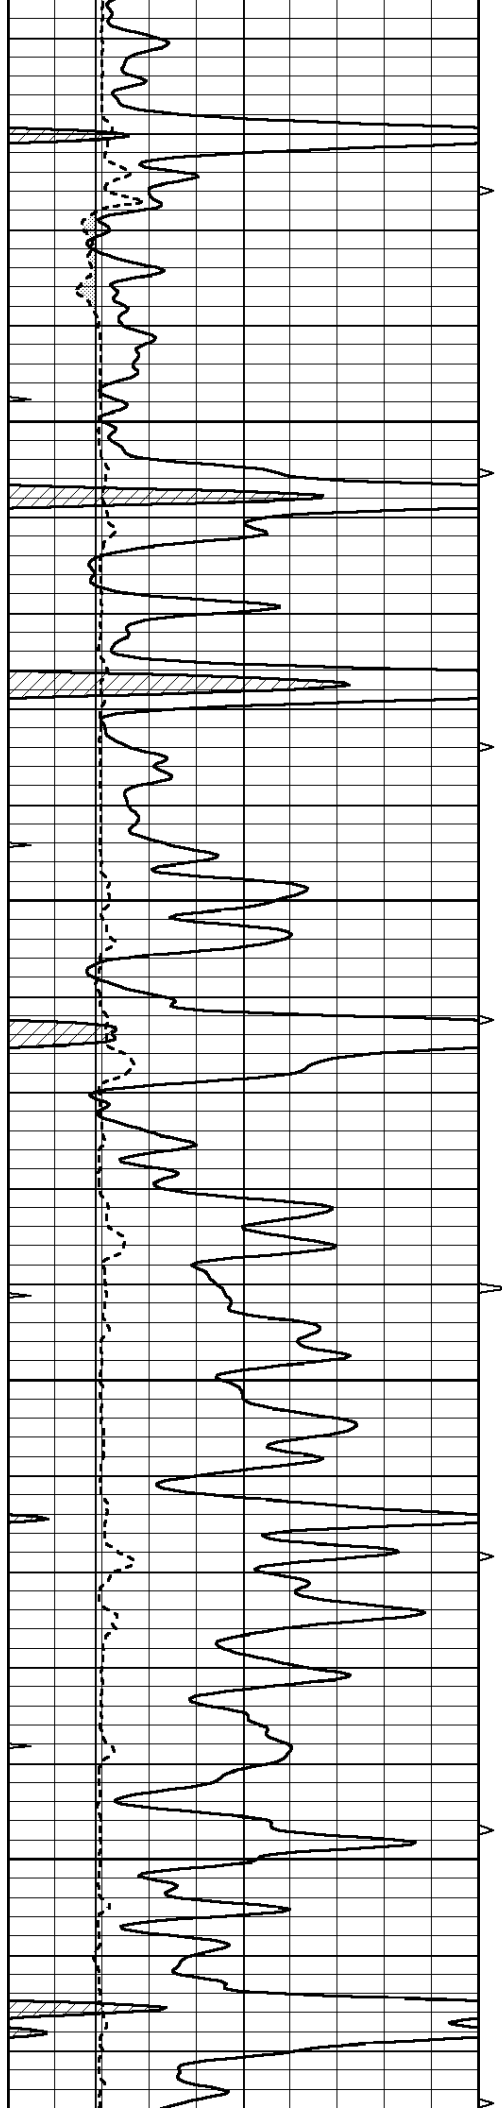



5200

5250

5300


5350

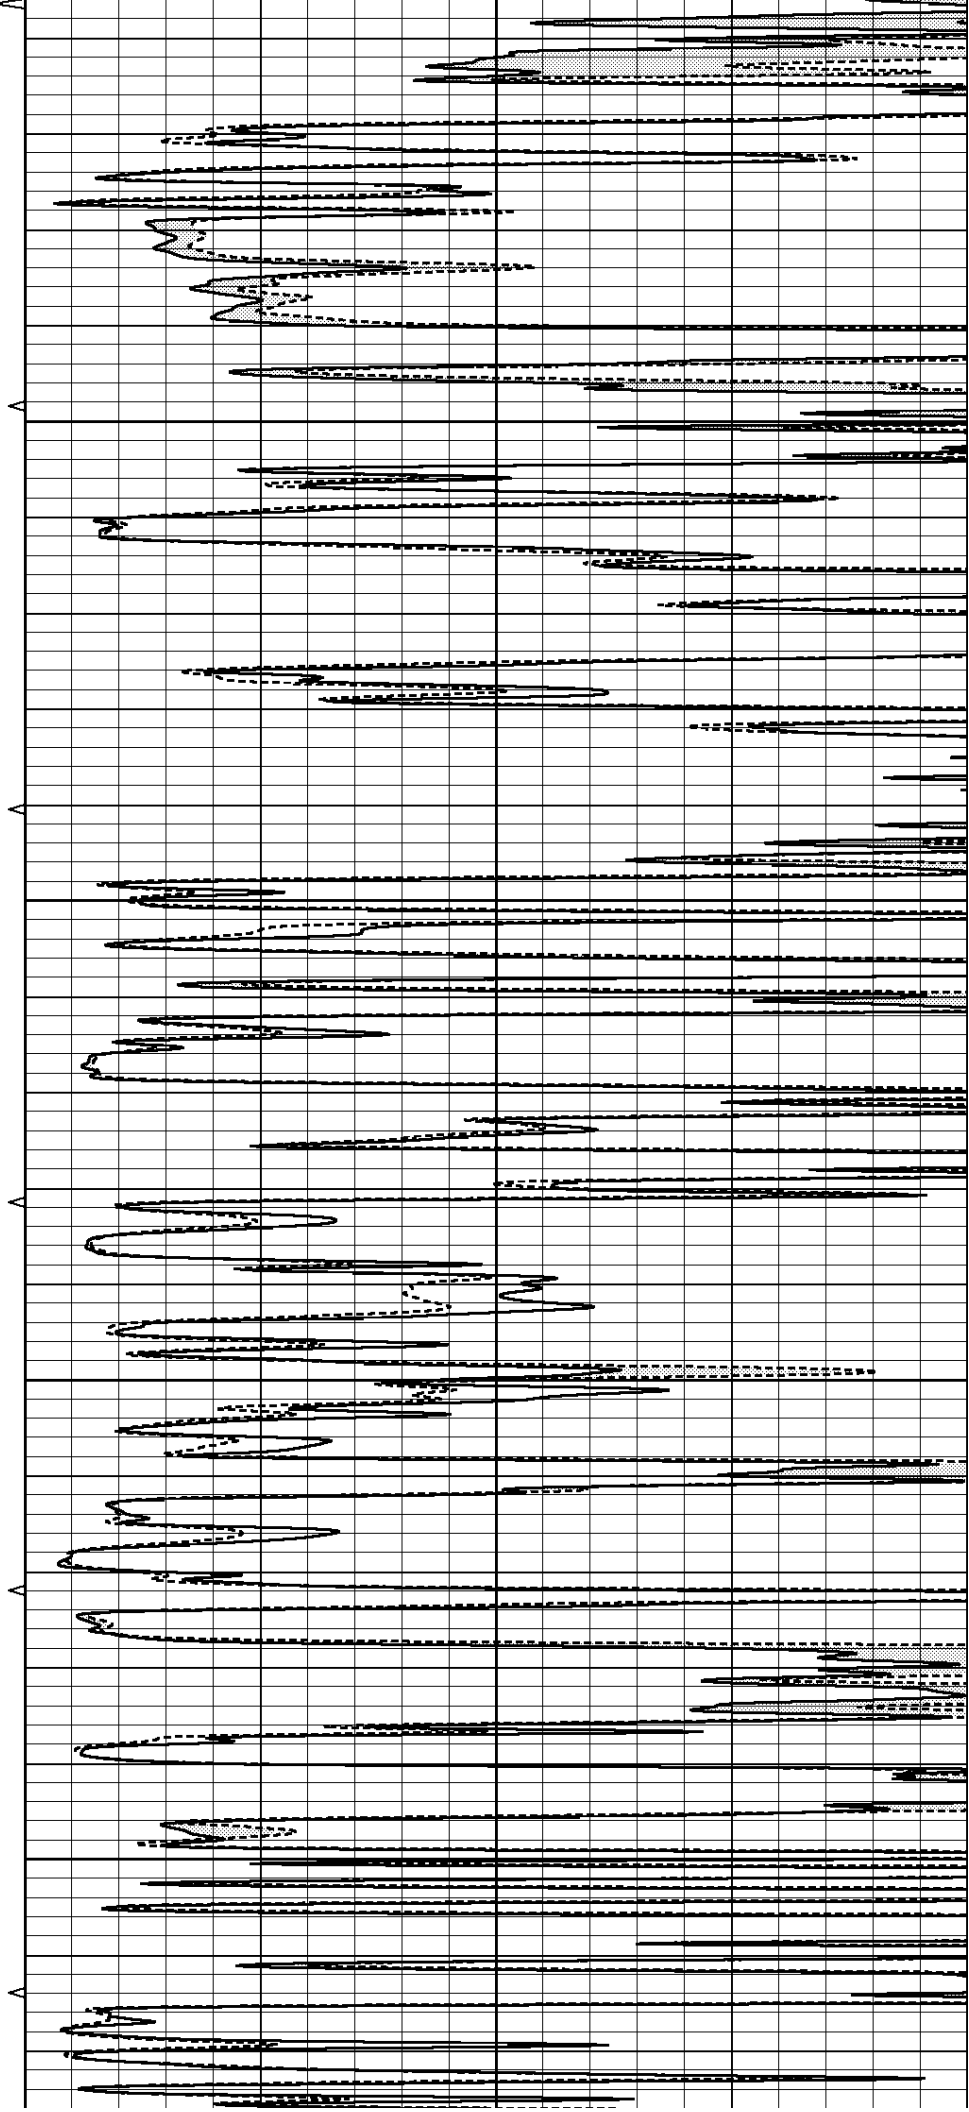

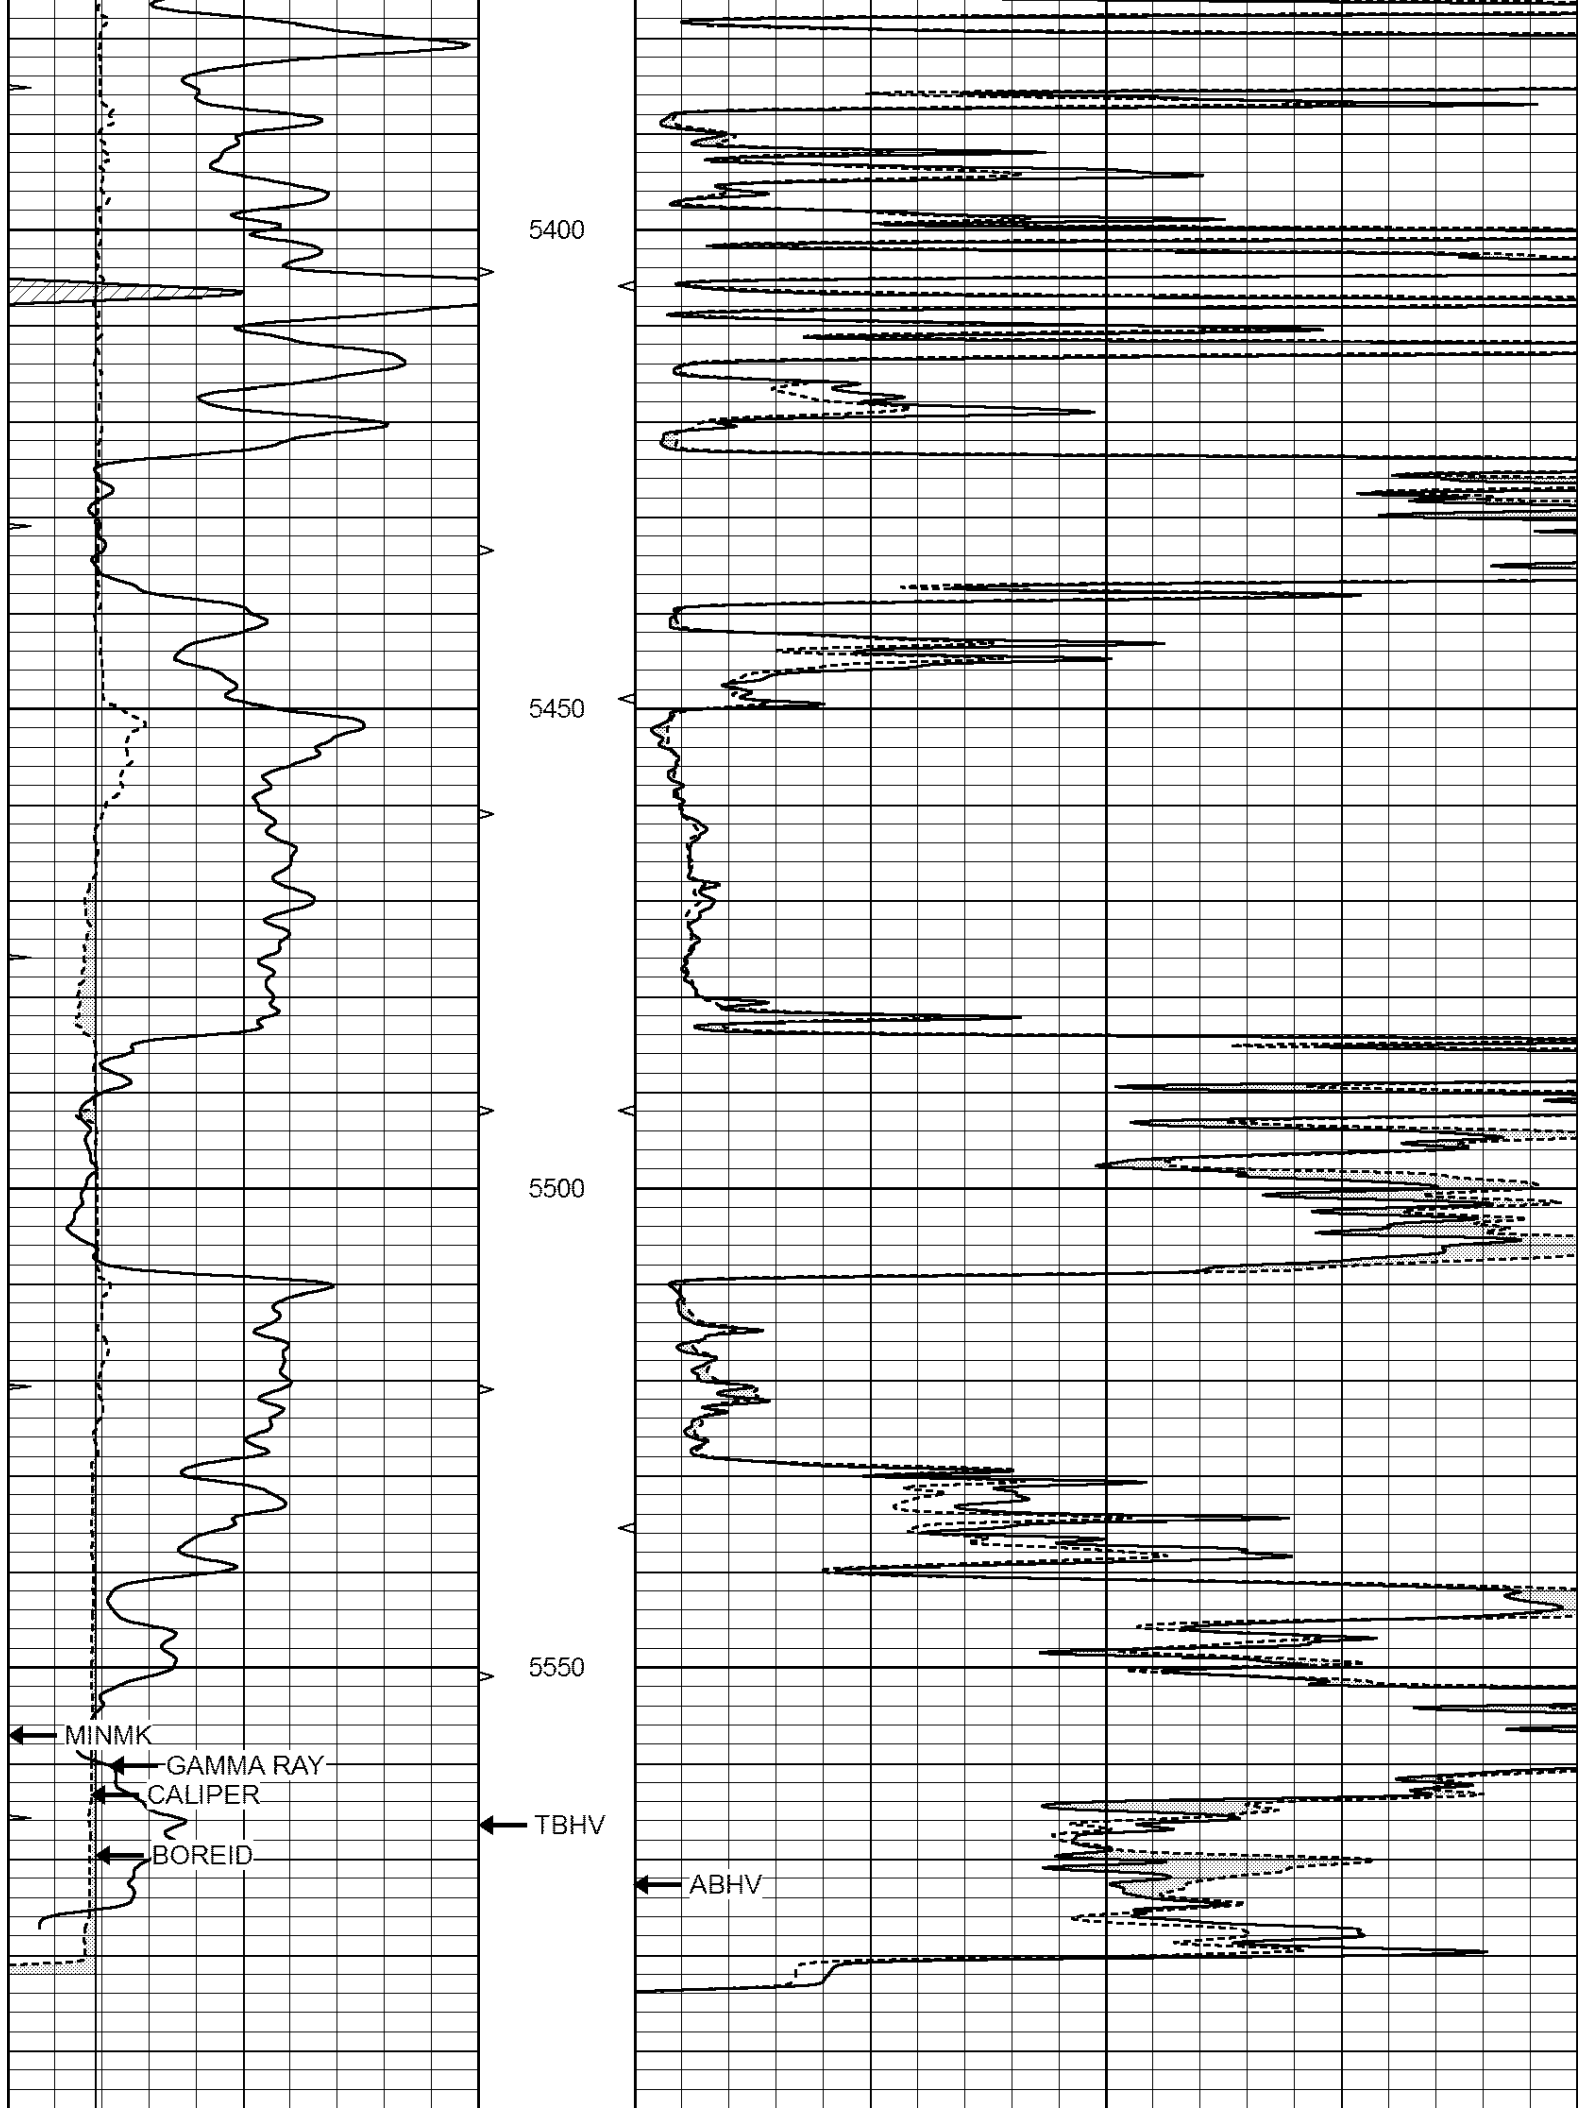



Database File: 4097pe.db
Dataset Pathname: pass7.1
Presentation Format: _micro
Dataset Creation: Fri Oct 04 20:57:07 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

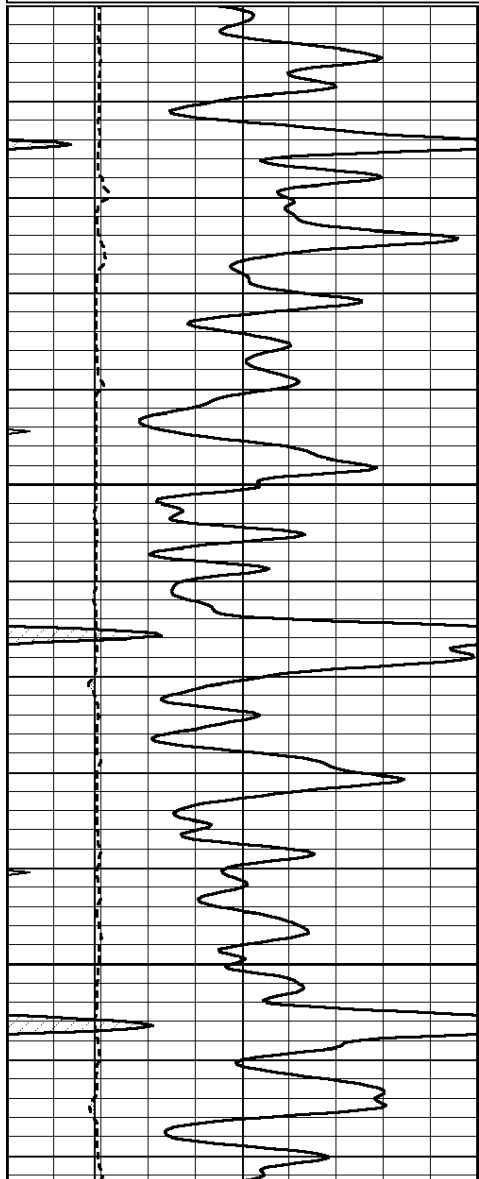

5400

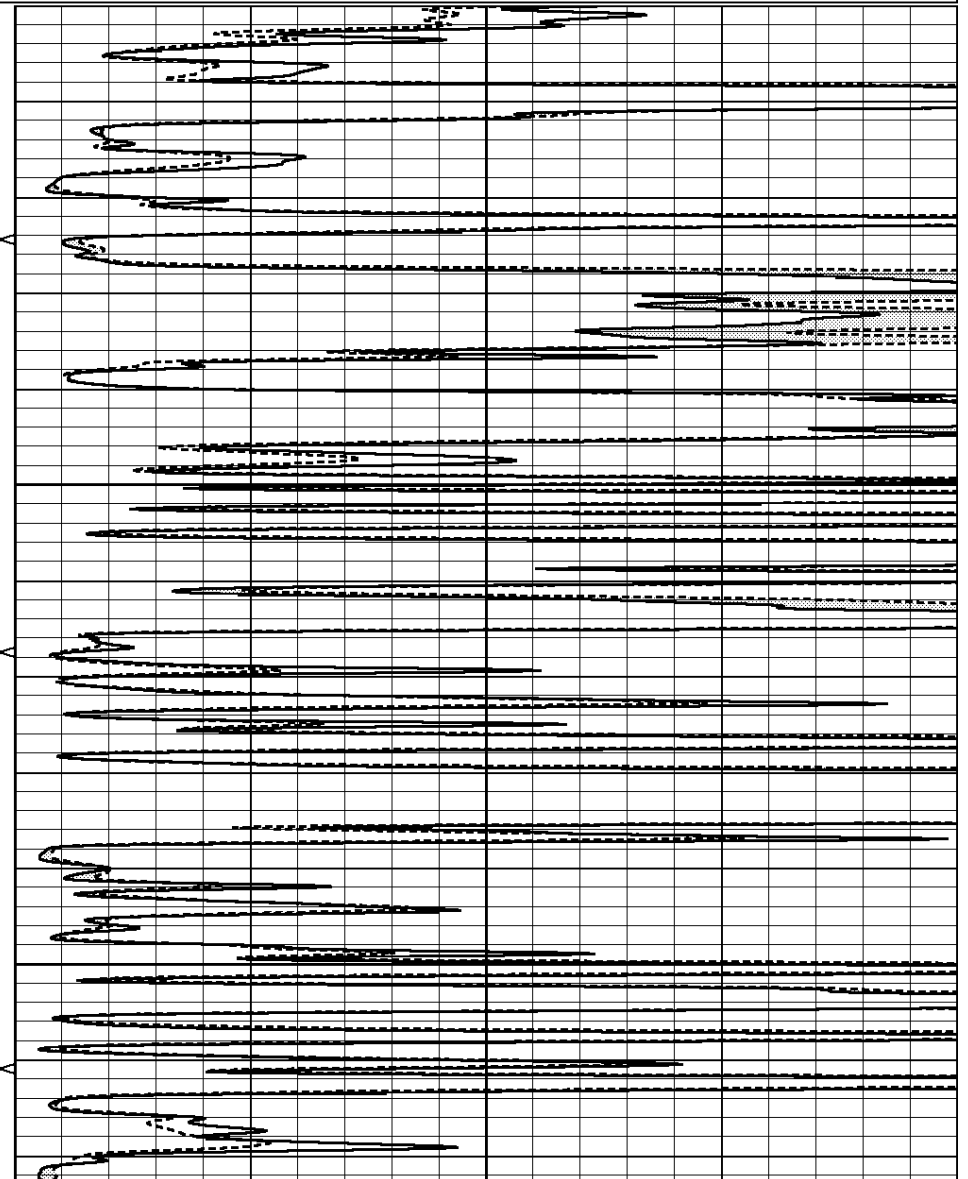

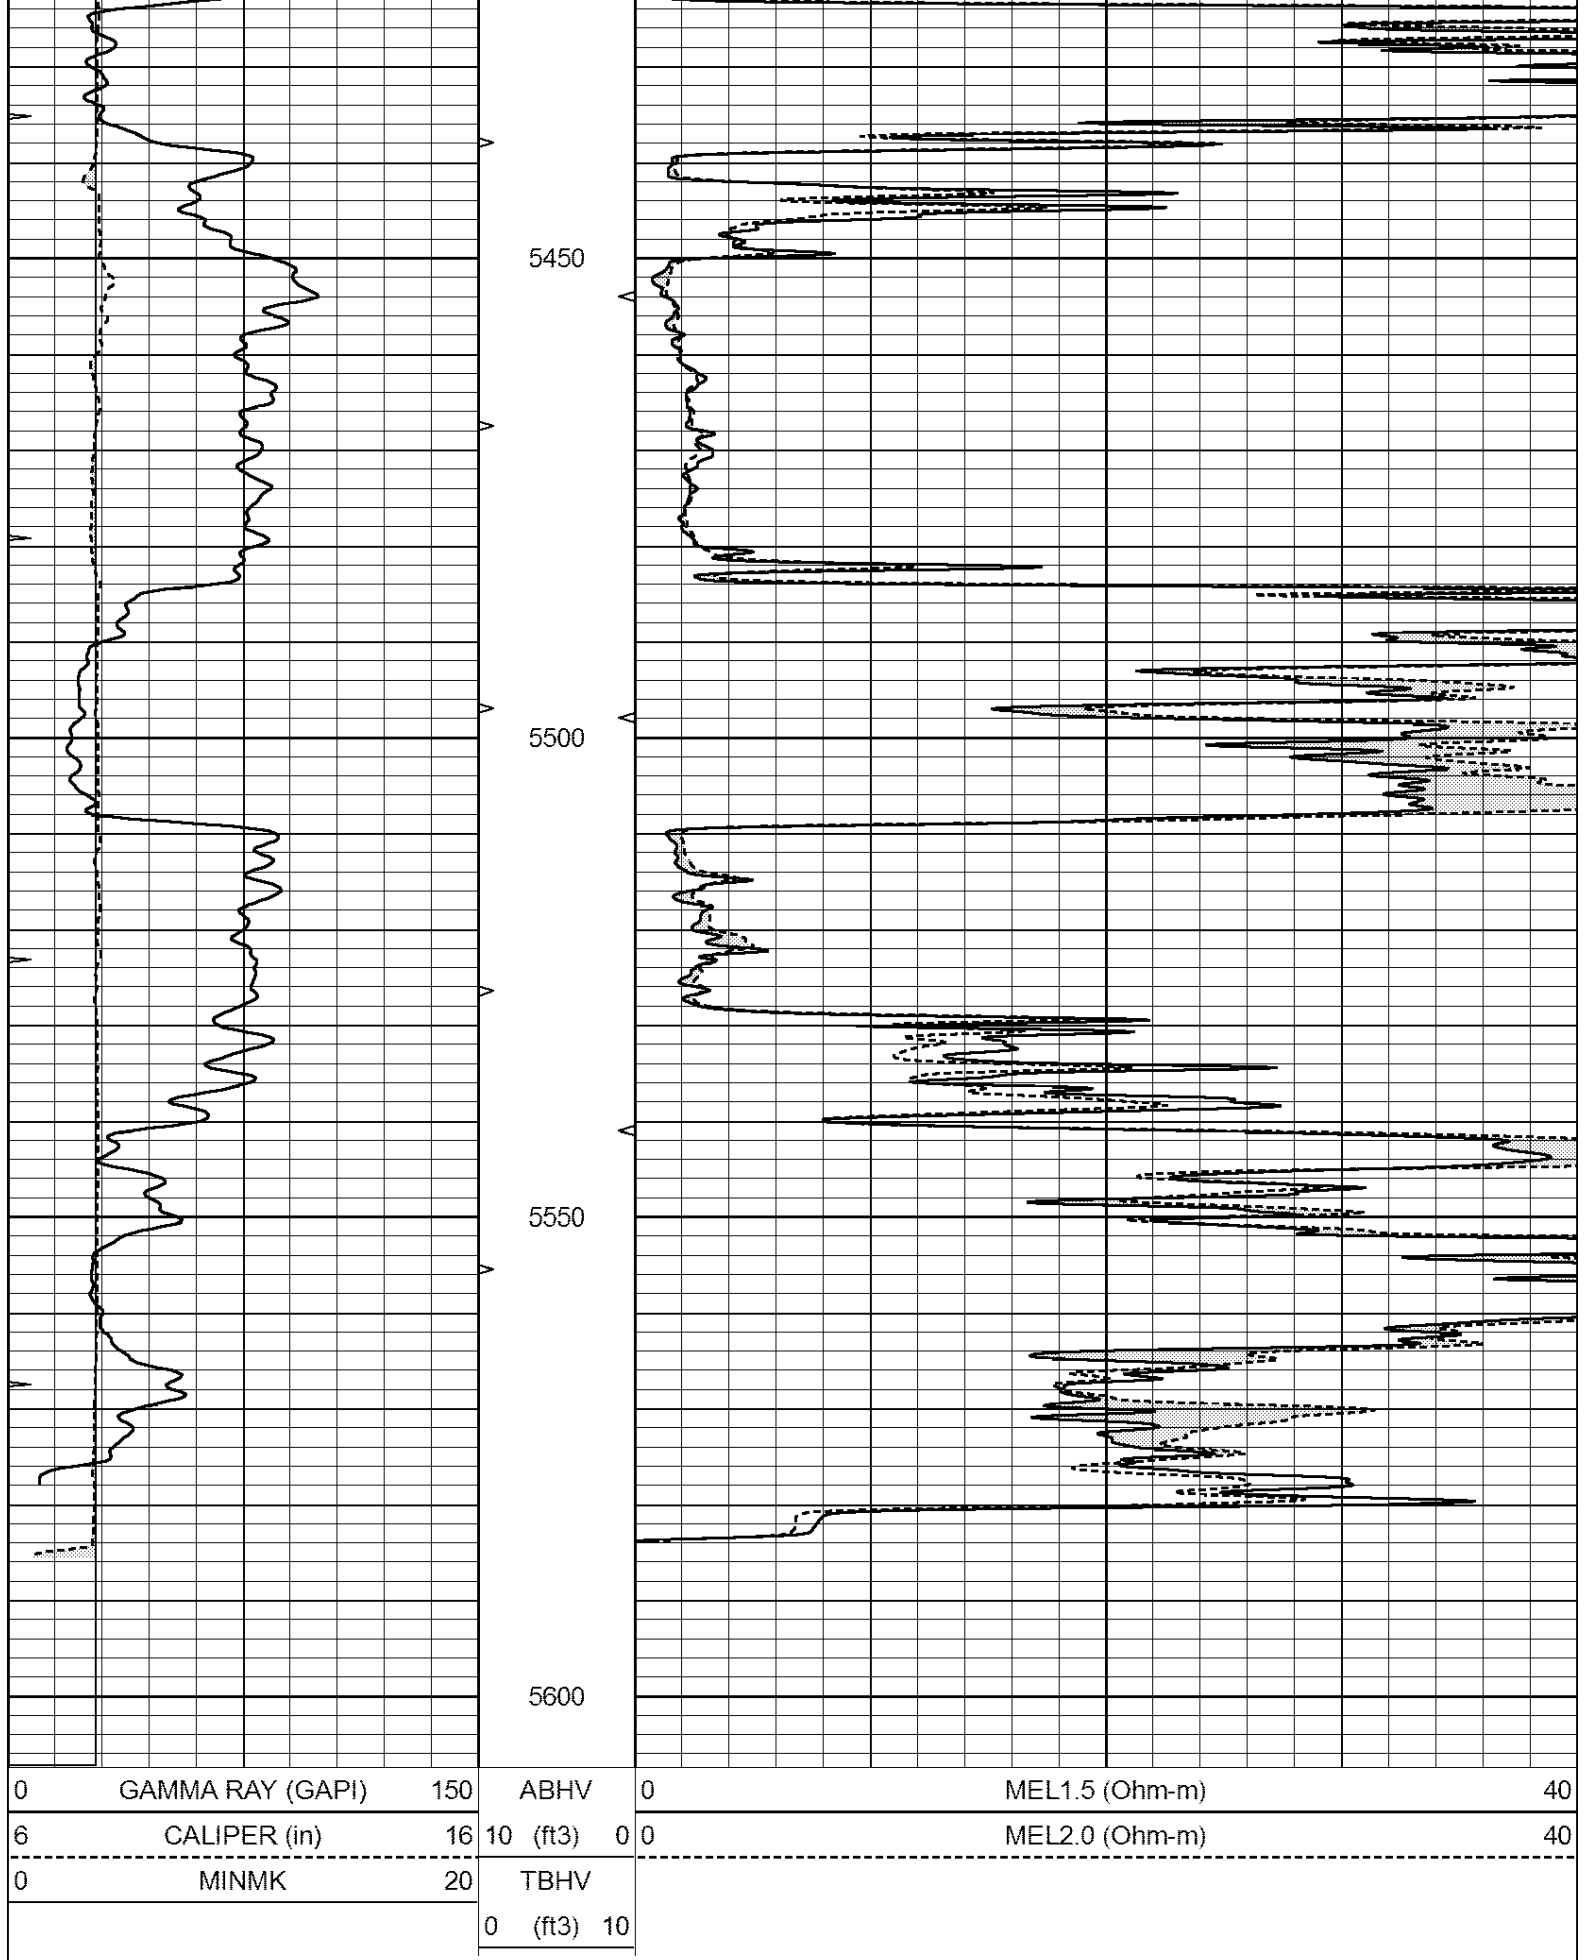

Calibration Report

Database File: 4097pe.db
Dataset Pathname: nace7 1

MICRO Calibration Report		
Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Thu Sep 12 10:50:26 2019	
Caliper Calibration:	Gain=2.030	Offset=6.555
	Low Cal	High Cal
References	9.500	13.000
Readings	0.308	2.032
1.5" Calibration:	Gain=56.134	Offset=-1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832
2" Calibration:	Gain=52.000	Offset=-0.300
	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Thu Sep 12 10:48:02 2019	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5000	GAPI/cps