



MICRO LOG

Company		DIXON OPERATING COMPANY, LLC.	
Well	DSA #2-3		
Field	MIKES METEOR		
County	STAFFORD	State	KANSAS
Location:	API # : 15-185-24059-0000		Other Services CDL/CNL/PE DIL/SON
2210' FSL & 2970' FEL			
Permanent Datum	SEC 3	TWP 23S	RGE 12W
Log Measured From	GROUND LEVEL		Elevation 1834
Drilling Measured From	KELLY BUSHING 11' A.G.L		K.B. 1845 D.F. 1843 G.L. 1834
Date	10/18/19		
Run Number	TWO		
Depth Driller	3850		
Depth Logger	3848		
Bottom Logged Interval	3830		
Top Log Interval	3100		
Casing Driller	8 5/8" @ 306'		
Casing Logger	306'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 6800 PPM
Density / Viscosity	9.2/46		
pH / Fluid Loss	10.5/9.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.65 @ 83F		
Rmf @ Meas. Temp	0.48 @ 83F		
Rmc @ Meas. Temp	0.78 @ 83F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	0.46 @ 115F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	115F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	BRUCE REED		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
ST. JOHN, KS. - 4 NORTH TO NE 70TH RD. - 6 EAST TO 60TH - 1 1/4 NORTH
EAST INTO




MAIN SECTION

Database File	4000pe8.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Fri Oct 18 21:40:18 2019
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

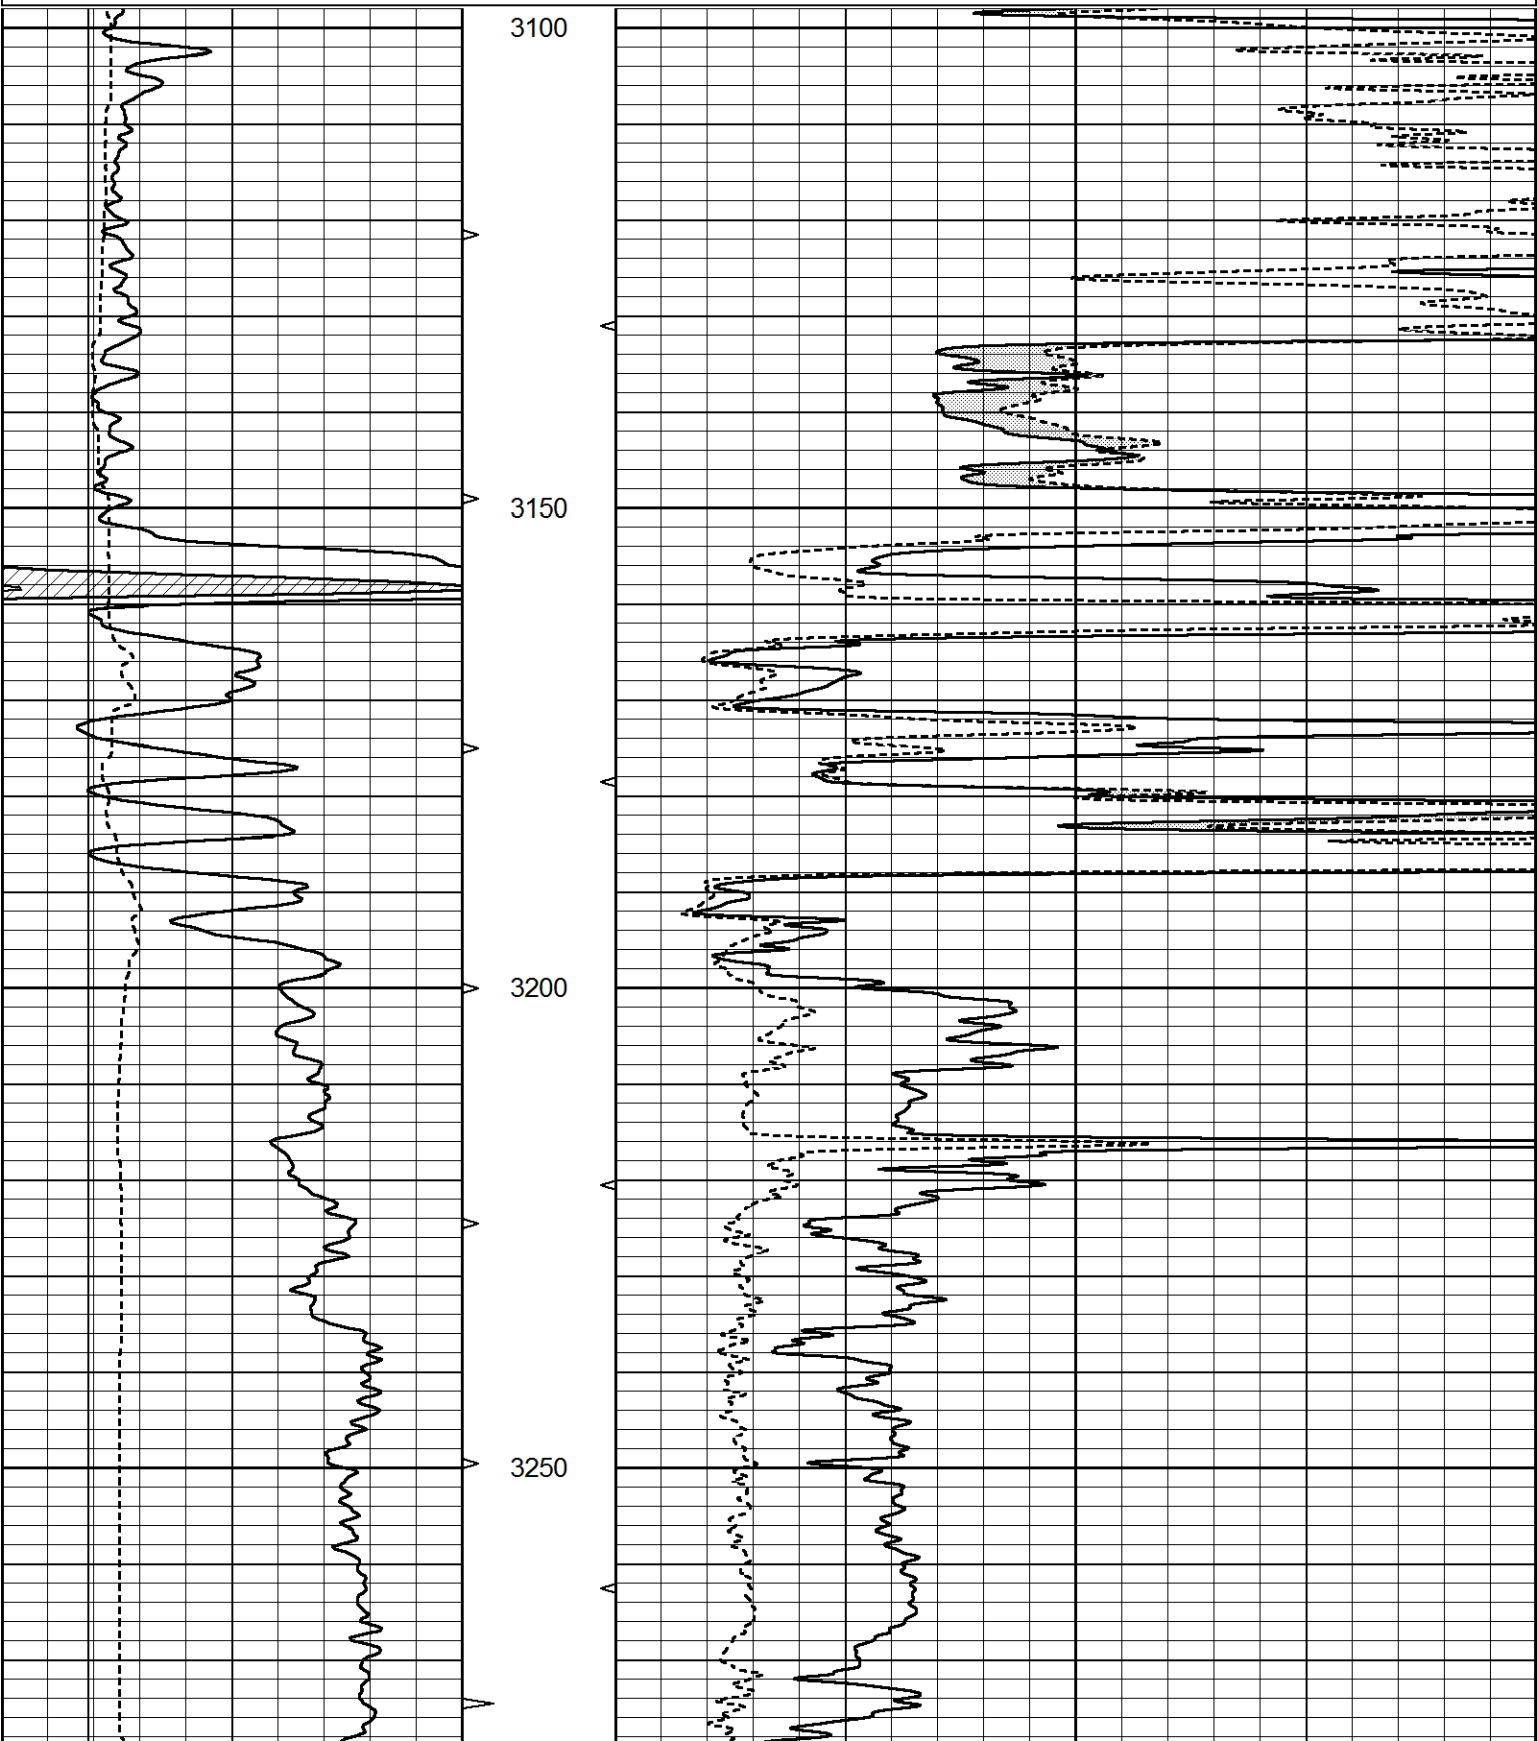

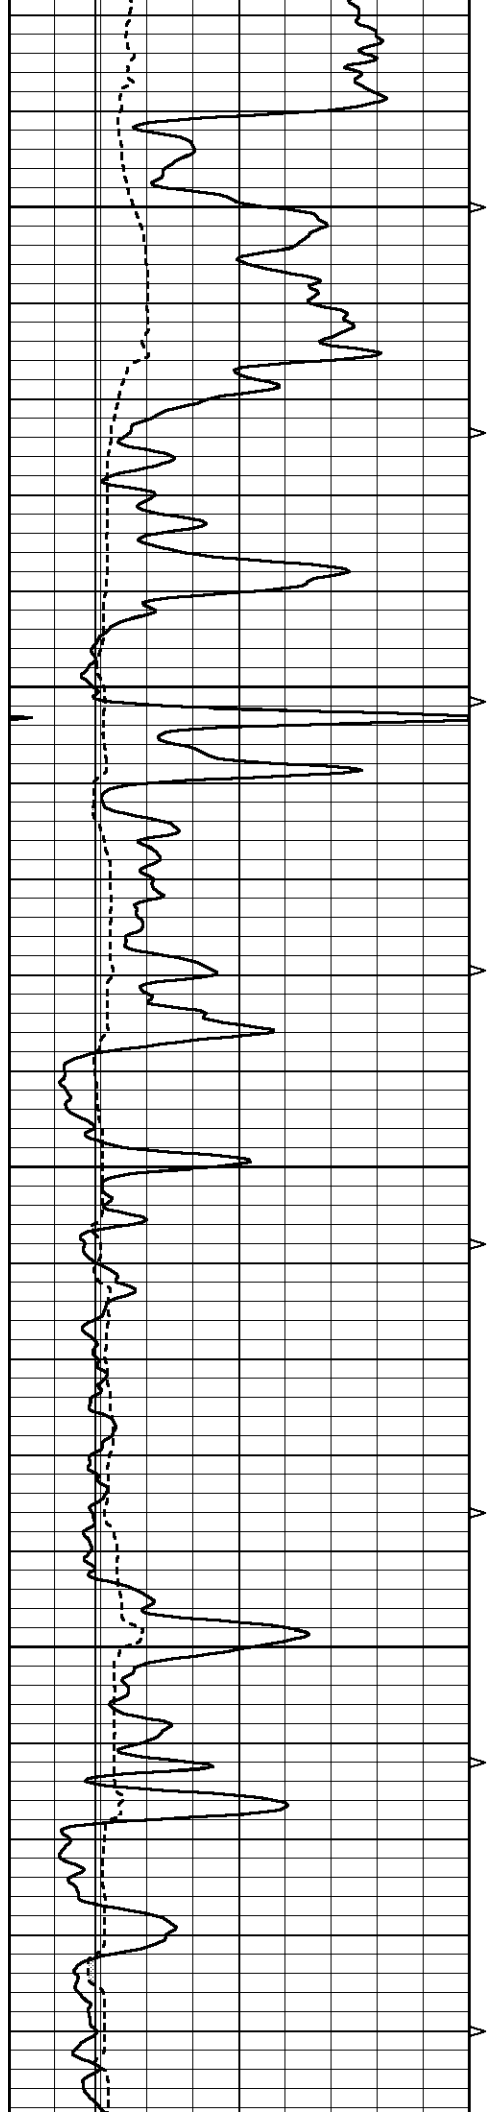



3300

3350

3400

3450

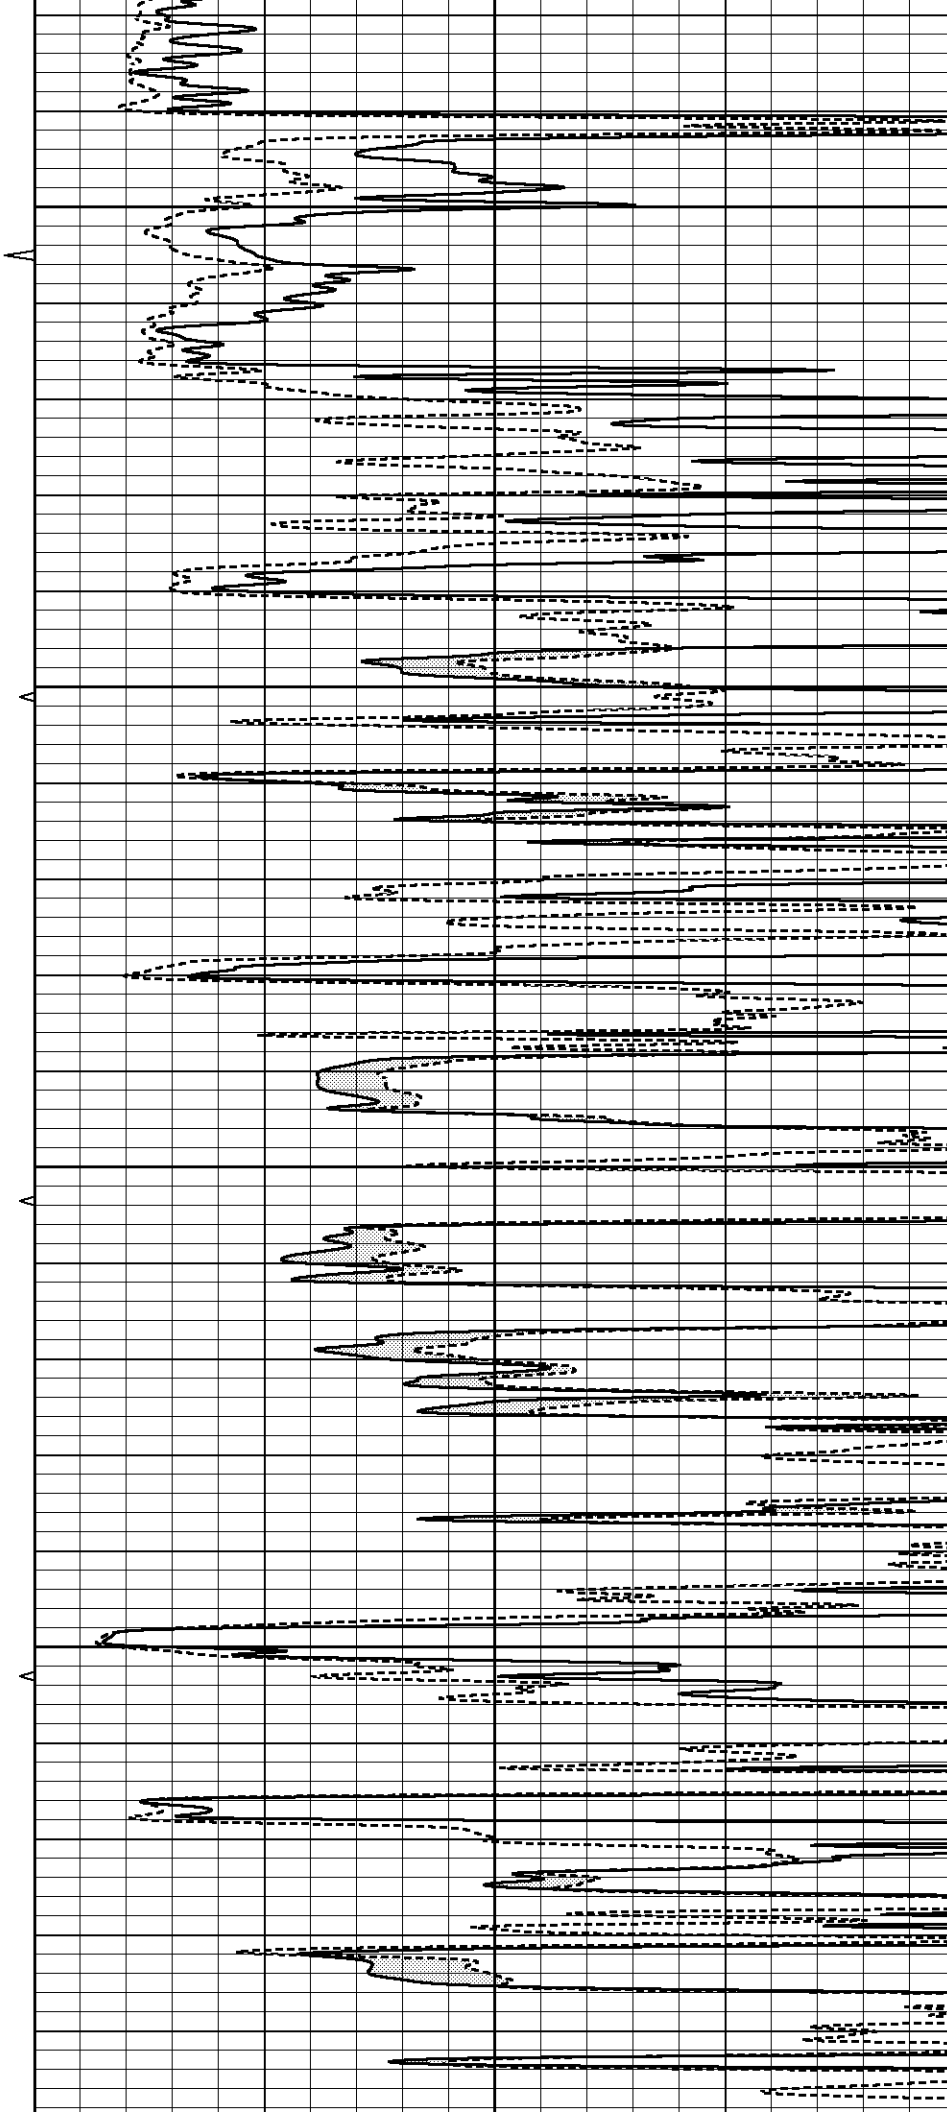

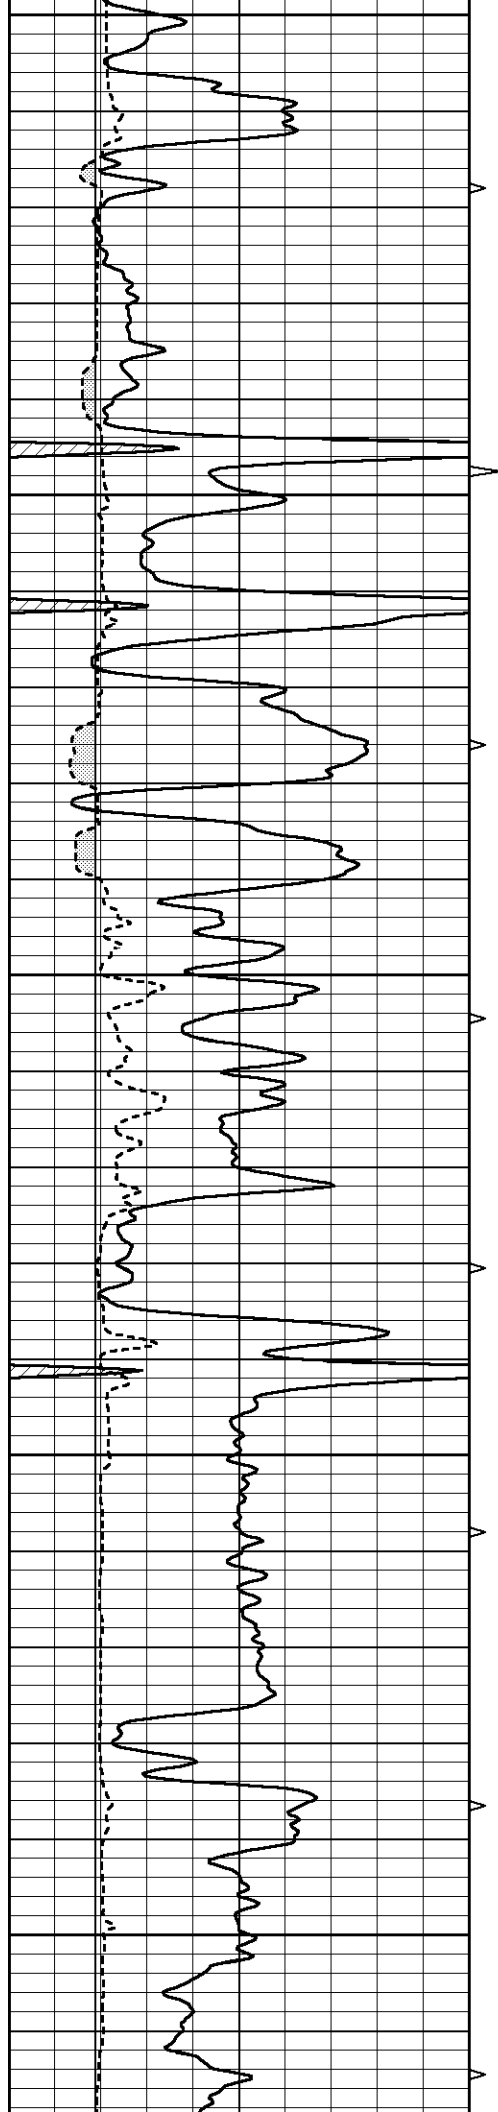


3500


3550

3600

3650

3700

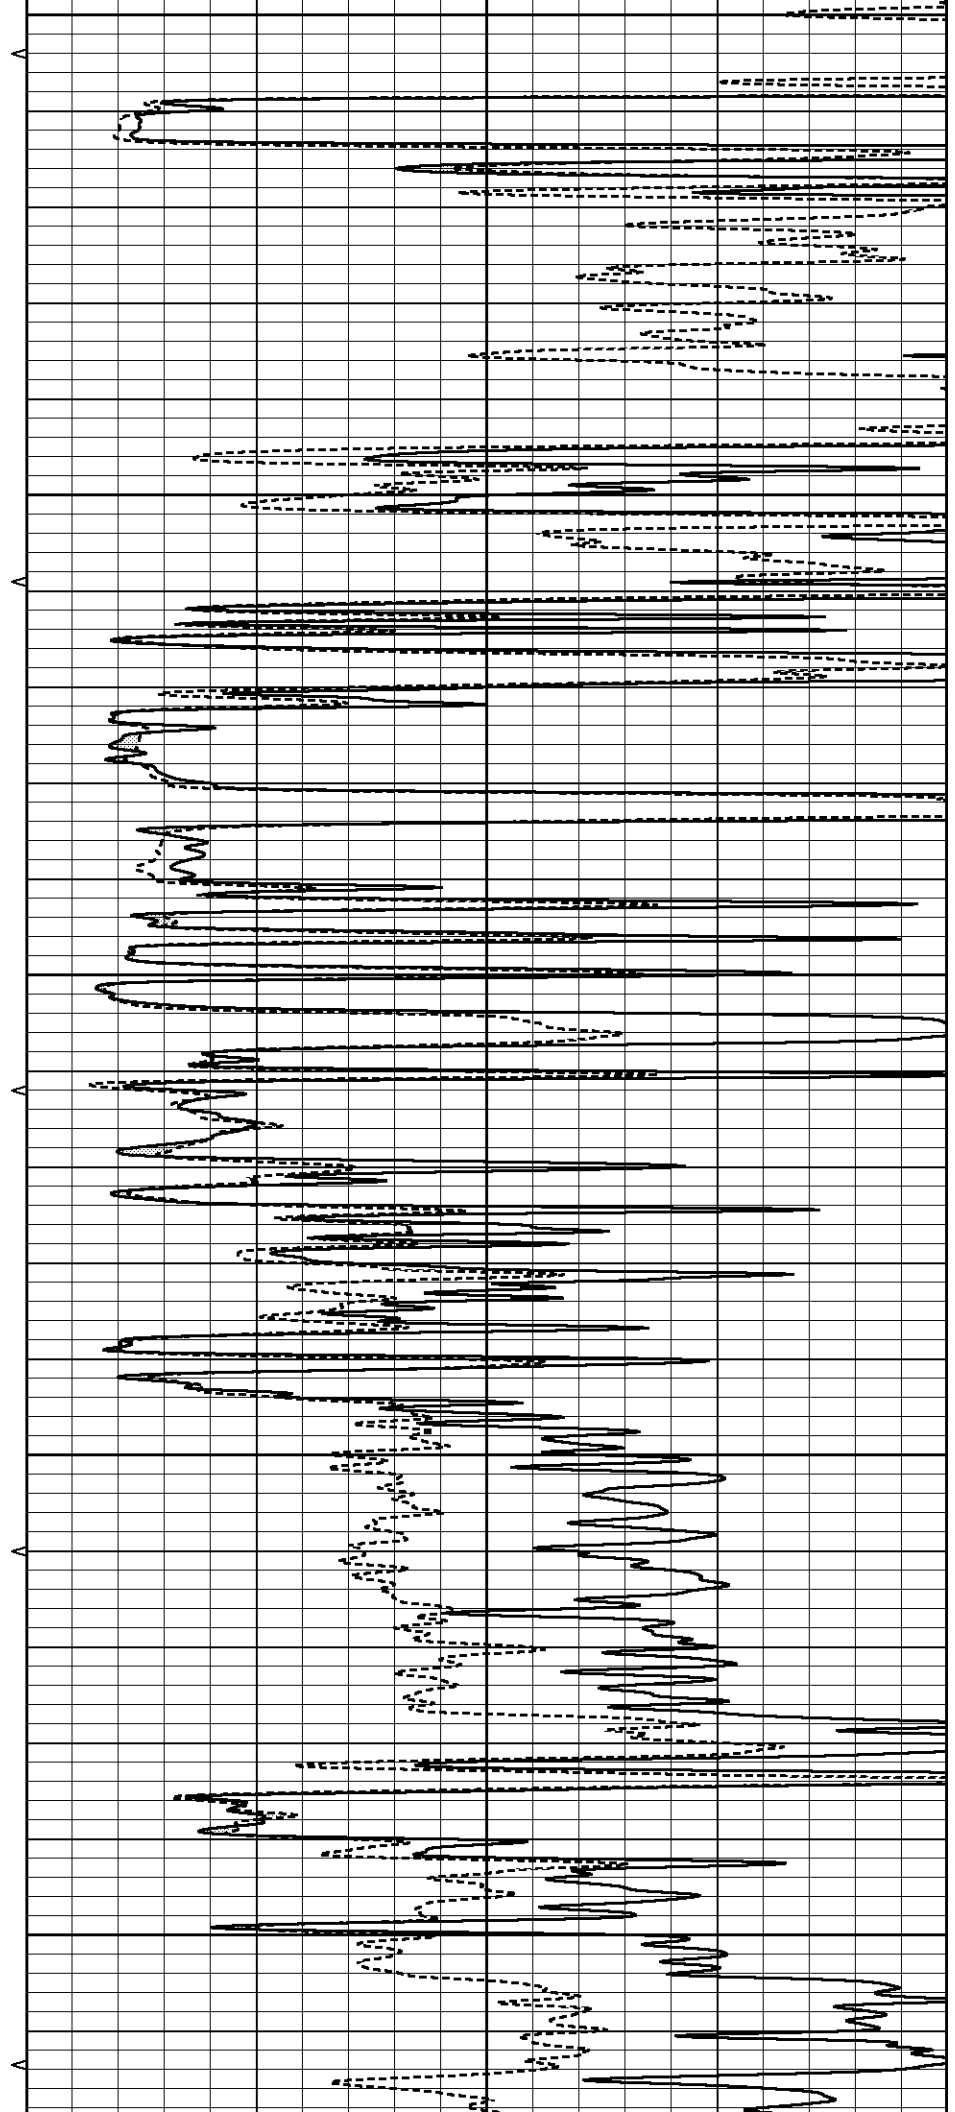


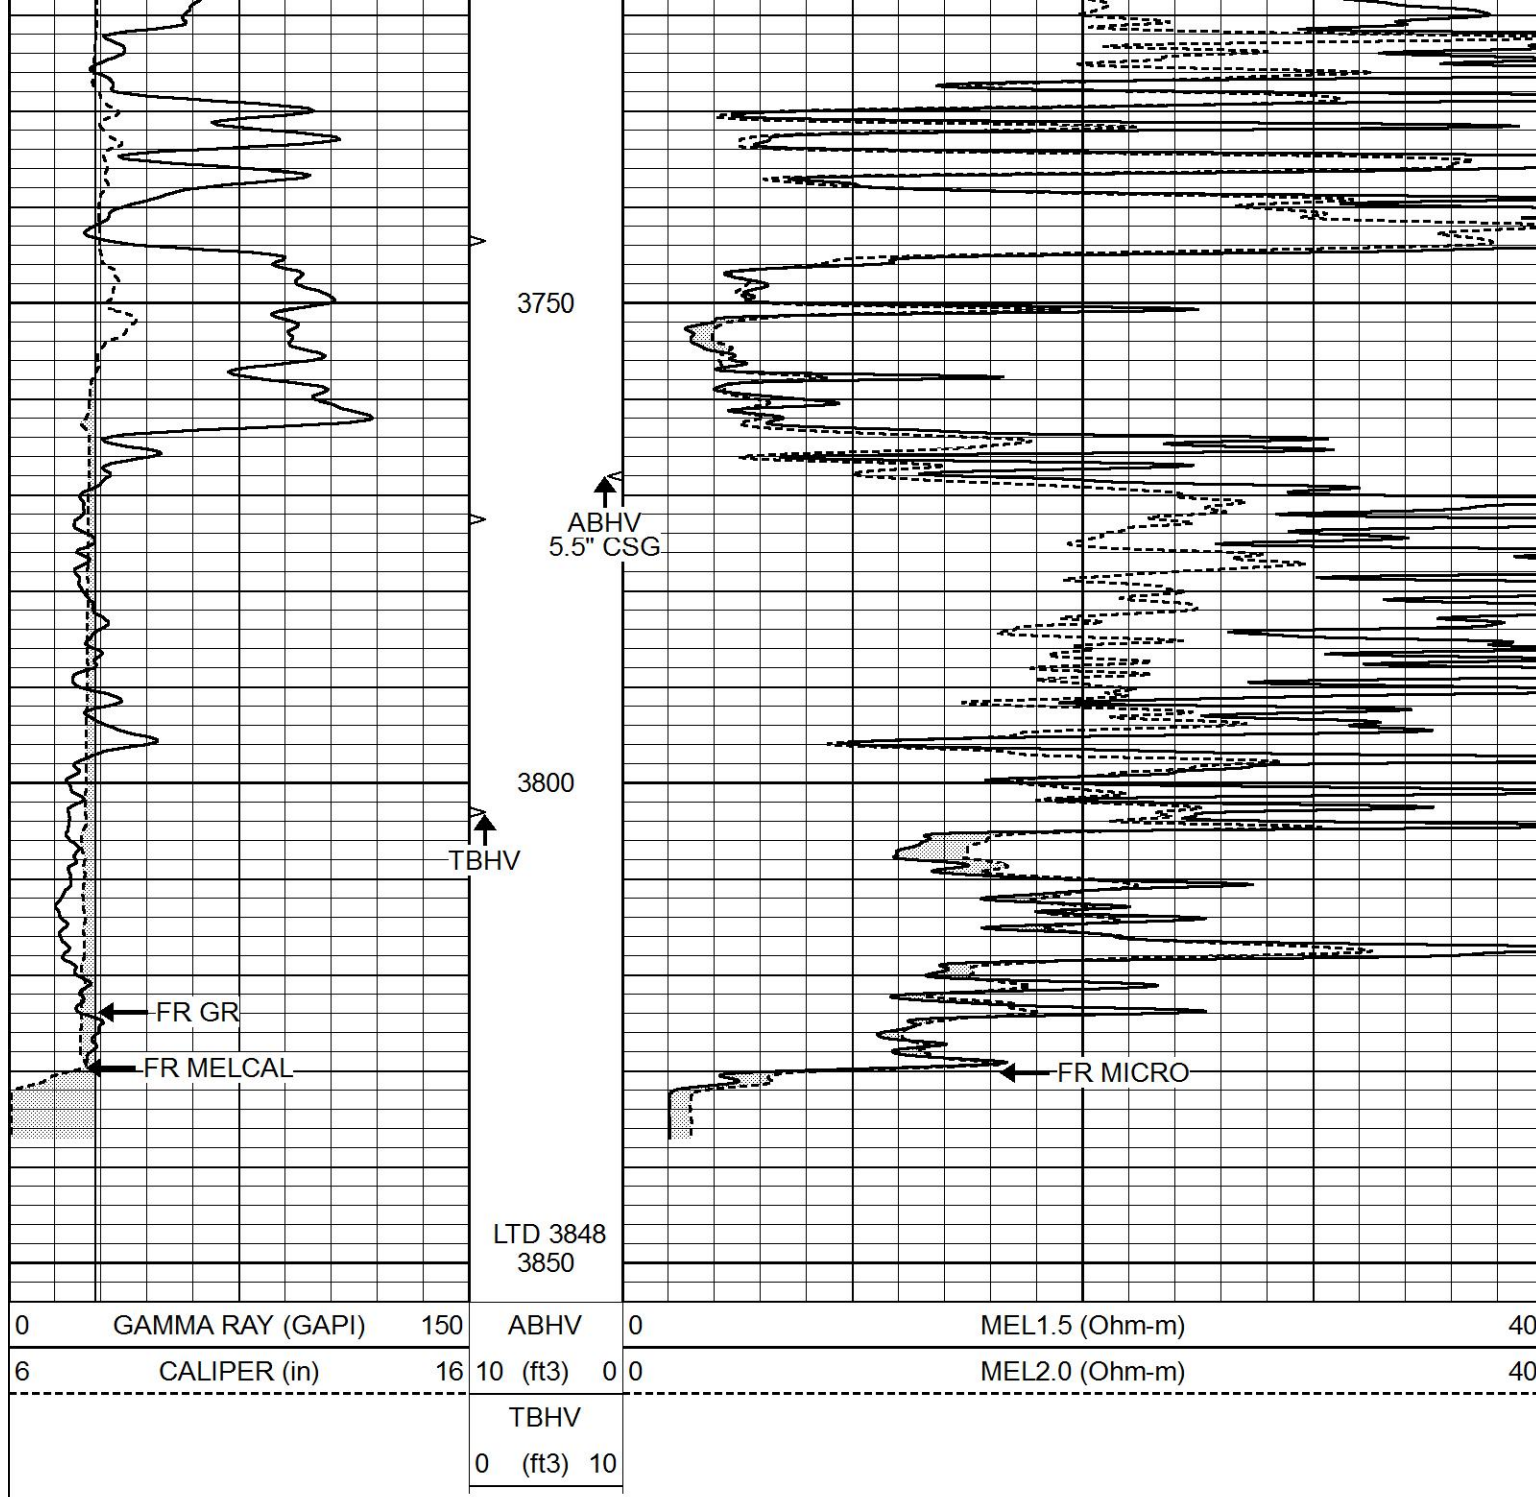


REPEAT SECTION

Database File 4000pe8.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Fri Oct 18 21:38:56 2019
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

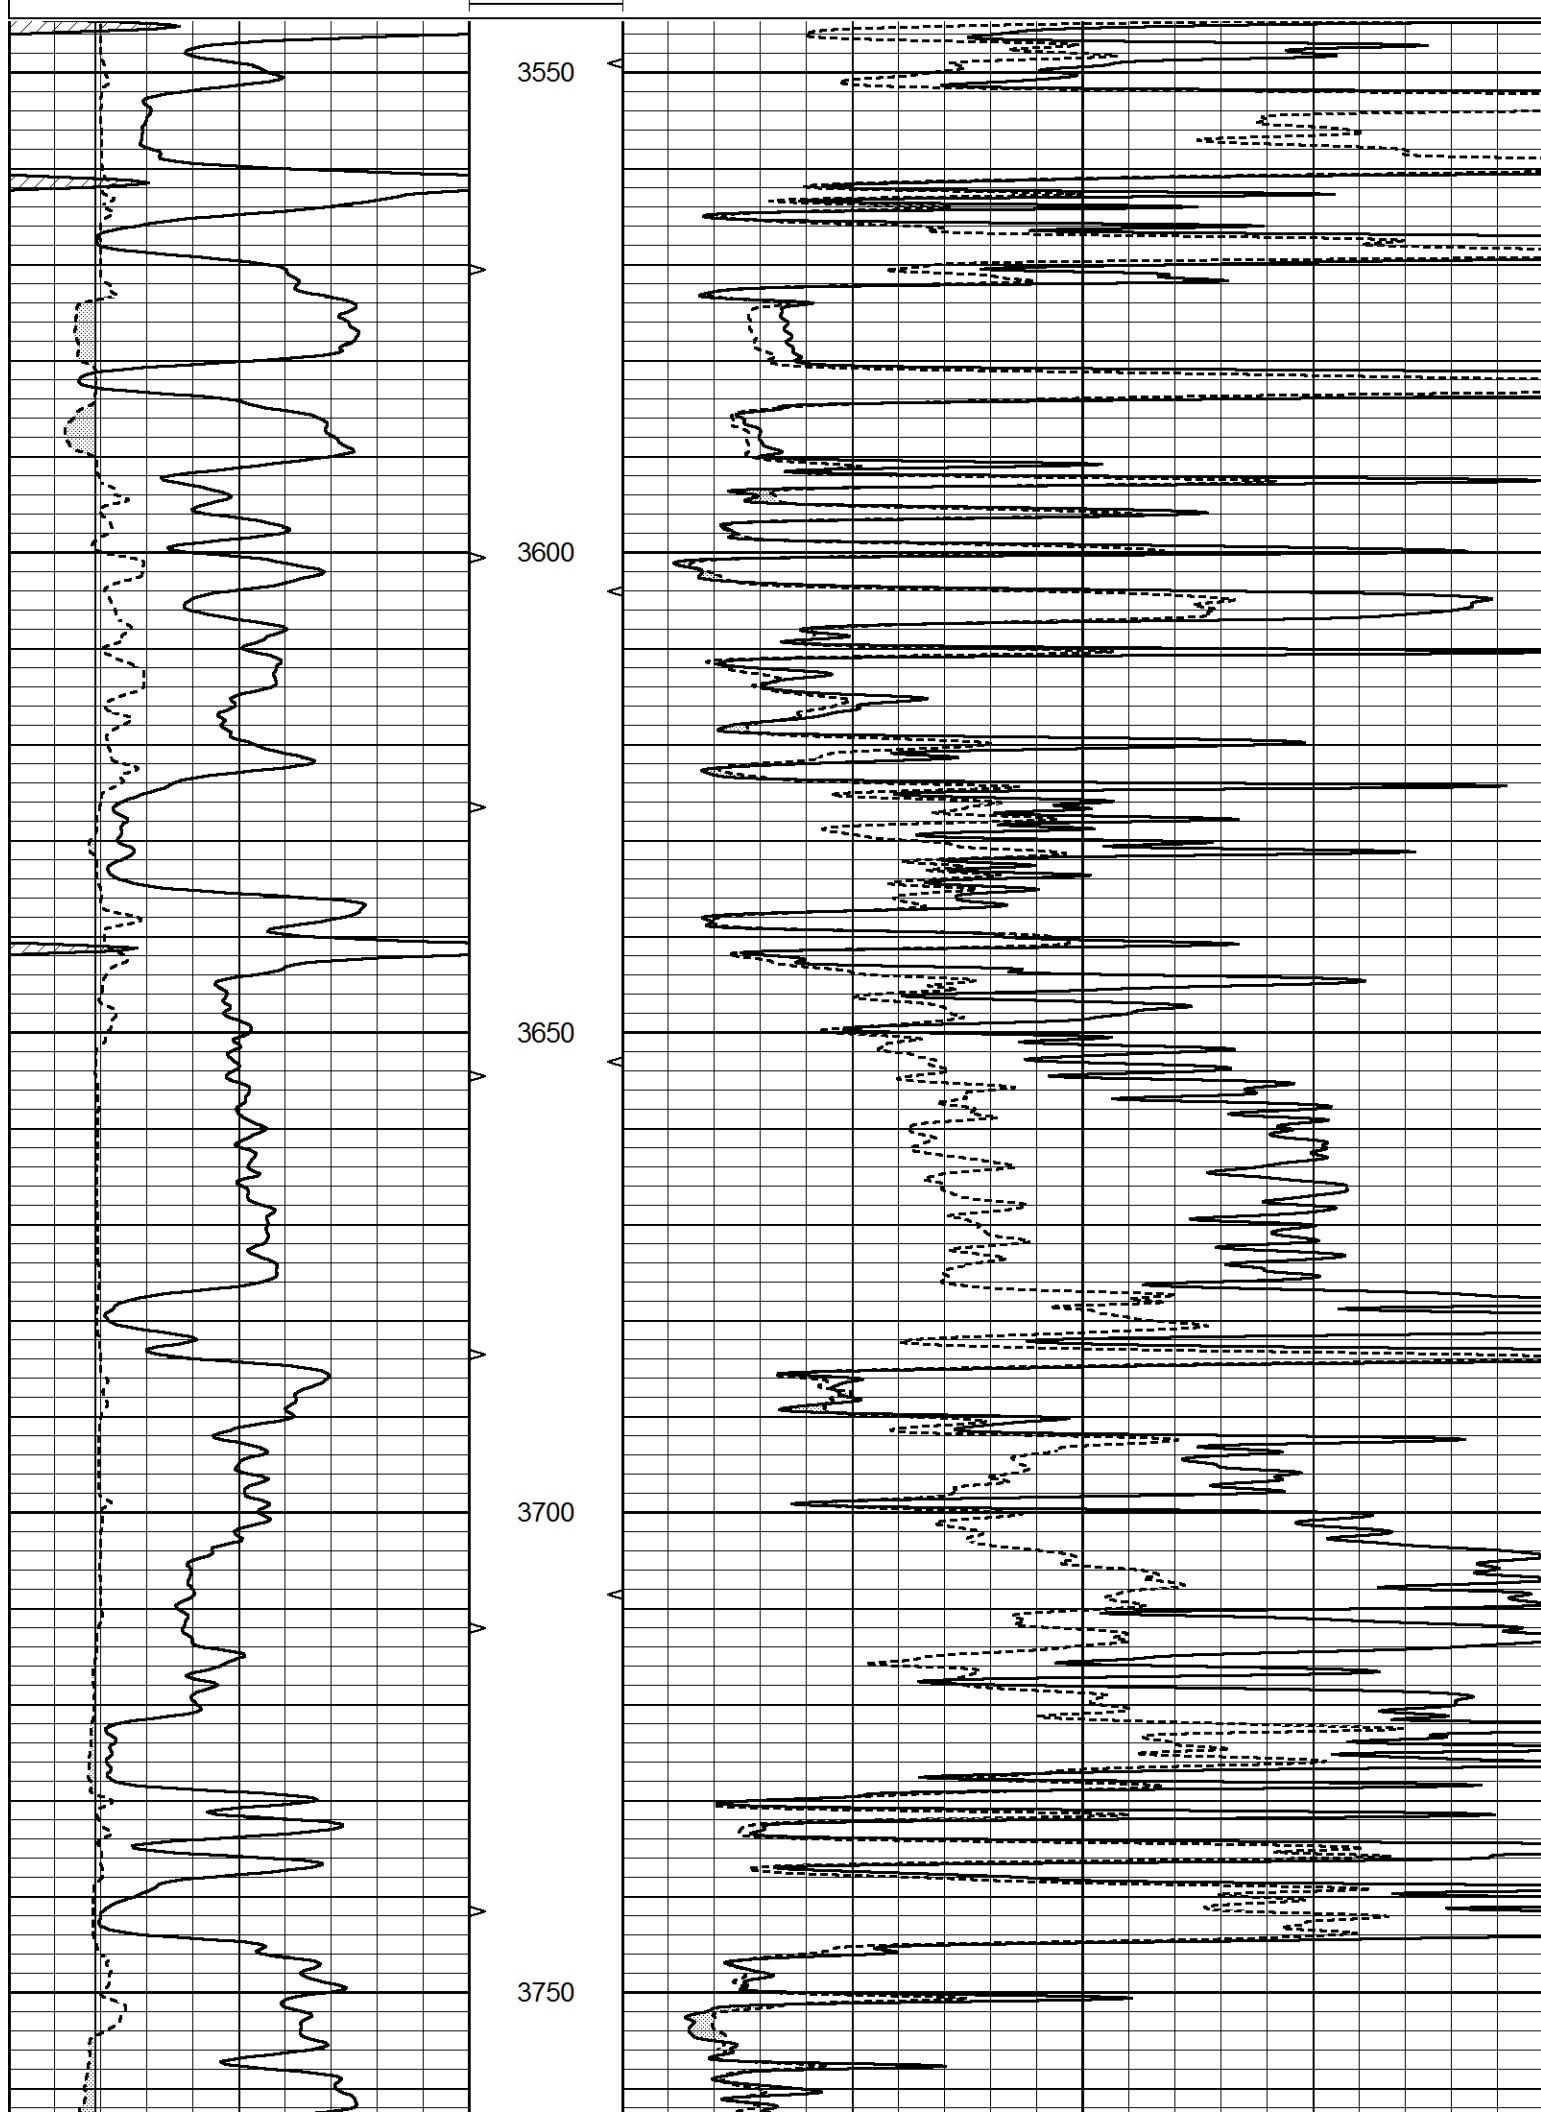

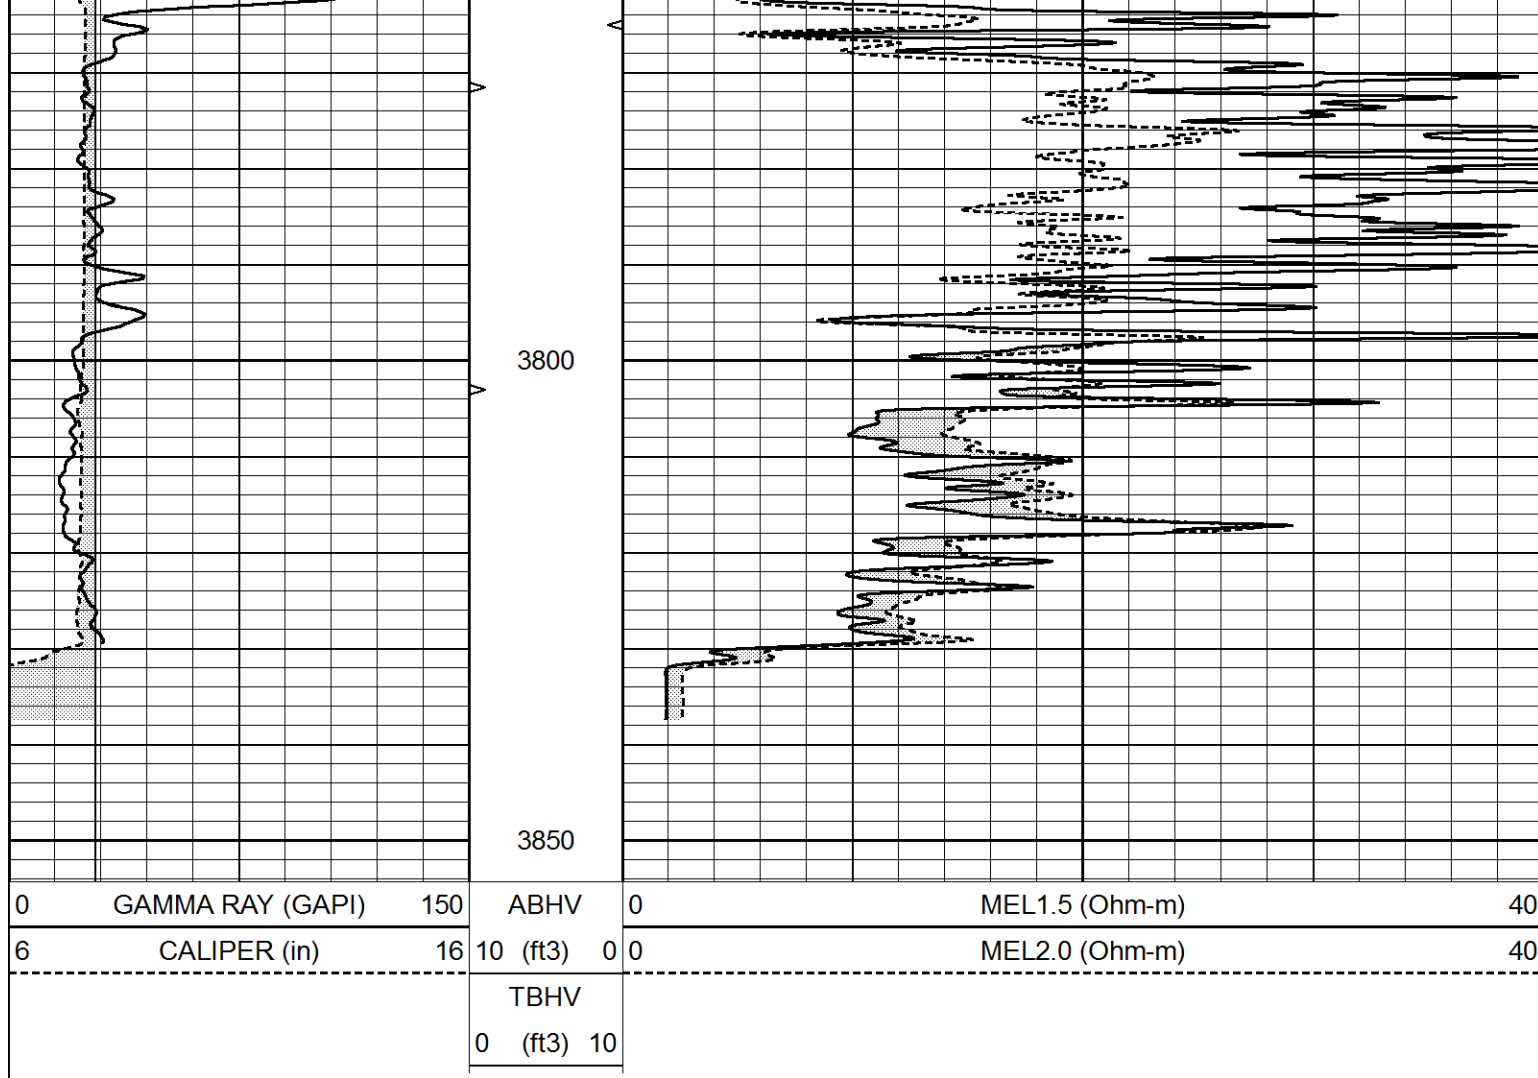

Calibration Report			
Database File	4000pe8.db		
Dataset Pathname	pass5.1		
Dataset Creation	Fri Oct 18 21:38:56 2019		
MICRO_USR Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeL		
Performed:	Fri Aug 03 23:13:00 2018		
Caliper Calibration:	Gain=7.336	Offset=3.017	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	0.652	1.470	
1.5" Calibration:	Gain=55.000	Offset=-0.067	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	1.335	
2" Calibration:	Gain=75.000	Offset=-0.779	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	1.029	
Microlog Calibration Report			

Serial-Model:
Performed:

070910-ProbeL
(Not Performed)

Readings				References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report								
Serial Number:			070558					
Tool Model:			Probe1					
Performed:			Mon Jan 21 19:38:56 2019					
Calibrator Value:			1.0	GAPI				
Background Reading:			0.0	cps				
Calibrator Reading:			1.0	cps				
Sensitivity:			0.2500	GAPI/cps				