

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-23388-00-01
Spot: NENWSW Sec/Twnshp/Rge: 17-16S-21W
2310 feet from S Section Line, 4290 feet from E Section Line
Lease Name: O'ROURKE Well #: 1
County: NESS Total Vertical Depth: 4350 feet

Operator License No.: 4767
Op Name: RITCHIE EXPLORATION, INC.
Address: BOX 783188 8100 E 22ND ST. N. #700
WICHITA, KS 67278

String	Size	Depth (ft)	Pulled (ft)	Comment
PC		1671		WITH 350 SX CMT \$ 141.38
PROD	5.5	4351	0	WITH 100 SX CMT
SURF	8.625	287		WITH 160 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/24/2006 10:30 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: BENNIE DILLS Company: RITCHIE EXPLORATION Phone: (620) 793-2525

Proposed Plugging Method: PUMP 35 SX CMT & 200# HULLS. PUMP GEL & 150 SX CMT. CHECK PRESSURE. CHECK BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/24/2006 11:45 AM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMPED 35 SX CMT WITH 200# HULLS. PUMP 14 SX GEL & 150 SX CMT.
PRESSURED TO 500#. TIED ONTO BACKSIDE & PUMPED 25 SX CMT. PRESSURED
TO 500#. PULLED SWEDGE ON 5 1/2" & TOPPED OFF WITH 15 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4238	4243		CHEROKEE

INVOICED
DATE 9/15/06
2007060535

RECEIVED


SEP 14 2006

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

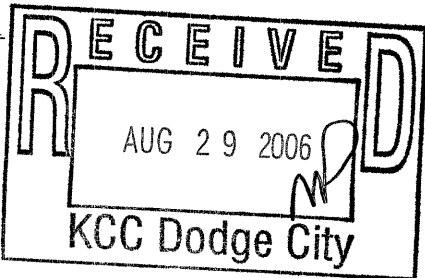

Signed Michael Maier
(TECHNICIAN)

Form CP 78
[Handwritten signature]