

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-081-00396-00-00  
Spot: NENESW Sec/Twnshp/Rge: 31-29S-32W  
2640 feet from N Section Line, 2640 feet from W Section Line  
Lease Name: MURPHY Well #: 1  
County: HASKELL Total Vertical Depth: 2754 feet

Operator License No.: 5208  
Op Name: EXXONMOBIL OIL CORP  
Address: 14950 HEATHROW FORREST PARKWA  
HOUSTON, TX 77210

String	Size	Depth (ft)	Pulled (ft)	Comment
L1		2754		
PROD 7		2616	0	WITH 800 SX CMT
SURF	10.75	505		WITH 300 SX CMT

\$ 89.51

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/18/2006 1:00 PM

Plug Co. License No.: 99994 Plug Co. Name: DOWELL SCHLUMBERGER

Proposal Rcvd. from: JOHN HANEPHIN Company: EXXON MOBIL Phone: (281) 651-1929

Proposed Plugging Method: CIBP @ 2550' & 4 SX CMT. CIBP @ 750' WITH 4 SX CMT. PRESSURE TEST CASING TO 700#. PERFORATE AT 700'. PUMP 200 SX CMT. IF NO CIRCULATION, PUMP 150 SX CMT DOWN BACKSIDE. IF WELL TRYING TO CIRCULATE, PUMP 250 SX CMT.

Plugging Proposal Received By: KEN JEHLIK

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 08/29/2006 5:00 PM

KCC Agent: KEN JEHLIK

Actual Plugging Report:

SLOTTED LINER FROM 2599-2754'. NOTE: THE WAY THE WELL WAS PLUGGED, SUGGESTS THAT THE 7" CASING WAS CEMENTED FROM T.D. TO SURFACE. 1ST PLUG AT 1772' WITH CIBP & 4 SX CMT. 2ND PLUG PERFORATED 7" @ 700'. PUMP 92 SX CMT. MAXIMUM PRESSURE 1500#. 3RD PLUG TEST ANNULUS TO 200#. NO CMT IN ANNULUS.

Perfs:

Top	Bot	Thru	Comments
2622	2754		

INVOICE  
DATE 9/15/06  
NO. 2007060529

RECEIVED


SEP 14 2006

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SCHLUMBERGER.

Plugged through: CSG

District: 01

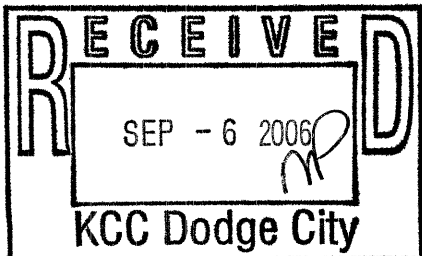

Signed

*Ken Jehlik*

(TECHNICIAN)

Form CP-4/3

*PLT*