

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20482-00-00
Spot: SENWSW Sec/Twnshp/Rge: 27-17S-31W
1650 feet from S Section Line, 990 feet from W Section Line
Lease Name: GRUVER P Well #: 2
County: SCOTT Total Vertical Depth: 4571 feet

Operator License No.: 3988
Op Name: SLAWSON EXPLORATION COMPANY,
Address: 204 N ROBINSON, STE 2300
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comment
PC		2243		WITH 700 SX CMT
PROD	4.5	4300		WITH 200 SX CMT
SURF	8.625	388		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 08/17/2006 2:45 PM
Plug Co. License No.: 31627 Plug Co. Name: WHITETAIL CRUDE, INC
Proposal Rcvd. from: SHANE Company: WHITETAIL CRUDE, INC Phone: (785) 798-3641

Proposed Plugging Method: PUMP 25 SX CMT & 200# HULLS. CIRCULATE CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 08/17/2006 6:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

RUN TUBING TO 4120' CEMENTED WITH 25 SX CMT & 200# HULLS. PULLED TUBING TO 2100'. CEMENTED WITH 145 SX CMT. CIRCULATED TO SURFACE. PULLED TUBING AND TOPPED OFF WITH 20 SX CMT. TIED ONTO BACKSIDE AND PRESSURED TO 450#.

Perfs:

Top	Bot	Thru	Comments
4186	4257		


INVOICE
DATE 9/15/06
WT. NO. 2007060538

RECEIVED
SEP 14 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

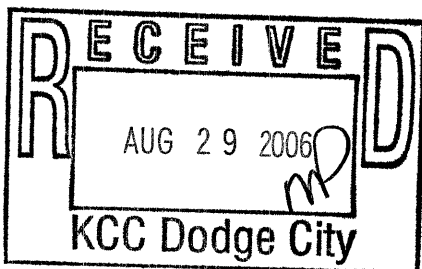

Signed Michael Maier
(TECHNICIAN)

PPF
Form C-23