

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20642-00-00
Spot: NENWSE Sec/Twnshp/Rge: 34-16S-31W
2310 feet from S Section Line, 1650 feet from E Section Line
Lease Name: BYRON SOWERS Well #: 1
County: SCOTT Total Vertical Depth: 4660 feet

Operator License No.: 31251
Op Name: WABASH ENERGY CORPORATION
Address: RR #1 - BOX 180-A P.O. BOX 595
LAWRENCEVILLE, IL 62439

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|---------|
| SURF | 8.625 | 225 | | |

151.45
\$ 148.56
PPT

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 08/31/2006 7:00 AM
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING
Proposal Rcvd. from: TOM ALM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Plugging Method: 1ST PLUG AT 2340' WITH 50 SX CMT. 2ND PLUG AT 1590' WITH 80 SX CMT. 3RD PLUG AT 810' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 08/31/2006 9:00 AM KCC Agent: STEVE DURRANT

Actual Plugging Report:

Perfs:

1ST PLUG AT 2340' WITH 50 SX CMT. 2ND PLUG AT 1590' WITH 80 SX CMT. 3RD PLUG AT 810' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.


INVOICED
9/15/06
PPT 2007060538
2007060539

RECEIVED
SEP 14 2006
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

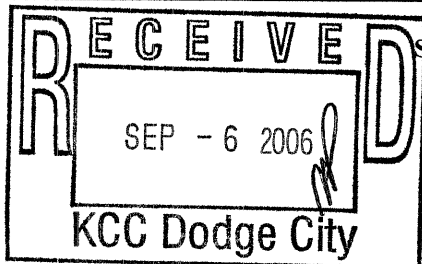

Signed

Steve Durrant
(TECHNICIAN)

PPT