

"AMENDED"

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-163-22986-00-00
Spot: NWNWSE Sec/Twnshp/Rge: 15-9S-19W
2310 feet from S Section Line, 2210 feet from E Section Line
Lease Name: NOVOTNY A Well #: 1-15
County: ROOKS Total Vertical Depth: 3514 feet

Operator License No.: 6931
Op Name: BOWMAN OIL COMPANY, A GENERAL
Address: 805 CODELL RD.
CODELL, KS 67663

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3514		
SURF	8.625	213		

\$ 114.08

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/08/2002 8:00 AM
Plug Co. License No.: 99998 Plug Co. Name: COMPANY TOOLS
Proposal Rcvd. from: DON BOWMAN Company: BOWMAN OIL COMPANY Phone: (785) 434-2286

Proposed Plugging Method: Perf at 1500' and 850'.
Ordered 200 sxs 60/40 pozmix - 10% gel - 500# hulls.

Plugging Proposal Received By: DENNIS HAMEL WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 05/08/2002 11:00 AM KCC Agent: DENNIS HAMEL

Actual Plugging Report:

Ran tubing to 2880' and pumped 20 sxs gel, followed with 30 sxs cement and 300# hulls.
Pulled tubing to 1800' and circulated cement to surface with 120 sxs.
Pulled tubing and tied onto production casing - pumped 25 sxs cement.
S.I.P. 500#.

Perfs:

RECEIVED
SEP 18 2006
KCC WICHITA

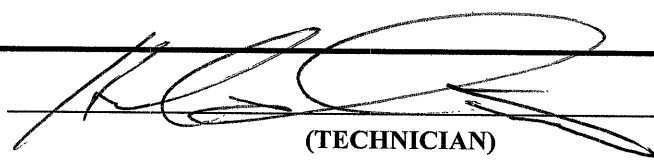
INVOICED
DATE 6-27-02
2002062014

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: TBG

District: 04

Signed _____


(TECHNICIAN)

Form CP-2/3

SEP 06 2006

PKT