

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-22574-00-00
Spot: NWSESW Sec/Twnshp/Rge: 30-17S-24W
990 feet from S Section Line, 1650 feet from W Section Line
Lease Name: BISHOP Well #: 2
County: NESS Total Vertical Depth: 4433 feet

Operator License No.: 5663
Op Name: HESS OIL COMPANY
Address: PO BOX 1009
MCPHERSON, KS 67460

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| PROD | 5.5 | 4430 | 0 | WITH 125 SX CMT |
| SURF | 8.625 | 717 | | WITH 375 SX CMT |

\$144.07

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/06/2006 10:45 AM
Plug Co. License No.: 5663 Plug Co. Name: HESS OIL COMPANY
Proposal Rcvd. from: ARNIE HESS Company: HESS OIL COMPANY Phone: (785) 731-5615

Proposed Plugging Method: PUMP 40 SX CMT & 100# HULLS AT 4400'. PLUG AT 1400' WITH 25 SX CMT. PLUG AT 1060' + 80 SX CMT OVER CAPACITY. PERFORATE & PUMP 150 SX CMT. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/06/2006 6:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

RUN TUBING TO 4400' & SPOT 40 SX CMT WITH 100# HULLS. PULL TUBING TO 1700' & PUMP 25 SX COMMON CMT WITH 3% CC. PULLED TUBING TO 1150' & PUMPED 50 SX COMMON CMT WITH 3% CC. WAITED 1 1/2 HOURS. PUMPED 40 SX CMT AND 150# HULLS & DISPLACED TO 1100'. PRESSURED TO 1000# & HELD. PERFORATE AT 1060'. PUMP 150 SX CMT & CIRCULATE TO SURFACE.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4430 | 4433 | OH | |

INVOICED
DATE 9/19/06
INVOICE # 2007060545
RECEIVED
SEP 18 2006
KCC WICHITA

Remarks: USED COMMON CMT W/3% CC & 60/40 POZMIX 6% GEL BY SWIFT SERVICES.

Plugged through: TBG

District: 01

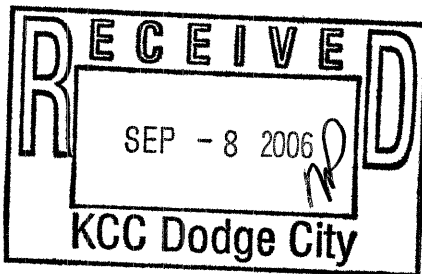

Signed Michael Maier
(TECHNICIAN)

Form 682-2/5

PBT