

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-083-21519-00-00  
Spot: SWNE Sec/Twnshp/Rge: 10-21S-21W  
1980 feet from N Section Line, 1980 feet from E Section Line  
Lease Name: SONJA Well #: 1  
County: HODGEMAN Total Vertical Depth: 4358 feet

Operator License No.: 9860  
Op Name: CASTLE RESOURCES, INC.  
Address: BOX 87  
SCHOENCHEN, KS 67667

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	216		WITH 160 SX CMT

\$ 141.64

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/14/2006 4:30 PM  
Plug Co. License No.: 33549 Plug Co. Name: LANDMARK DRILLING, LLC  
Proposal Rcvd. from: LARRY HINDERLITER Company: LANDMARK DRILLING, LLC Phone: (620) 930-2036

Proposed Plugging Method: 1ST PLUG AT 1350' WITH 50 SX CMT. 2ND PLUG AT 550' WITH 50 SX CMT. 3RD PLUG AT 240' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/14/2006 6:00 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

1ST PLUG AT 1350' WITH 50 SX CMT. 2ND PLUG AT 550' WITH 50 SX CMT. 3RD PLUG AT 240' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Perfs:


Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

INVOICED  
DATE 9/26/06  
2007060588

RECEIVED  
SEP 25 2006  
KCC WICHITA

District: 01

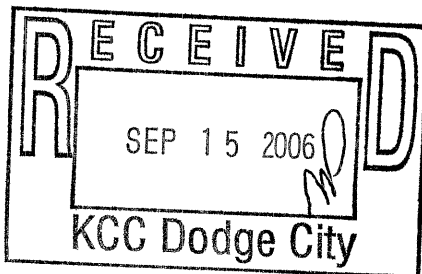

Signed

Richard W. Lacey

(TECHNICIAN)

PKT SA