

MICRO LOG

Company	WHITE EXPLORATION INC.
Well	SPENCER'S BLUFFS #1-21
Field	WILDCAT
County	BARBER
State	KANSAS
Location:	API # : 15-007-24367-0000 3590' FSL & 880' FEL
Permanent Datum	SEC 21 TWP 31S RGE 12W
Log Measured From	GROUND LEVEL Elevation 1639
Drilling Measured From	KELLY BUSHING 7' A.G.L. KELLY BUSHING
Elevation	K.B. 1646 D.F. 1642 G.L. 1639
Date	03/12/20
Run Number	TWO
Depth Driller	4680
Depth Logger	4677
Bottom Logged Interval	4657
Top Log Interval	3300
Casing Driller	8 5/8" @ 348
Casing Logger	348
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.3/51
pH / Fluid Loss	10.5/10.4
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.52 @ 62F
Rmf @ Meas. Temp	.39 @ 62F
Rmc @ Meas. Temp	.62 @ 62F
Source of Rmf / Rmc	MEASURED
Rm @ BHT	.26 @ 122F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	122F
Equipment Number	1523
Location	HAYS, KANSAS
Recorded By	GUS PFANENSTIEL
Witnessed By	ANDY WHITE


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: SUN CITY RD FROM MEDICINE WEST 3 MILES TO SPRING CREEK RD.
NORTH 3.3 MILES, SE INTO.

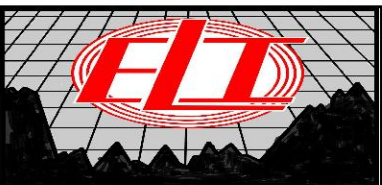


MAIN PASS

Database File	4683pe.db
Dataset Pathname	pass7MIC
Presentation Format	_micro
Dataset Creation	Thu Mar 12 12:42:39 2020
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

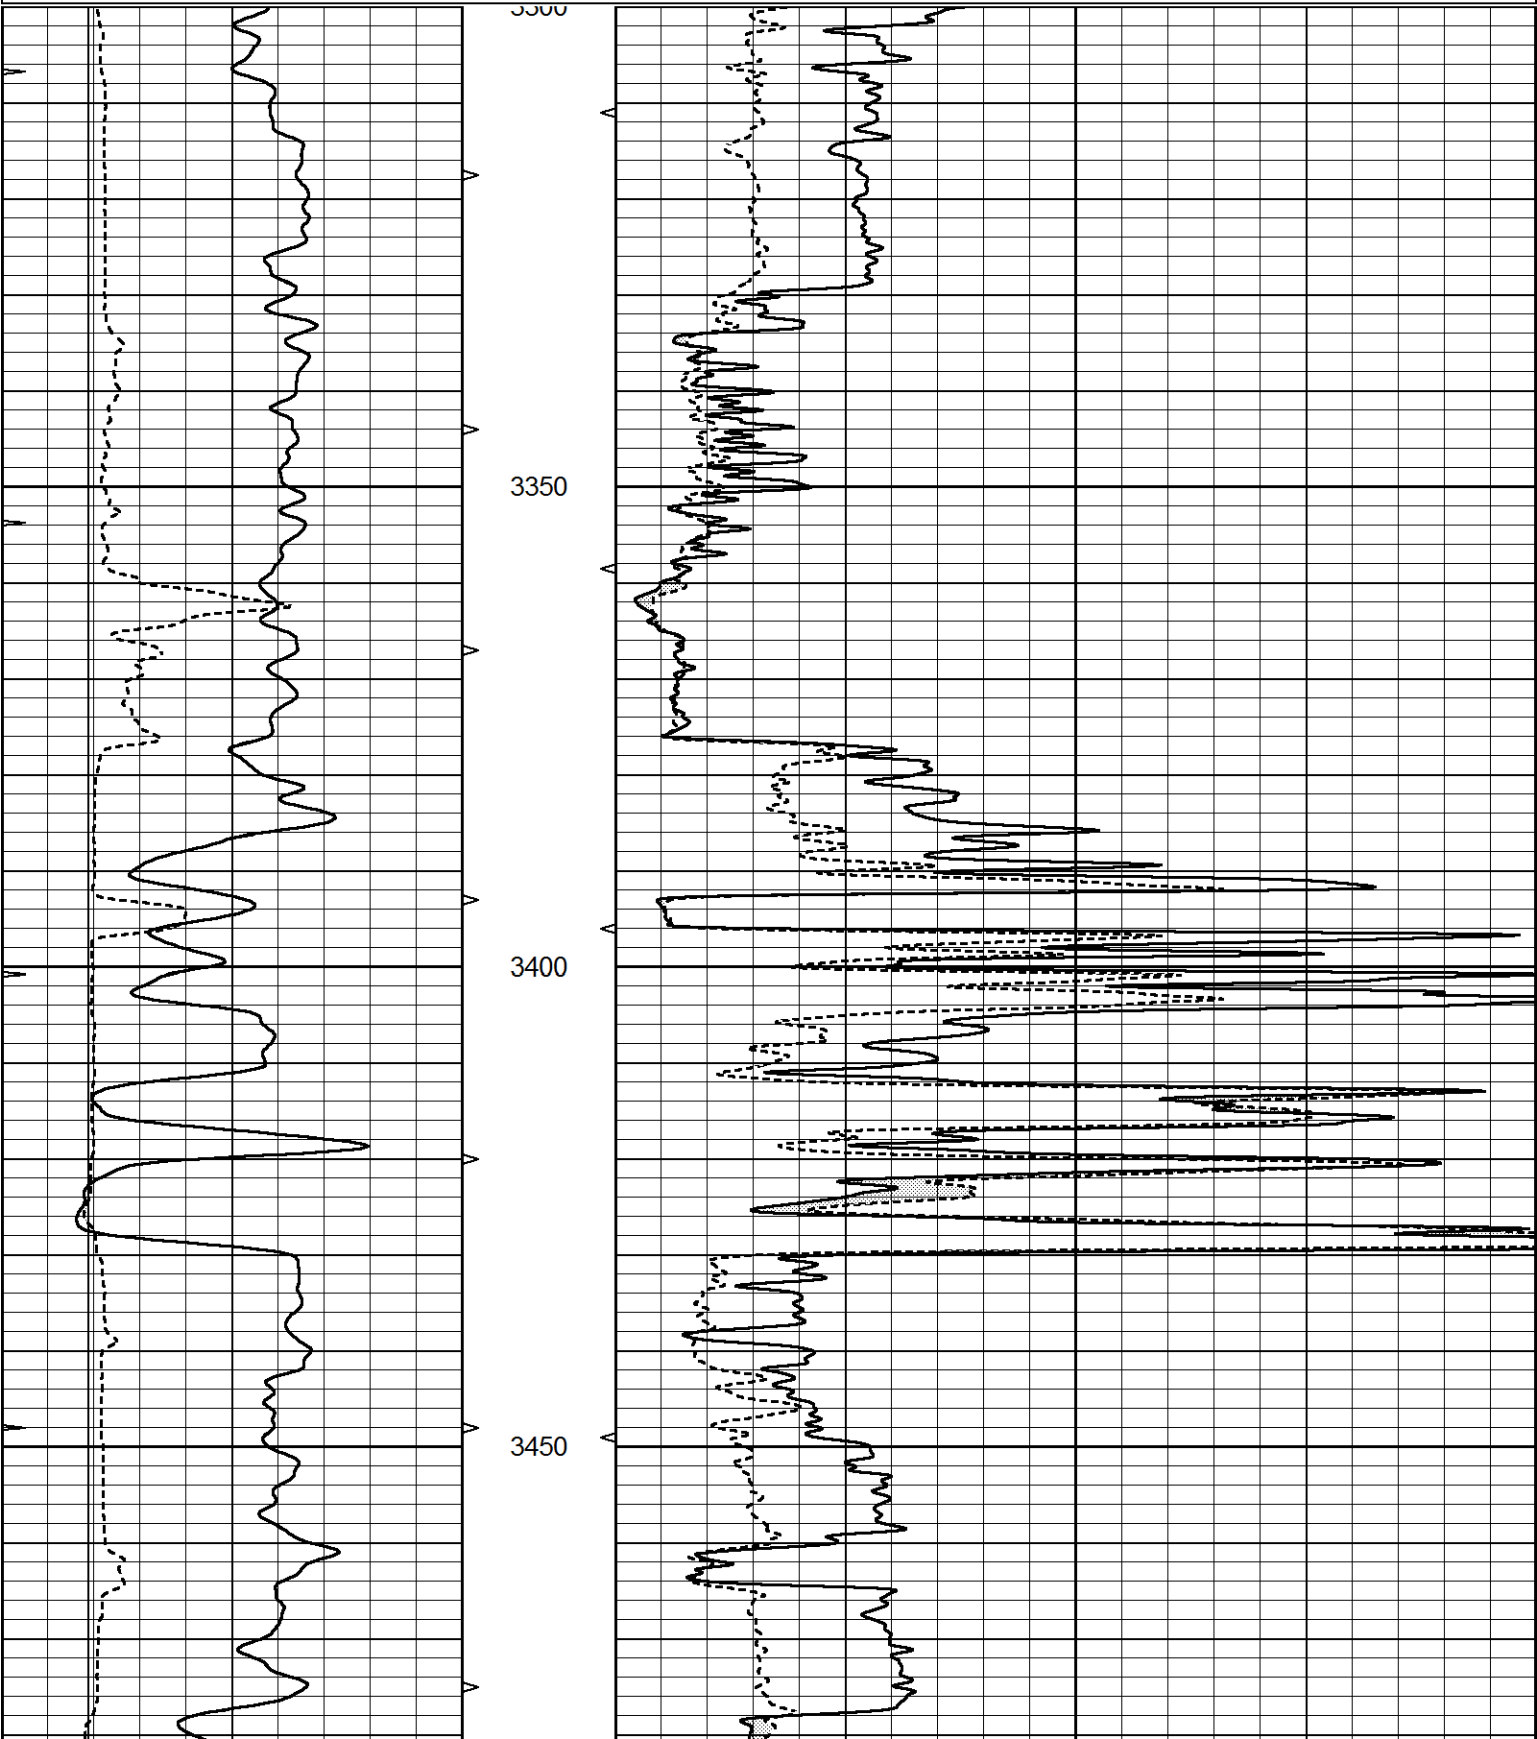

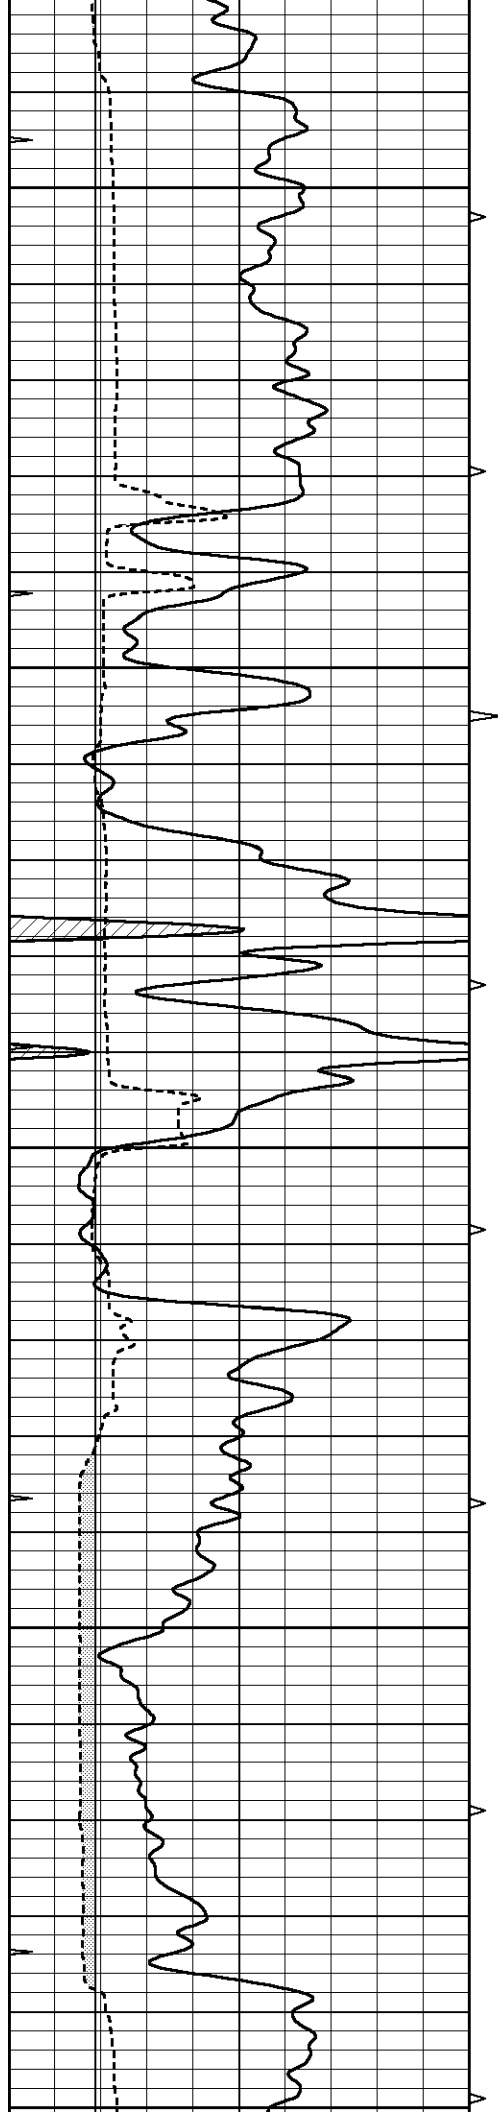


3500



3550


3600

3650

3700

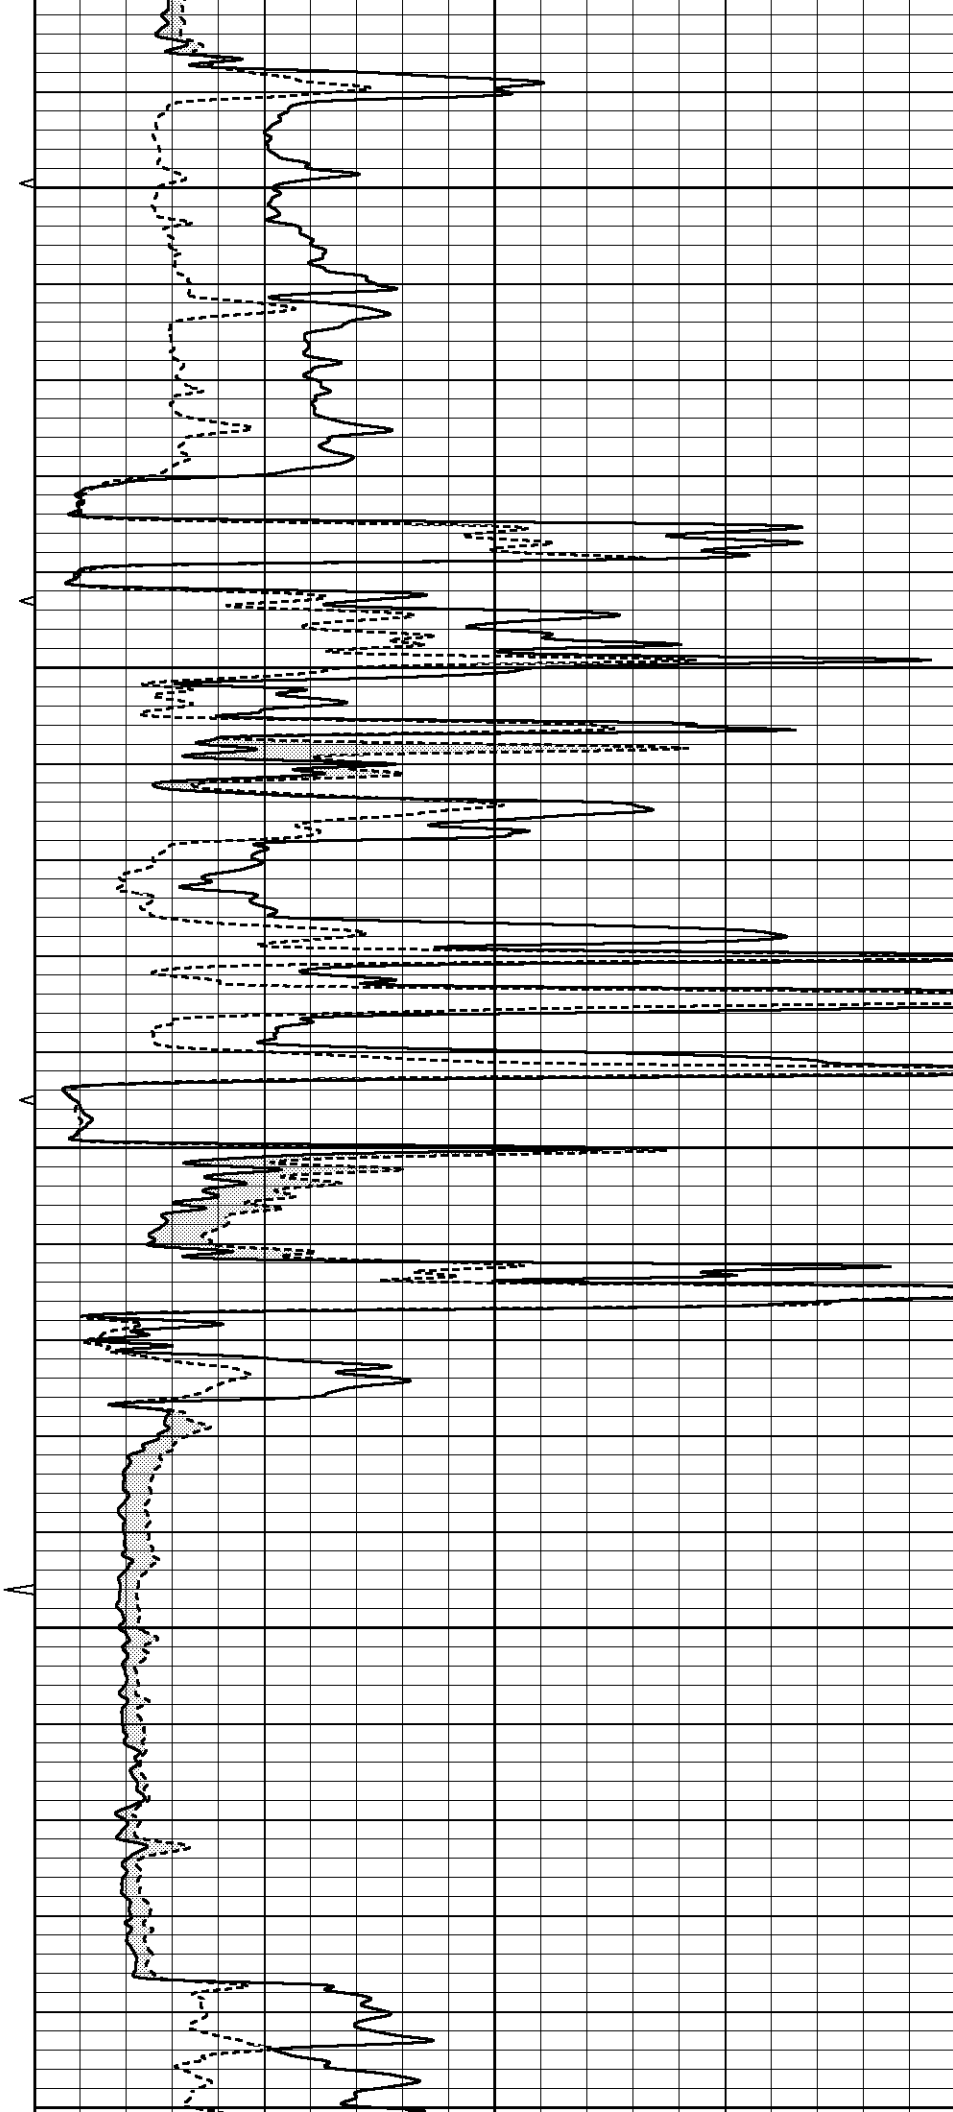

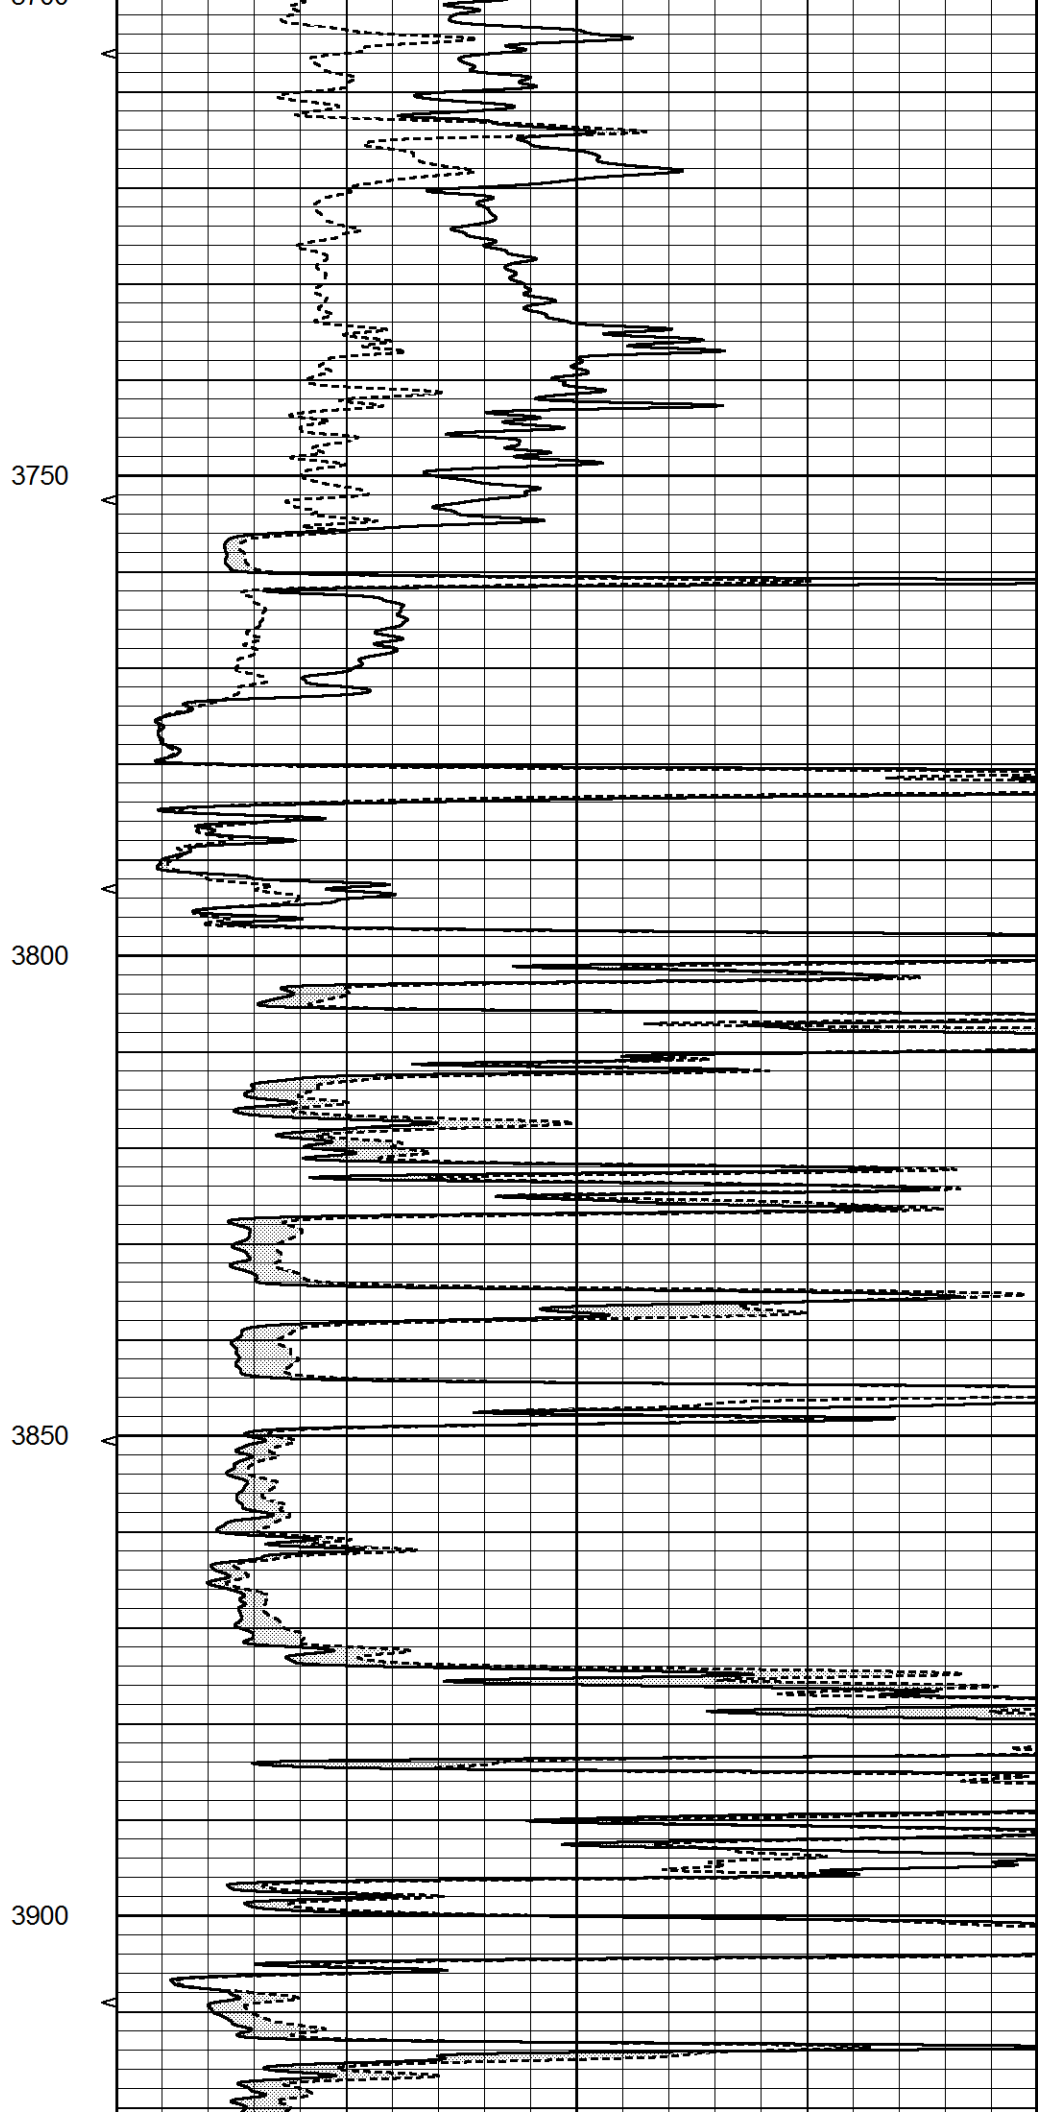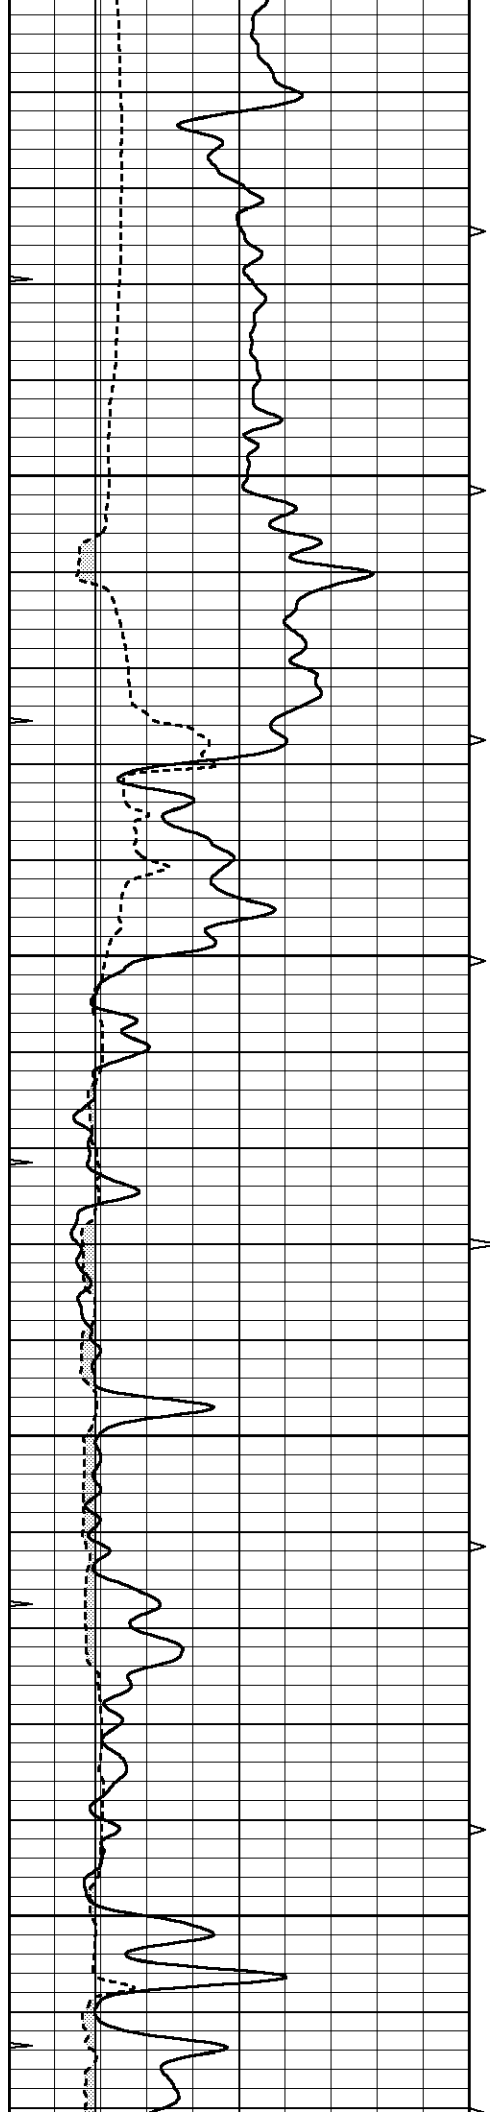

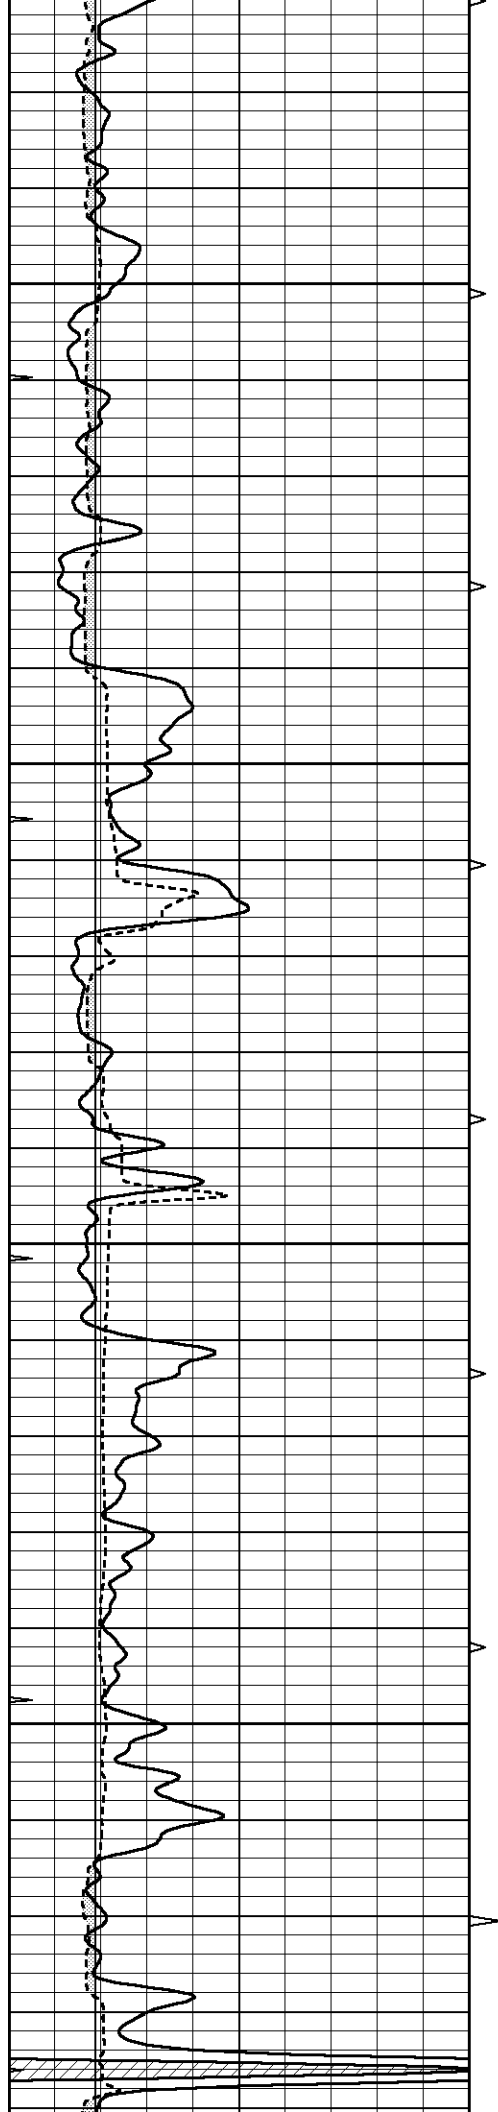



3950

4000

4050

4100

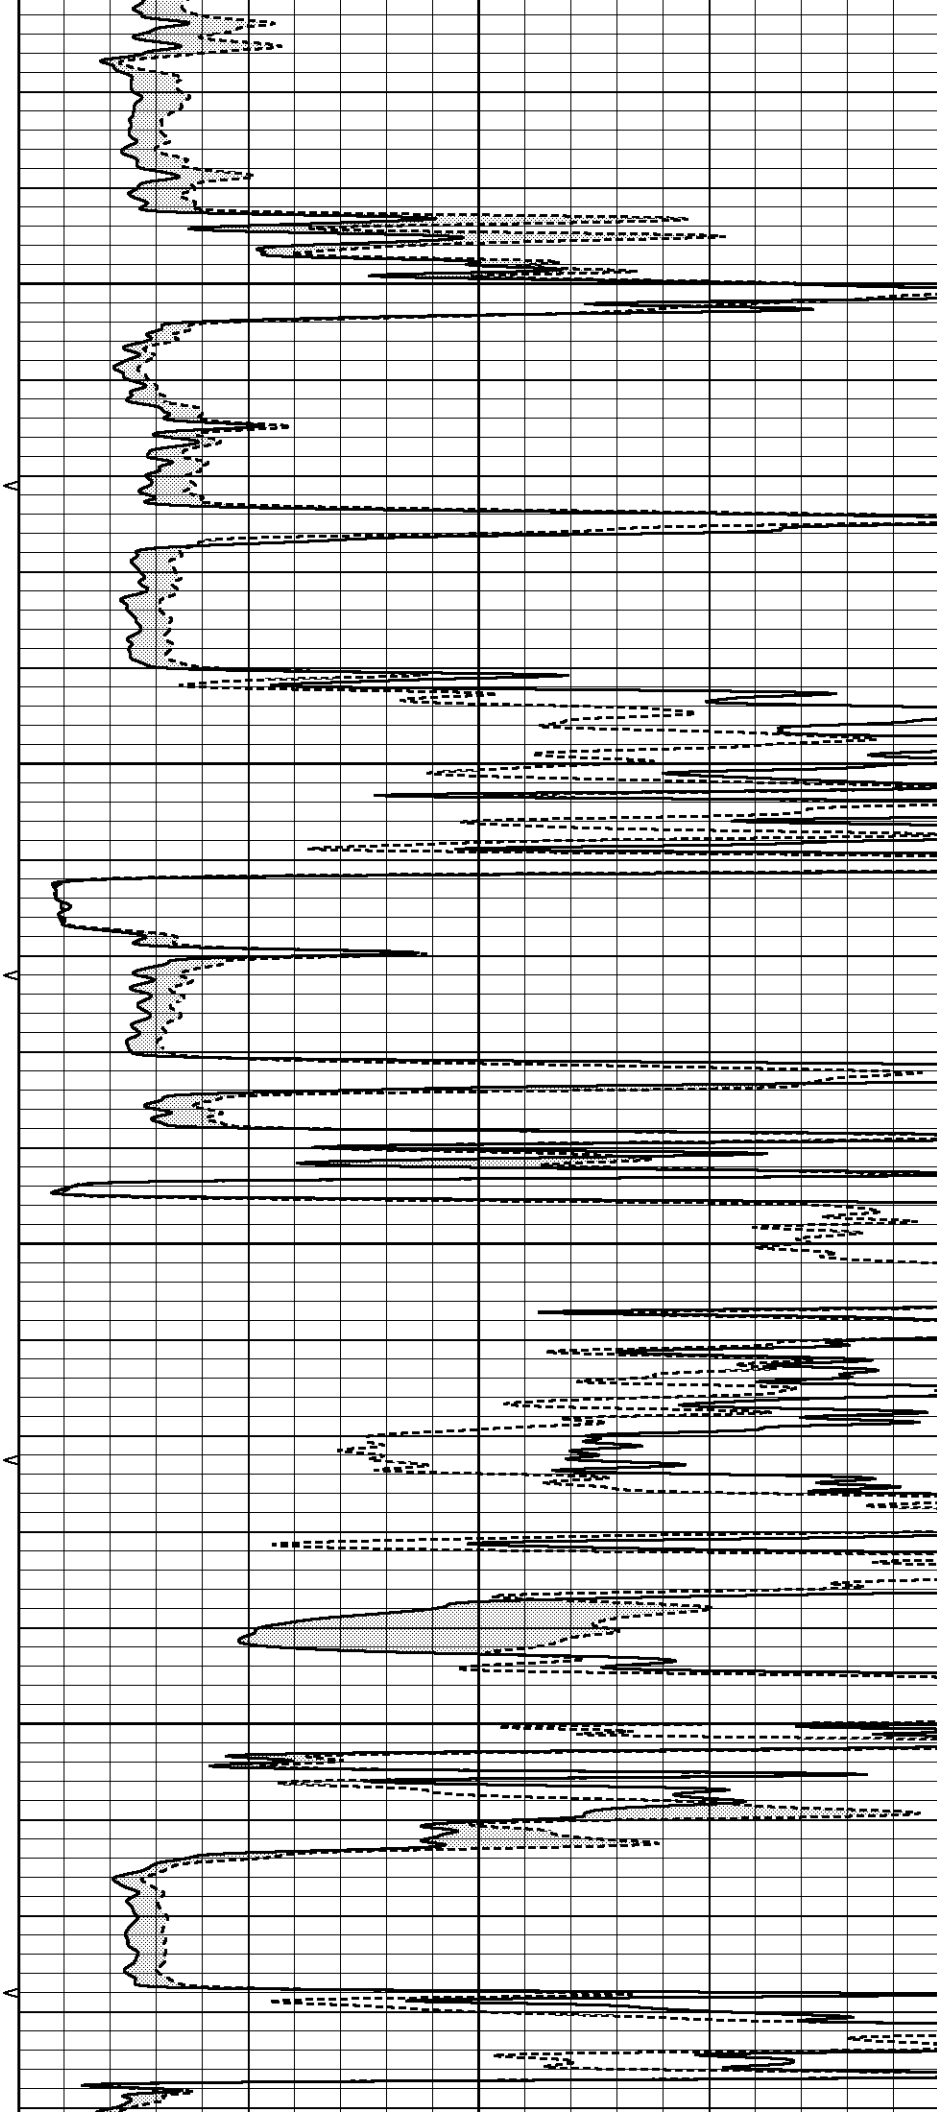

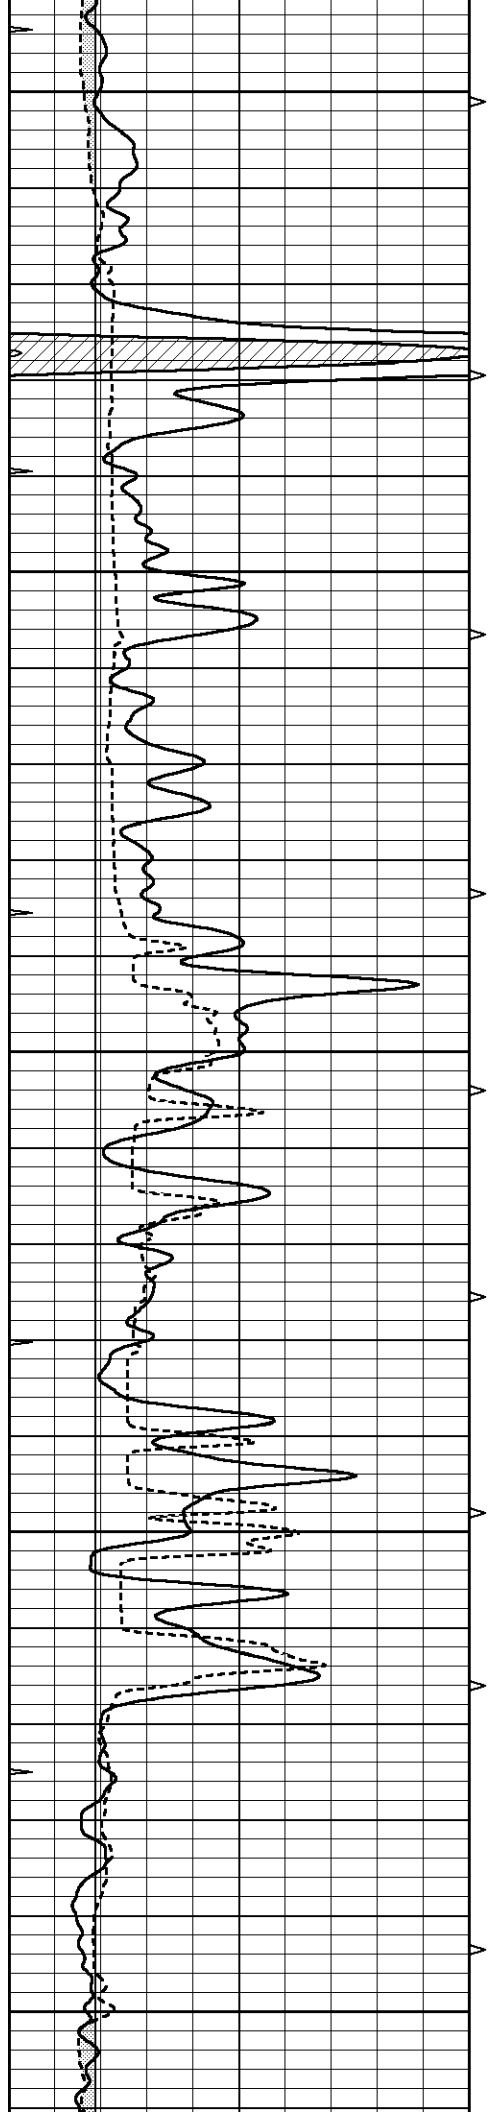


4150



4200


4250

4300

4350

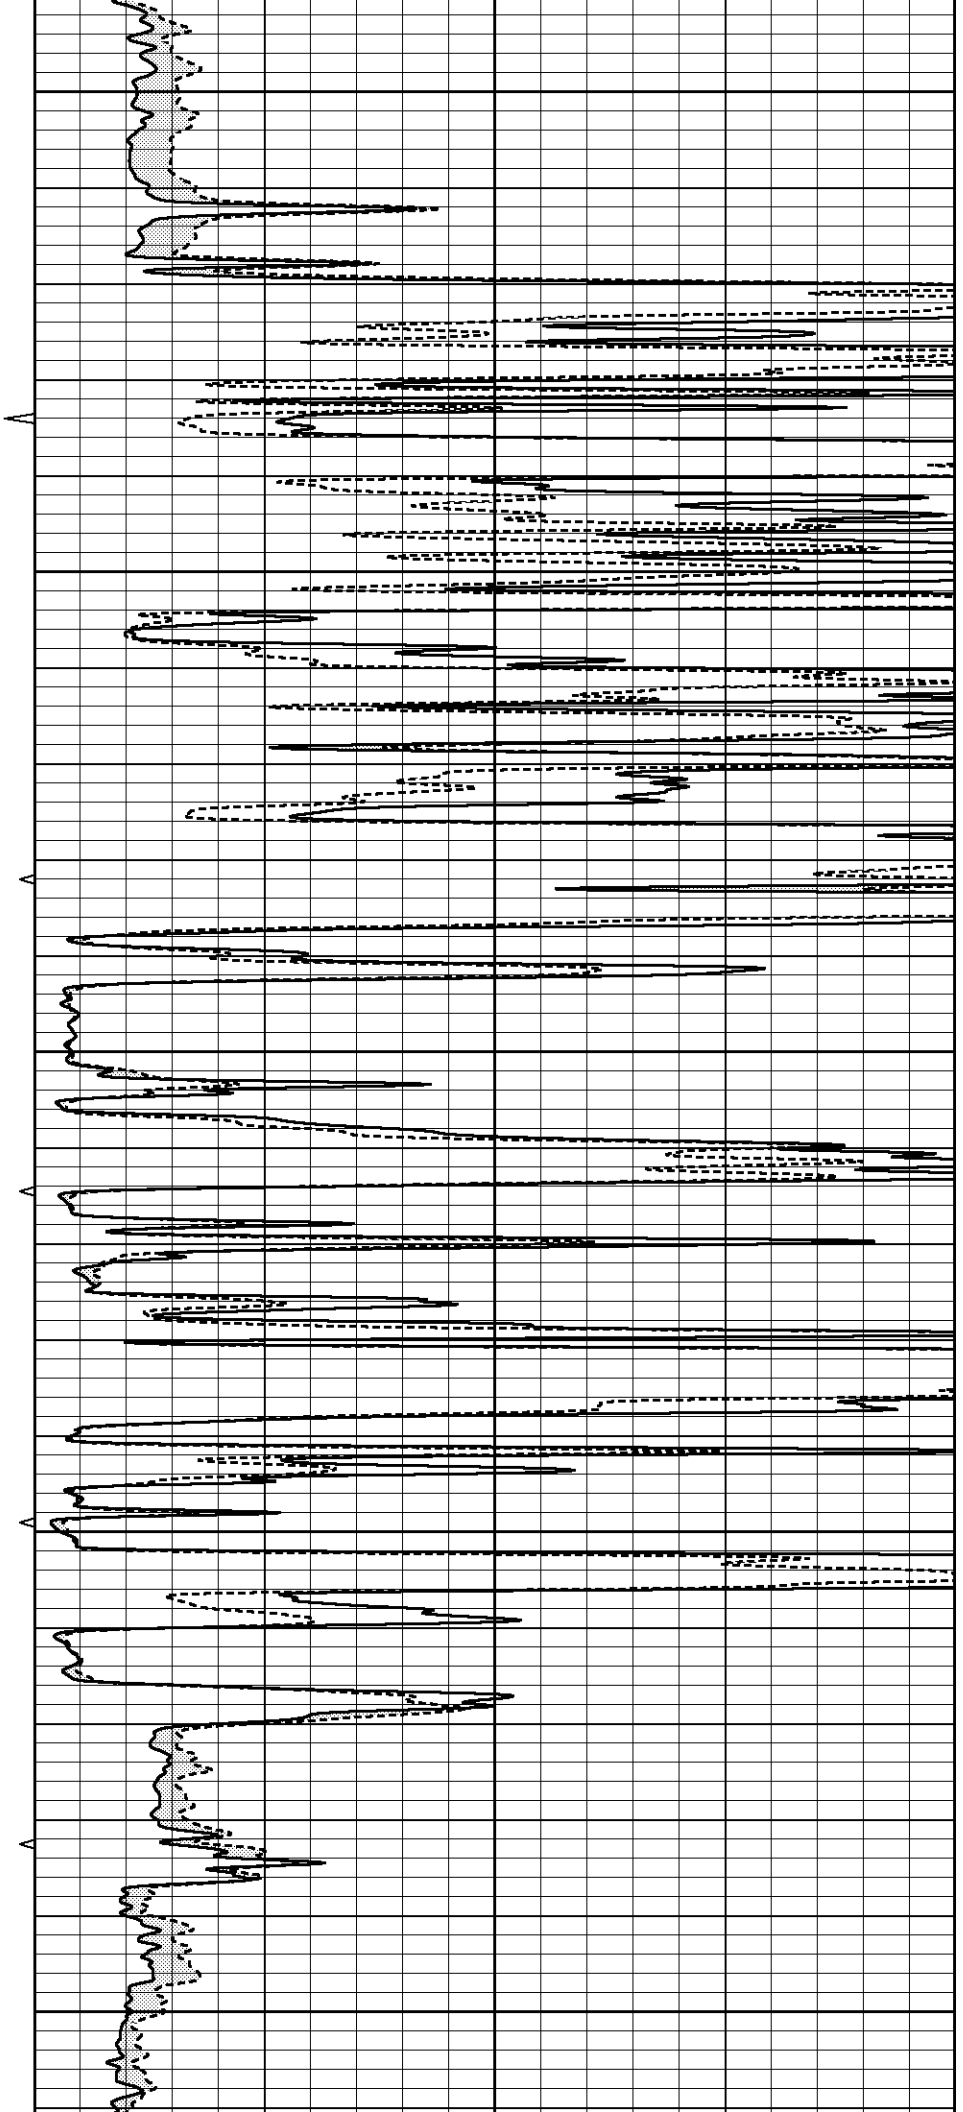

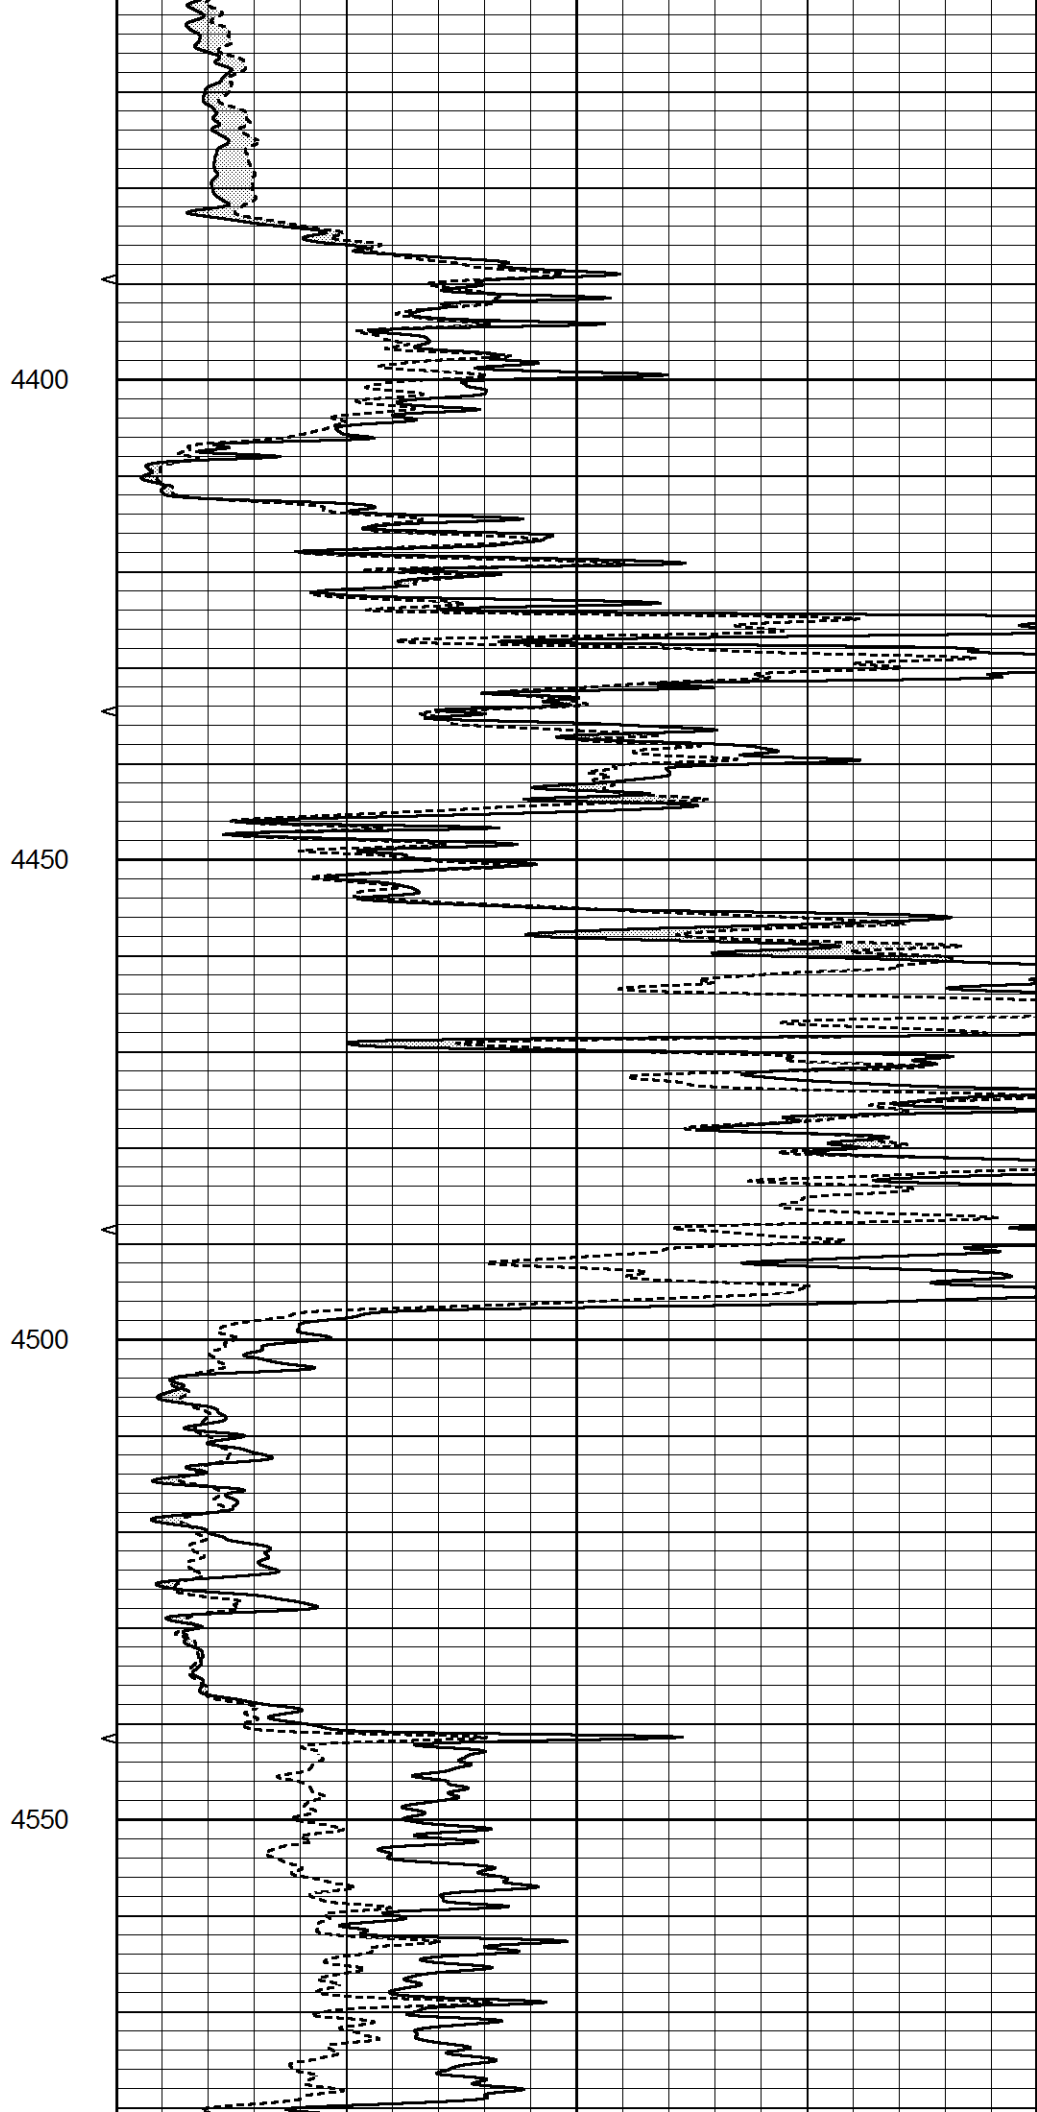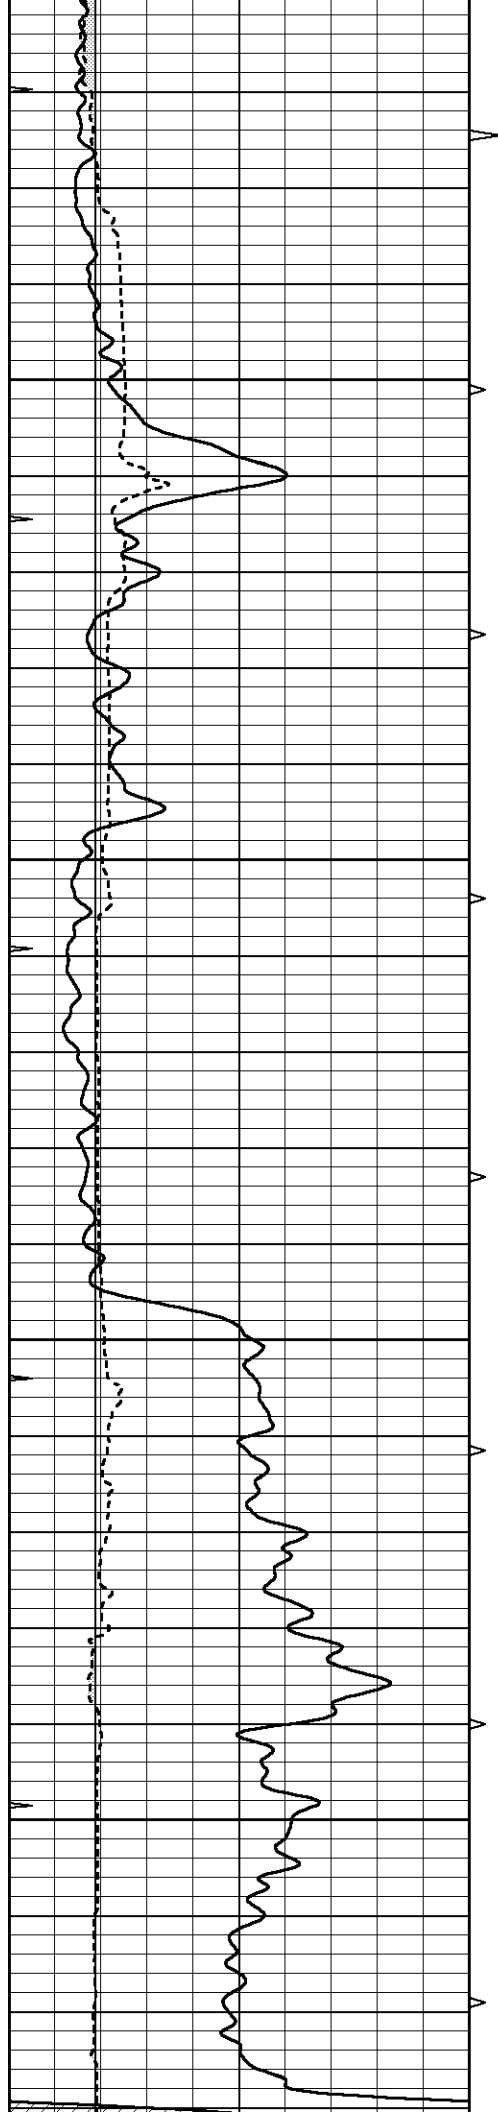


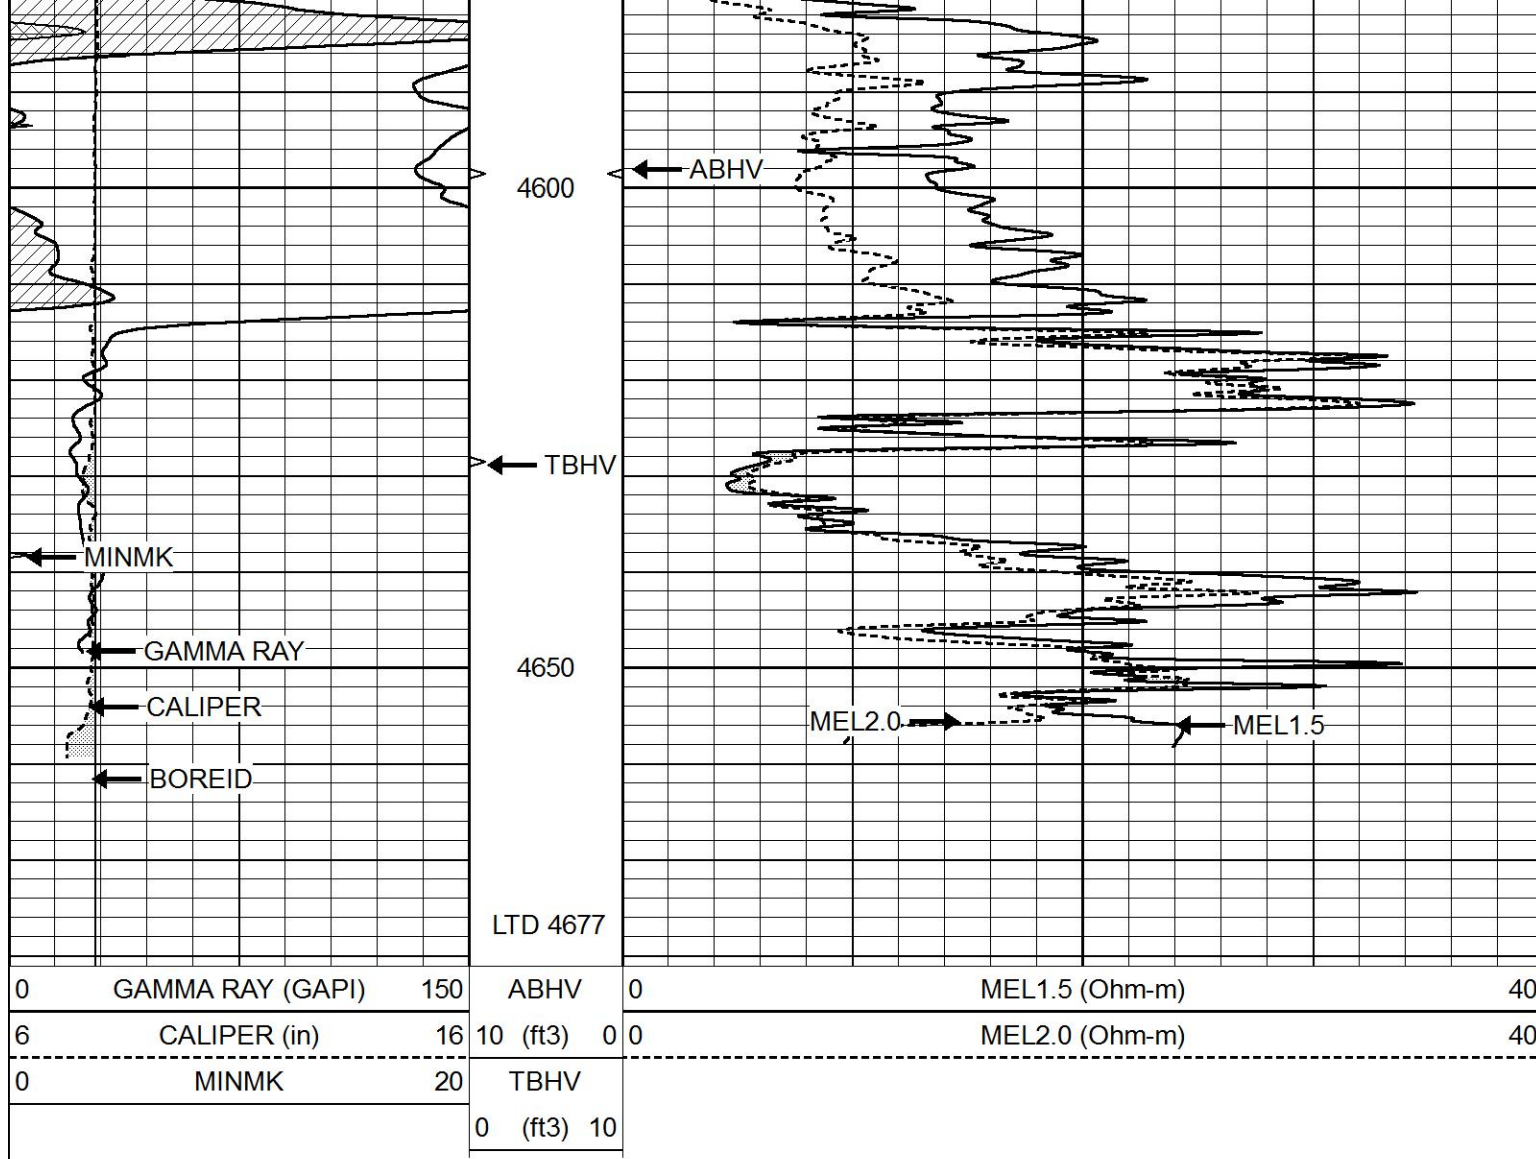


REPEAT SECTION

Database File 4683pe.db
 Dataset Pathname pass6.2MIC
 Presentation Format _micro
 Dataset Creation Thu Mar 12 12:46:24 2020
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

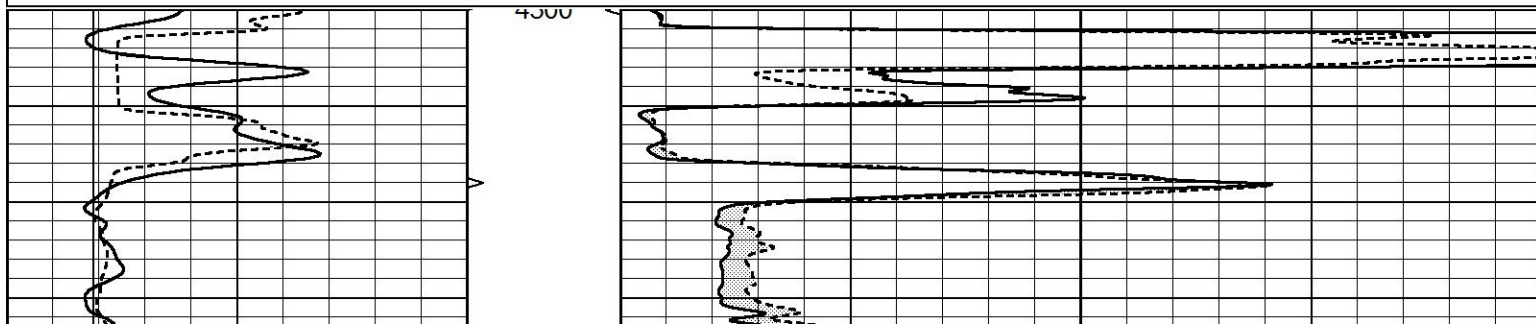

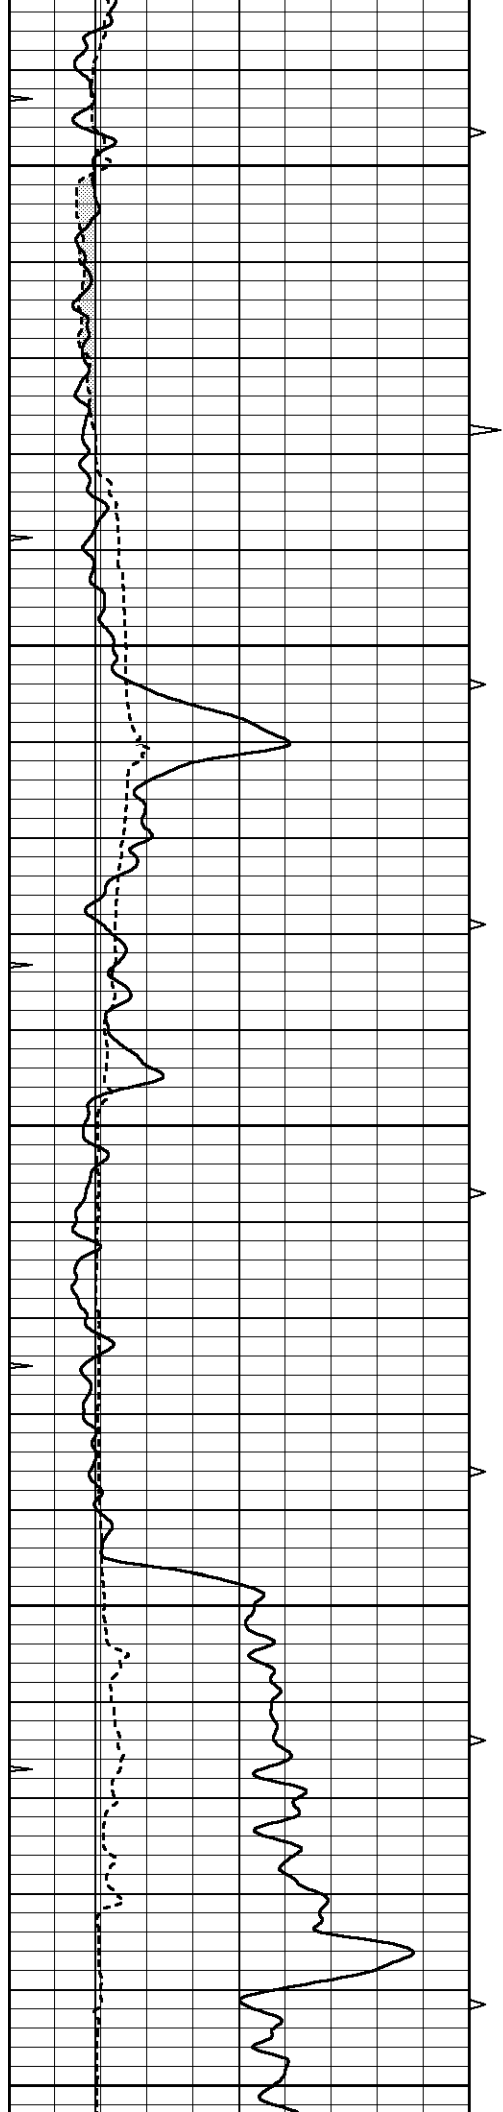


4350


4400

4450

4500

4550

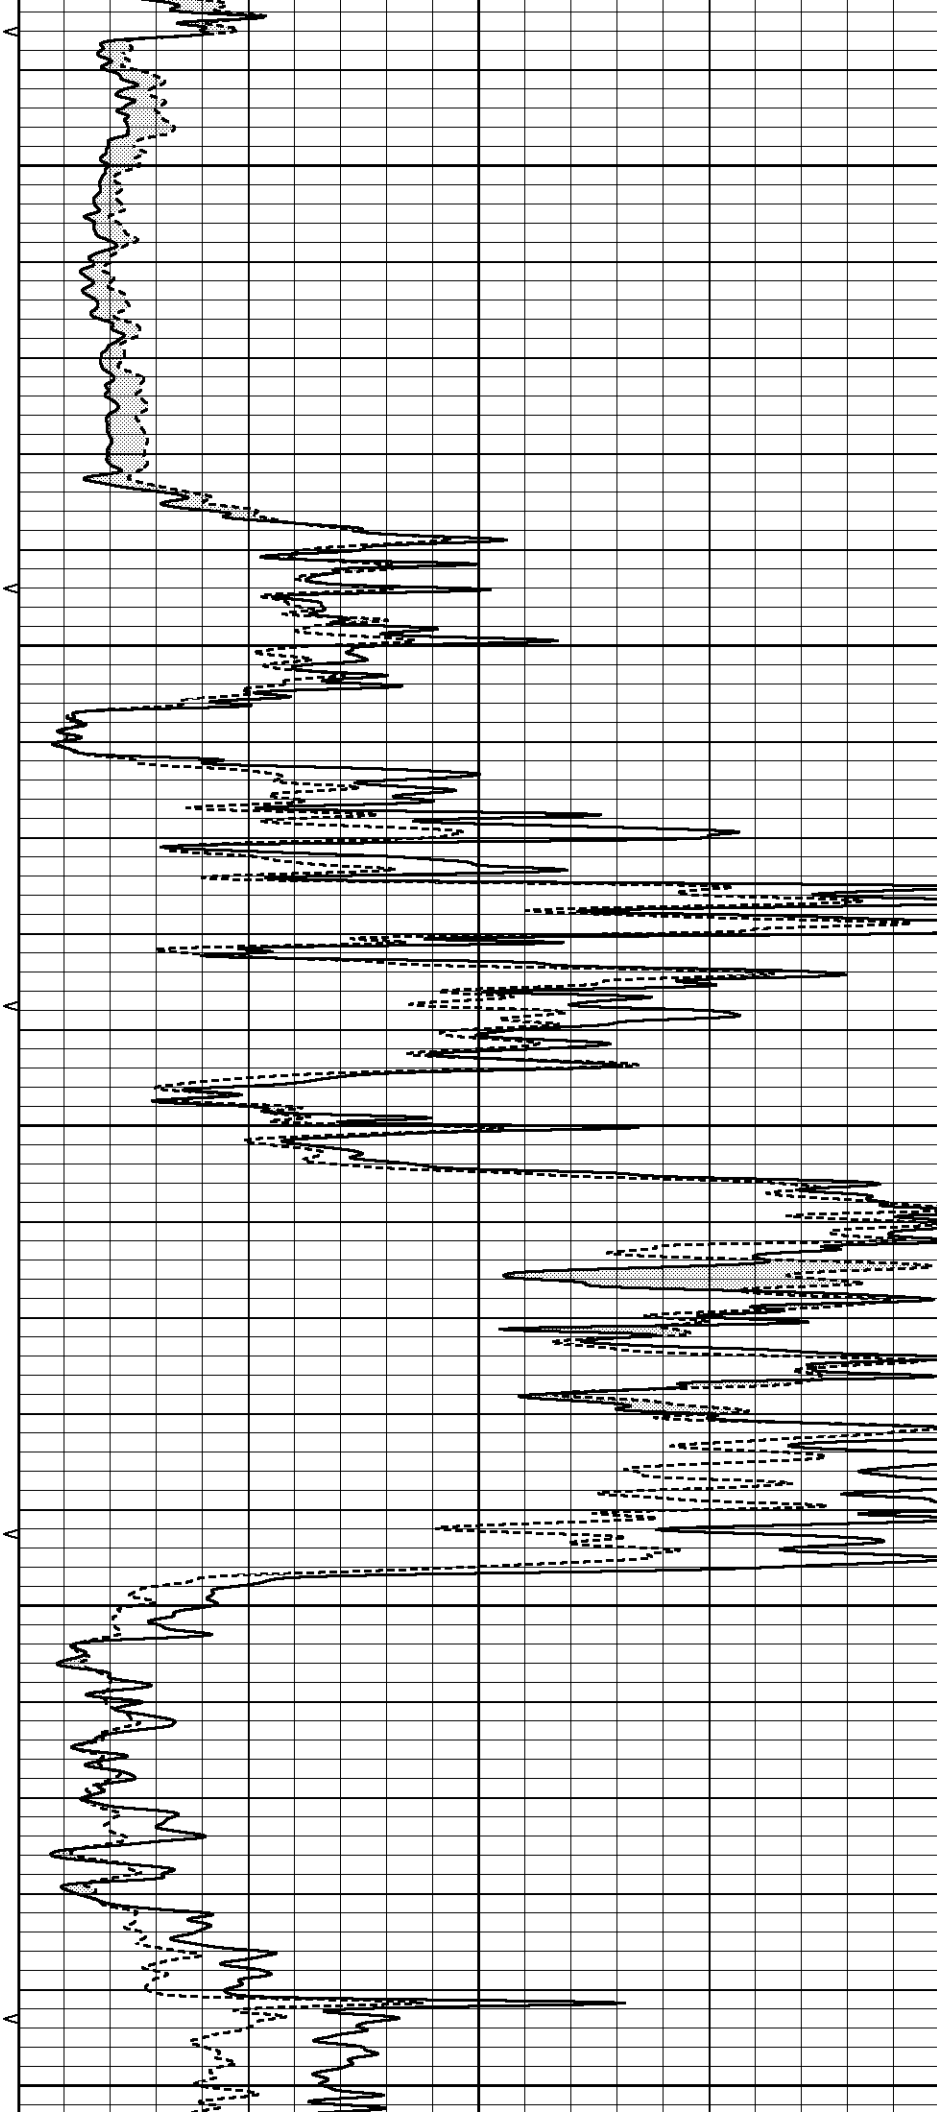

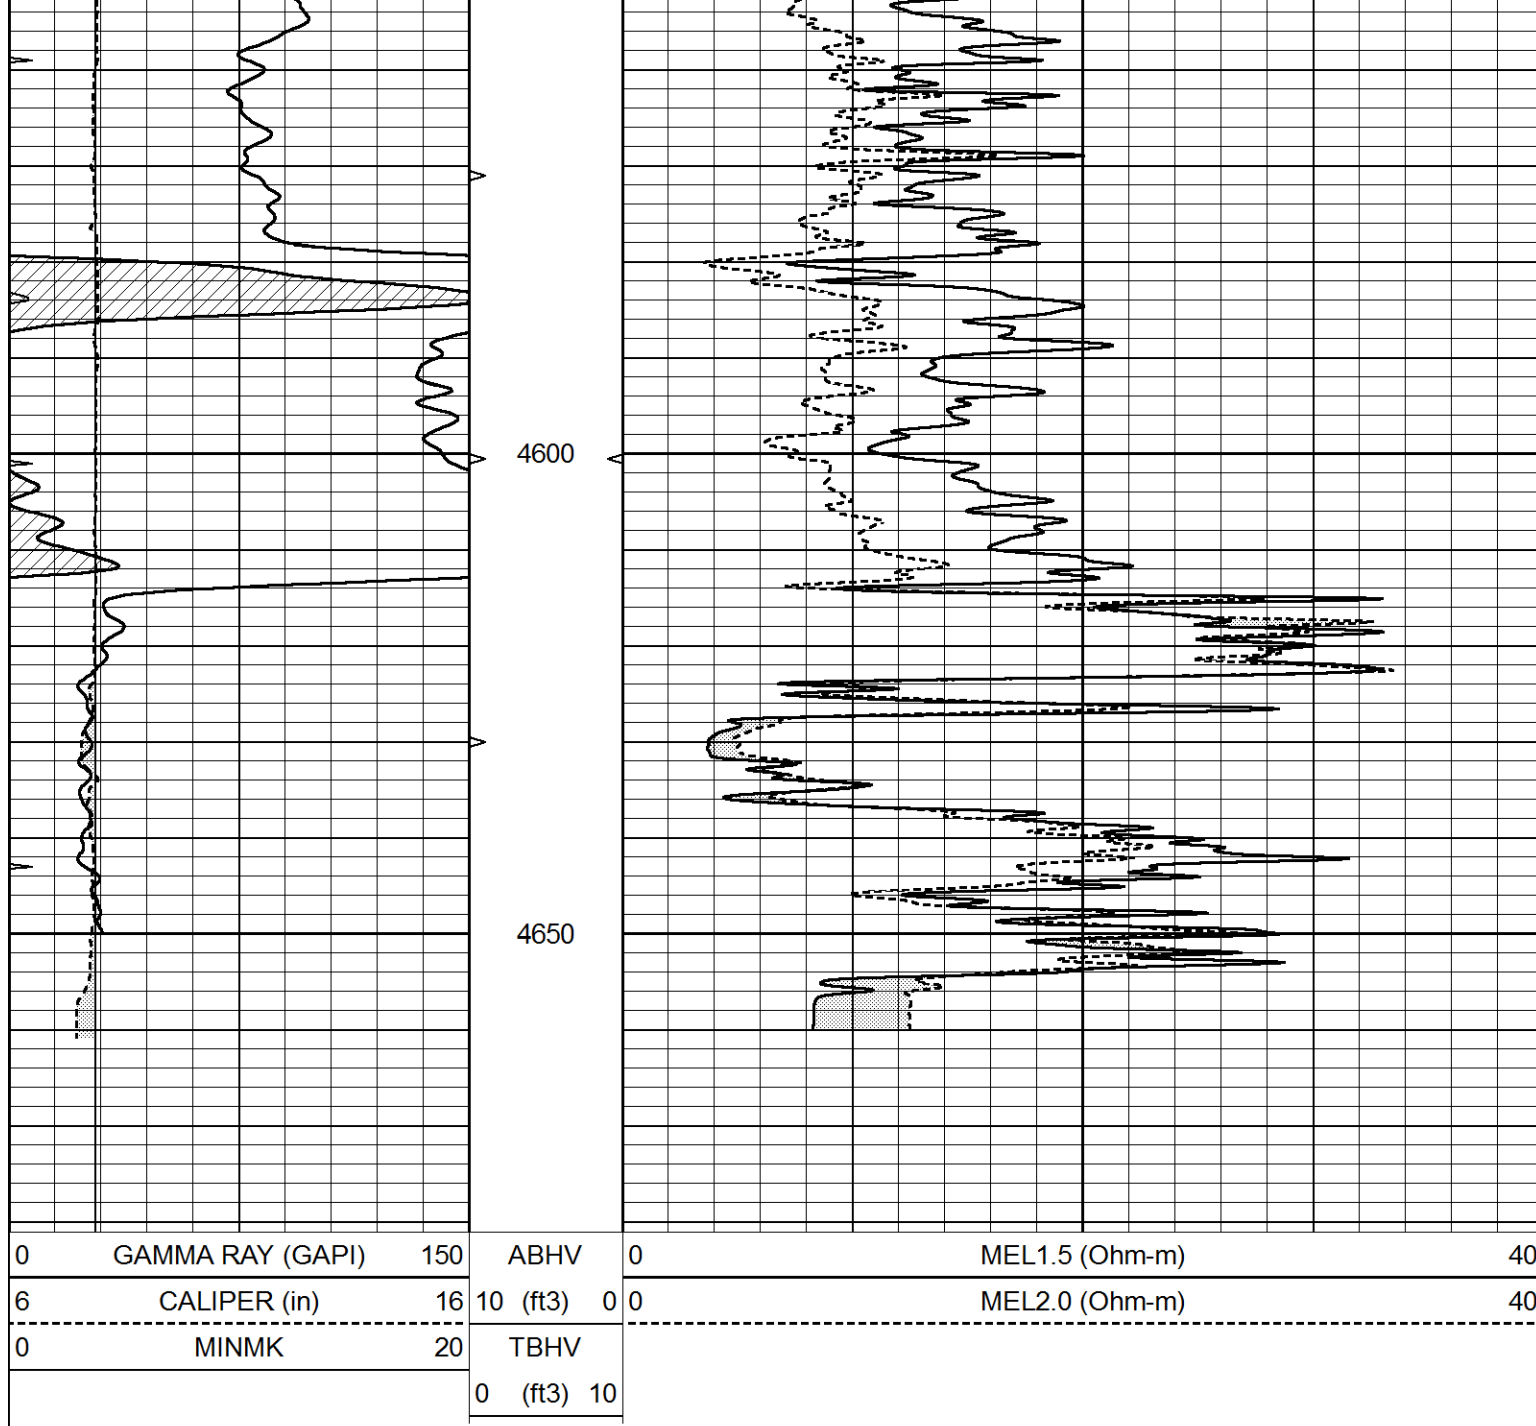

Calibration Report			
Database File	4683pe.db		
Dataset Pathname	pass6.2MIC		
Dataset Creation	Thu Mar 12 12:46:24 2020		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Mon Feb 17 12:46:42 2020		
Caliper Calibration:	Gain=3.980	Offset=4.951	
References	Low Cal	High Cal	
Readings	9.500	13.000	
	0.308	2.032	
1.5" Calibration:	Gain=36.134	Offset=0.000	
	Low Cal	High Cal	

References	0.000	20.000
Readings	0.004	0.832
2" Calibration:	Gain=38.000	Offset=0.200
References	Low Cal	High Cal
Readings	0.000	20.000
	0.022	0.793
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Sun Jan 05 05:38:27 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.4500	GAPI/cps