

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20524-00-00
Spot: SENWNW Sec/Twnshp/Rge: 21-22S-15W
990 feet from N Section Line, 990 feet from W Section Line
Lease Name: FOX Well #: 1
County: PAWNEE Total Vertical Depth: 4047 feet

Operator License No.: 31273
Op Name: NUSS, FRED J.
Address: 158 E STATE RD 4
HOISINGTON, KS 67544

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4045	1537	WITH 250 SX CMT
SURF	8.625	350		WITH 300 SX CMT

\$ 131.53

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/12/2006 9:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 1850' WITH 4 SX CMT. PLUG AT 970' WITH 10 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/12/2006 10:05 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

CEMENT RETAINER @ 2026'. SANDED TO 1840' & 4 SX CMT. PUMPED PLUGS THROUGH CASING. 1ST PLUG AT 970' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 350' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4004	4007		
2870	2880		
2036	2039		
1985	1994		
1897	1900		

INVOICED
9/27/06
2007060596


RECEIVED
SEP 25 2006

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

KCC WICHITA

Plugged through: CSG

District: 01

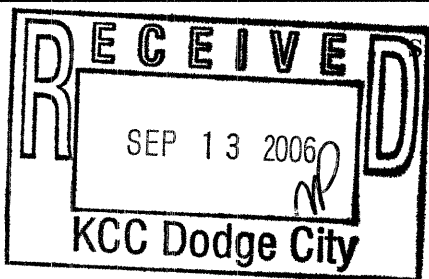

Signed Richard W. Lacey
(TECHNICIAN)

Handwritten initials/signature