

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202.

API Well Number: 15-145-20492-00-00
Spot: NENENW Sec/Twnshp/Rge: 13-23S-15W
4950 feet from S Section Line, 2970 feet from E Section Line
Lease Name: ESTES Well #: 1
County: PAWNEE Total Vertical Depth: 4011 feet

Operator License No.: 101
Op Name: KCC FEE FUND PLUG
Address: 130 S. MARKET
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3097	2114	WITH 150 SX CMT
SURF	8.625	494		

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 09/19/2006 12:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: RICHARD LACEY Company: KCC Phone: (620) 225-8888

Proposed Plugging Method: SAND TO 2900' & 4 SX CMT WITH BAILER. FREEPOINT PIPE & PULL TO 1000'. SPOT 10 SX GEL & 50 SX CMT. PULL CASING TO 530' & SPOT 50 SX CMT. PULL TO 40' & SPOT 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/19/2006 1:35 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 940'. SANDED TO 2800' & 4 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1000' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 530' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.


Perfs:

Top	Bot	Thru	Comments
2951	2954		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

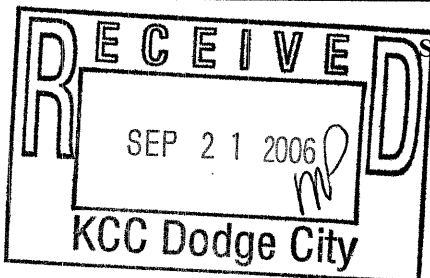

Signed

Richard M. Lacey

(TECHNICIAN)

RECEIVED

SEP 29 2006

KCC WICHITA

Form CP-2/3

[Handwritten signature]