

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-21412-00-00
Spot: E2SESENW Sec/Twnshp/Rge: 27-21S-14W
2970 feet from S Section Line, 2970 feet from E Section Line
Lease Name: DEVINE Well #: 1
County: STAFFORD Total Vertical Depth: 3845 feet

Operator License No.: 30043
Op Name: KIRKMAN, MICHAEL W.
Address: 810 RIDGEWAY
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3844	2400	WITH 150 SX CMT
SURF	8.625	508		

\$ 124.96

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/15/2006 2:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND BOTTOM TO 3522' & 5 SX CMT. FREEPOINT & CUT CASING. PULL CASING TO 850'. SPOT 10 SX GEL & 50 SX CMT. PULL CASING TO 530' & SPOT 50 SX CMT. PULL CASING TO 40'. CIRCULATE WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/15/2006 3:20 PM KCC Agent: RICHARD LACEY

Actual Plugging Report: _____ Perfs: _____


ANHYDRITE = 850'. SANDED TO 3500' & 5 SX CMT WITH DUMP BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 850' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 530' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

INVOICED
DATE 10-2-06
TR NO. 2007060617

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

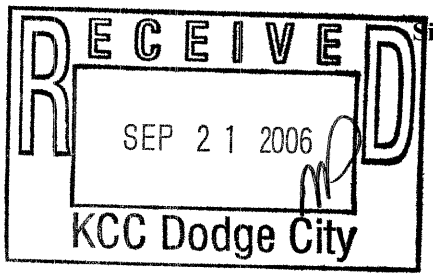

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
SEP 29 2006
KCC WICHITA

Form CP-2
[Signature]
PG