

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-20713-00-00
Spot: E2NESE Sec/Twnshp/Rge: 1-21S-15W
1980 feet from S Section Line, 330 feet from E Section Line
Lease Name: WEATHERS Well #: 1
County: PAWNEE Total Vertical Depth: 3698 feet

Operator License No.: 31273
Op Name: NUSS, FRED J.
Address: 158 E STATE RD 4
HOISINGTON, KS 67544

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3684	1520	WITH 300 SX CMT
SURF	8.625	874		WITH 425 SX CMT

\$ 120.19

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/13/2006 2:30 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 1780' & 5 SX CMT. PLUG AT 900' WITH 10 SX GEL - 50 SX CMT. PLUG AT 400' WITH 40 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/13/2006 3:25 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 885'. SANDED TO 1780' & 5 SX CMT WITH DUMP BAILER. PUMPED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 900' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 400' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3670	3674		
3620	3631		
2754	2758		
2618	2624		
2562	2668		
2382	2388		
1830	1840		

INVOICED
DATE 10-2-06
SER. NO. 20070600-20

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

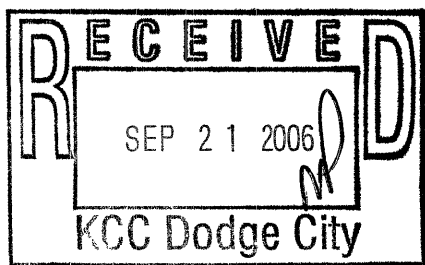

Signed Richard W. Lacey
(TECHNICIAN)

RECEIVED
SEP 29 2006
KCC WICHITA

FORM 11-2/3
[Handwritten initials]