

MICRO LOG


Company		MAI OIL OPERATIONS, INC.	
Well		J.A. STICE #10	
Field		WEBSTER	
County		ROOKS	
State		KANSAS	
Location:		API # : 15-163-24409-0000 1360' FSL & 2365' FVL SW - SW - NW - SE	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 10' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 27 TWP 8S RGE 19W		Elevation K.B. 1952 D.F. 1950 G.L. 1942	
Date	3/8/20		
Run Number	TWO		
Depth Driller	3386		
Depth Logger	3385		
Bottom Logged Interval	3383		
Top Log Interval	2800		
Casing Driller	8 5/8"@264'		
Casing Logger	264		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 750 PPM	
Density / Viscosity	8.9/52		
pH / Fluid Loss	10.0/6.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.850@70F		
Rmf @ Meas. Temp	.638@70F		
Rmc @ Meas. Temp	1.02@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.541@110F		
Time Circulation Stopped	10 HOURS		
Time Logger on Bottom	12:30 P.M.		
Maximum Recorded Temperature	110F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
PLAINVILLE, KS., 6N. ON HWY 183 TO "RD. R", 6 1/2W., N. INTO, THEN EAST @TANK BATTERY

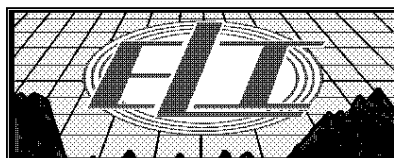


MAIN SECTION

Database File: 4534ddn.db
 Dataset Pathname: pass7.2
 Presentation Format: micro
 Dataset Creation: Sun Mar 08 15:22:50 2020
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

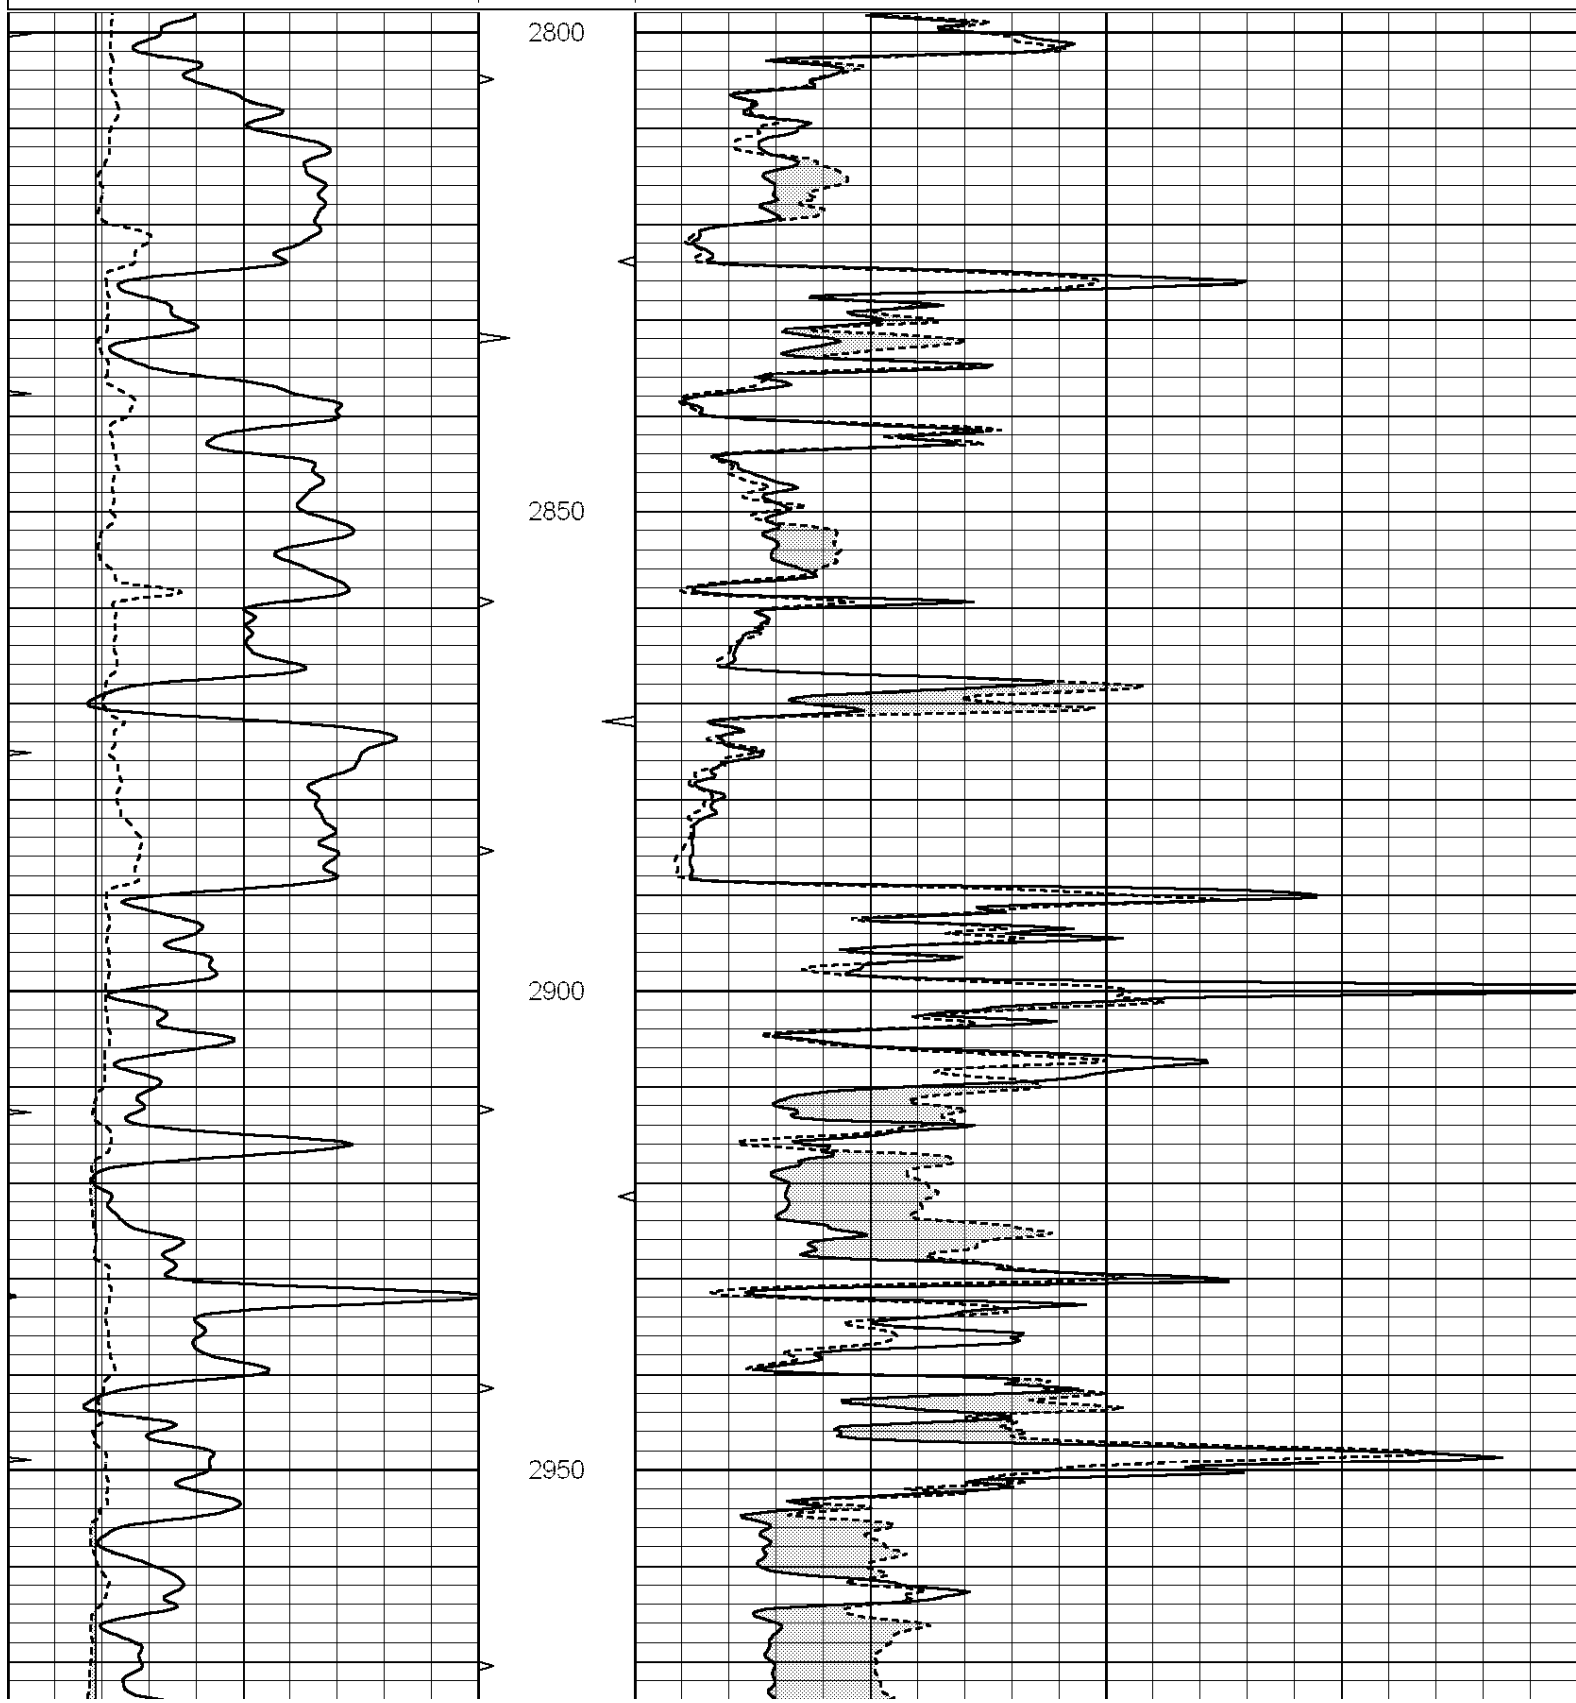

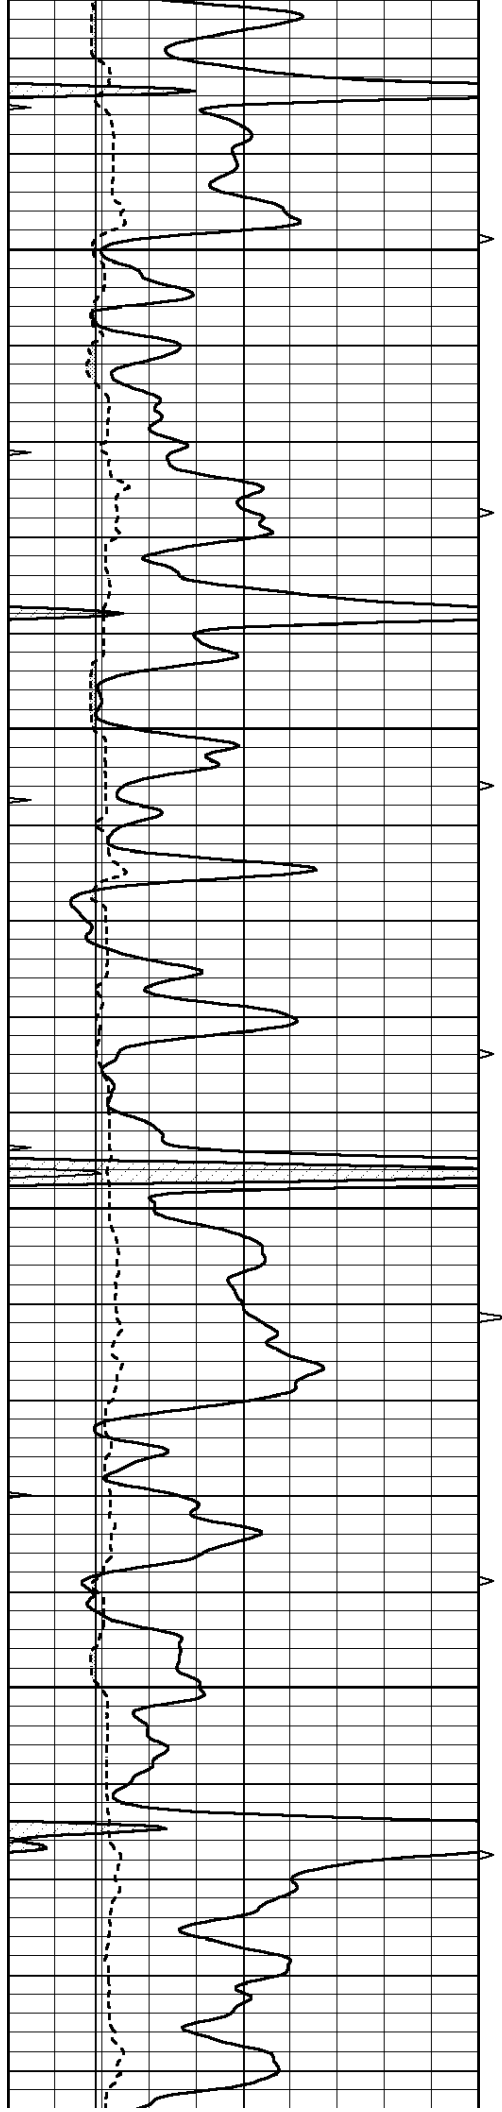



3000


3050

3100

3150

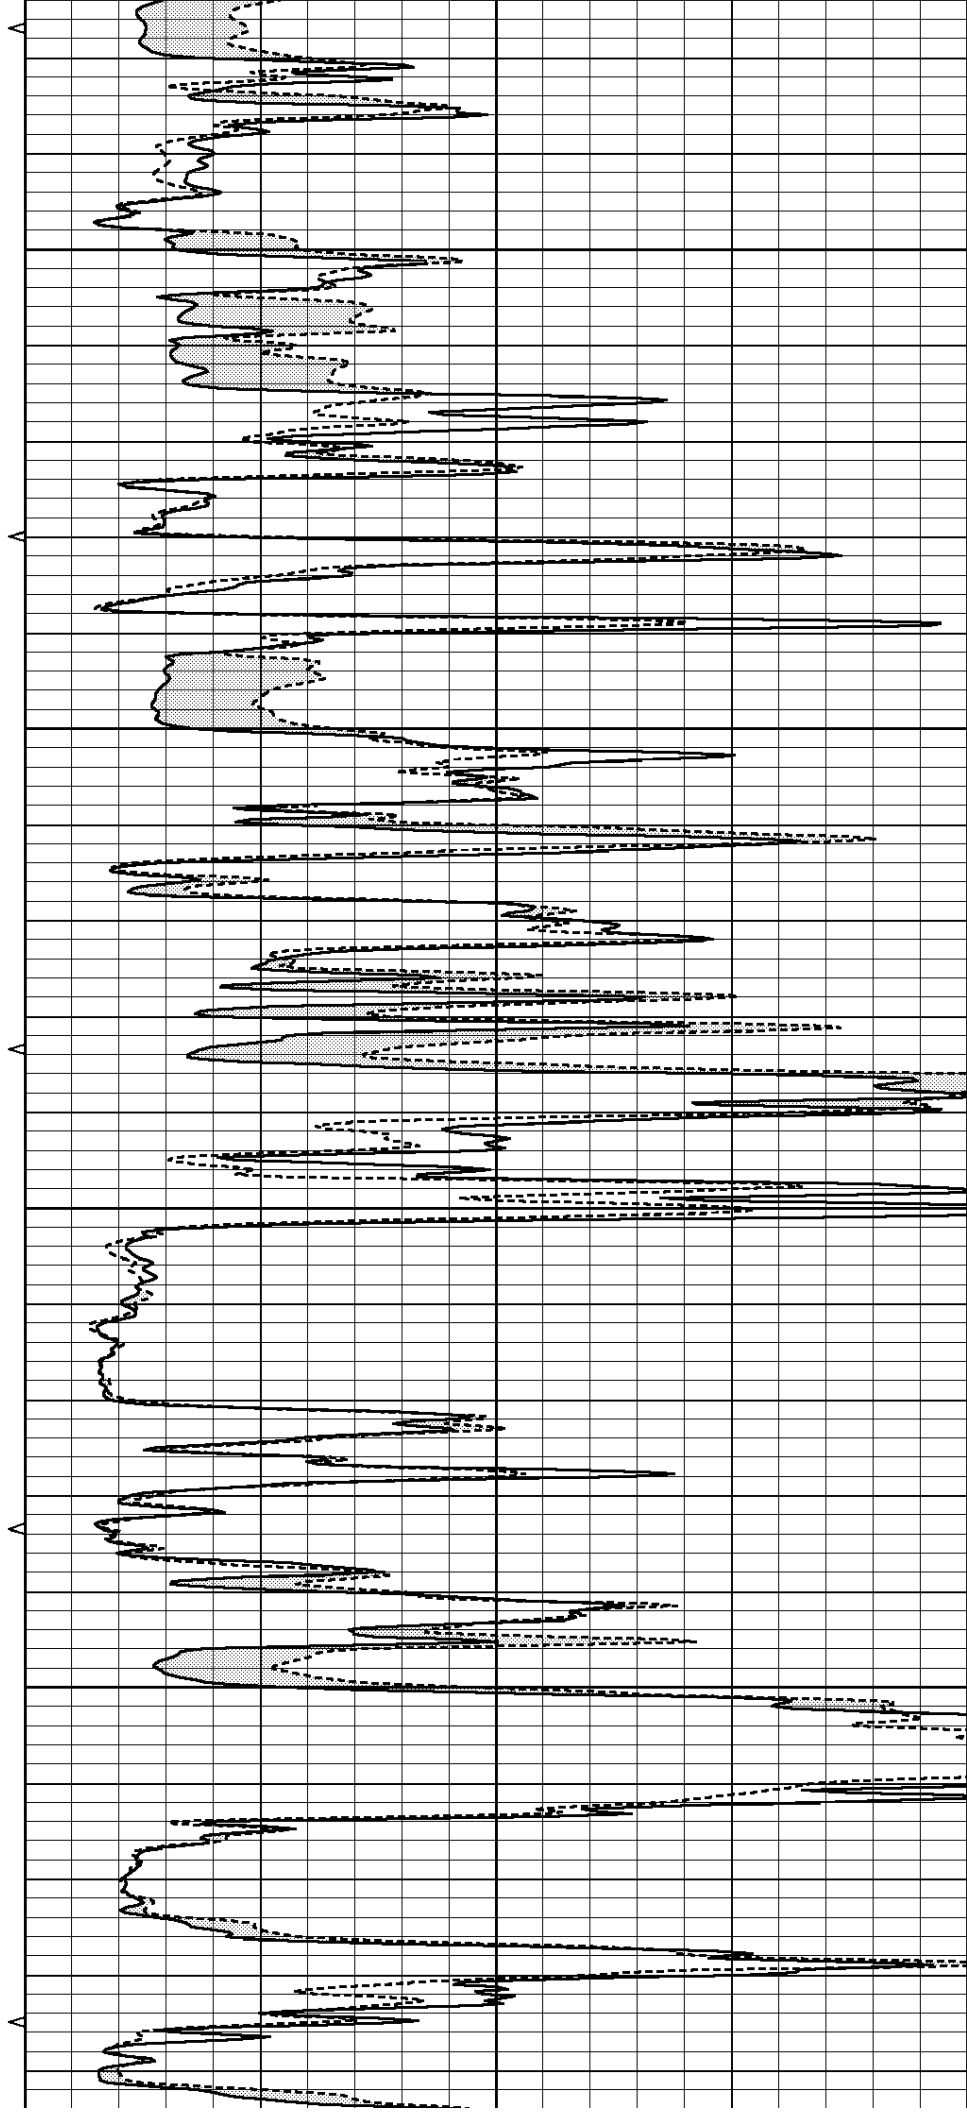

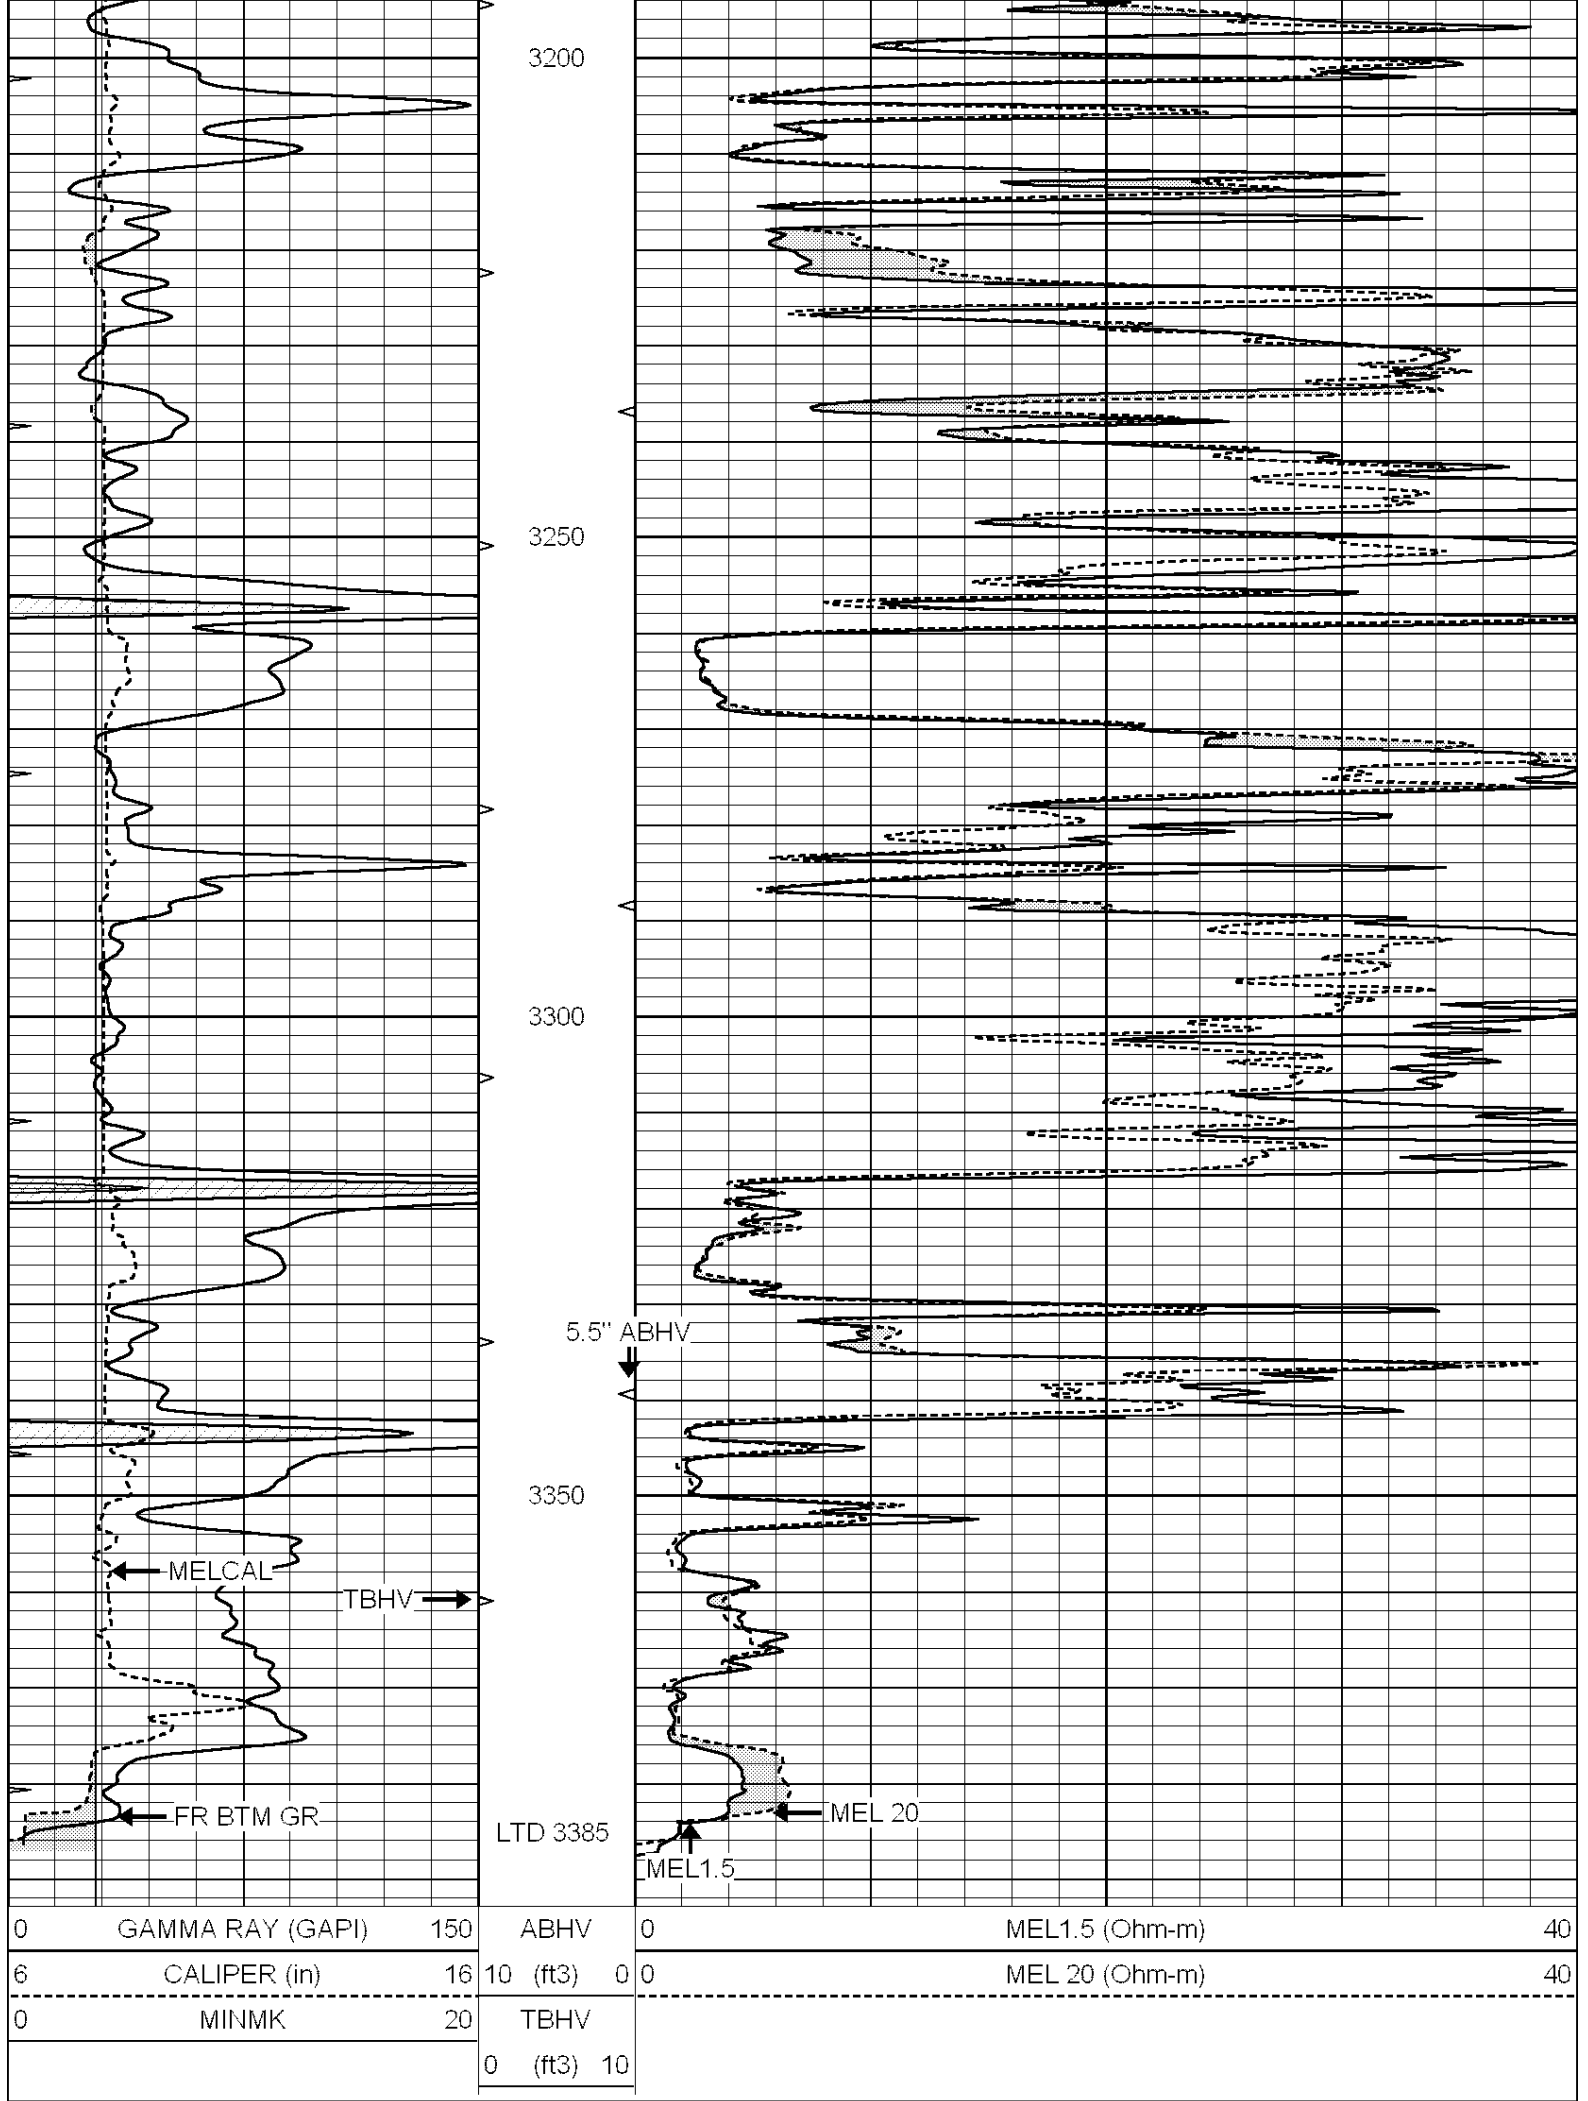


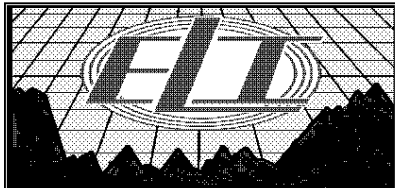


REPEAT SECTION

Database File: 4534ddn.db
Dataset Pathname: pass6.3
Presentation Format: micro
Dataset Creation: Sun Mar 08 15:13:34 2020
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL 20 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

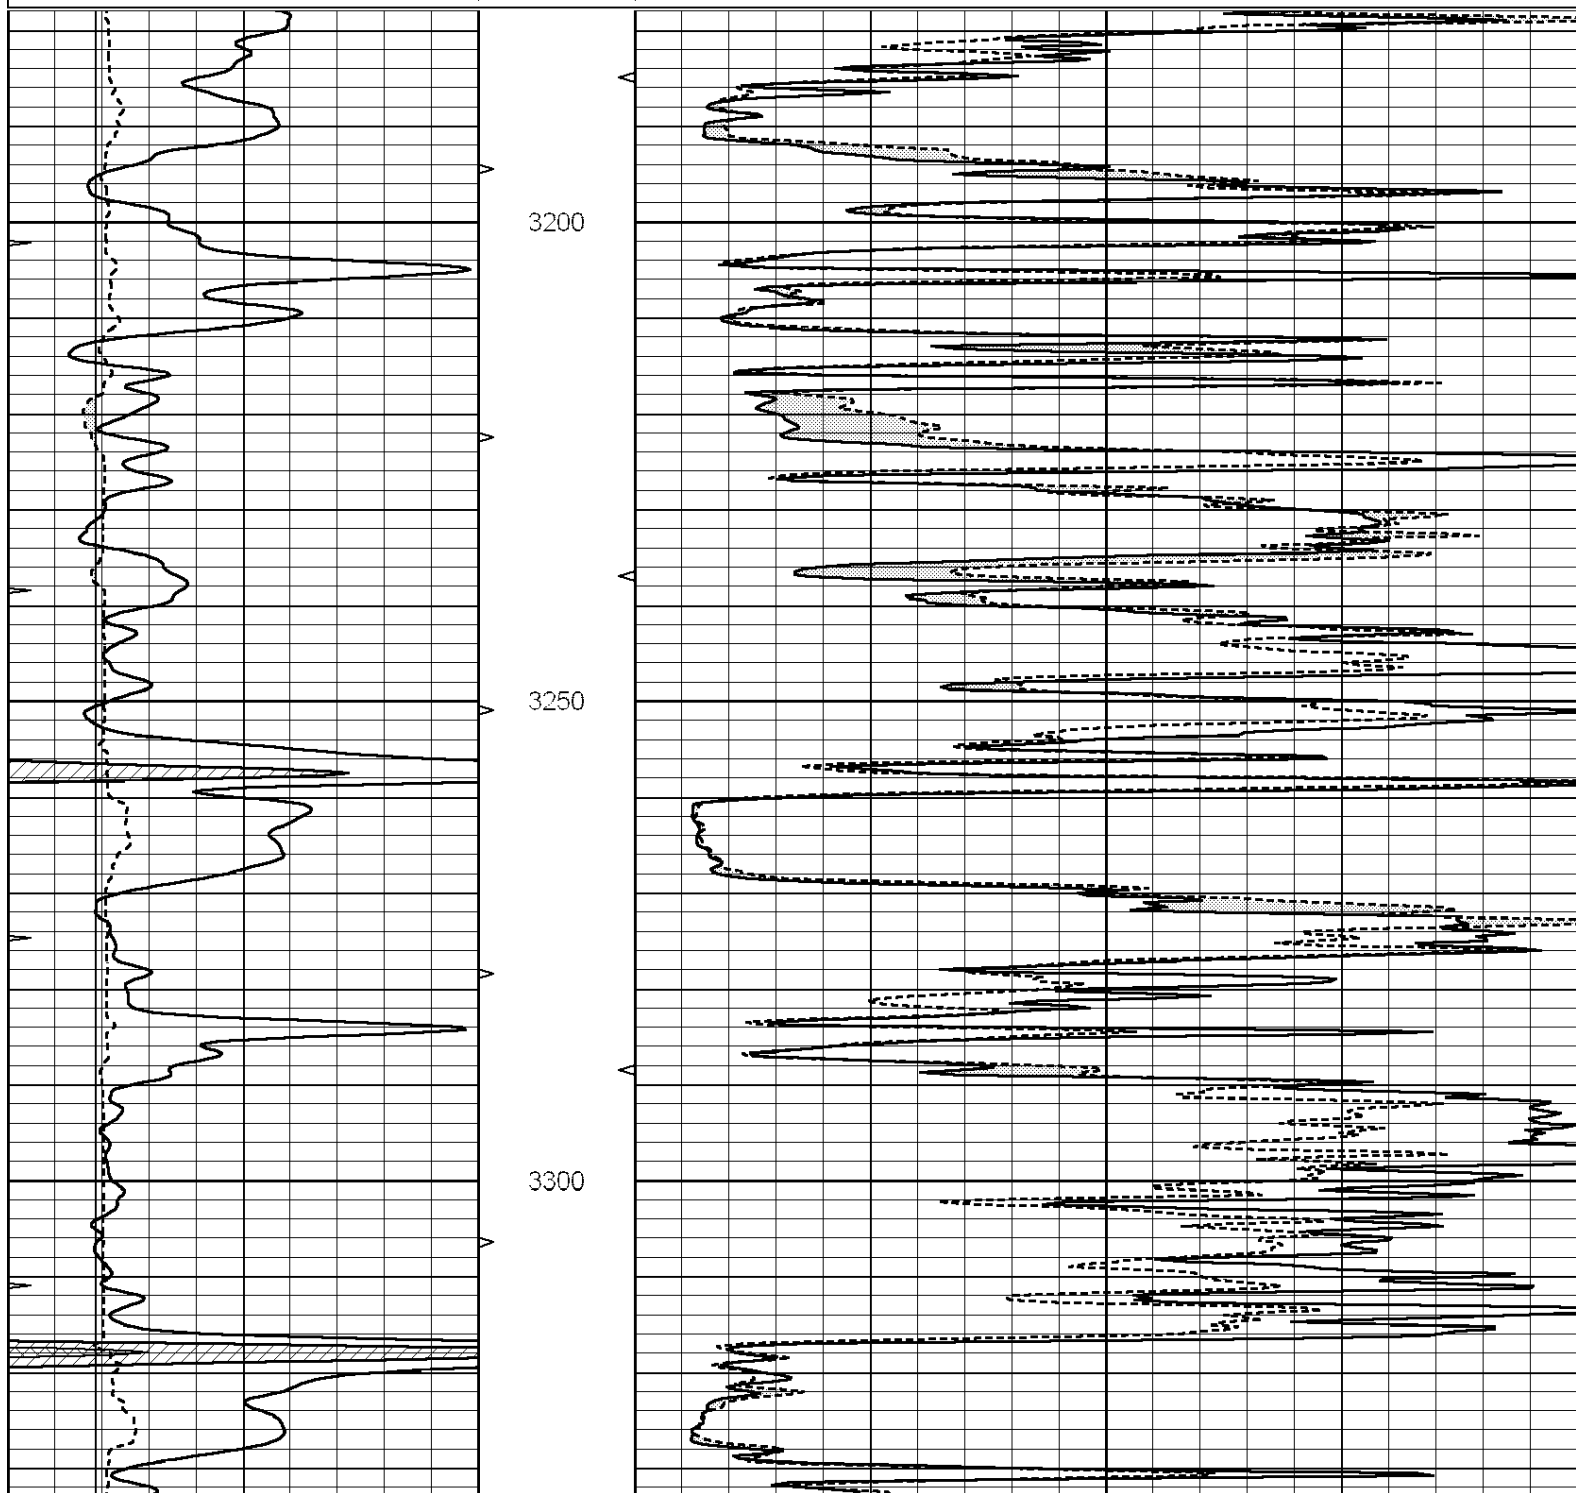

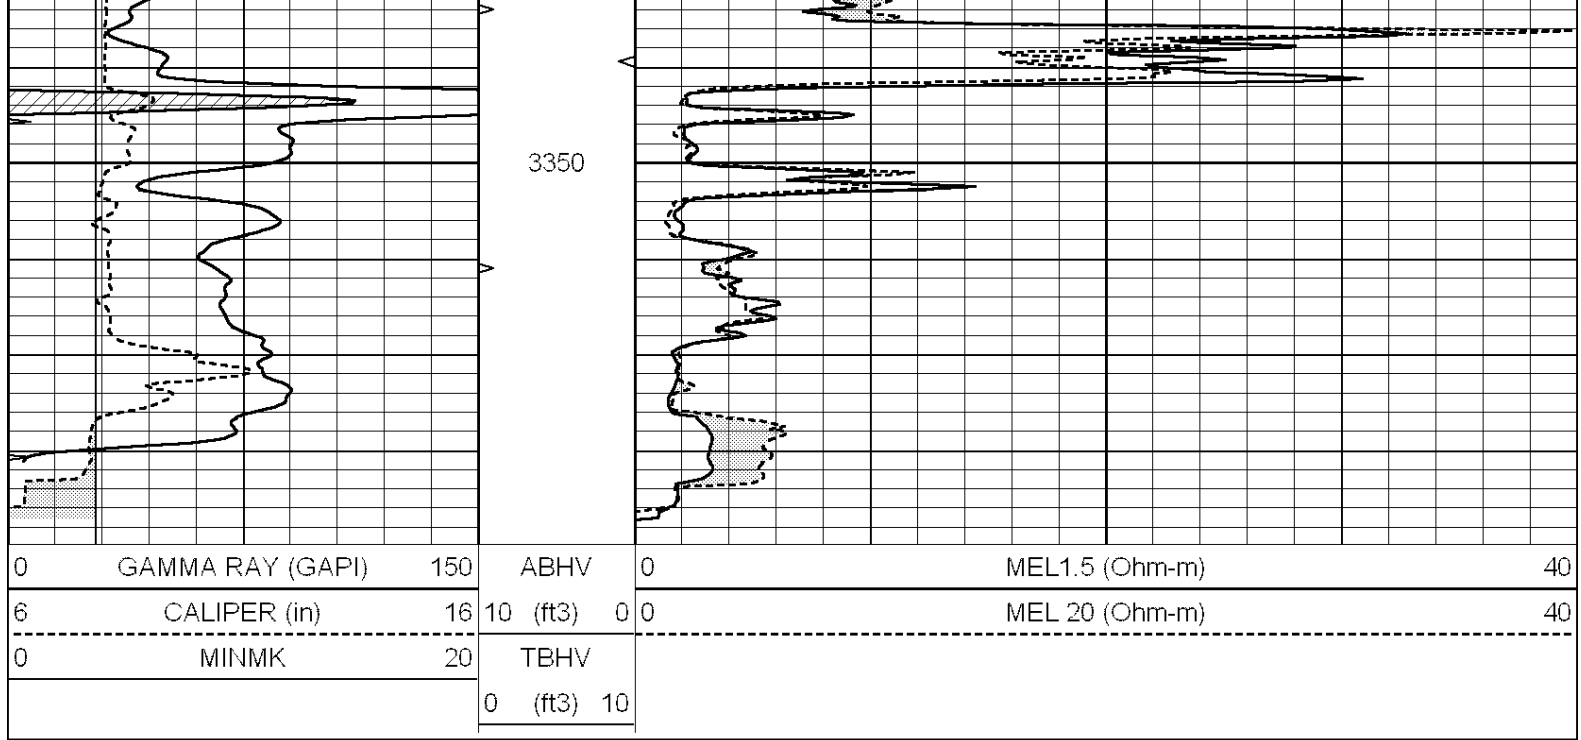

Calibration Report			
Database File:	4534ddn.db		
Dataset Pathname:	pass7.2		
Dataset Creation:	Sun Mar 08 15:22:50 2020		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Sun Mar 08 14:58:55 2020		
Caliper Calibration:	Gain=6.061	Offset=-0.182	
	Low Cal	High Cal	
References	8.000	18.000	
Readings	1.350	3.000	
1.5" Calibration:	Gain=22.000	Offset=1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.000	1.216	
2" Calibration:	Gain=56.000	Offset=-0.400	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Wed Feb 19 01:01:50 2020		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	