


KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING APPLICATION
Please TYPE Form and File ONE Copy



Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # ~~15~~ 1508320992-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 7/30/82 (spud)

Well Operator: Elysium Energy, LLC (Owner / Company Name) KCC License #: 32754 (Operator's)

Address: 1016 East Hwy 40 Bypass City: Hays

State: Kansas Zip Code: 67601 Contact Phone: (785) 625 - 4052

Lease: Huling 'AB' Well #: 7 Sec. 15 Twp. 21 S. R. 21 East West

C - NE - SE - Spot Location / QQQQ County: Hodgeman

~~880~~ 1980 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

~~880~~ 660 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

PER 28DMS4 LOGS - KCC - DLG

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8" Set at: 1285' Cemented with: 730 Sacks

Production Casing Size: 5 1/2" Set at: 4369' Cemented with: 235 Sacks

List (ALL) Perforations and Bridgeplug Sets: Mississippian 4299-4305'; CIBP @ 4215' with 1.5 sks cement to 4202'; Lansing-Kansas City 3742-3957'; CIBP set at 3510' with 2 sks cement to 3493'; Topeka 3360-3456'

Elevation: 2145' (G.L. / K.B.) T.D.: 4370' PBTD: 3493' Anhydrite Depth: 1275' (Top)
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Plugging procedure attached

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Mr. Dave Stahl

Phone: (785) 625 - 4052

Address: 1016 E. Hwy 40 Bypass City / State: Hays, KS 67601

Plugging Contractor: Allied Cementing (Company Name) KCC License #: 99996 (Contractor's)


Address: Hays, KS Phone: () -


Proposed Date and Hour of Plugging (if known?): Unknown

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 9/20/2006 Authorized Operator / Agent:

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202



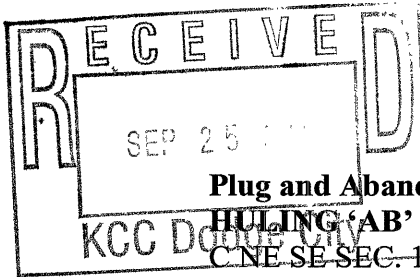

Plug and Abandon Inactive Well

HULING 'AB' #7

CNE SE SEC. 15-T21S-R21W

NW Eakin Field

Hodgeman County, Kansas

Plugging Procedure

1. RIH with sand line drill, tag PBSD @ 3493'. Drill out cement and CIBP.
2. TOOH with drill.
3. MIRU cementing company.
4. RIH with open ending 2-7/8" work string.
5. Cement well according to the following schedule using 350 sks total cement (350% excess):
 - *Log Tech Sonic CBL log dated 7/20/94 attached for depth control.
 - a) Spot 50 sk balanced plug over LKC perfs from 3742'-3957'.
 - b) Pull-up and reverse circulate clean
 - c) Spot 50 sk balanced plug over Topeka perfs 3360'-3456'.
 - d) Pull-up and reverse circulate clean
 - e) Move up hole and circulate cement from Anhydrite top at 1275' to surface.
 - f) Pull tubing to surface and set surface plug.
 - g) Cut well head and casing off 4' below surface.
 - h) Remediate location.

RECEIVED
SEP 27 2006
KCC WICHITA

KANSAS

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Elysium Energy, L.L.C.
1625 Broadway, Ste 2000
Denver, CO 80202

October 09, 2006

Re: HULING AB #7
API 15-083-20992-00-00
NESE 15-21S-21W, 1980 FSL 660 FEL
HODGEMAN COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely



Barry Metz
Deputy Director

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888