

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21604-00-01 ^{00-02 KCC WHM 10-06-06}
Spot: SWSSEW Sec/Twnshp/Rge: 14-29S-11W
330 feet from S Section Line, 3630 feet from E Section Line
Lease Name: HISKETT Well #: 1-14
County: PRATT Total Vertical Depth: 4760 feet

Operator License No.: 5056
Op Name: HOLL, F.G., COMPANY L.L.C.
Address: 9431 E CENTRAL, SUITE 100
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		2625		WITH 2 SX CMT
PROD	4.5	4745	1820	WITH 250 SX CMT
SURF	8.625	266		WITH 210 SX CMT

\$154.70

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/24/2006 8:45 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: TERRY BAIRD Company: QUALITY WELL SERVICE, INC. Phone: (316) 684-8481

Proposed Plugging Method: CIBP @ 2625' WITH 2 SX CMT. PLUG AT 700' WITH 12 SX GEL - 50 SX CMT. PLUG AT 290' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 02/24/2006 9:30 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 2625' & PUT 2 SX CMT ON TOP OF CIBP THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 700' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 290' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4642	4643		
2664	2671		

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICES.

Plugged through: CSG

INVOICED
DATE 3-8-06
NO. 2006061244

District: 01

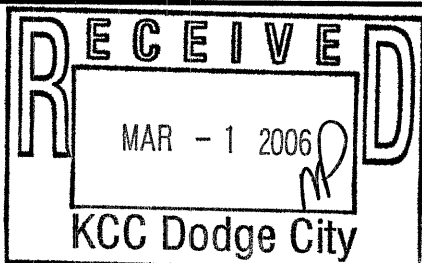

Signed

Stephen J. Pappas
(TECHNICIAN)

RECEIVED
MAR 08 2006
KCC WICHITA

Form CP-10