

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-135-00517-00-00  
Spot: SWNWNE Sec/Twnshp/Rge: 26-17S-25W  
4290 feet from S Section Line, 2310 feet from E Section Line  
Lease Name: ROSS POTTER Well #: 1  
County: NESS Total Vertical Depth: 4492 feet

Operator License No.: 5363  
Op Name: BEREXCO, INC.  
Address: PO BOX 20380  
WICHITA, KS 67208

String	Size	Depth (ft)	Pulled (ft)	Comment
DVT		1076		WITH 250 SX CMT
PROD	5.5	4489	0	WITH 200 SX CMT
SURF	9.625	252		WITH 150 SX CMT

\$ 145.99

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/28/2006 8:30 AM  
Plug Co. License No.: 5363 Plug Co. Name: BEREXCO, INC.  
Proposal Rcvd. from: MARK LEIKER Company: BEREXCO, INC. Phone: (316) 265-3311

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/28/2006 11:10 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

RAN TUBING TO 3954'. PUMP 300# HULLS & 65 SX CMT. PULLED TUBING TO 1198'. PUMPED 60 SX COMMON CMT W/4% CC. SHUT DOWN. PRESSURED CASING TO 500#. PERFORATED @ 1000'. PUMPED 200# HULLS & 205 SX CMT DOWN CASING. SHUT IN AT 300#. PUMPED 100# HULLS & 100 SX CMT DOWN BACKSIDE. SHUT IN AT 100#. TOPPED OFF CASING WITH 5 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4439	4444		
4424	4430		
4417	4420		MISS
4406	4414		FT.SCOTT
4308	4310		
3328	3357		
1296	1721		

**INVOICED**  
DATE 10/6/06  
2007060640

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

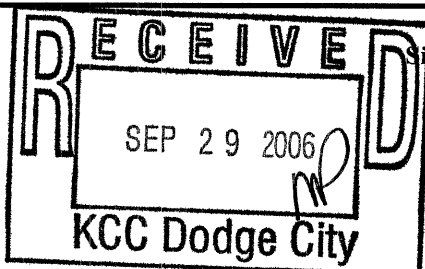

Signed Eric MacLaren  
(TECHNICIAN)

RECEIVED  
OCT - 5 2006  
KCC WICHITA

Form ~~CS-30~~

pet