

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-171-20640-00-00
Spot: NWSWNW Sec/Twnshp/Rge: 10-19S-31W
1650 feet from N Section Line, 330 feet from W Section Line
Lease Name: BETTY Well #: 1
County: SCOTT Total Vertical Depth: 4652 feet

Operator License No.: 33802
Op Name: SUNSTONE OPERATING COMPANY, L
Address: 101 N. ROBINSON, SUITE 810
OKLAHOMA CITY, OK 72102

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	379		

\$ 151.19

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 09/19/2006 8:00 PM
Plug Co. License No.: 5147 Plug Co. Name: BEREDCO, INC.
Proposal Revd. from: MARVIN JULIAN Company: BEREDCO, INC. Phone: (316) 265-2856

Proposed Plugging Method: 1ST PLUG AT 2300' WITH 50 SX CMT. 2ND PLUG AT 1650' WITH 50 SX CMT. 3RD PLUG AT 700' WITH 80 SX CMT. 4TH PLUG AT 400' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: NONE
Date/Time Plugging Completed: 09/19/2006 10:30 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

Perfs:


1ST PLUG AT 2300' WITH 50 SX CMT. 2ND PLUG AT 1650' WITH 80 SX CMT. 3RD PLUG AT 700' WITH 50 SX CMT. 4TH PLUG AT 400' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

INVOICED
DATE 10/6/06
2007060650

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

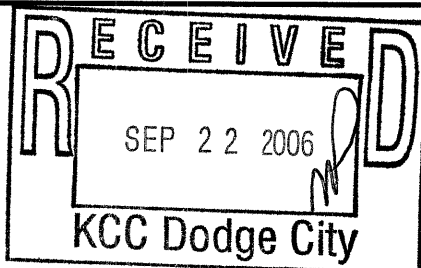

Signed

Jim Holland (TECHNICIAN)

RECEIVED
OCT - 5 2006
KCC WICHITA

Form CR-2

PEJ