

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-21042-00-00
Spot: NWSE Sec/Twnshp/Rge: 10-32S-35W
1980 feet from S Section Line, 1980 feet from E Section Line
Lease Name: VERNON COMBES Well #: 2
County: STEVENS Total Vertical Depth: 6350 feet

Operator License No.: 33002 •

Op Name: KERR-MCGEE OIL & GAS ONSHORE LP

Address: 5735 PINELAND, SUITE 300
DALLAS, TX 75231

String Size Depth (ft) Pulled (ft) Comment

COND 16 74
PROD 5.5 6350 1850 WITH 1150 SX CMT
SURF 8.625 1850 WITH 900 SX CMT

\$ 206.38

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 09/27/2006 1:00 PM

Plug Co. License No.: 31151

Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.

Proposal Rcvd. from: JOHN

Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: SET CIBP @ 6000' W/2 SXS. CMT.; CIRC. WELL W/PXA MUD; CUT & PULL 5 1/2" CSG. @ +/- 1850; MIX & PUMP A 40 SX .CMT. PLUG @ 1900'-1800' - WOC & TAG; MIX & PUMP A 35 SX. CMT. PLUG @ 625'-525'; MIX & PUMP A 35 SX. CMT. PLUG @ 385'-285'; SPOT A 10 SX. CMT. PLUG @ 40'-3'; CUT OFF CSG. 3' B.G.L. & WELD ON PLATE.

Plugging Proposal Received By: JIM HOLLAND

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 09/29/2006 11:00 AM

KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 300# HULLS WITH 25 SX CMT ON BOTTOM. 1ST PLUG AT 1865' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 30 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
6118	6128		
6088	6097		

INVOICED
DATE 10/6/06
2007060647

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

District: 01

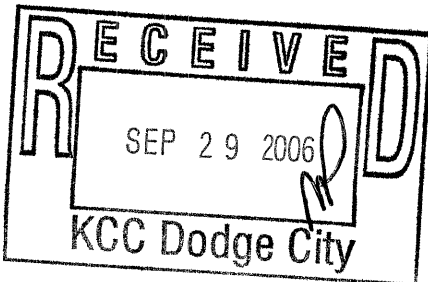

Signed

Jim Holland PART III
(TECHNICIAN)

RECEIVED
OCT - 5 2006
KCC WICHITA

Form CP-23

[Handwritten signature]