

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-20372-00-00
Spot: SWSENE Sec/Twnshp/Rge: 6-16S-17W
2310 feet from N Section Line, 1000 feet from E Section Line
Lease Name: WILLIAMS Well #: 1
County: RUSH Total Vertical Depth: 3438 feet

Operator License No.: 33612
Op Name: GEIST, RON DBA WILDCAT WELL SER
Address: PO BOX 961
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3436	1480	WITH 150 SX CMT
SURF	8.625	1023		

\$ 111.74

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/21/2006 11:00 AM
Plug Co. License No.: 33612 Plug Co. Name: GEIST, RON DBA WILDCAT WELL SERVICE
Proposal Rcvd. from: RON GEIST Company: GEIST, RON DBA WILDCAT WELL Phone: (785) 728-2040

Proposed Plugging Method: SAND TO 3290' & 4 SX CMT. PLUG AT 1050' WITH 10 SX GEL - 50 SX CMT. PLUG AT 500' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 09/21/2006 2:45 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

ANHYDRITE = 1025'. SANDED TO 3290' & 4 SX CMT WITH DUMP BAILER.
SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1020' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 500' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3347	3354		

INVOICED
DATE 10-11-06
2007060608

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

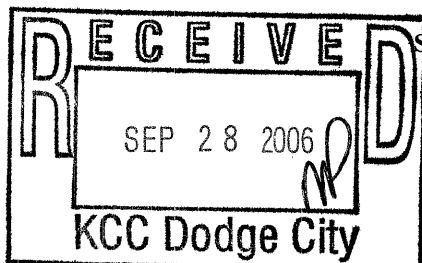

Signed Richard M. Lacey
(TECHNICIAN)

RECEIVED
OCT 10 2006
KCC WICHITA

Form CP-2

[Handwritten signature]