



MICRO LOG

Company EAGLE CREEK CORPORATION
Well CAMPBELL #1-2
Field WILDCAT
County FINNEY State KANSAS

Location: API # : 15-055-22536-0000
2305' FSL & 2250' FWL
SW - NE - NE - SW
SEC 2 TWP 21S RGE 34W
Permanent Datum GROUND LEVEL Elevation 2961
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL/PE
DIL/SONIC
Elevation
K.B. 2972
D.F. 2970
G.L. 2961

Date	9/13/20		
Run Number	TWO		
Depth Driller	4885		
Depth Logger	4887		
Bottom Logged Interval	4871		
Top Log Interval	3300		
Casing Driller	8 5/8"@268'		
Casing Logger	268		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,400 PPM	
Density / Viscosity	9.1/53		
pH / Fluid Loss	10.5/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.820@80F		
Rmf @ Meas. Temp	.615@80F		
Rmc @ Meas. Temp	.984@80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.529@124F		
Time Circulation Stopped	4.5 HOURS		
Time Logger on Bottom	9.45 A.M.		
Maximum Recorded Temperature	124F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	TIM PIERCE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785)628-6395
DIRECTIONS
SCOTT CITY, KS., 13S. ON HWY 83 TO (SCOTT/FINNEY COUNTY LINE) 7 1/2 W., 1/2S., E. INTO





MAIN SECTION


Database File	4810pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Sun Sep 13 10:22:42 2020
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

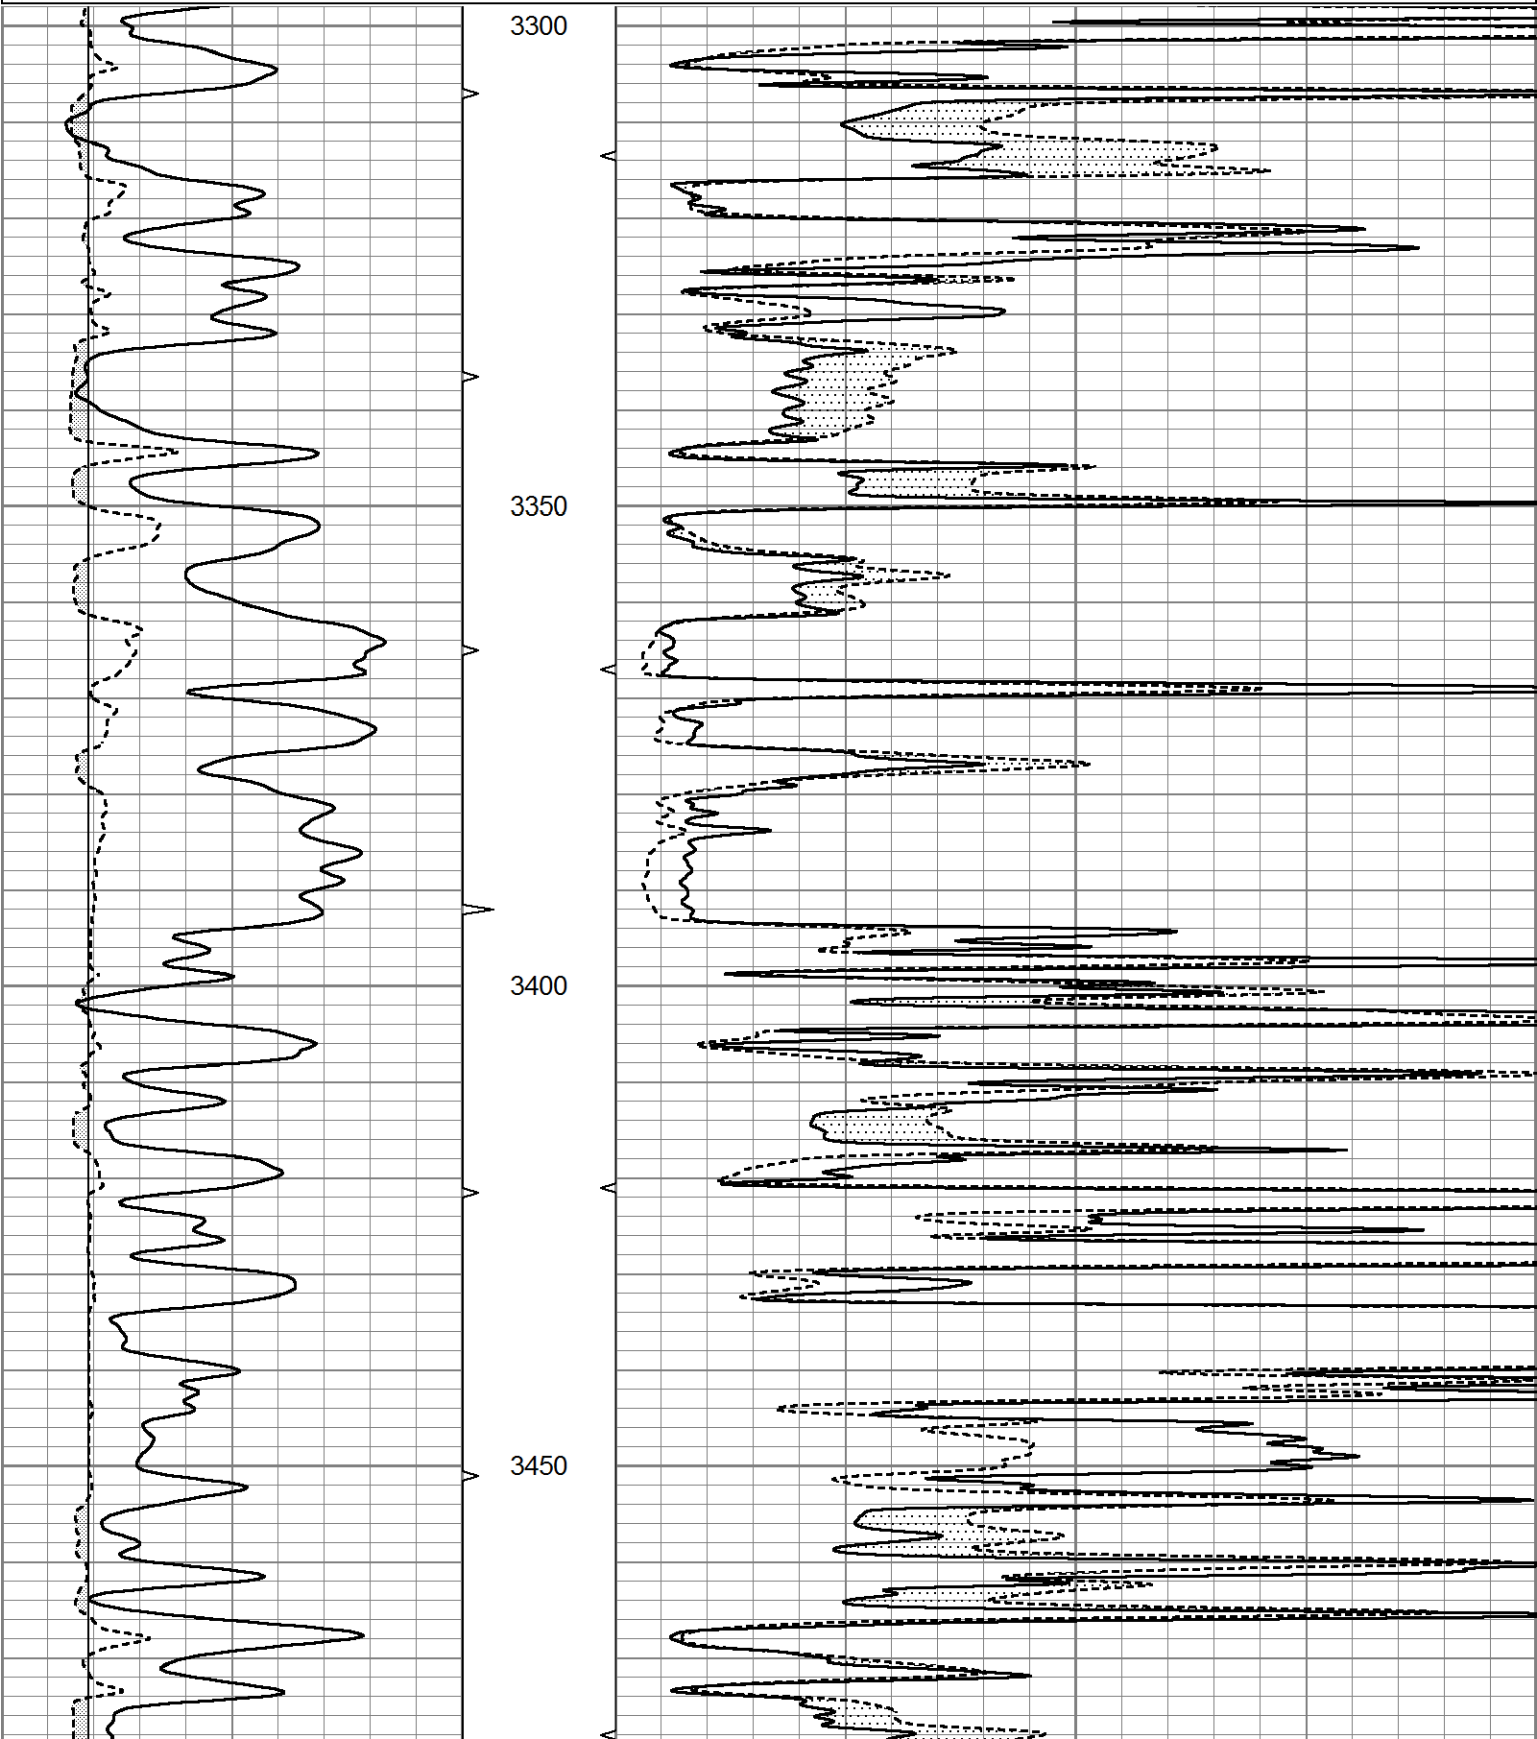


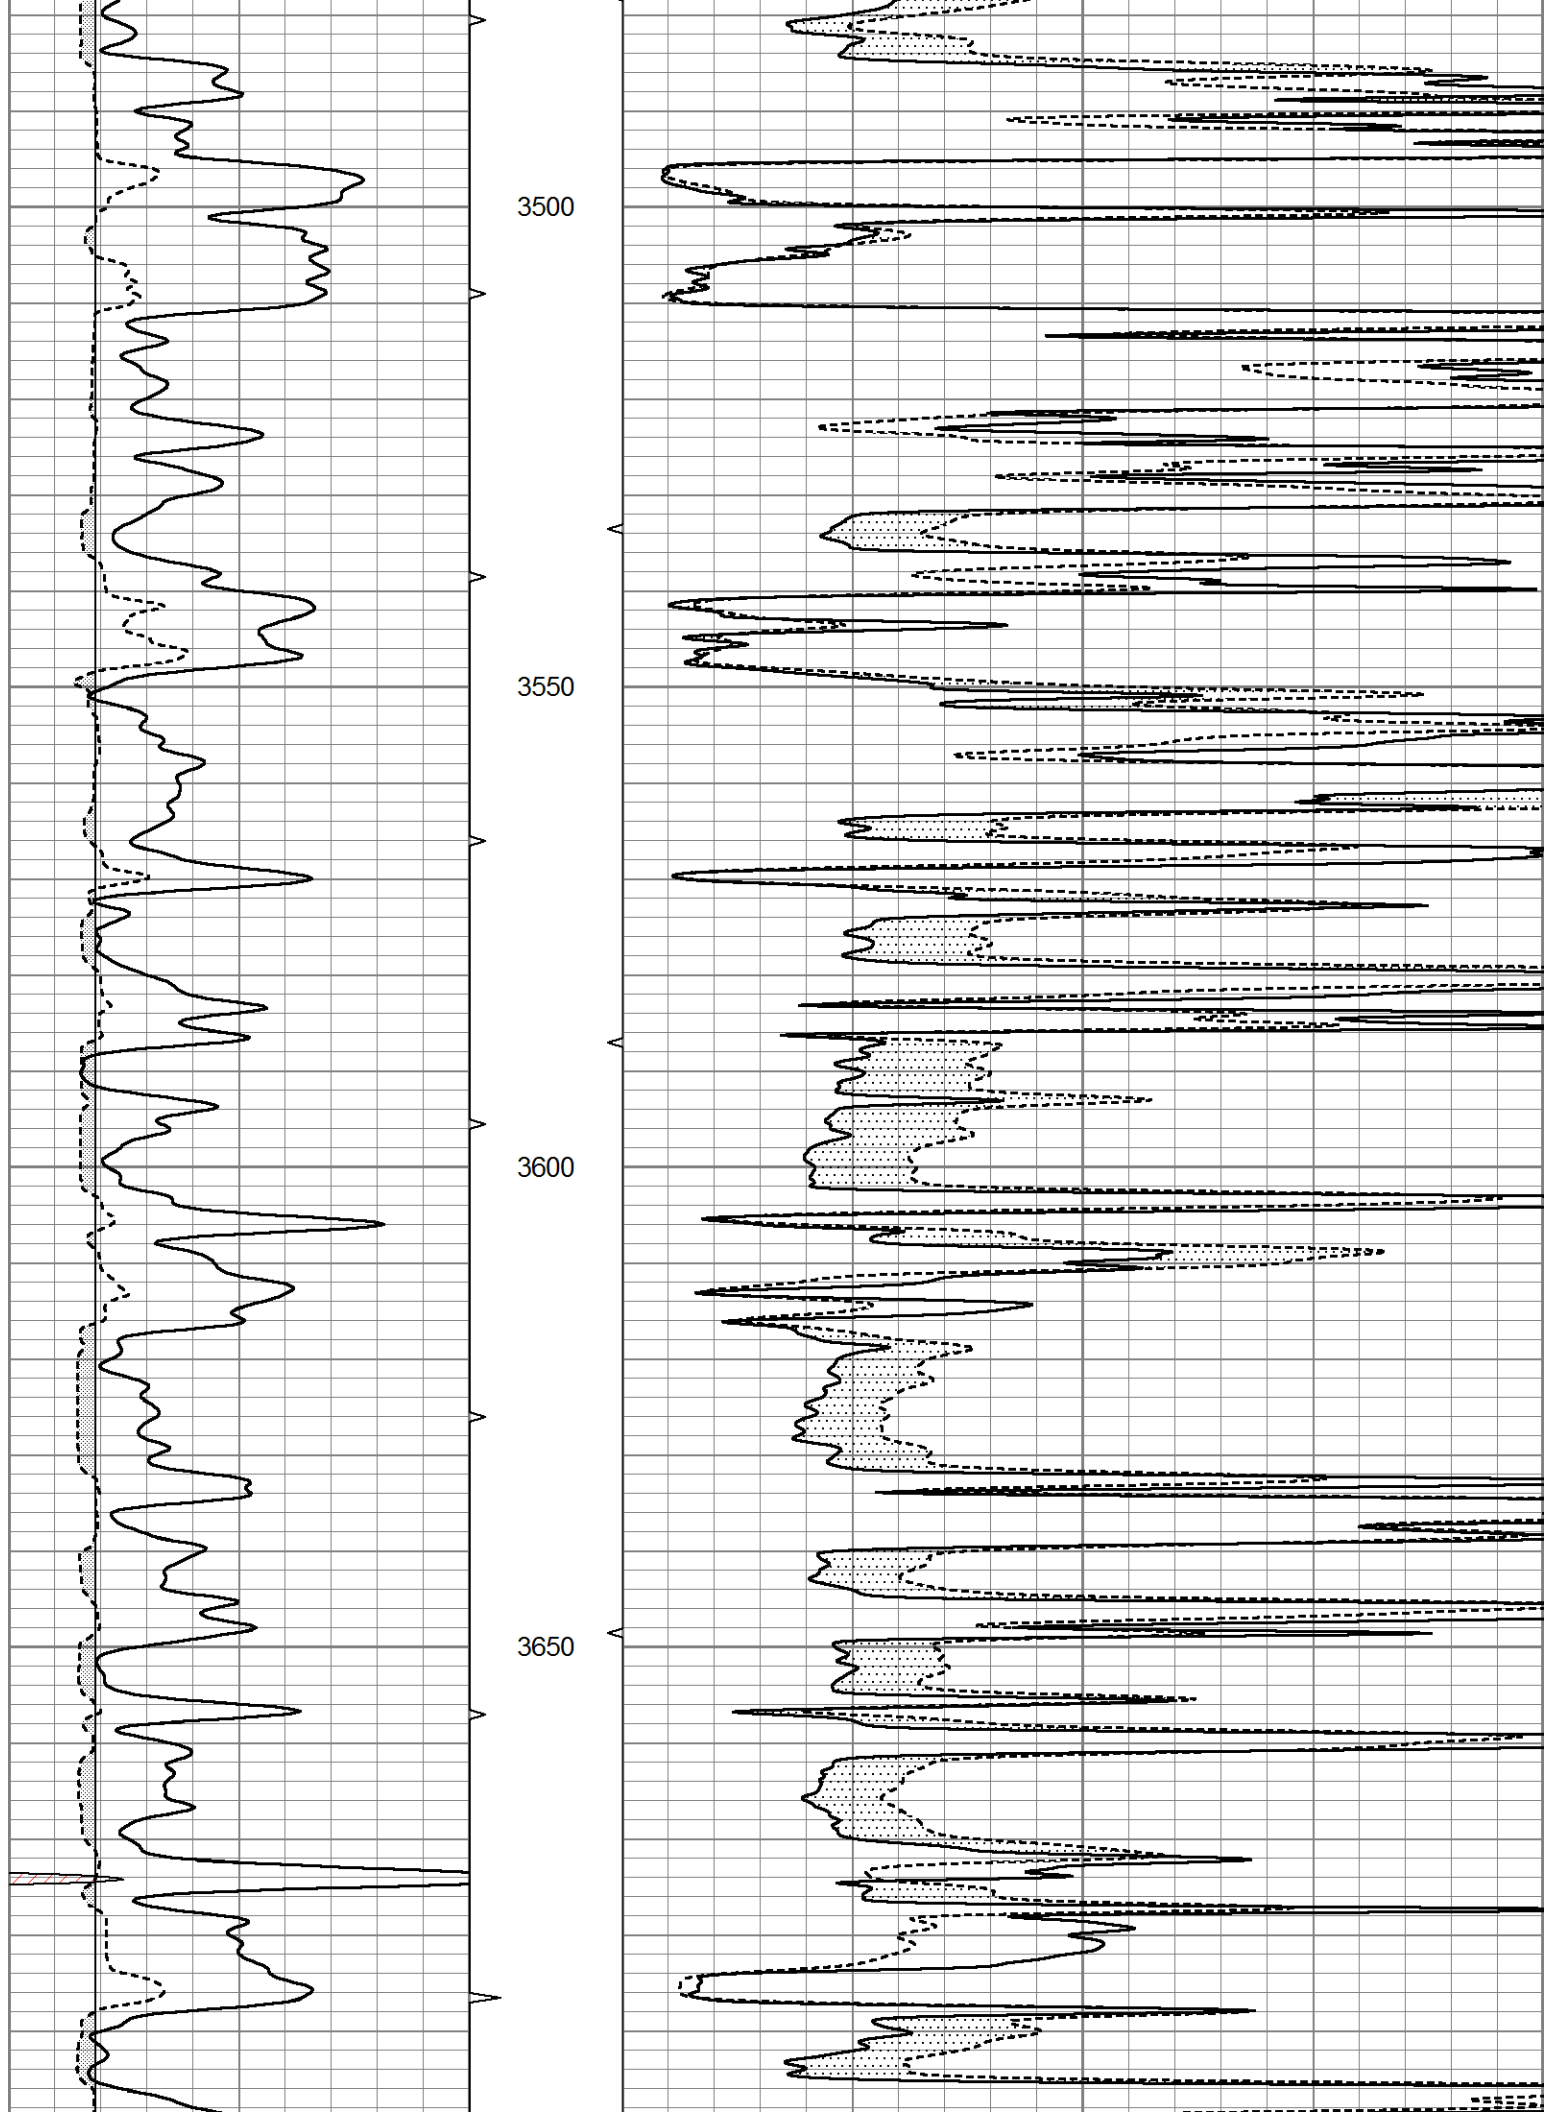

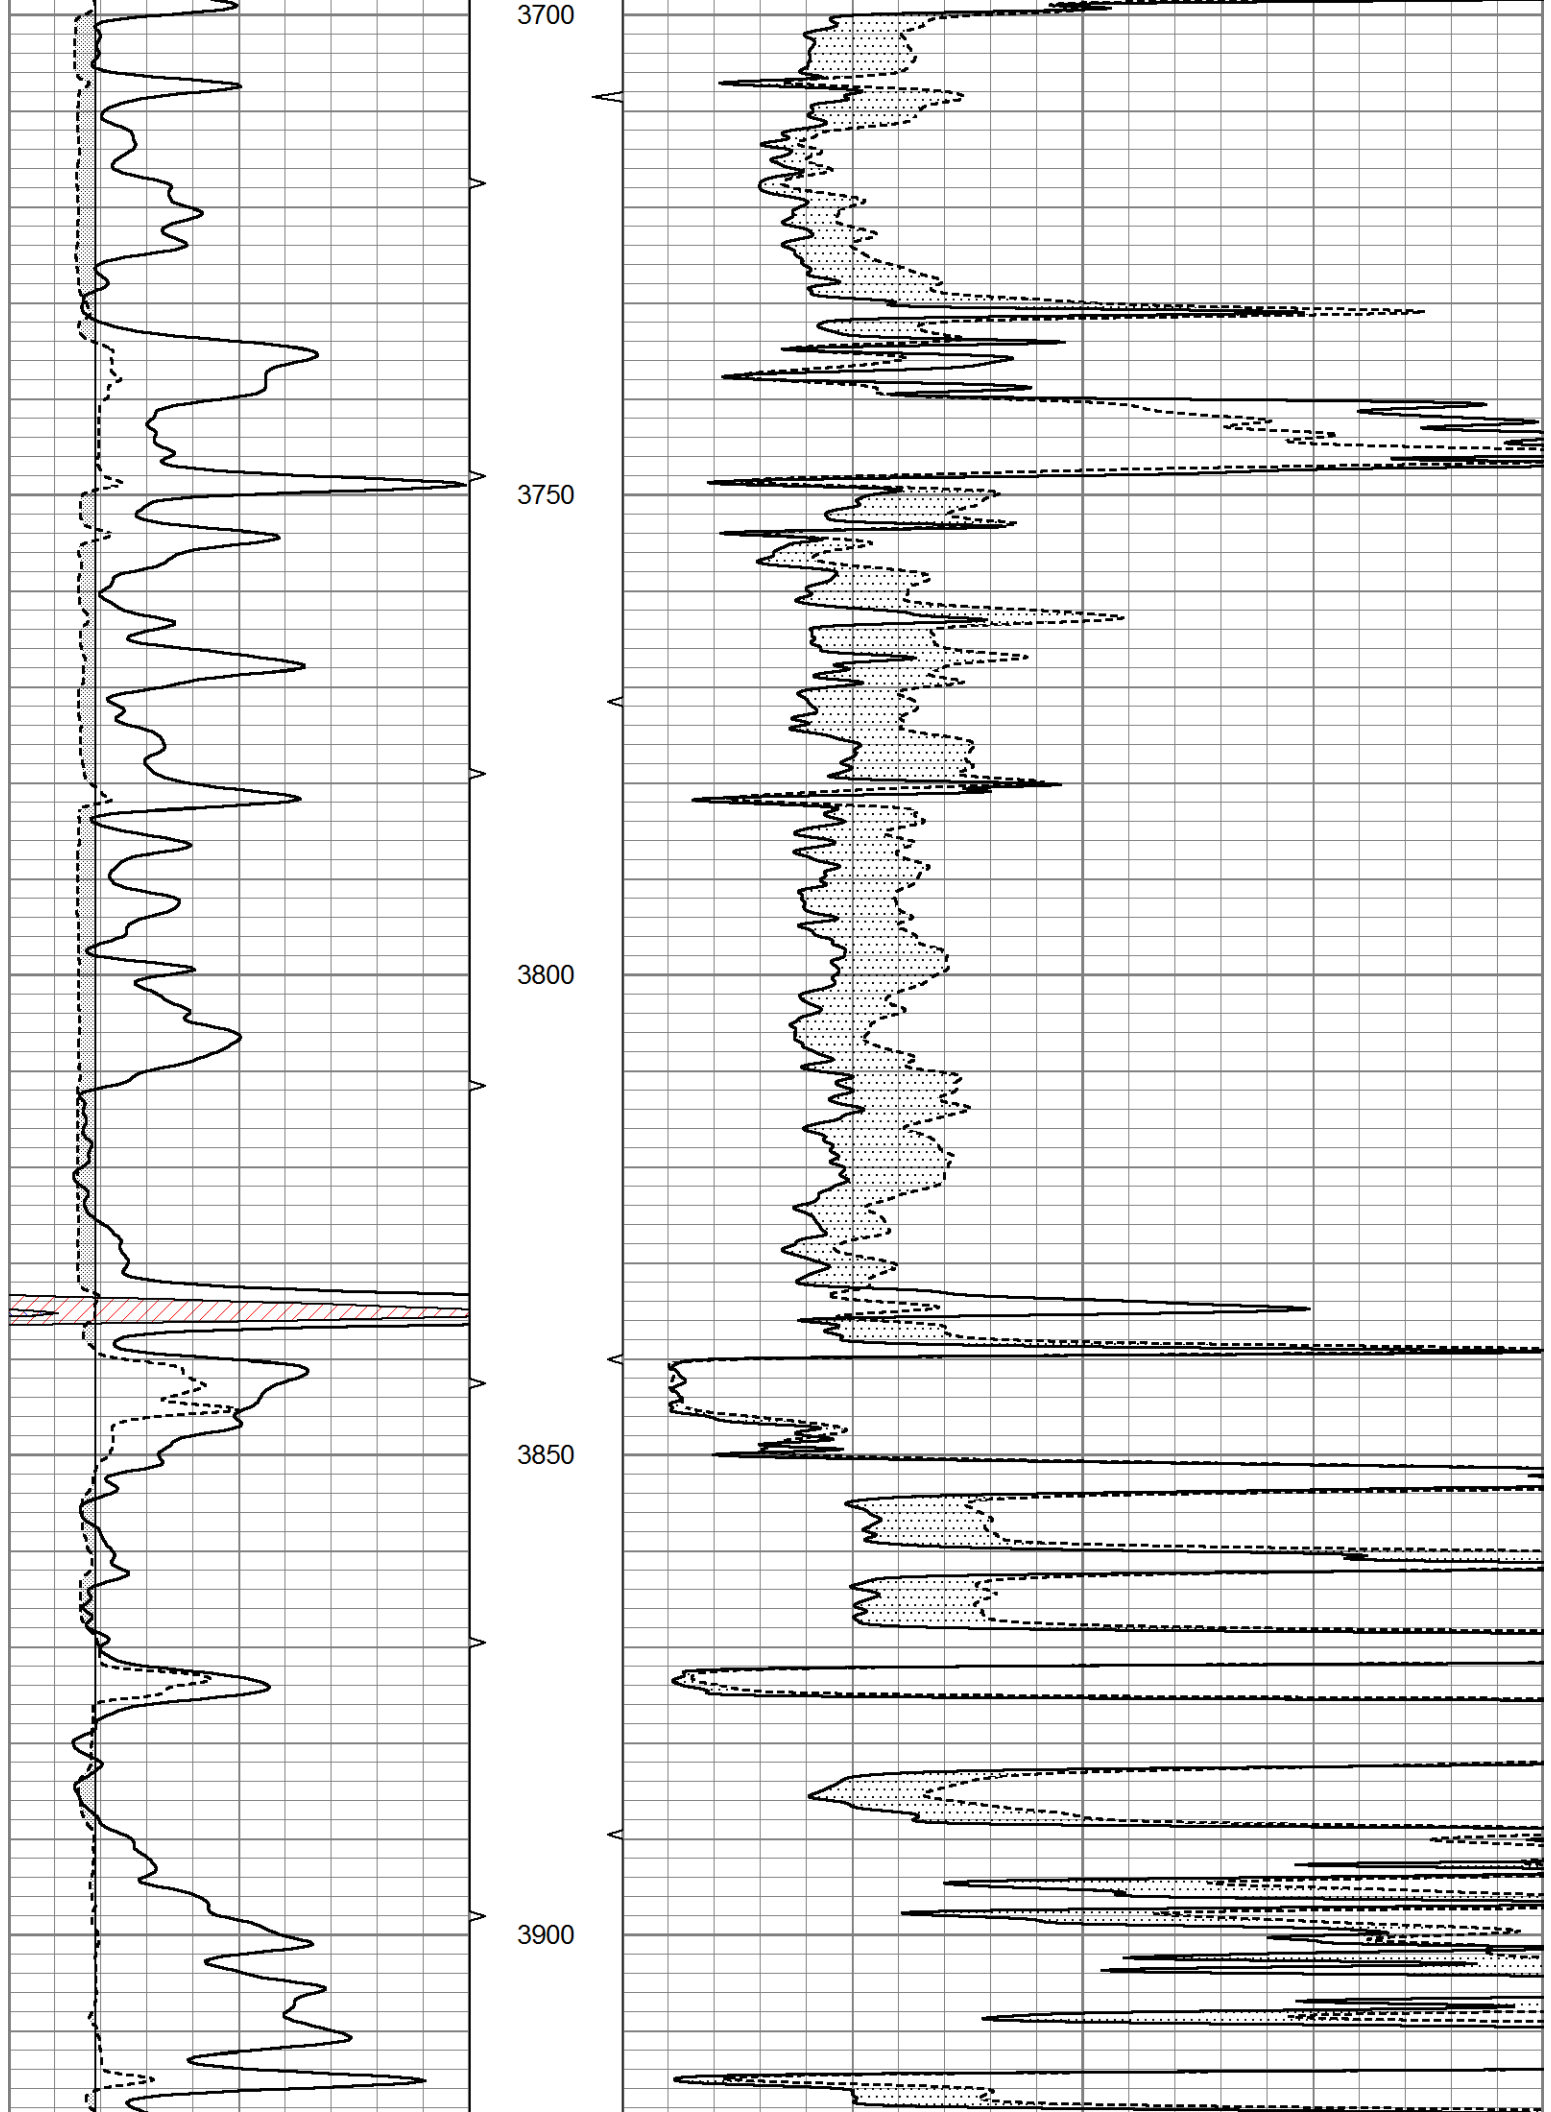

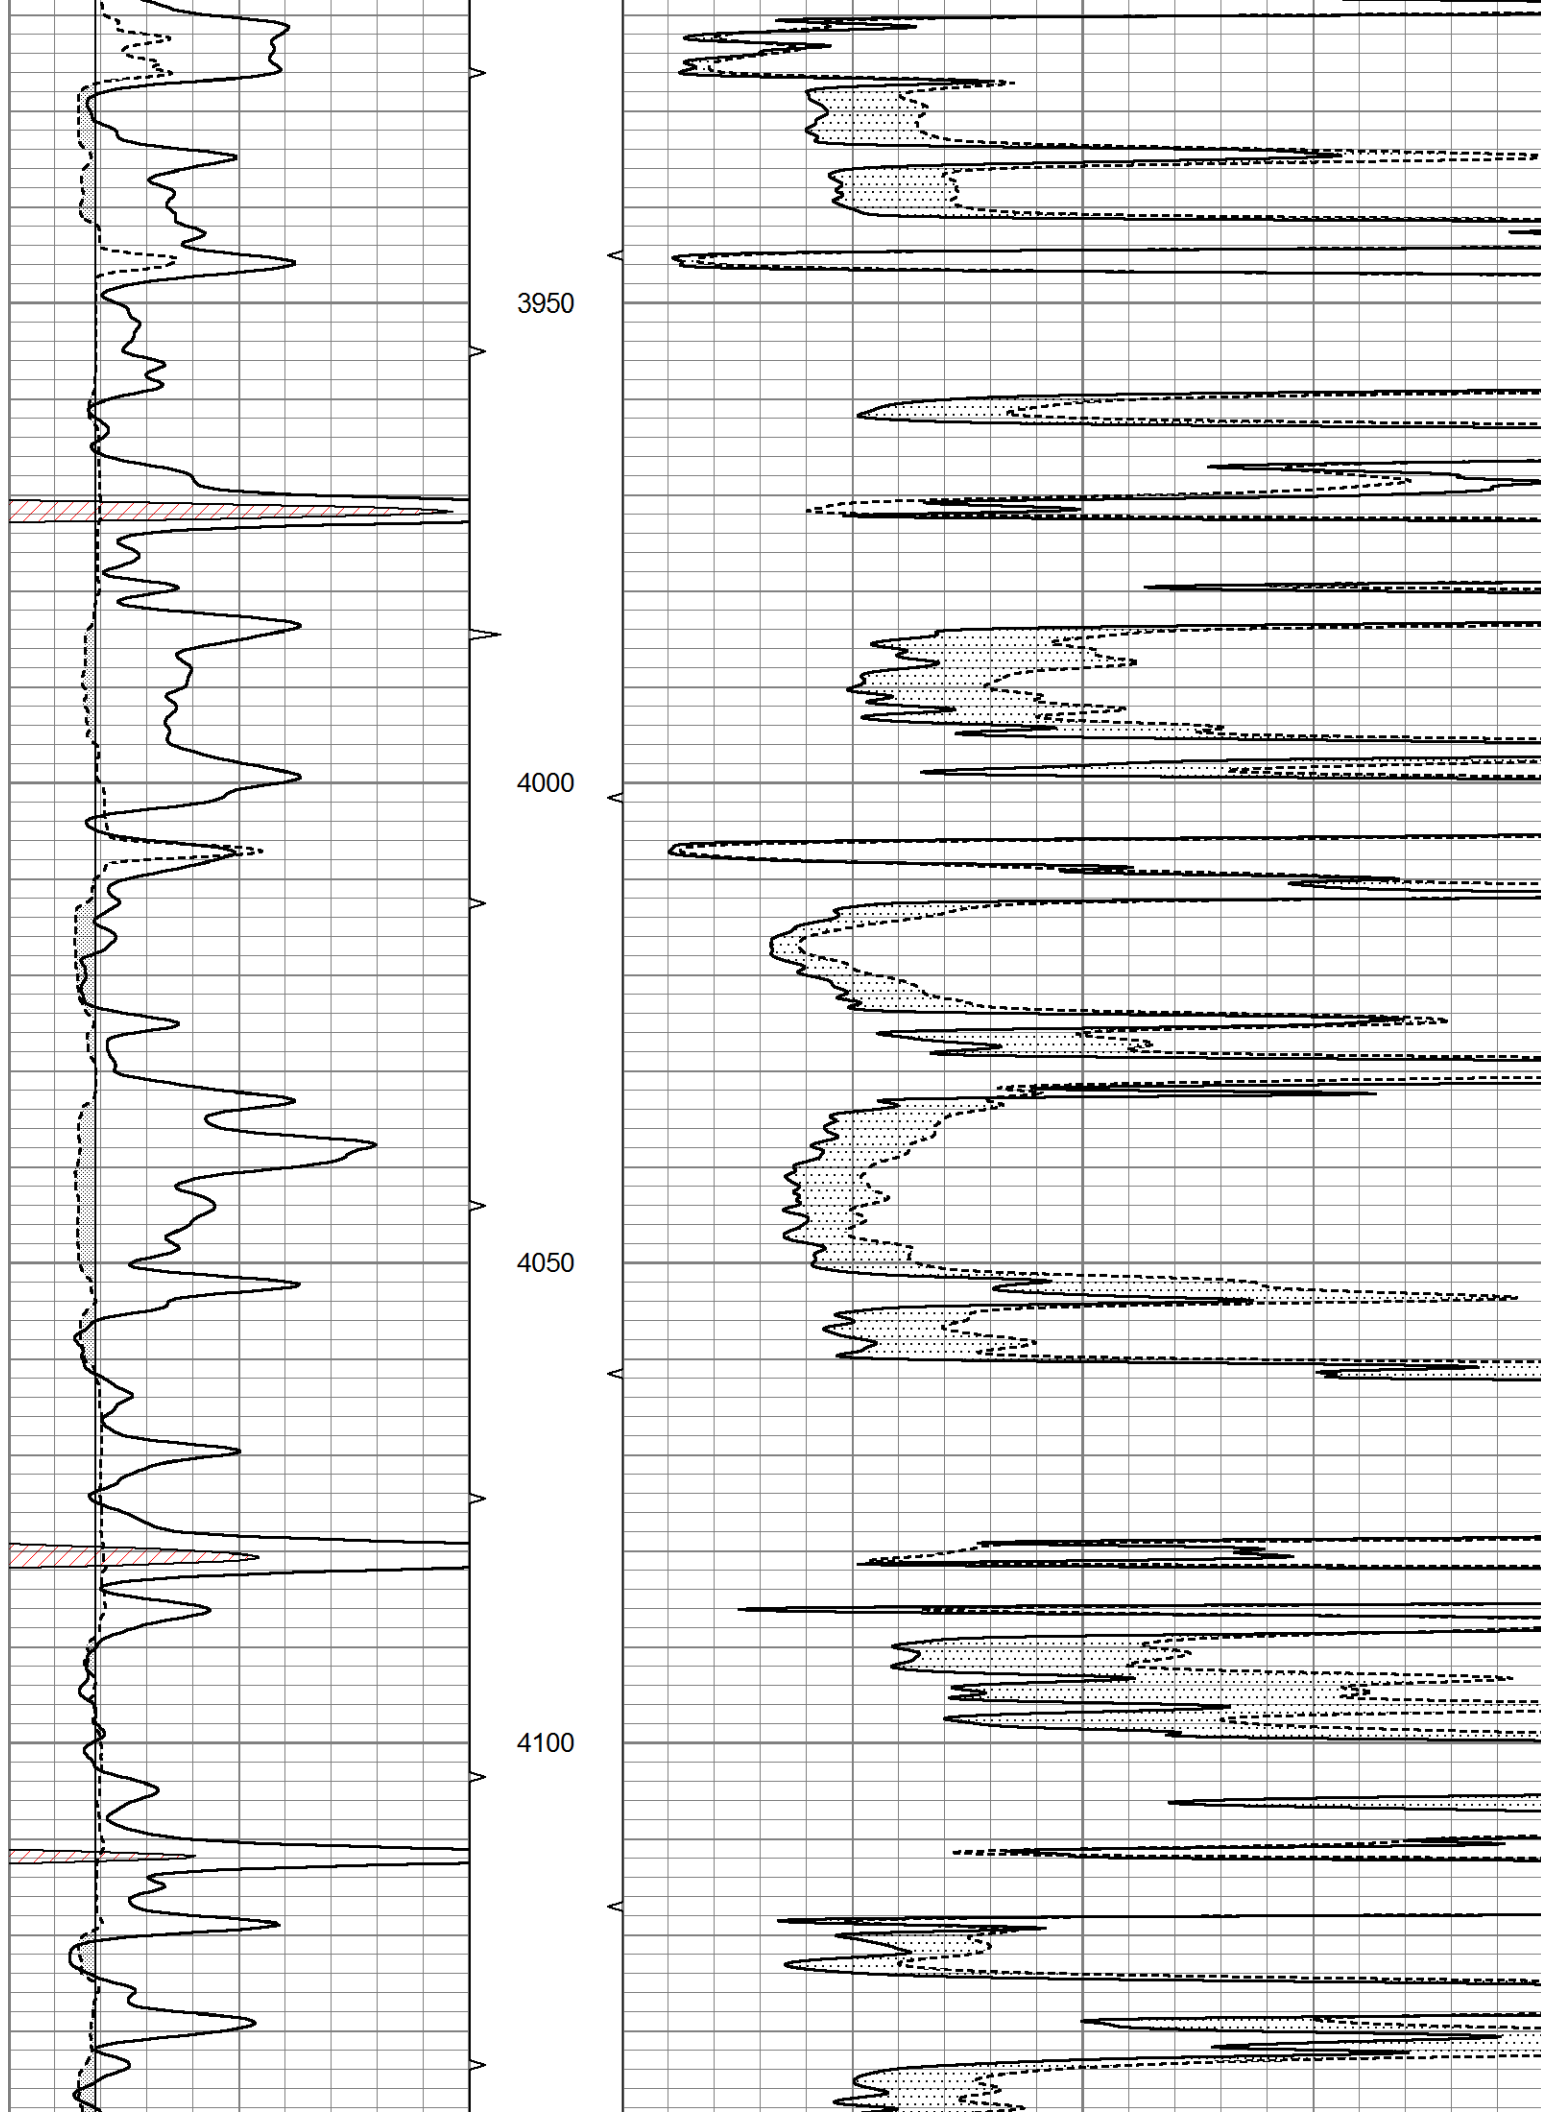

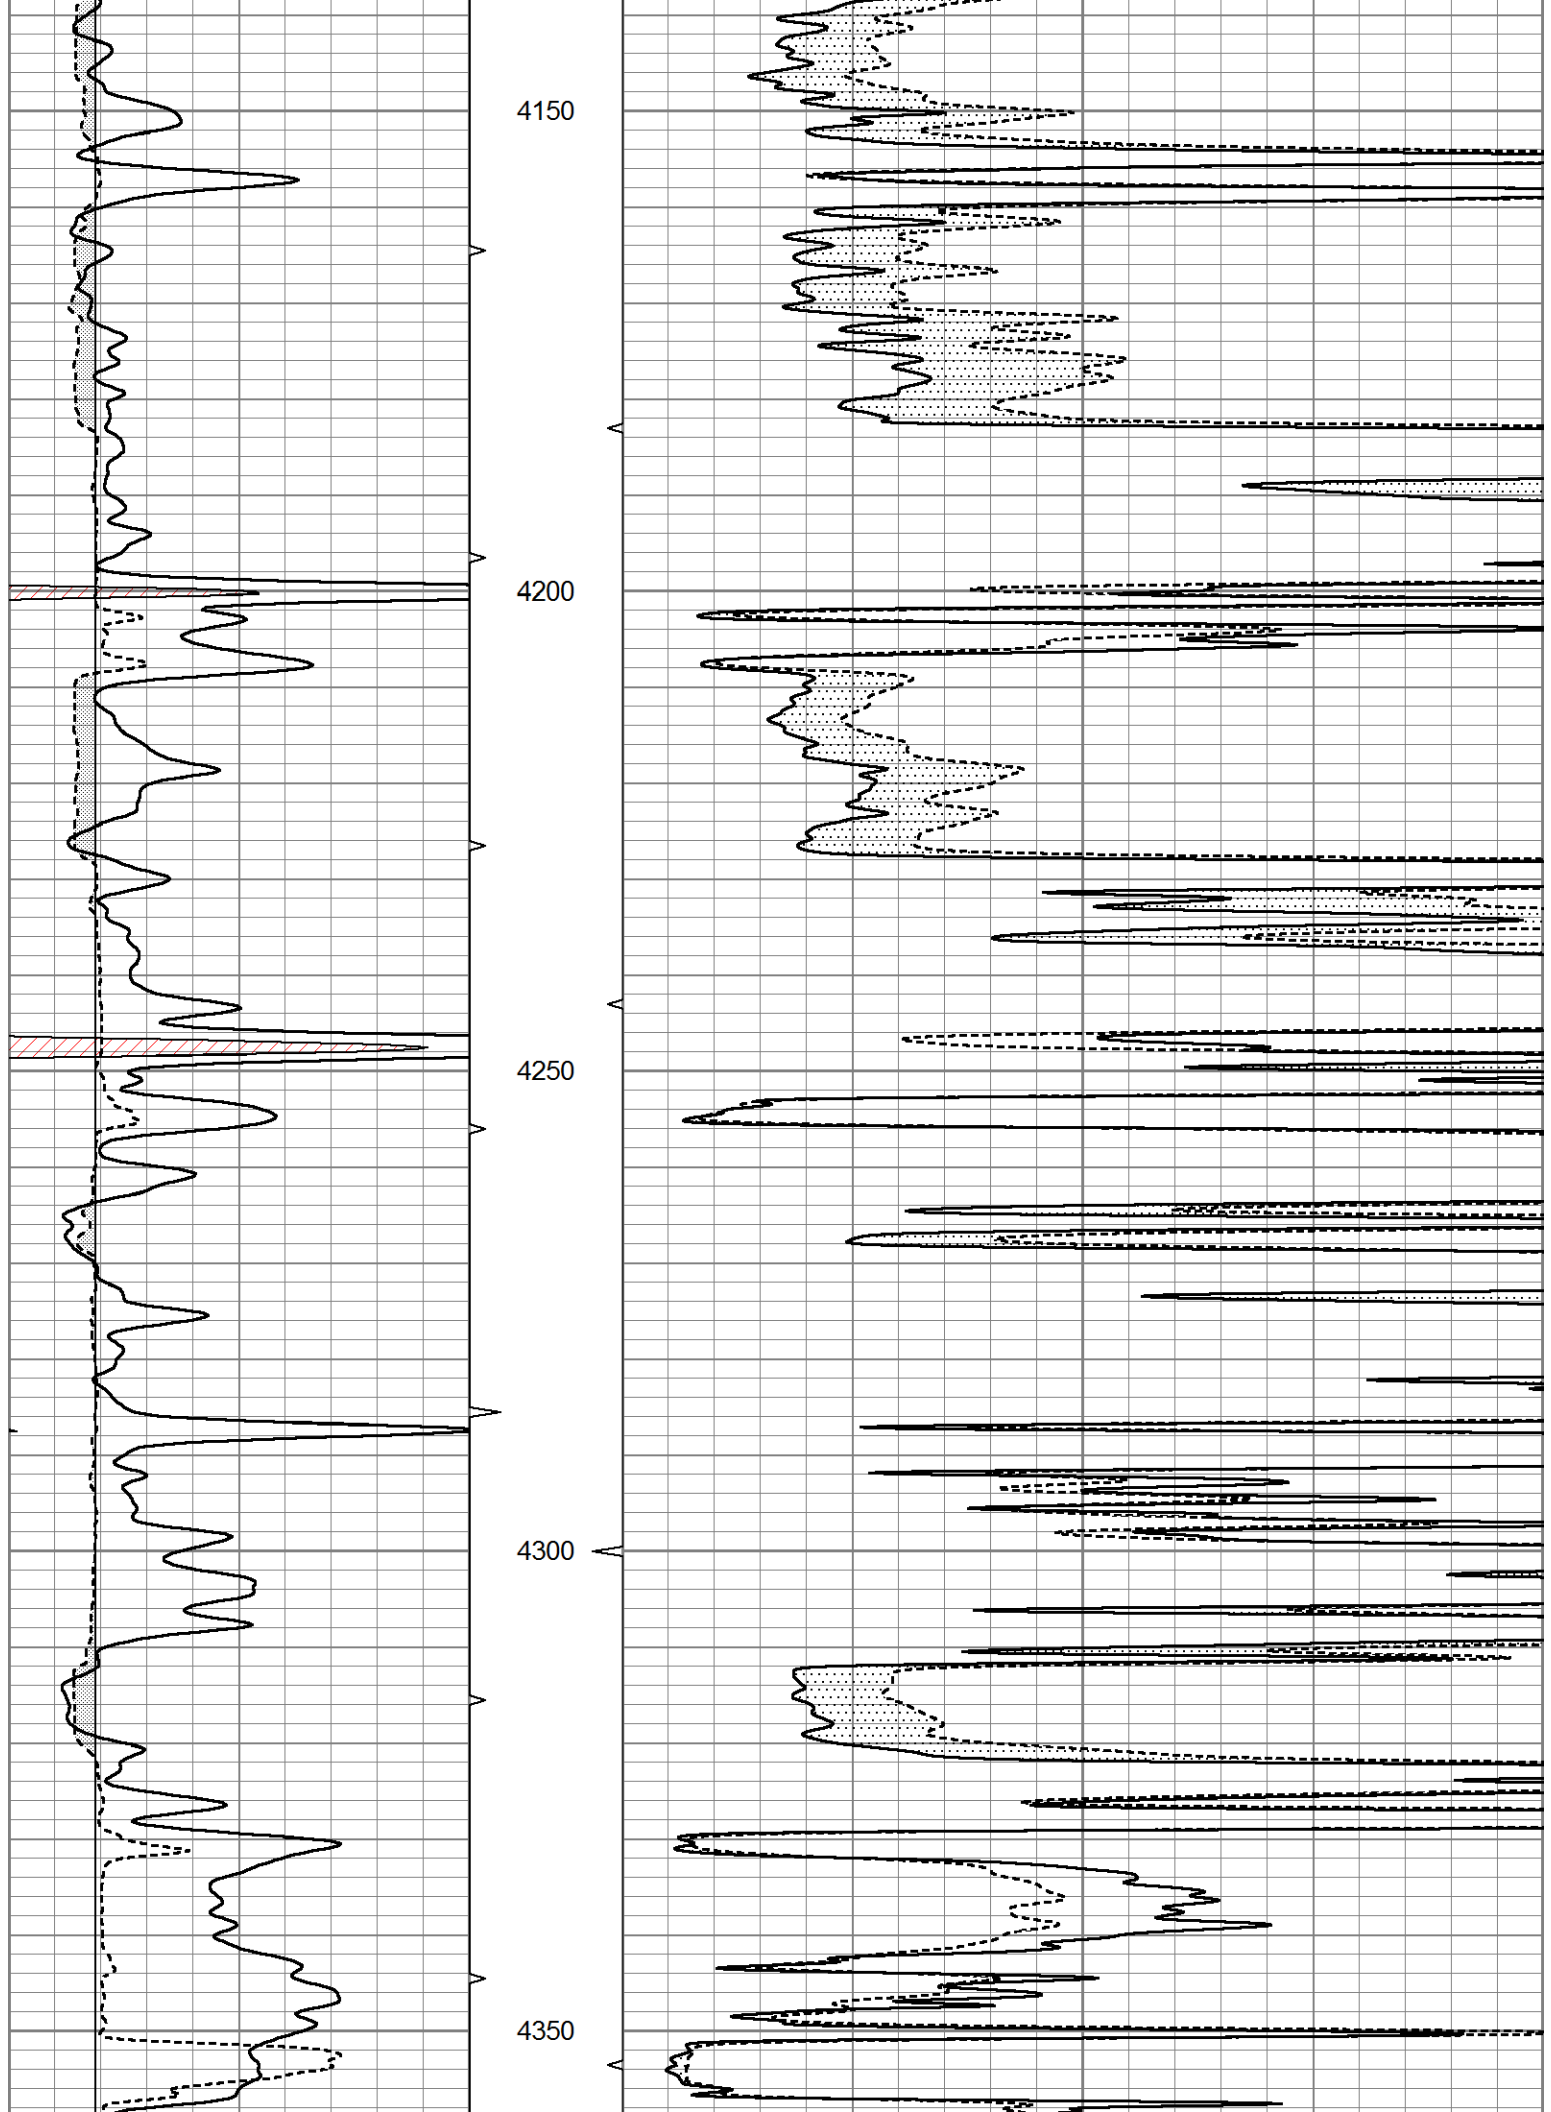

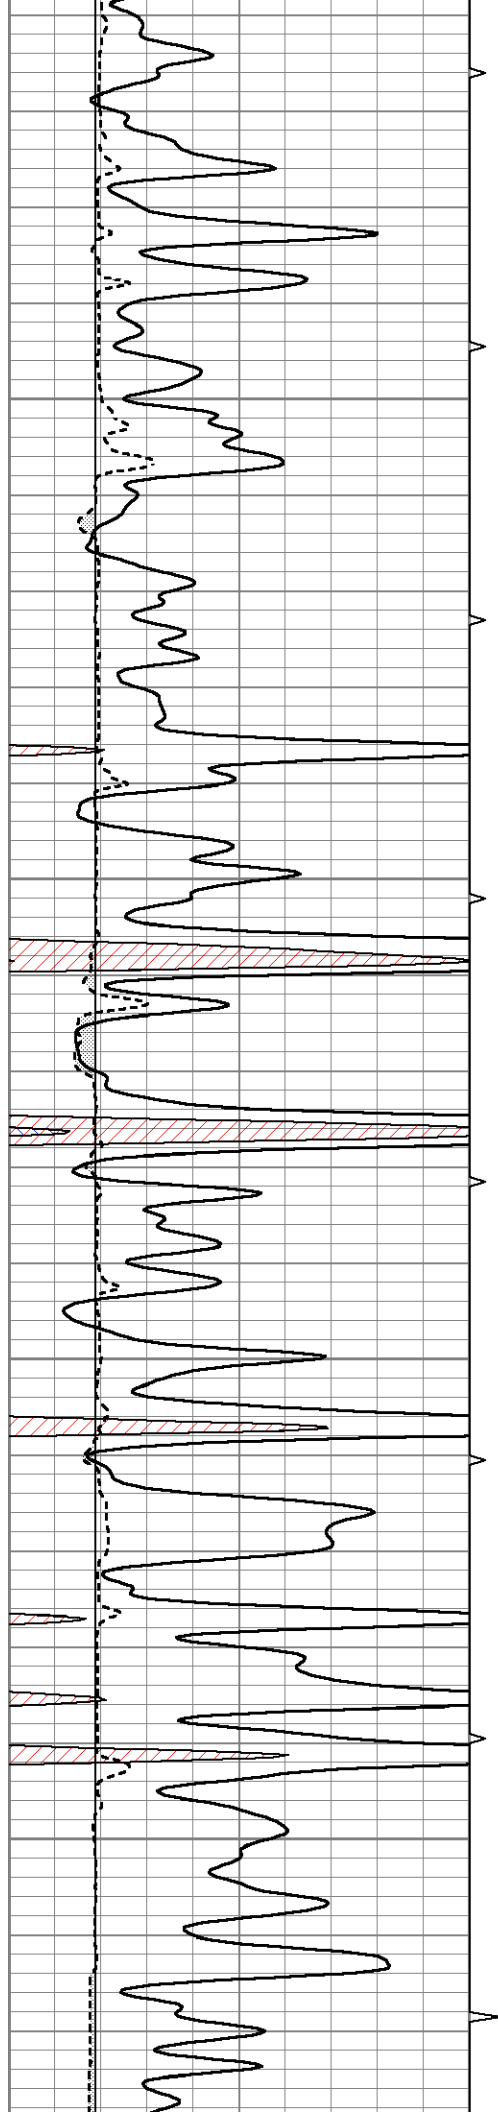



4400


4450

4500

4550

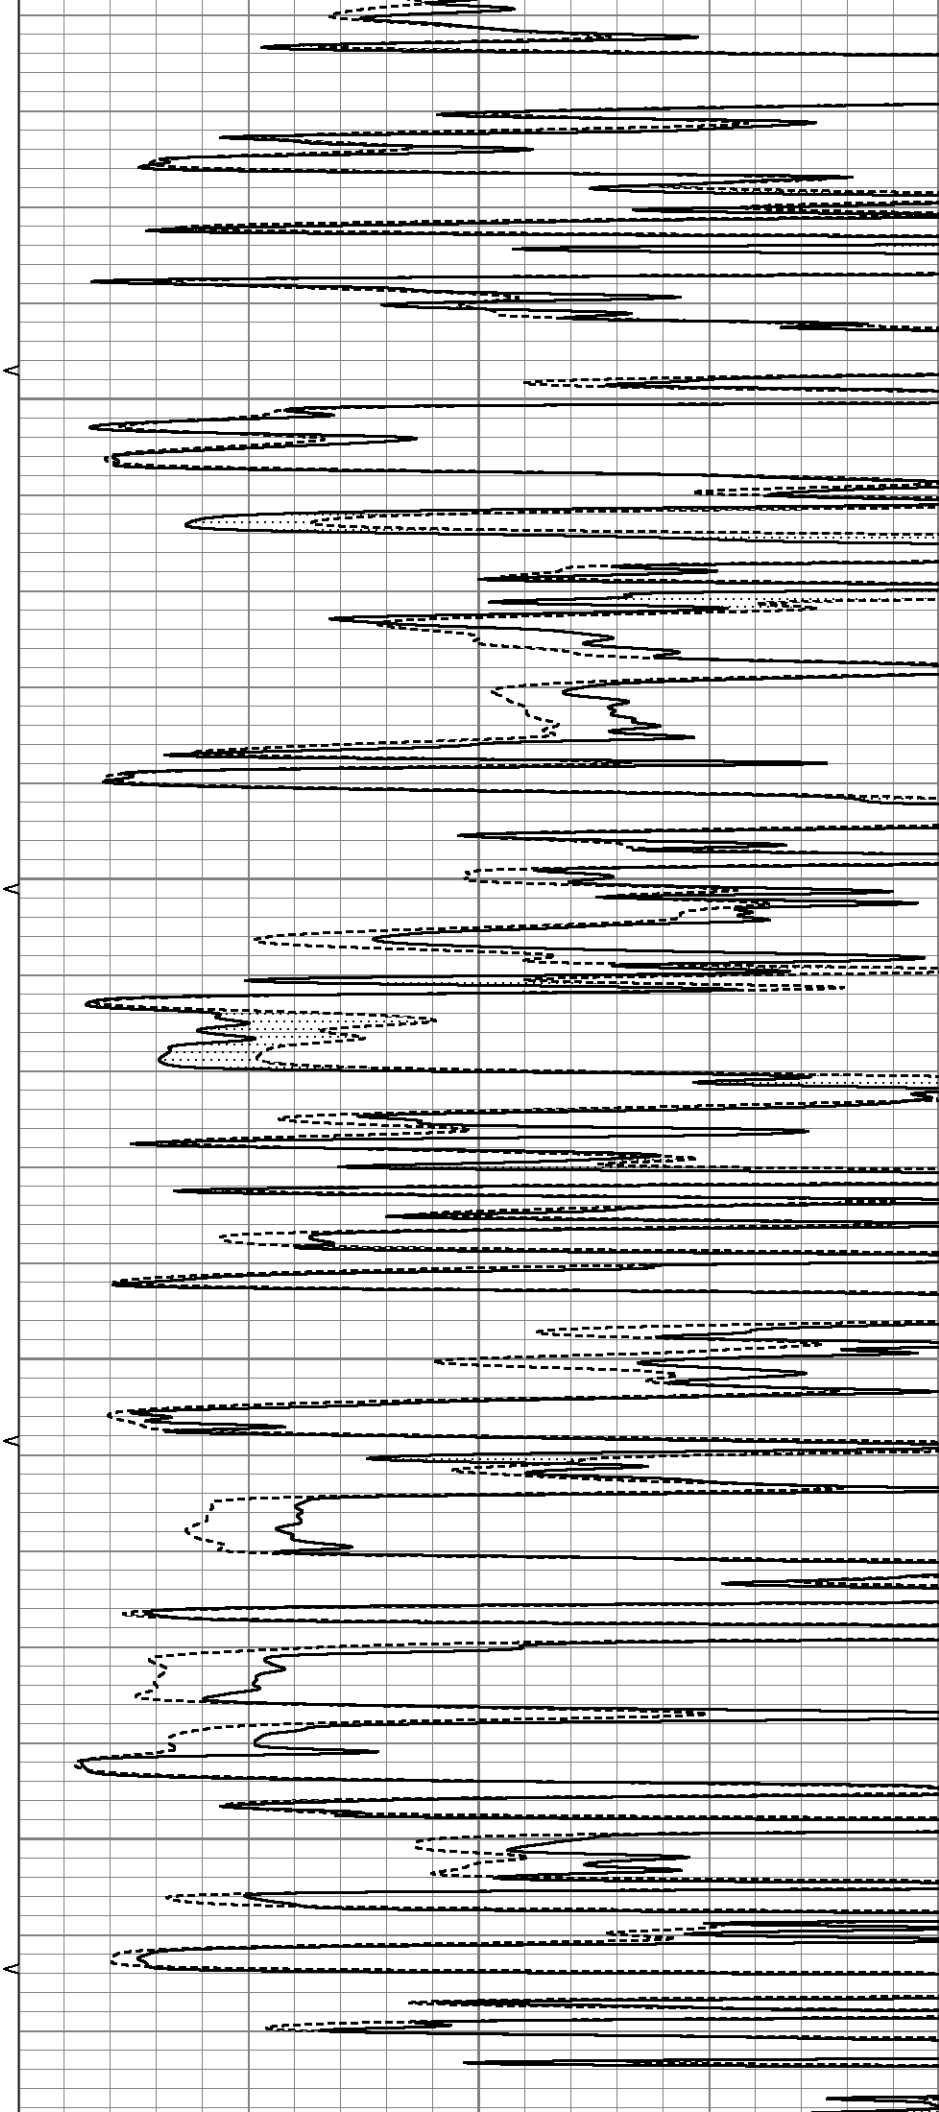

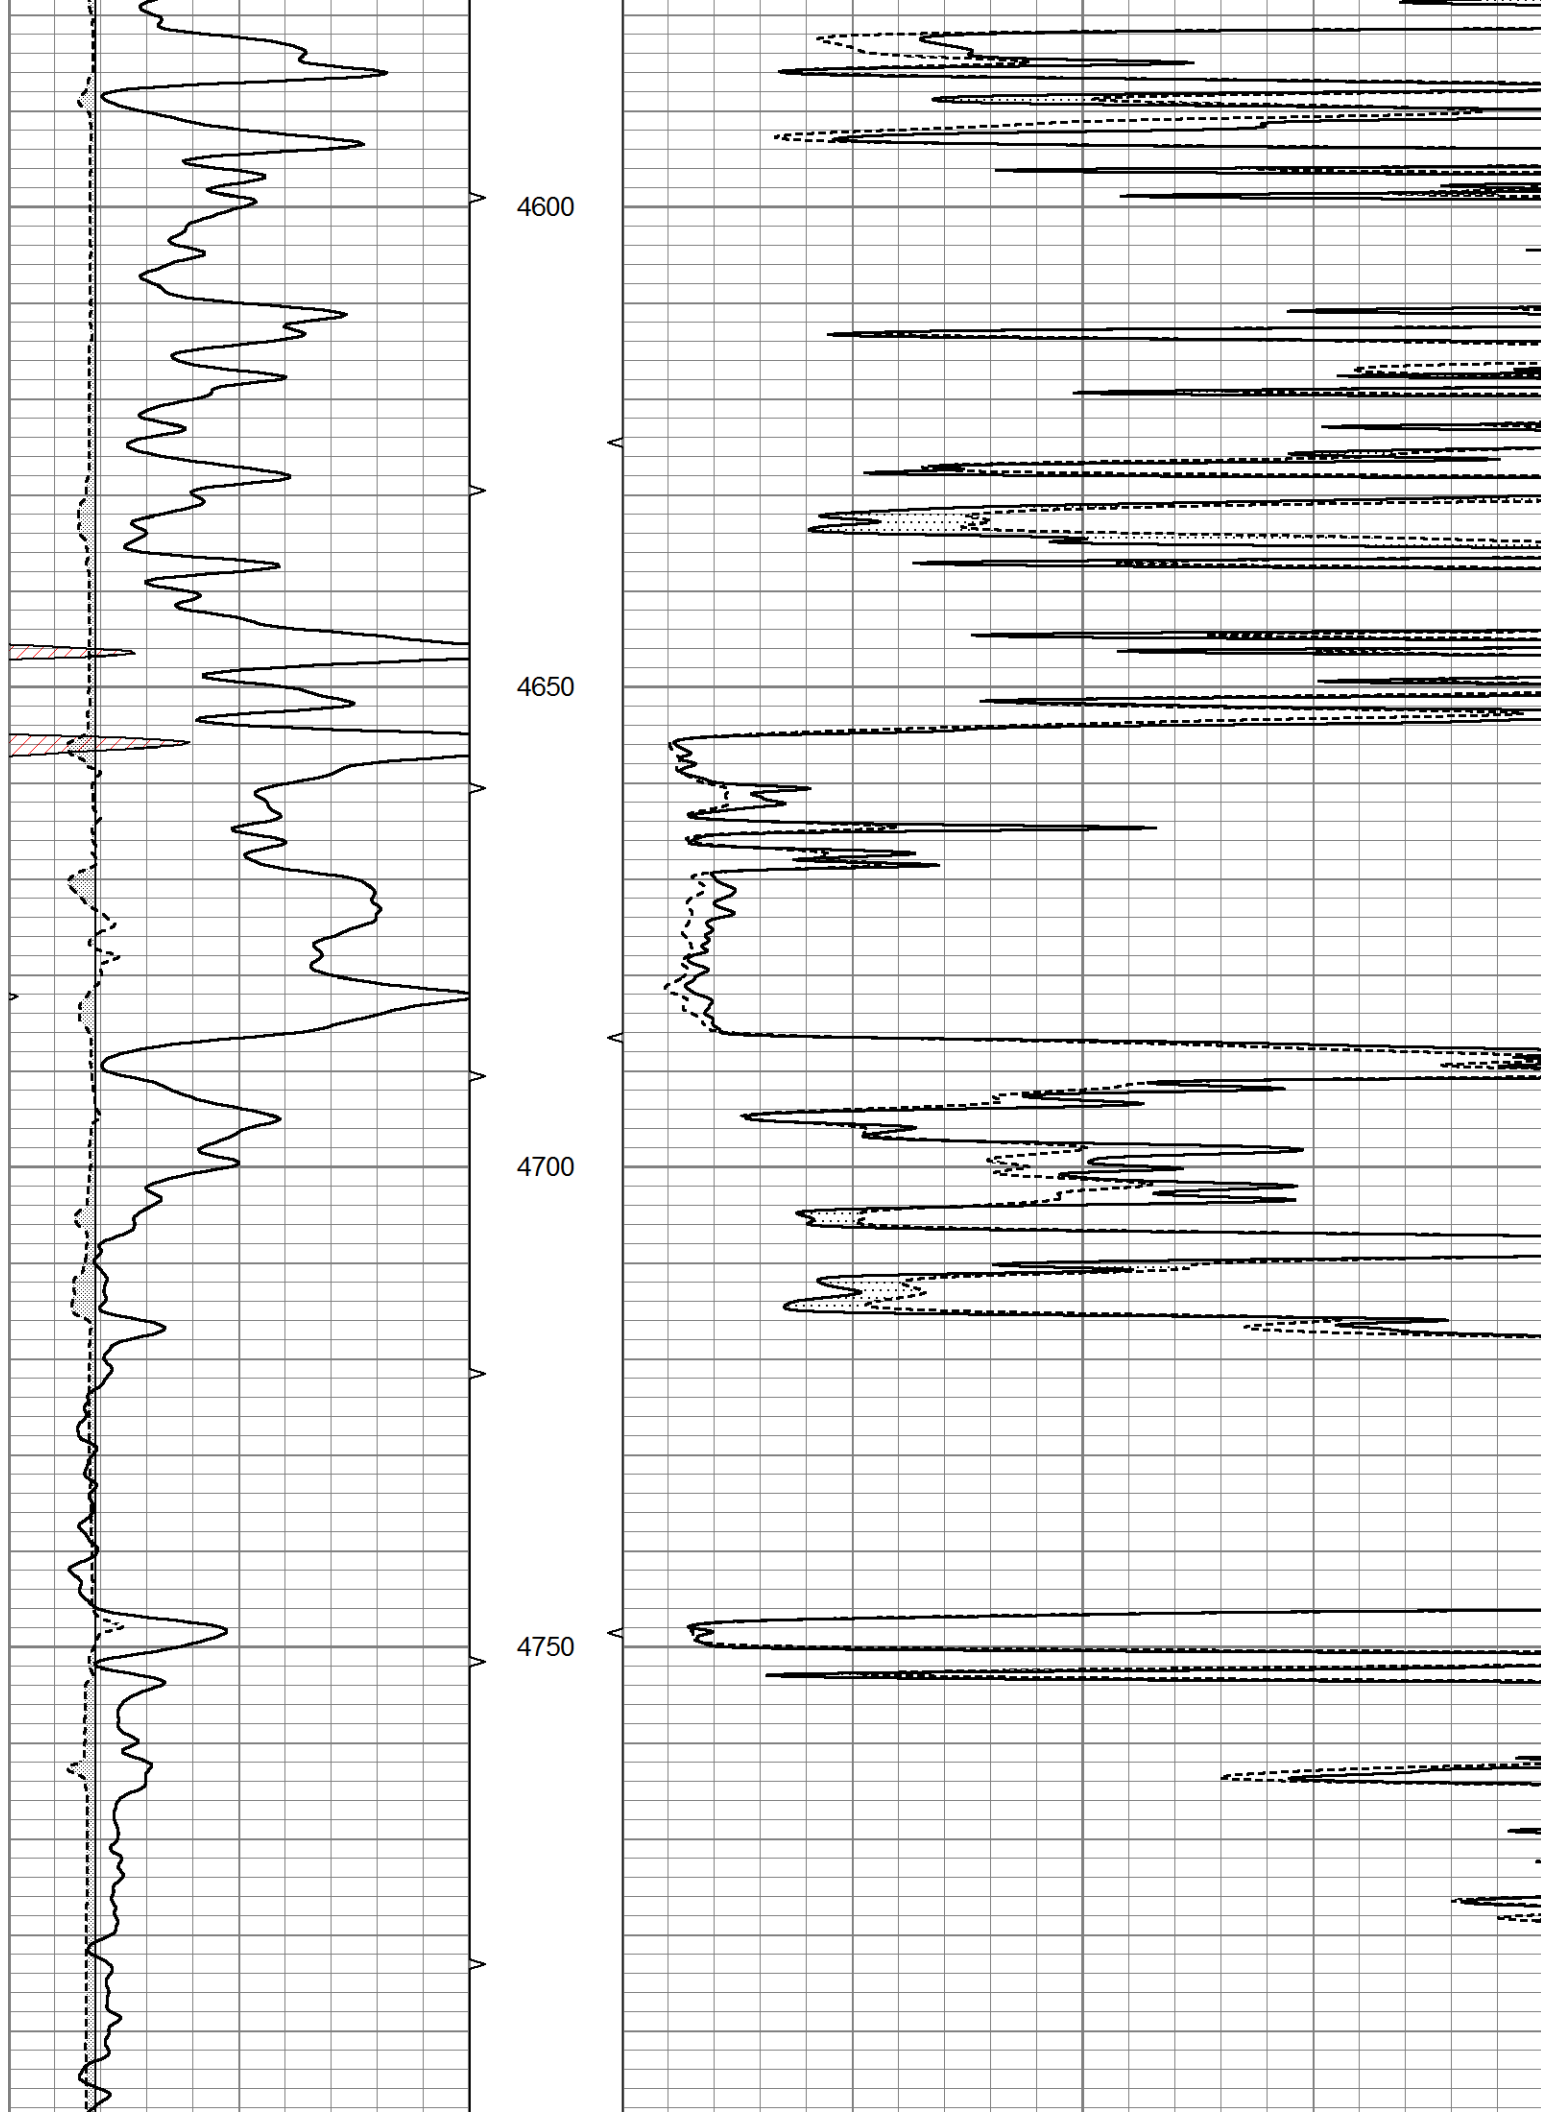


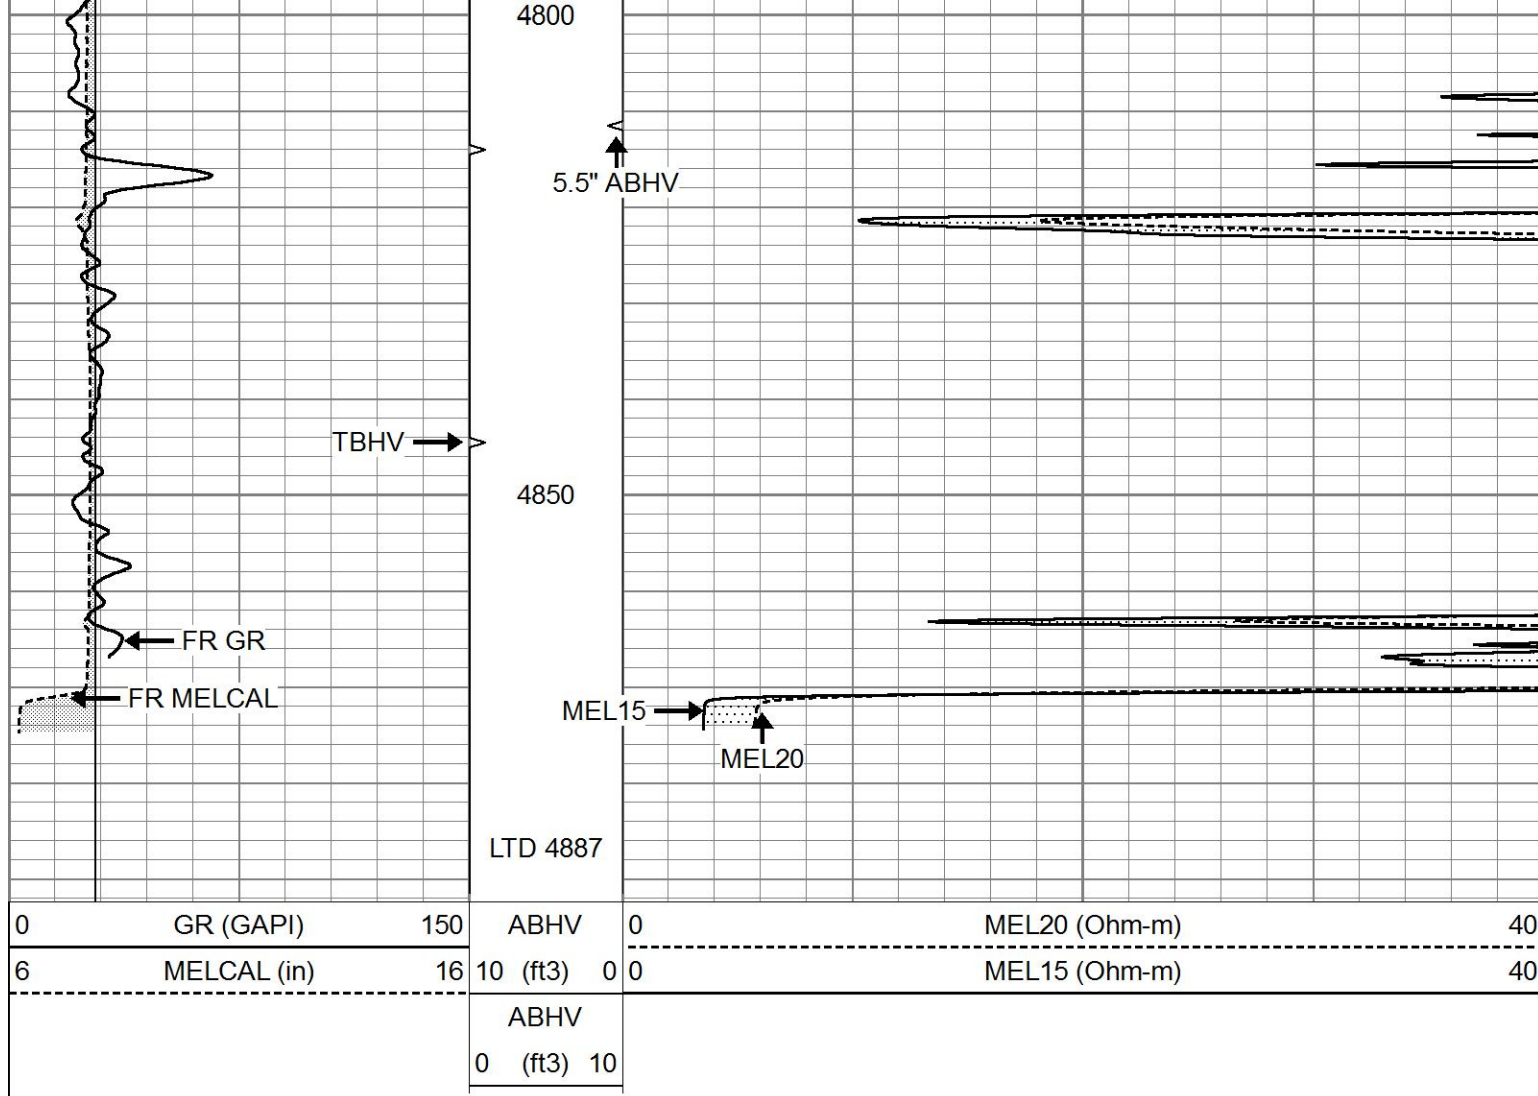


REPEAT SECTION

Database File 4810pe.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Sun Sep 13 09:39:25 2020
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

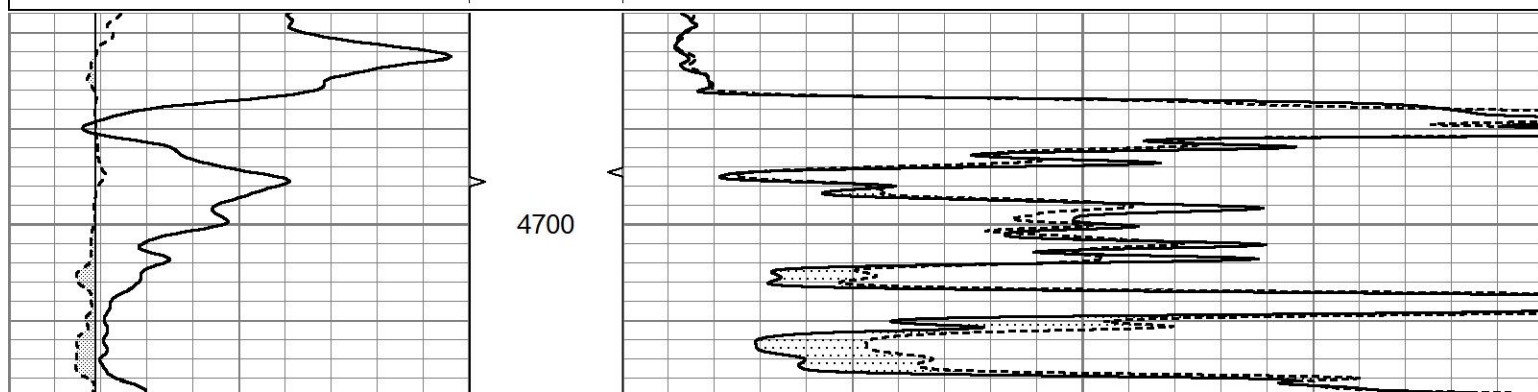

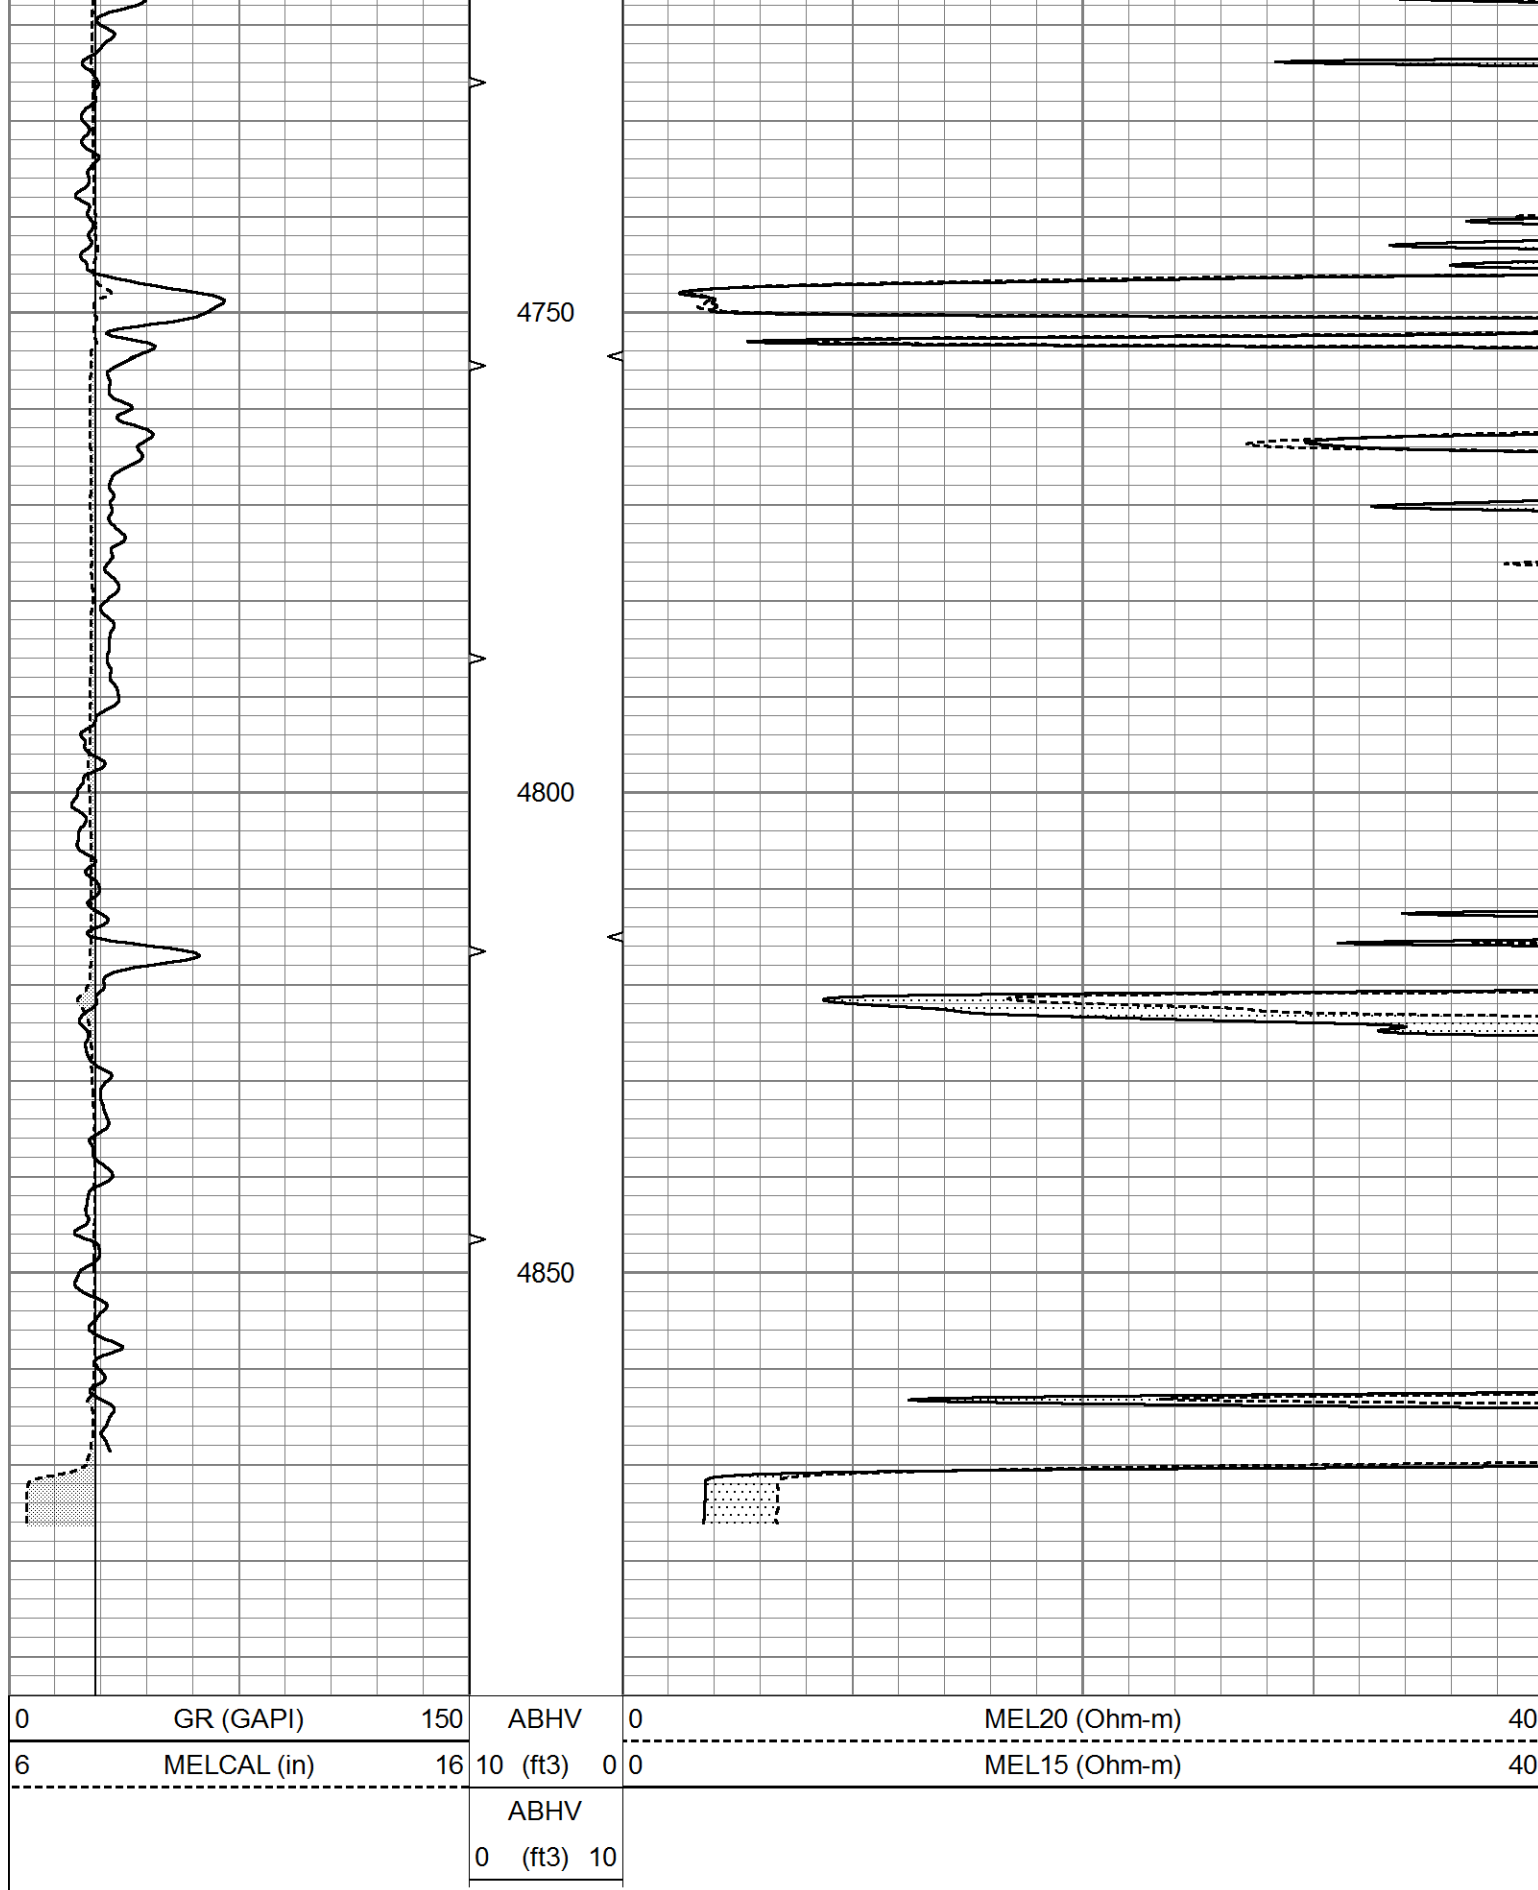

Calibration Report

Database File 4810pe.db
 Dataset Pathname pass6.2
 Dataset Creation Sun Sep 13 10:22:42 2020

MICRO Calibration Report

Serial Number:	070911
Tool Model:	ProbeN
Performed:	Wed Aug 12 15:29:02 2020

Caliper Calibration:	Gain=4.908	Offset=0.294
References	Low Cal	High Cal
Readings	8.000	16.000
	1.570	3.200

1.5" Calibration:	Gain=42.000	Offset=-0.200
References	Low Cal	High Cal
Readings	0.000	20.000
	0.001	1.240

2" Calibration:	Gain=52.000	Offset=-1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.001	1.076

Gamma Ray Calibration Report

Serial Number:	070559
Tool Model:	OPEN_GR
Performed:	Thu Jun 18 11:25:33 2020

Calibrator Value:	1.0	GAPI
-------------------	-----	------

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity:	0.3200	GAPI/cps
--------------	--------	----------