



DUAL INDUCTION LOG

Company VAL ENERGY, INC.

Well HOUSE RANCH #2-30

Field UNKNOWN

County COWLEY State KANSAS

Location: API #: 15-035-24724-0000

1170' FSL & 2140' FEL

Other Services
CDL/CNL
ML

SEC 30 TWP 33S RGE 6E

Elevation

Permanent Datum GROUND LEVEL Elevation 1278

Log Measured From KELLY BUSHING 9' A.G.L.

Drilling Measured From KELLY BUSHING

K.B. 1287
D.F. 1285
G.L. 1278

Date 10/23/20

Run Number ONE

Depth Driller 3474

Depth Logger 3468

Bottom Logged Interval 3466

Top Log Interval 00

Casing Driller 8 5/8" @ 342

Casing Logger 342

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/38

pH / Fluid Loss 10.0/8.0

Source of Sample FLOWLINE

Rm @ Meas. Temp 3.1 @ 60F

Rmf @ Meas. Temp 2.32 @ 60F

Rmc @ Meas. Temp 3.72 @ 60F

Source of Rmf / Rmc MEASURED

Rm @ BHT 1.67 @ 111F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom ////

Maximum Recorded Temperature 111F

Equipment Number 1523

Location HAYS, KANSAS
Recorded By GUS PFANENSTIEL
Witnessed By JOE BAKER


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS:WINFIELD EAST TO COWLEY 1 RD, SOUTH TO 212 RD,
EAST 3 MILES, SOUTH 1 MILE, EAST AT TANK BATTERY

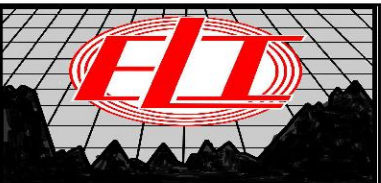





MAIN PASS


Database File 5034pe.db
 Dataset Pathname pass4.1
 Presentation Format _dil2
 Dataset Creation Fri Oct 23 08:24:38 2020
 Charted by Depth in Feet scaled 1:600

0 Gamma Ray (GAPI) 150
 -100 SP (mV) 100


1000 CILD (mmho/m) 0
 0 RLL3 (Ohm-m) 50
 0 RILD (Ohm-m) 50
 50 RILD X10 (Ohm-m) 500
 50 RLL3 X10 (Ohm-m) 500


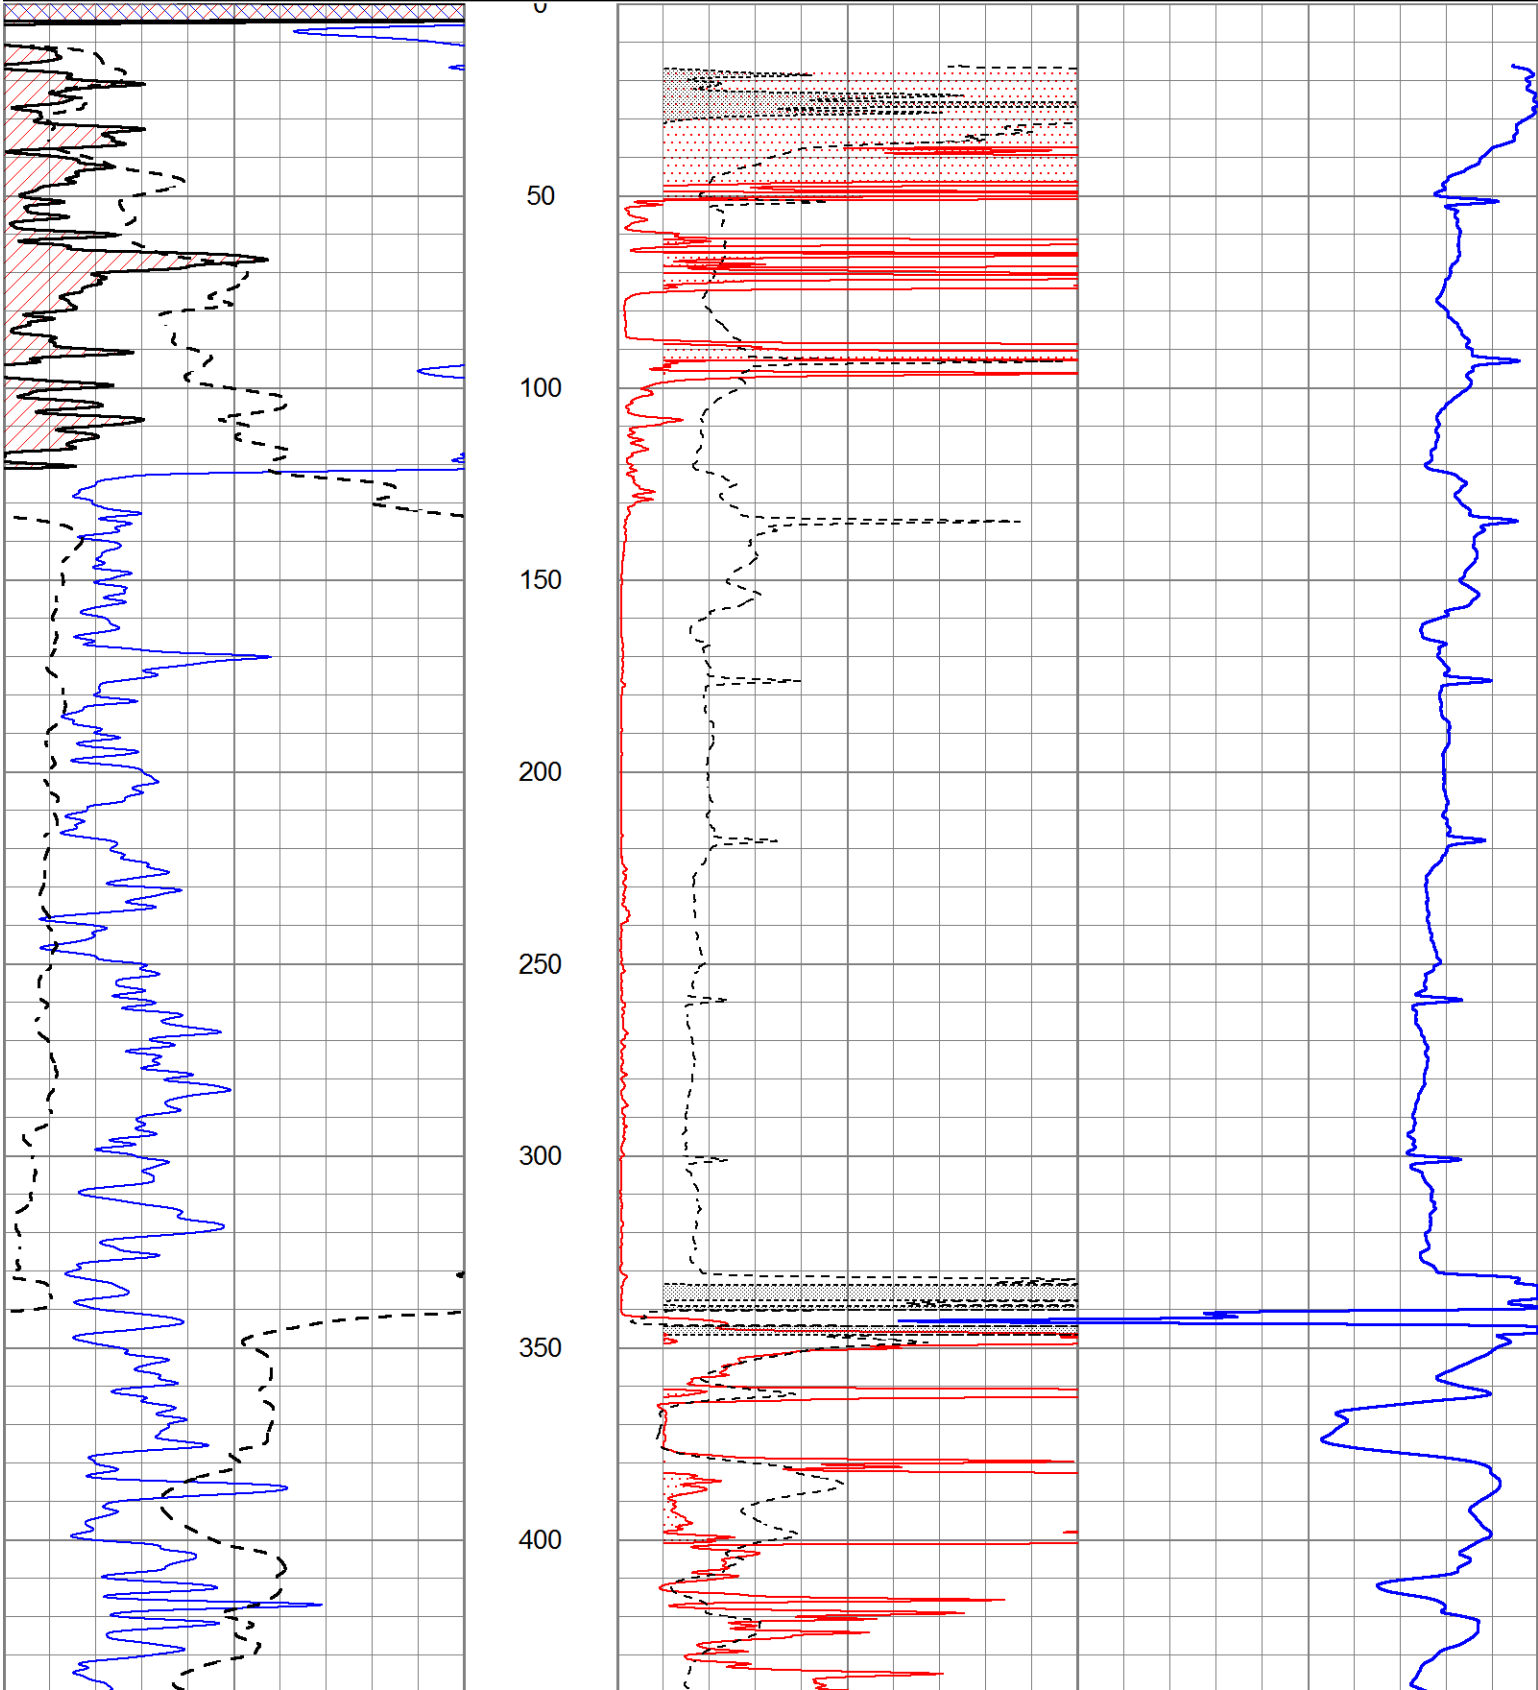


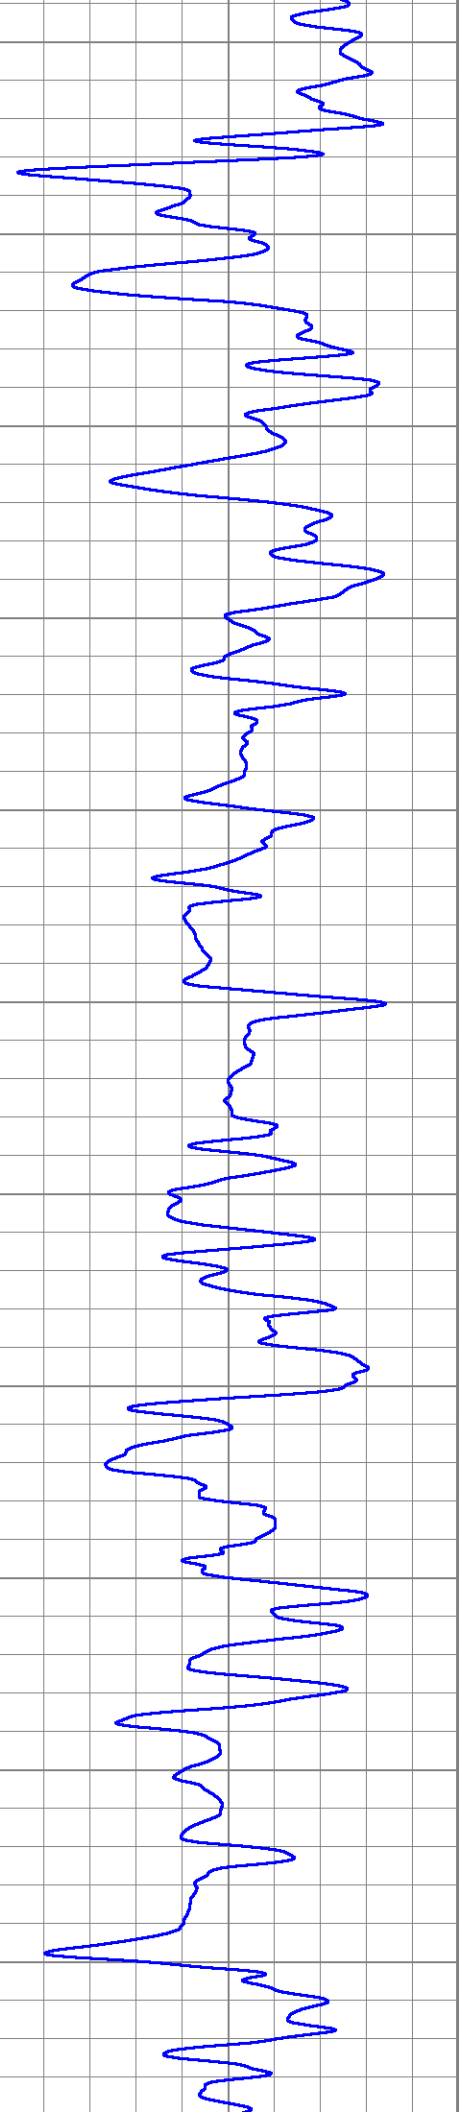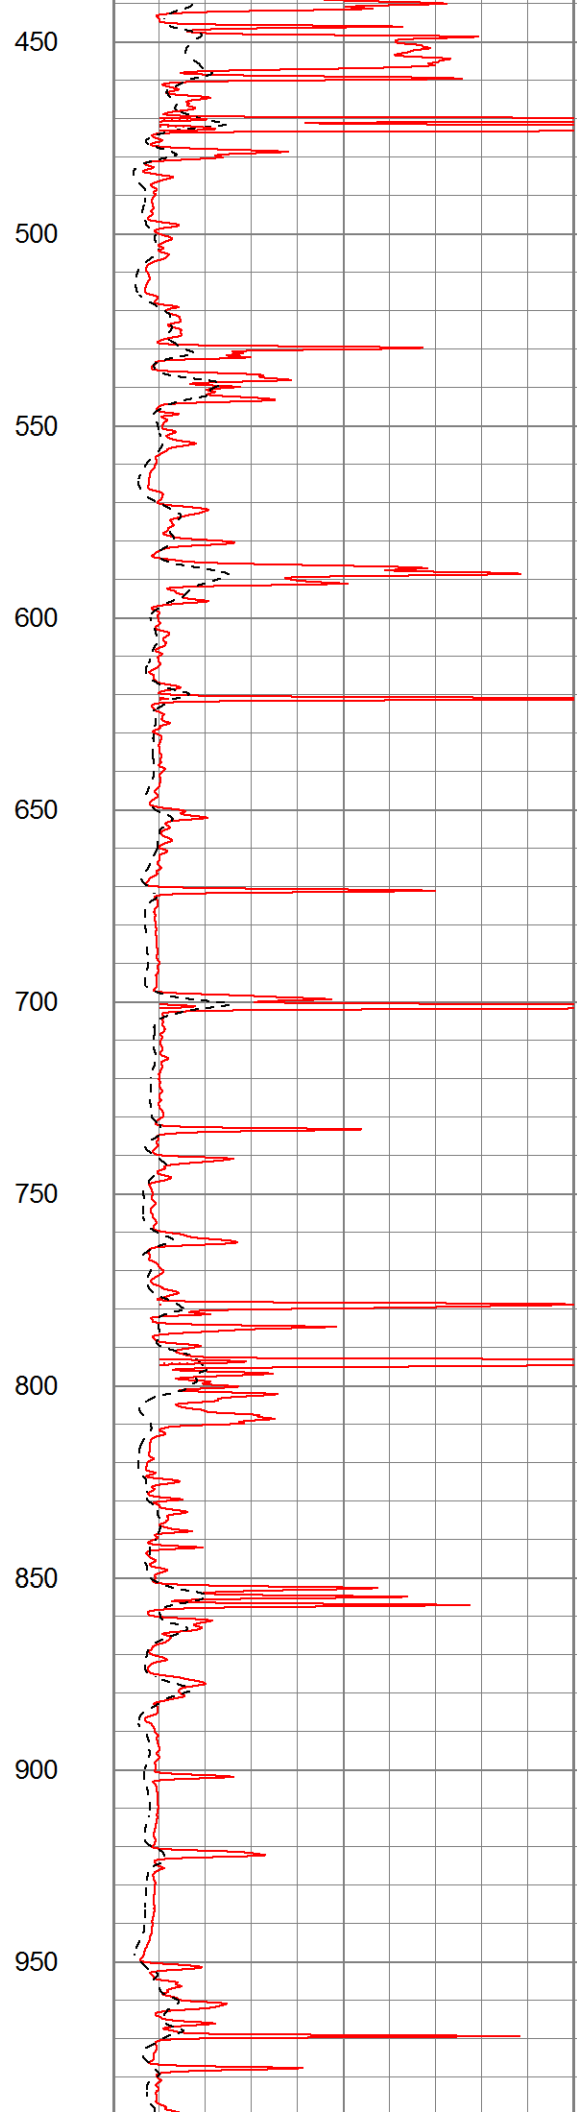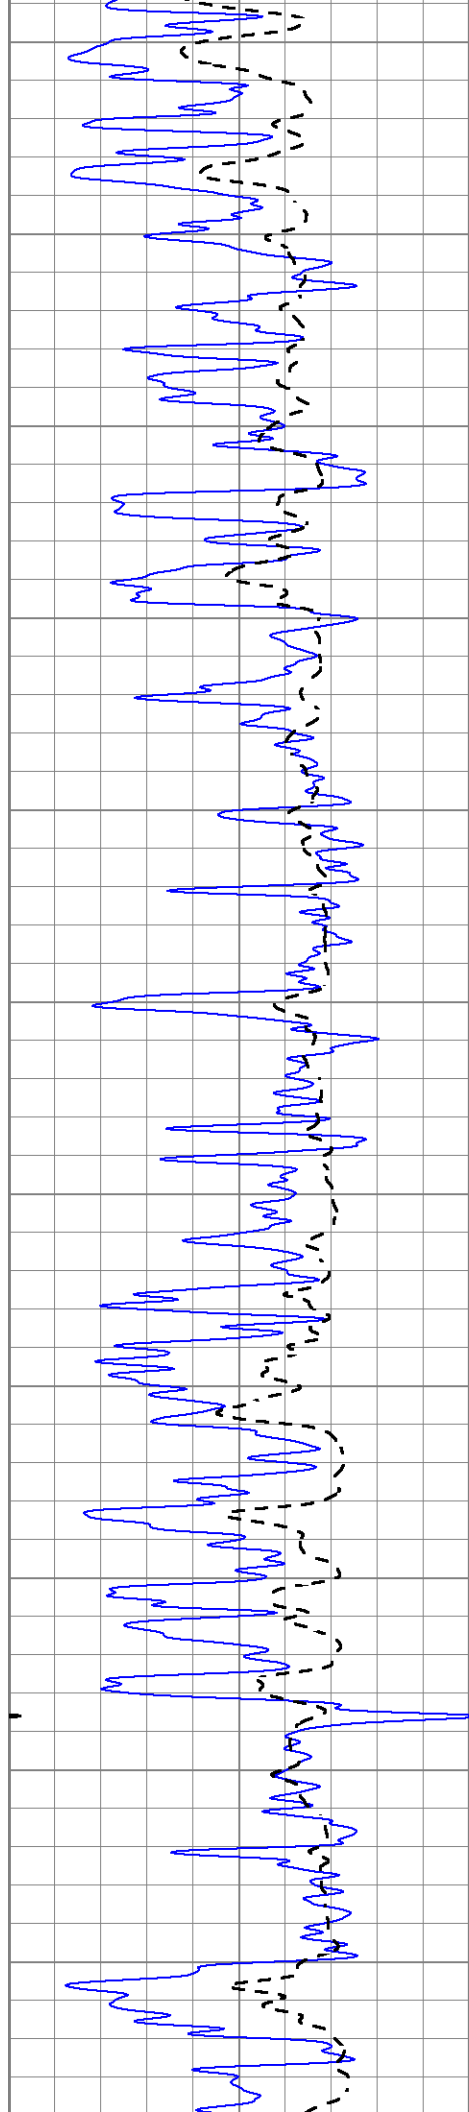


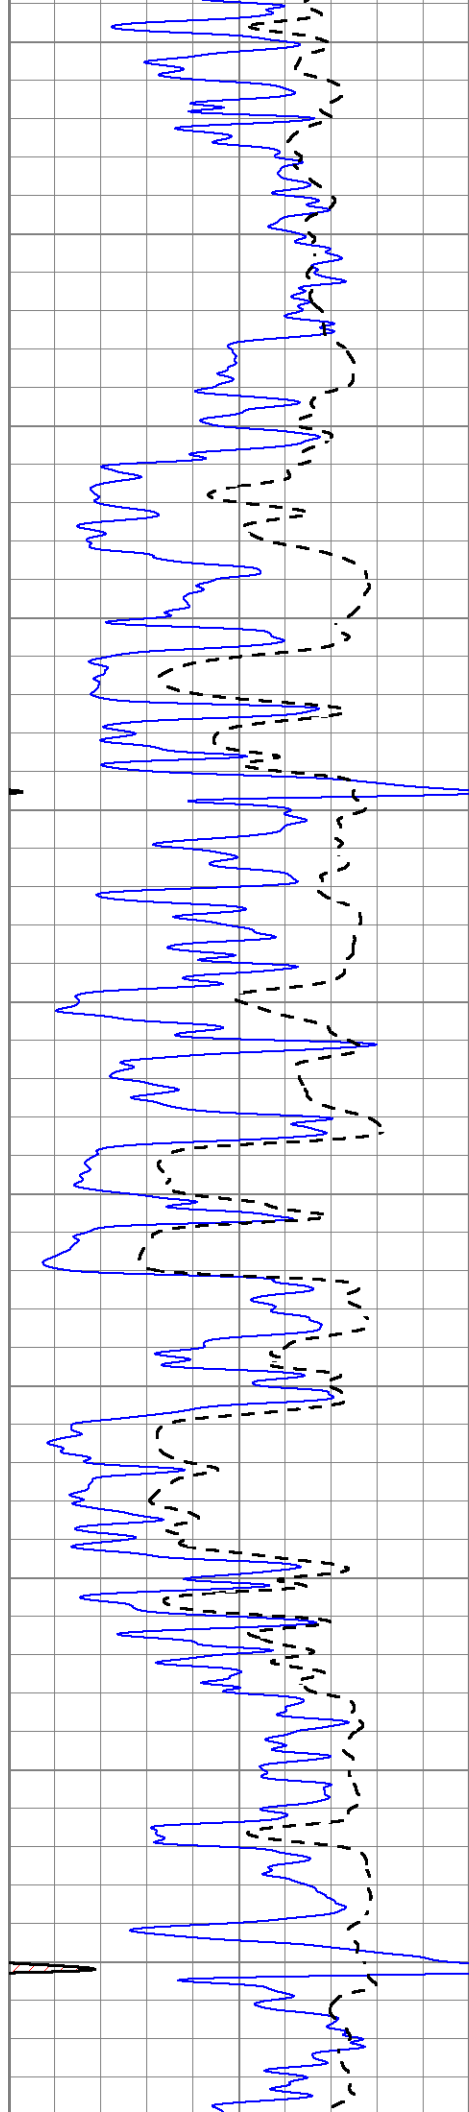


1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

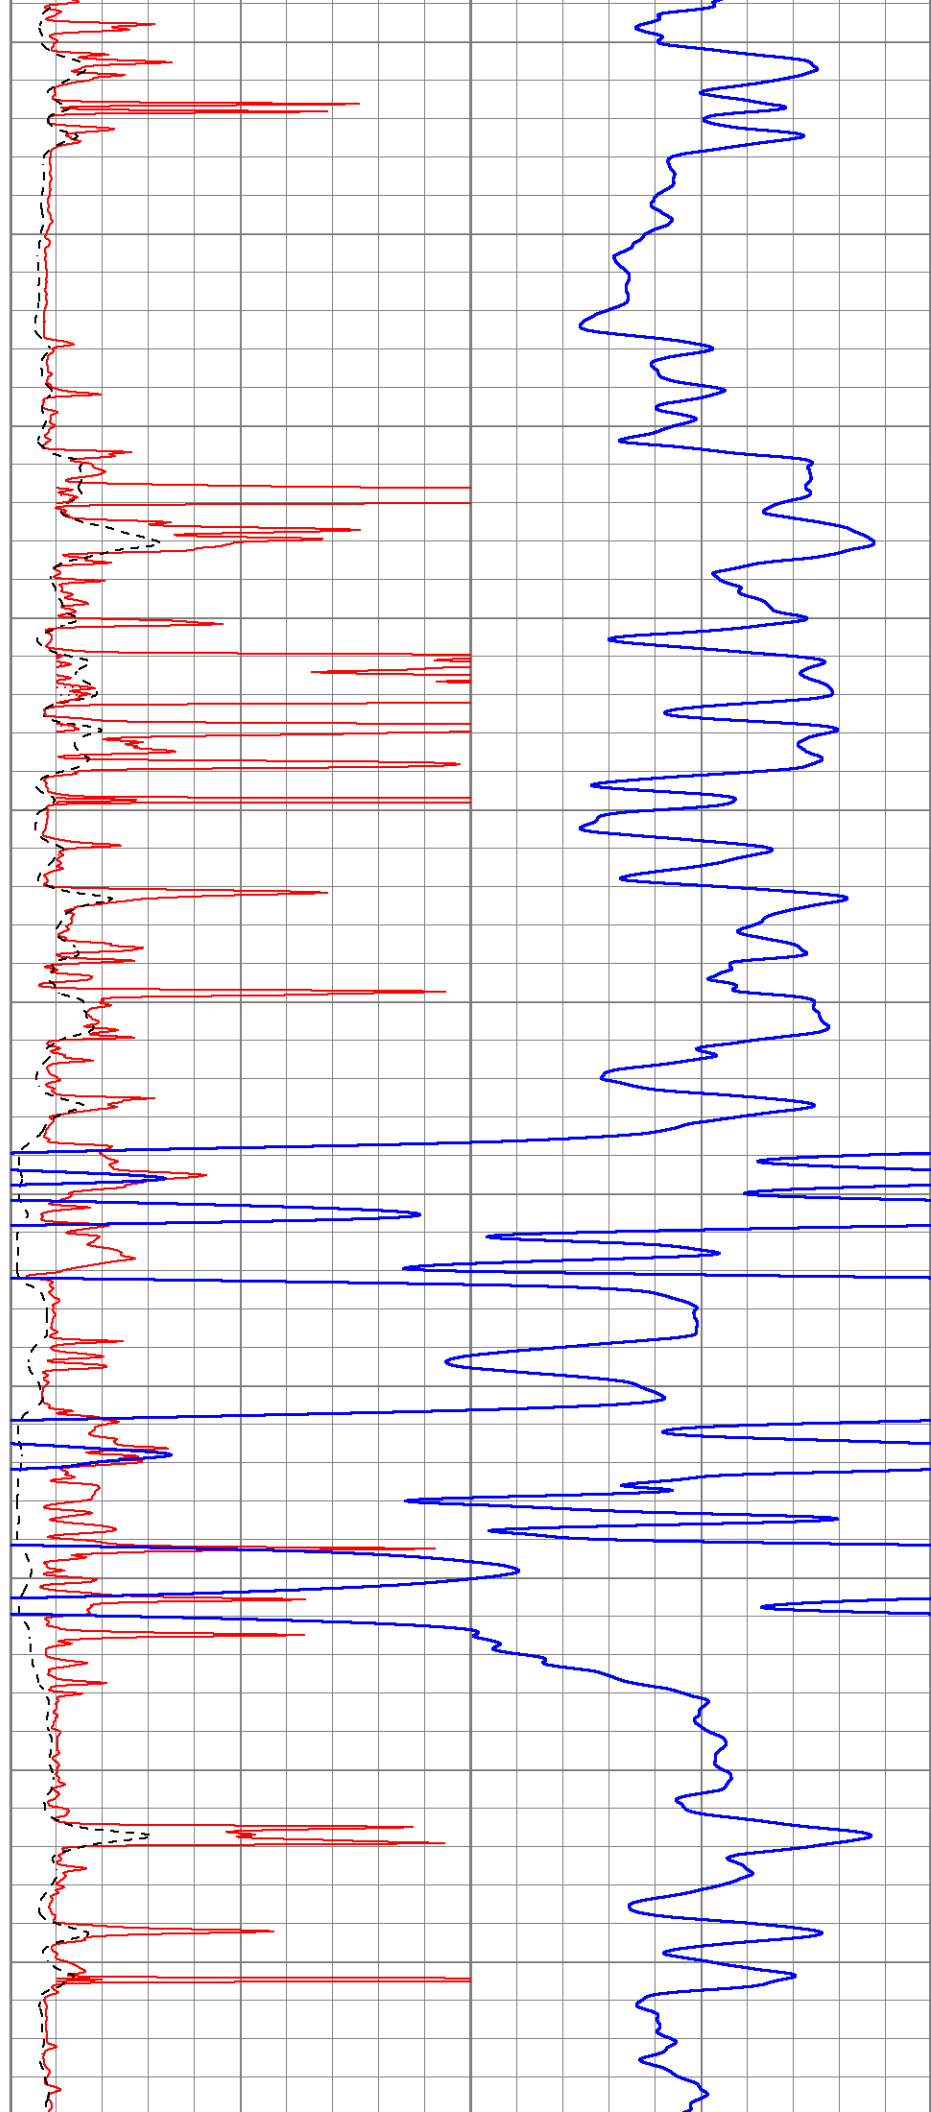


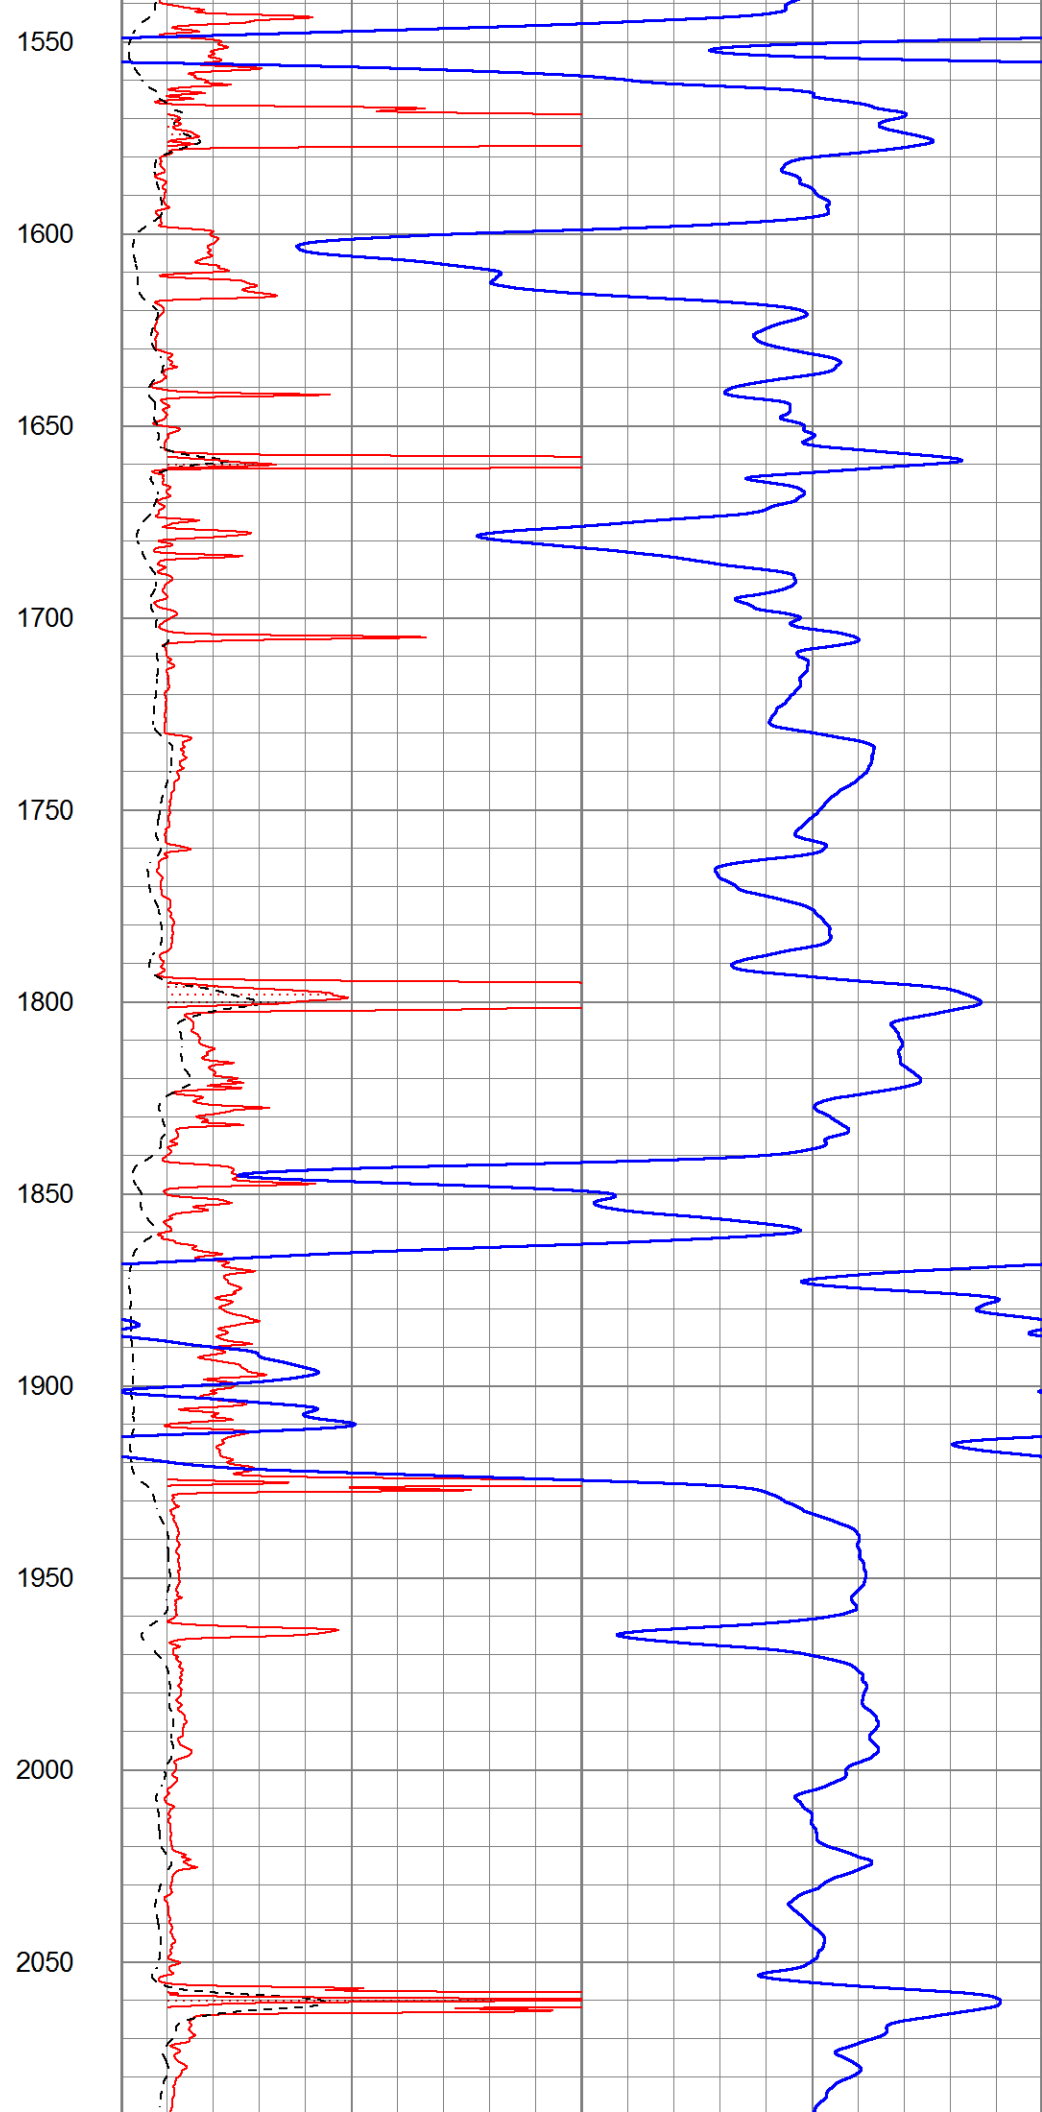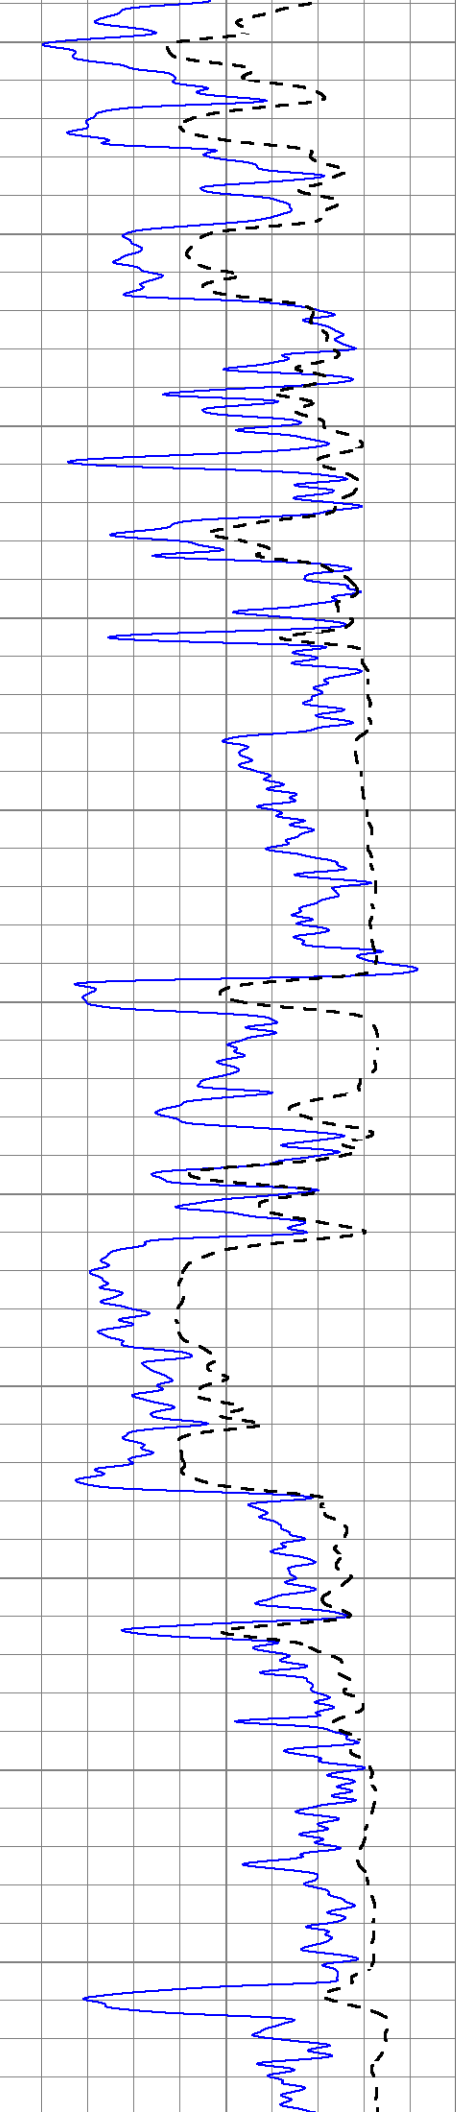


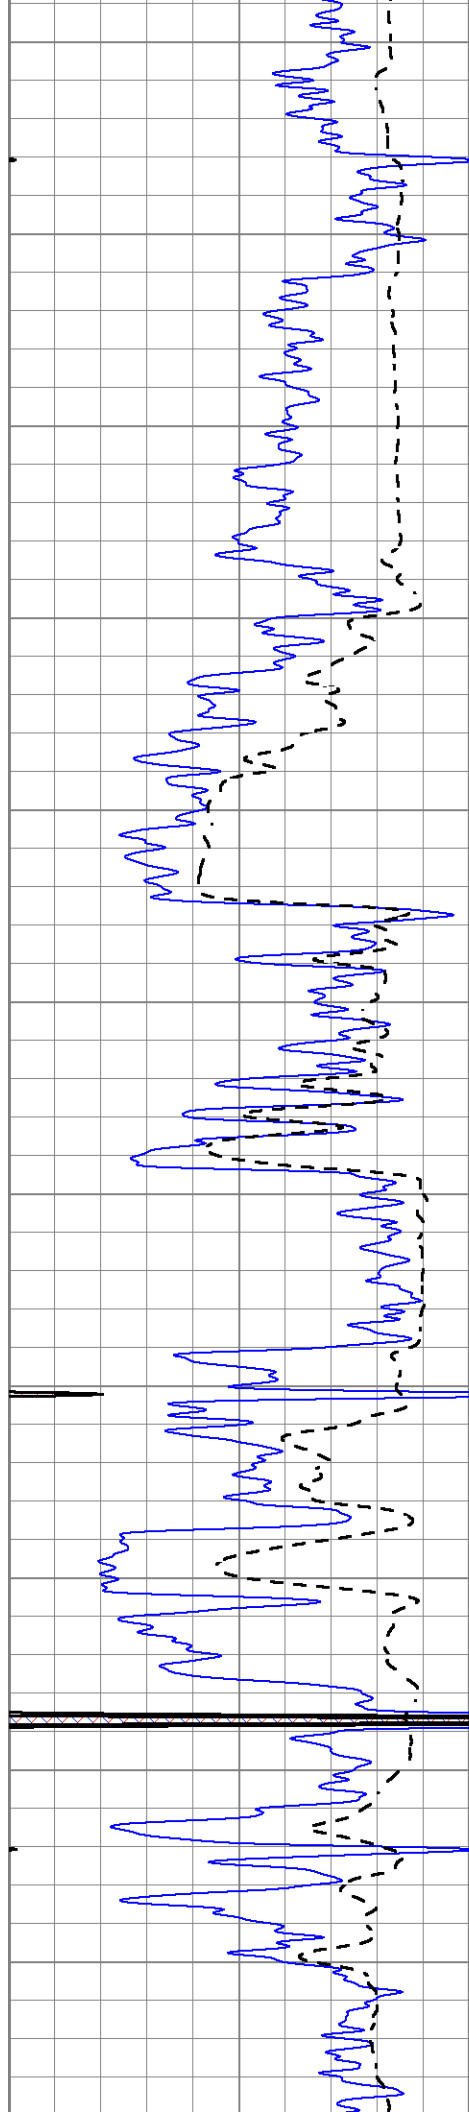



2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600

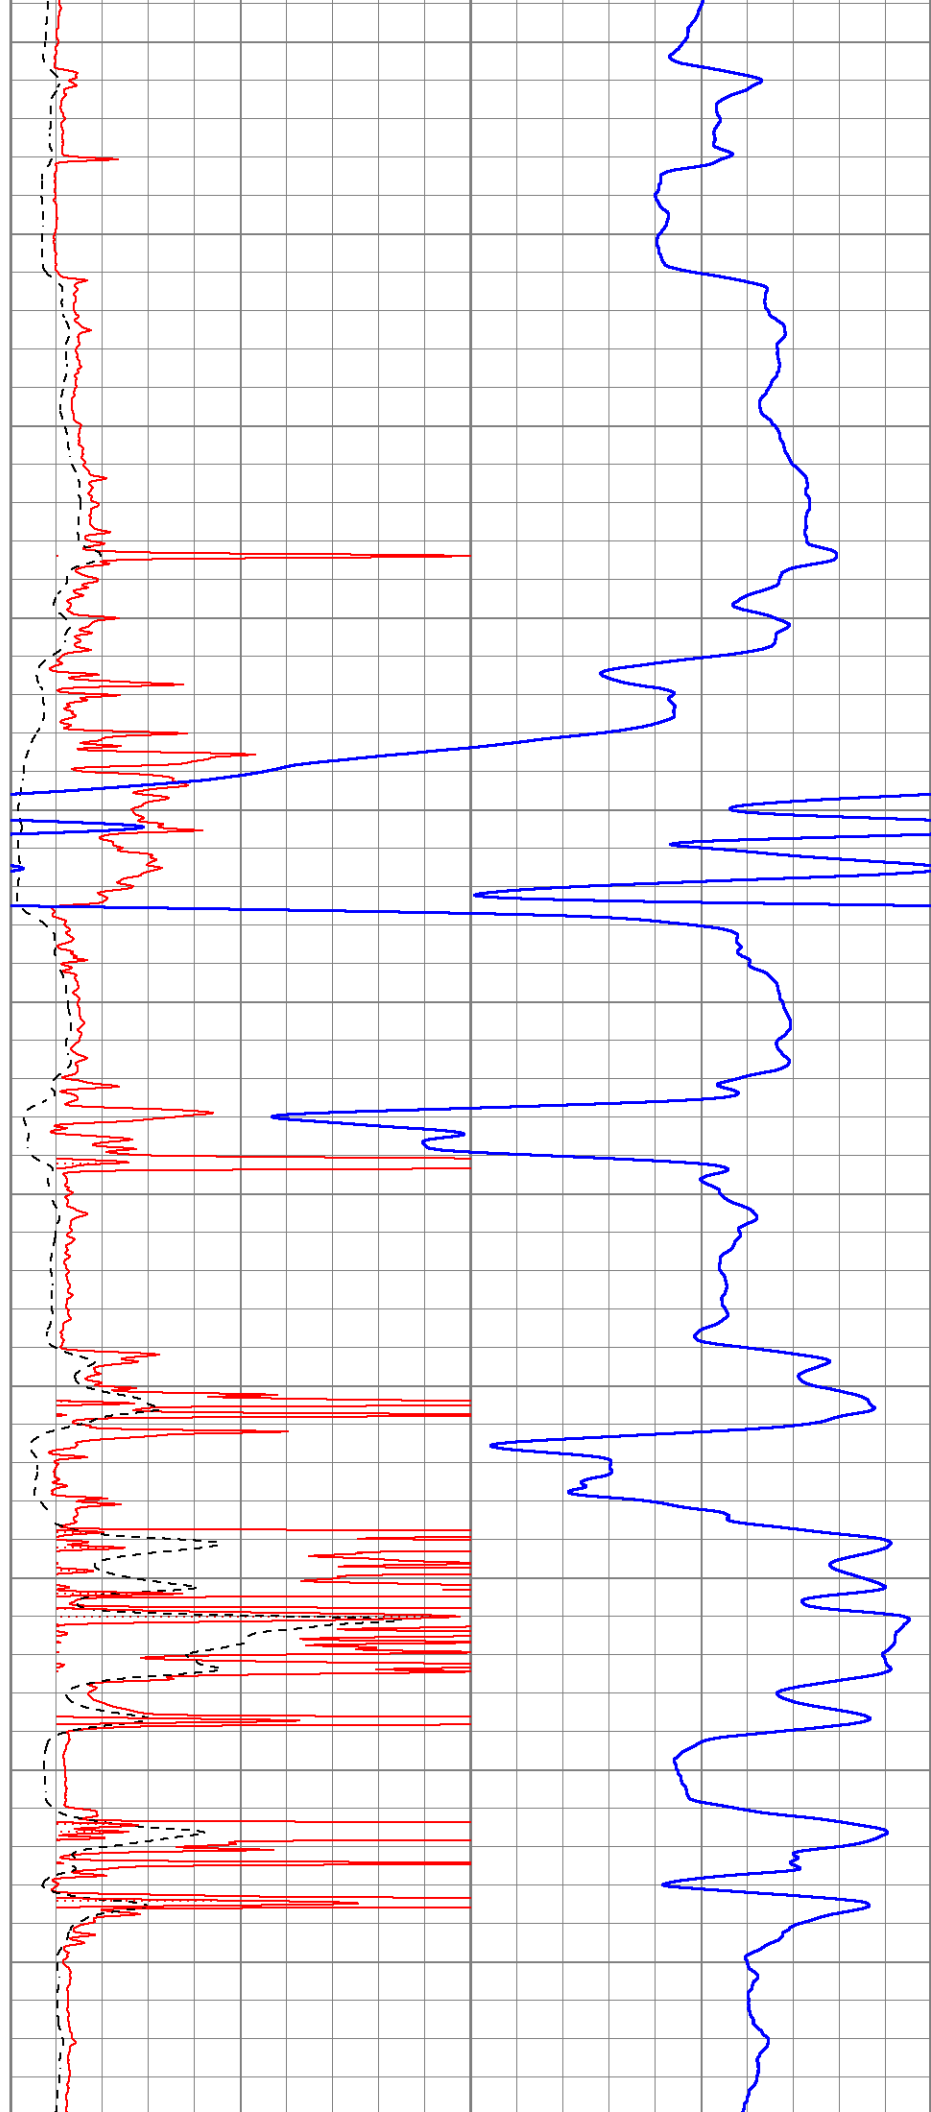

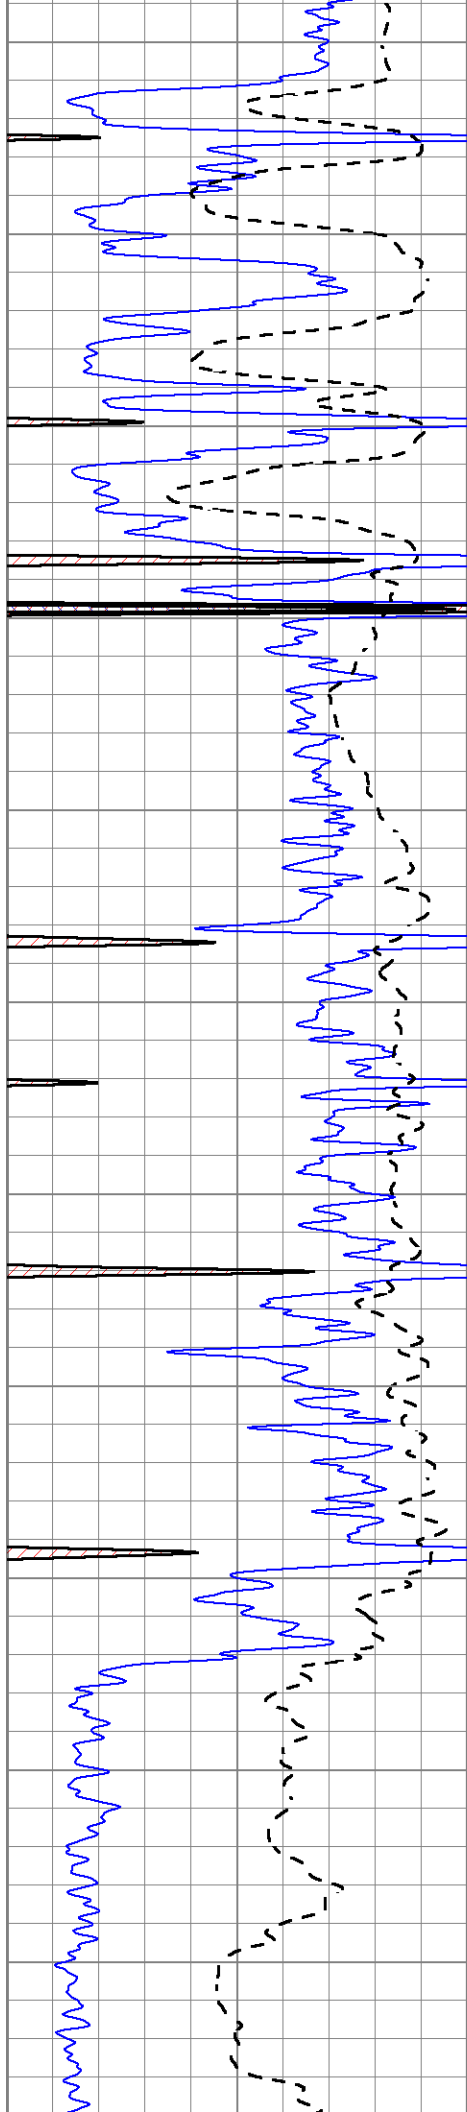

2650
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150

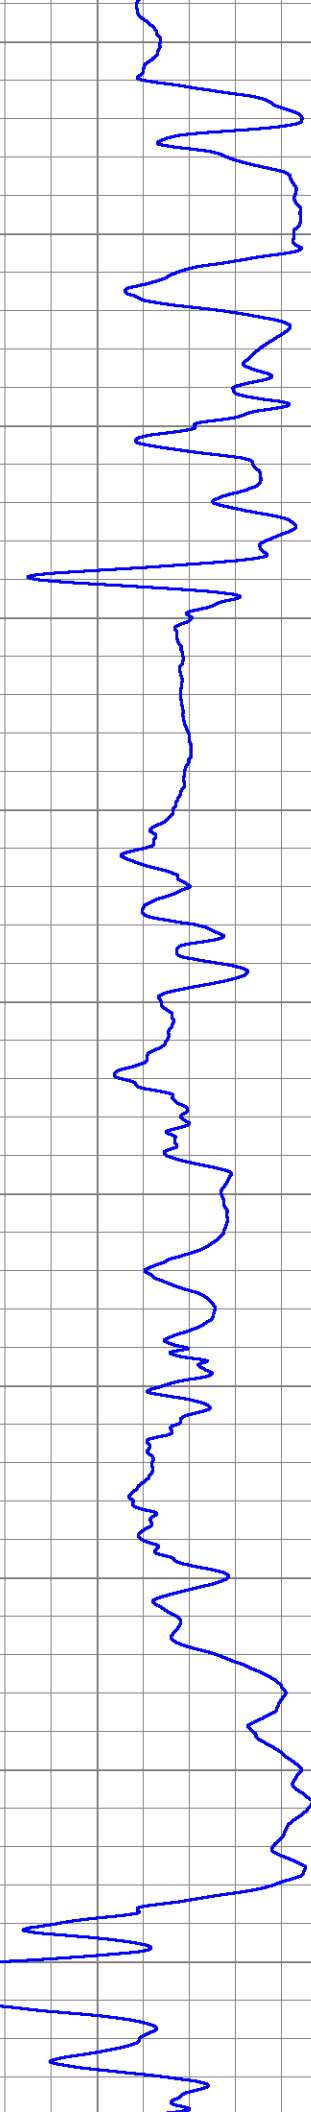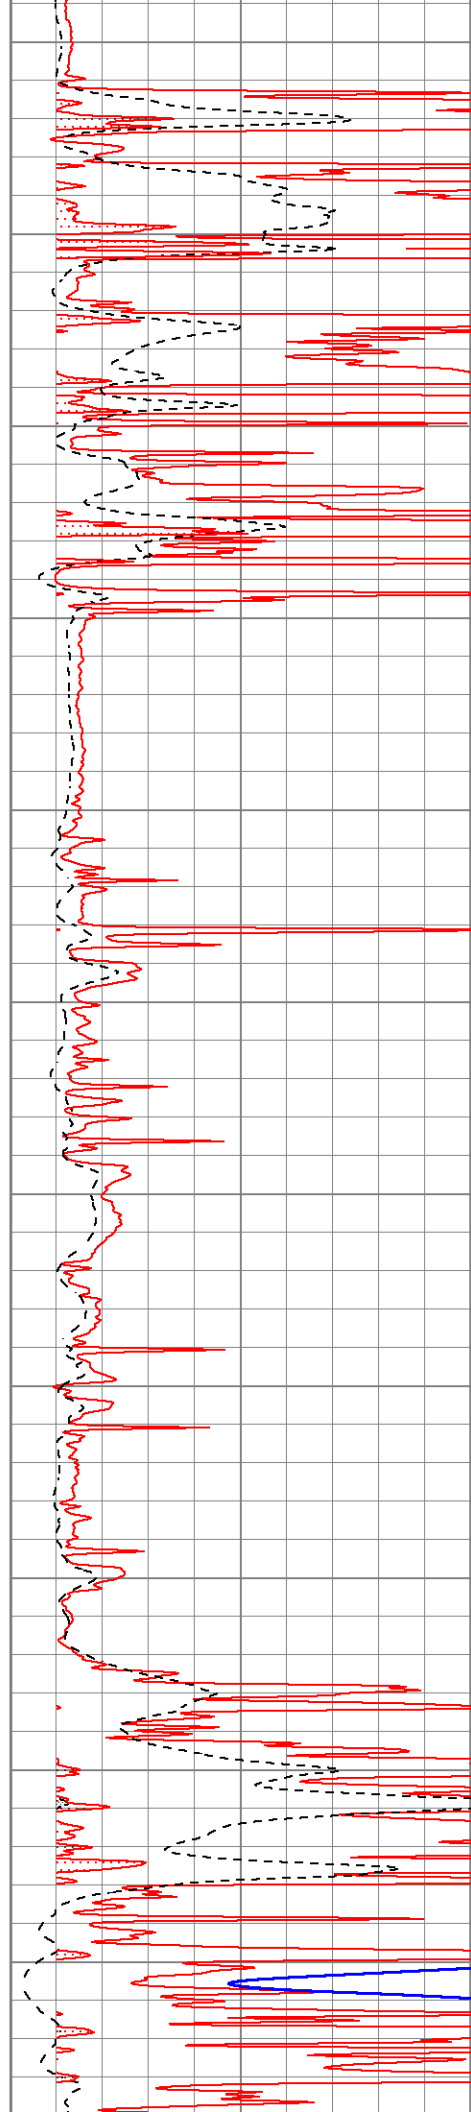


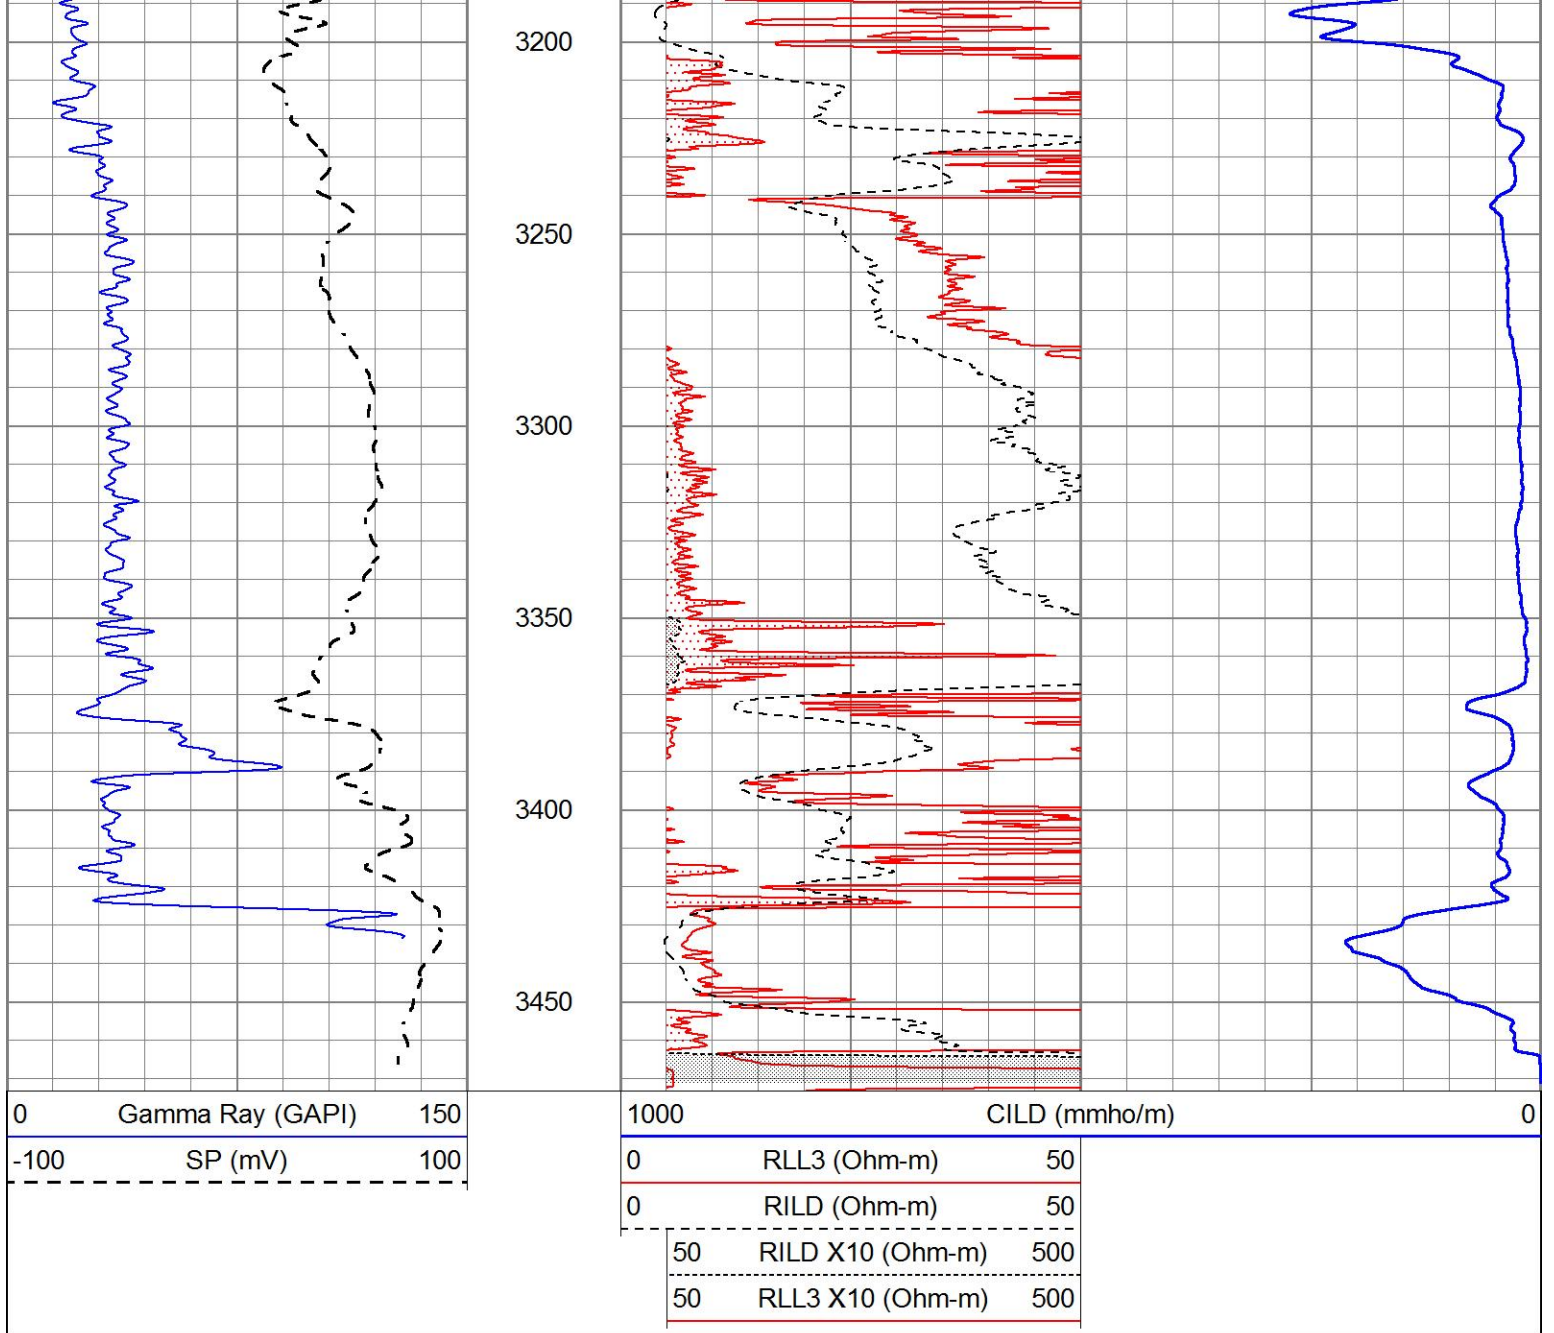



MAIN PASS

Database File 5034pe.db
 Dataset Pathname pass4.1
 Presentation Format _dil
 Dataset Creation Fri Oct 23 08:24:38 2020
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

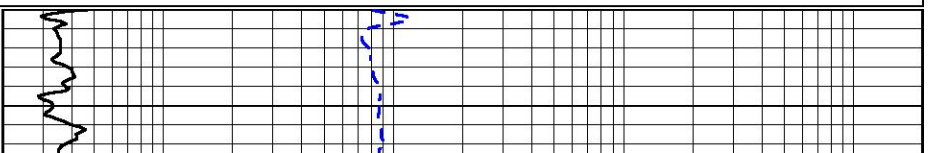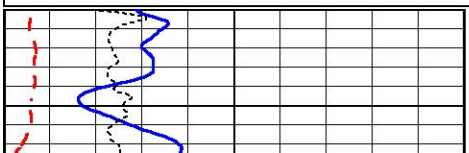

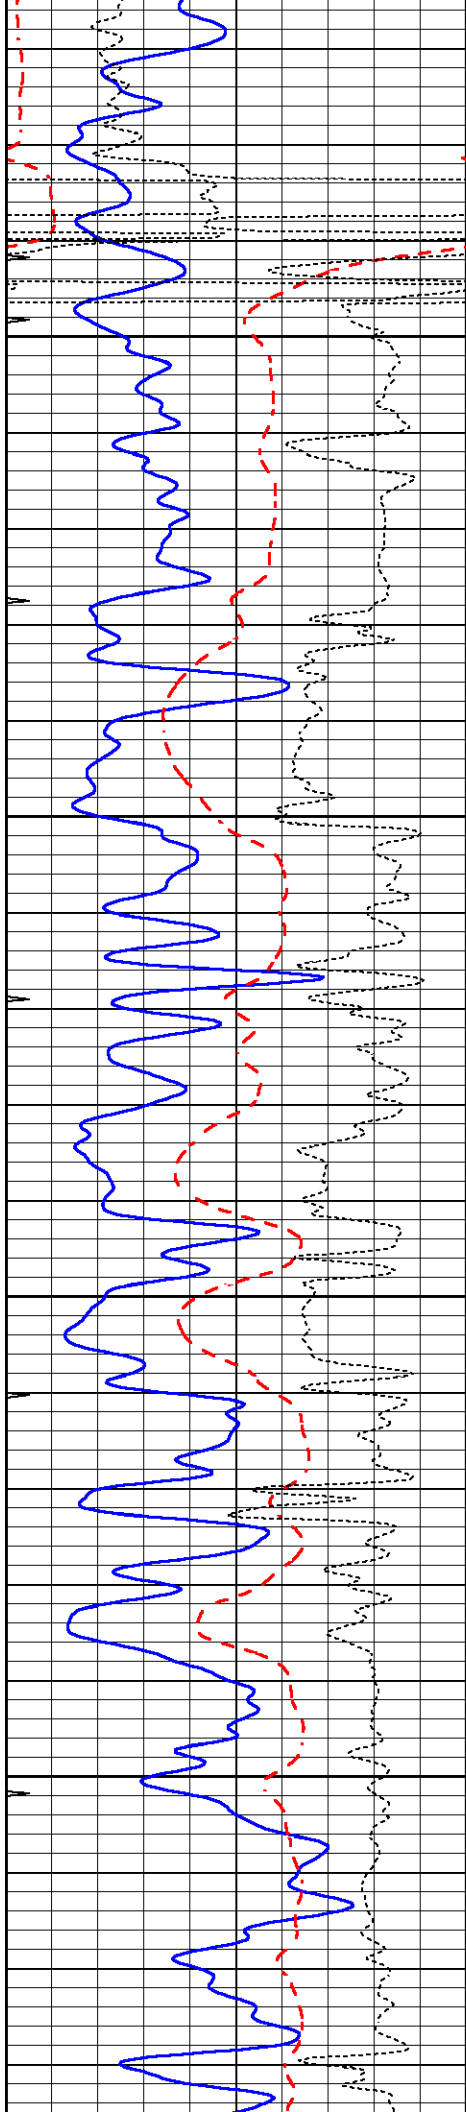



350

400

450

500

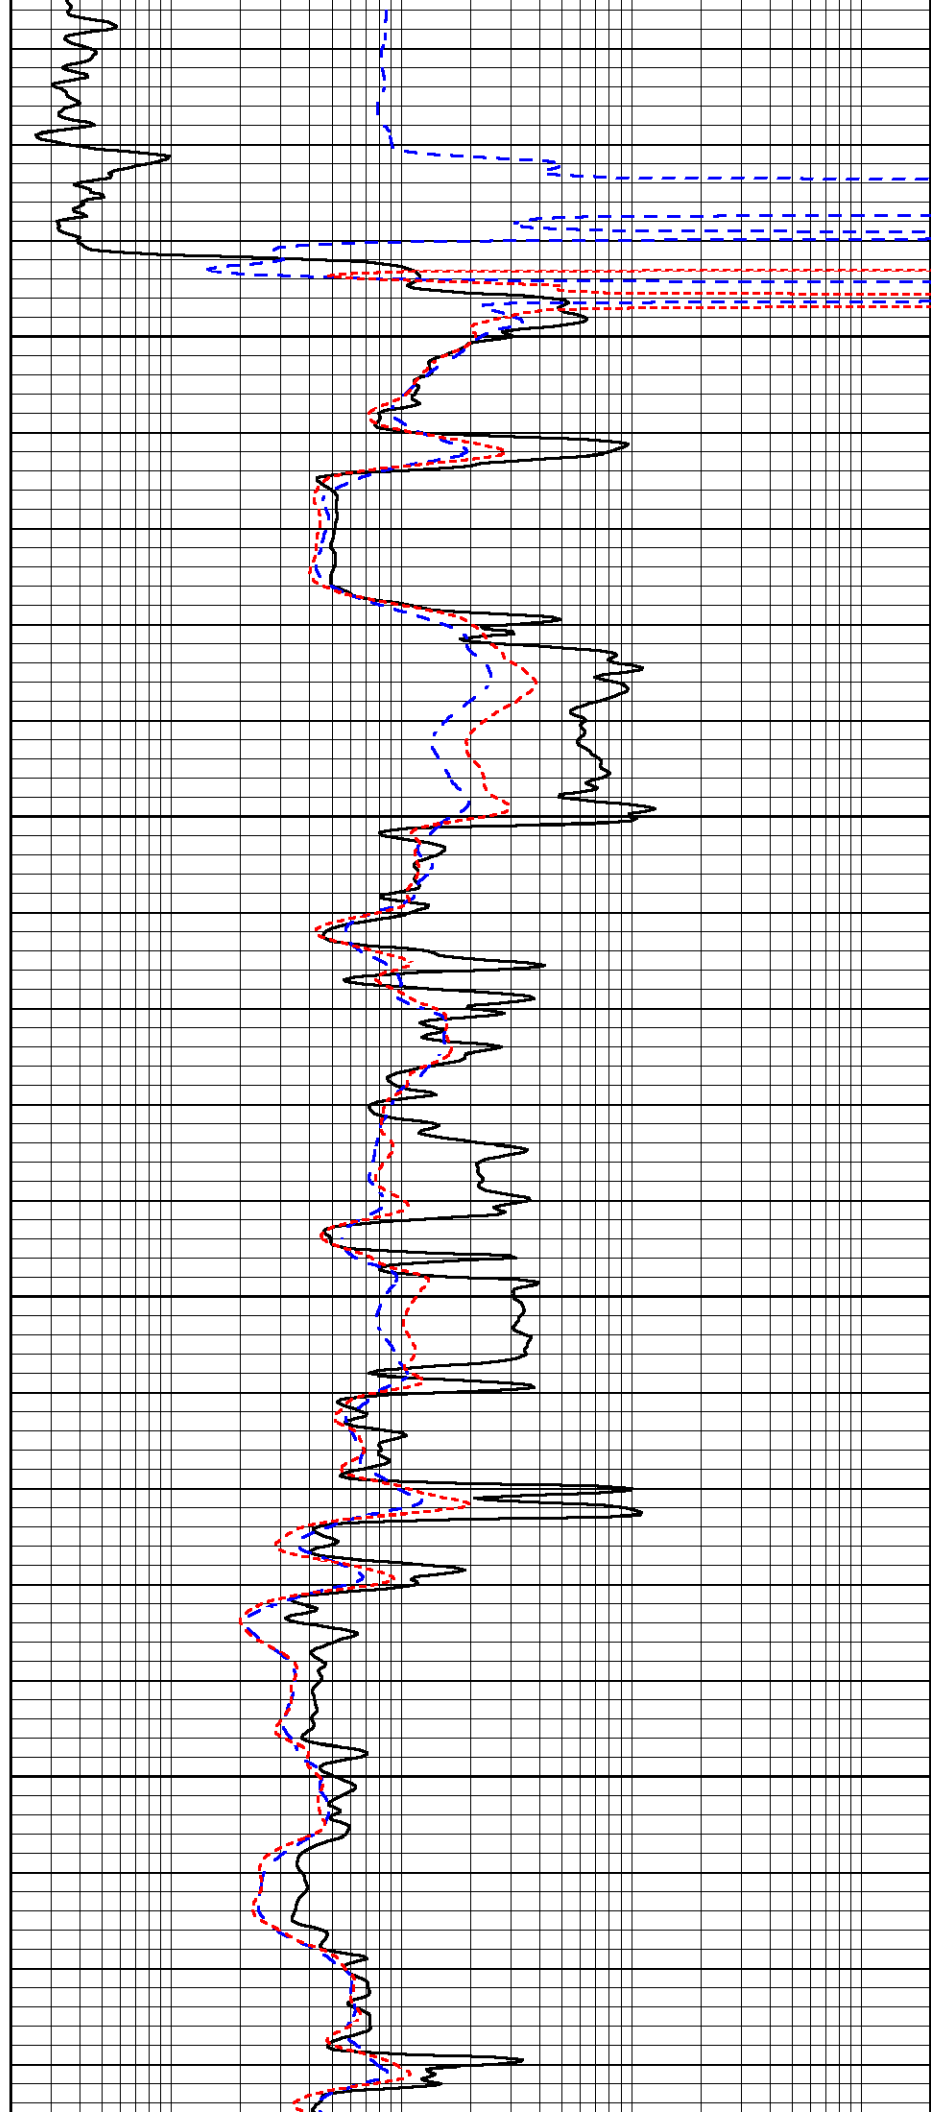

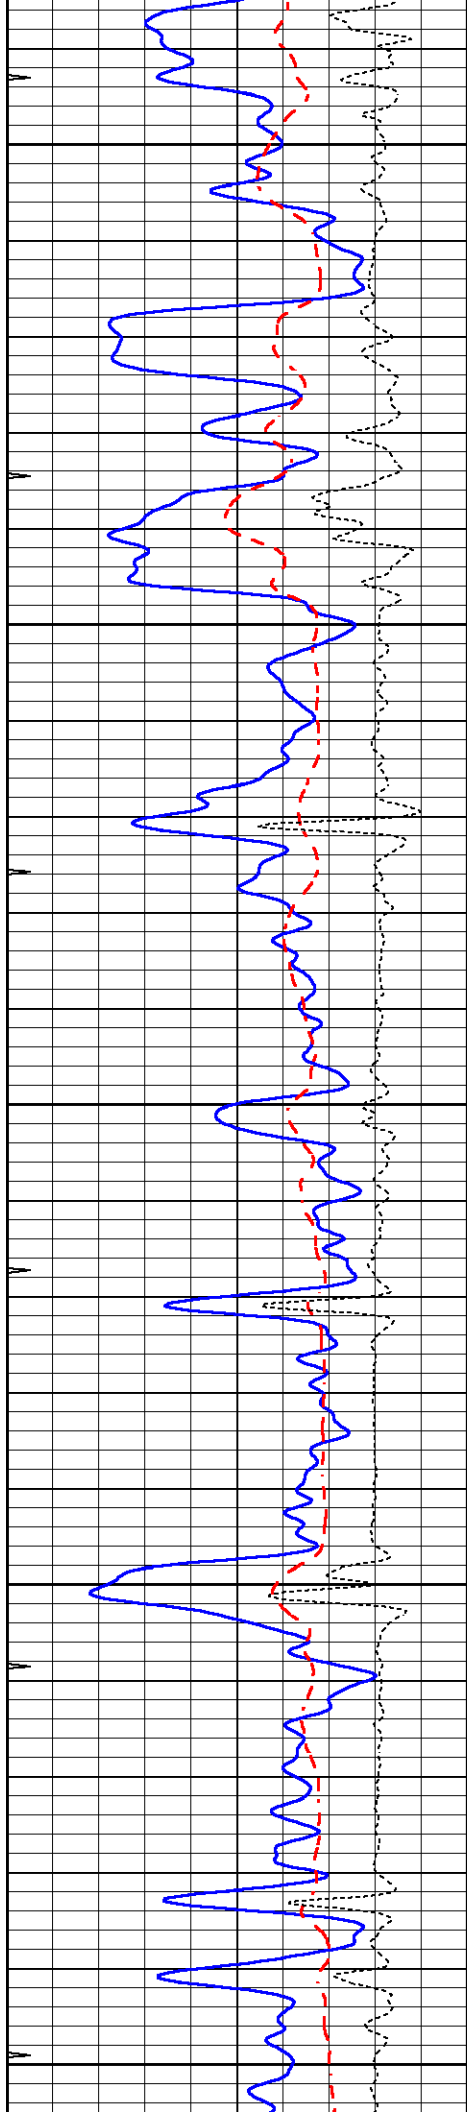


550


600

650

700

750

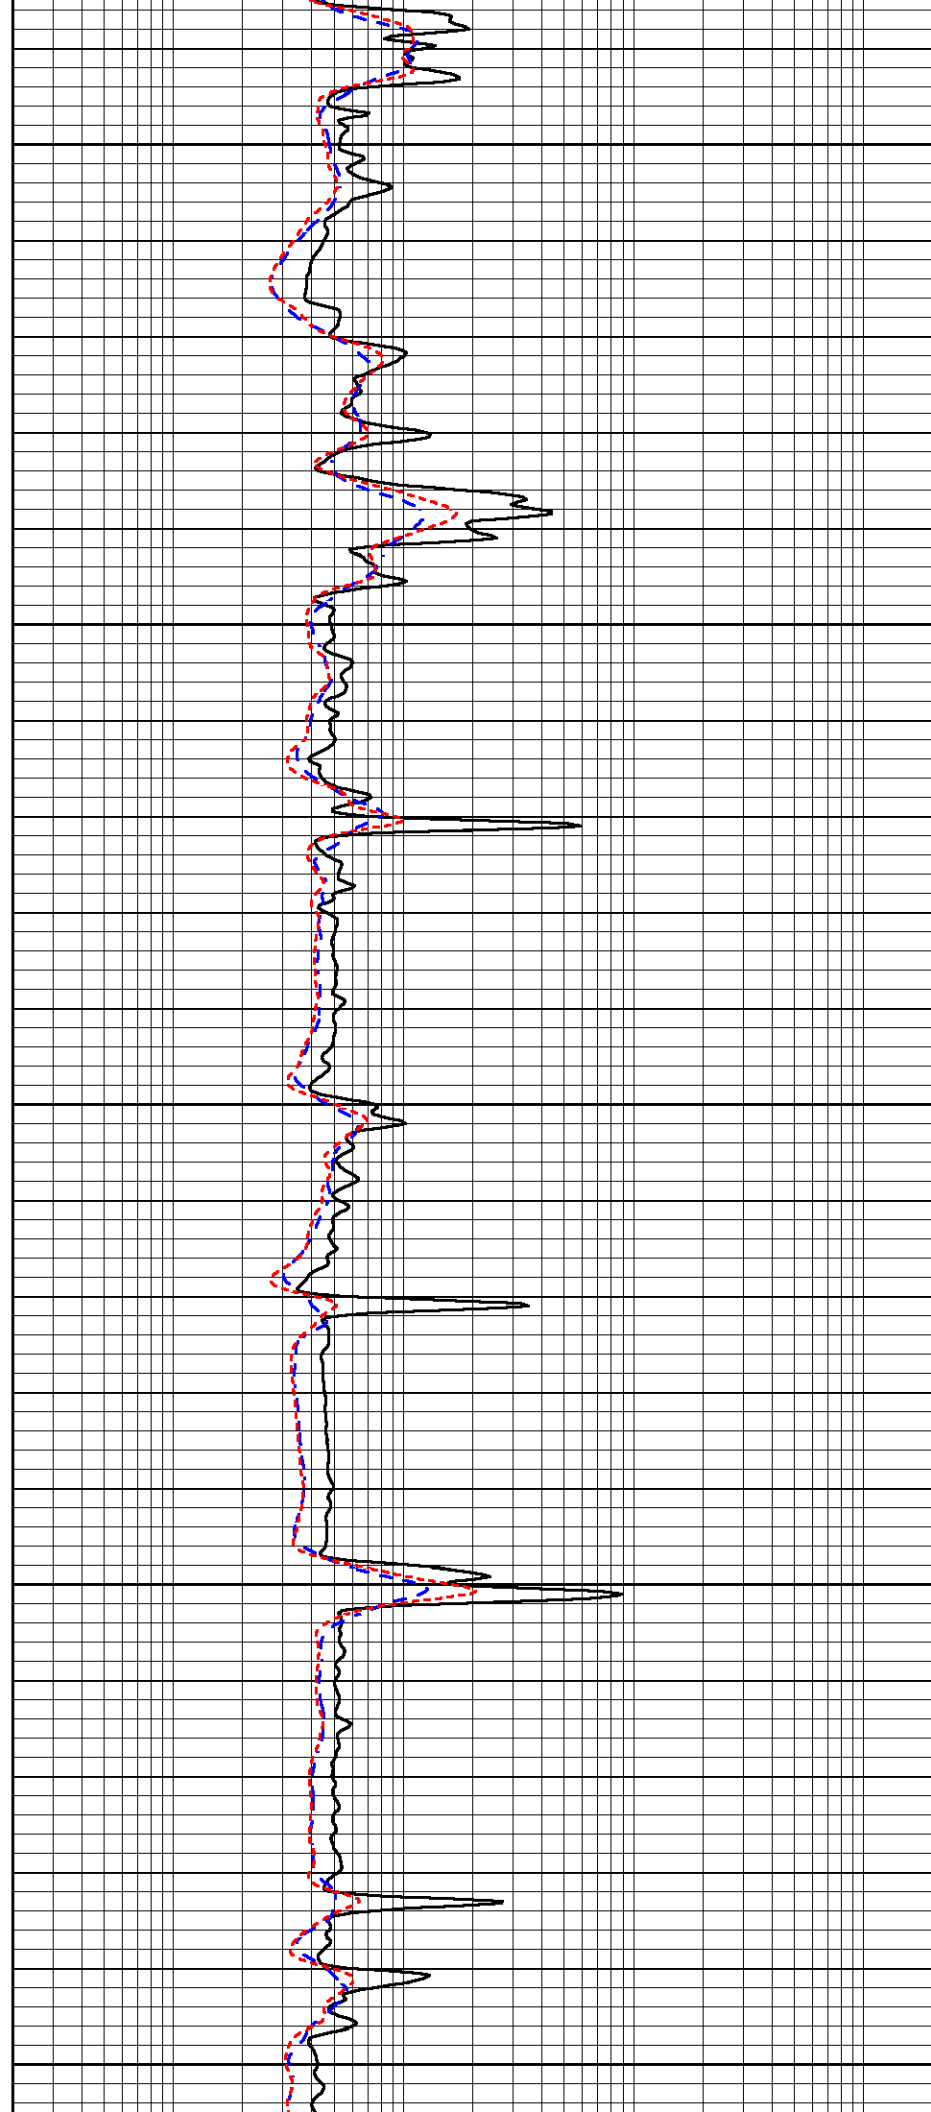

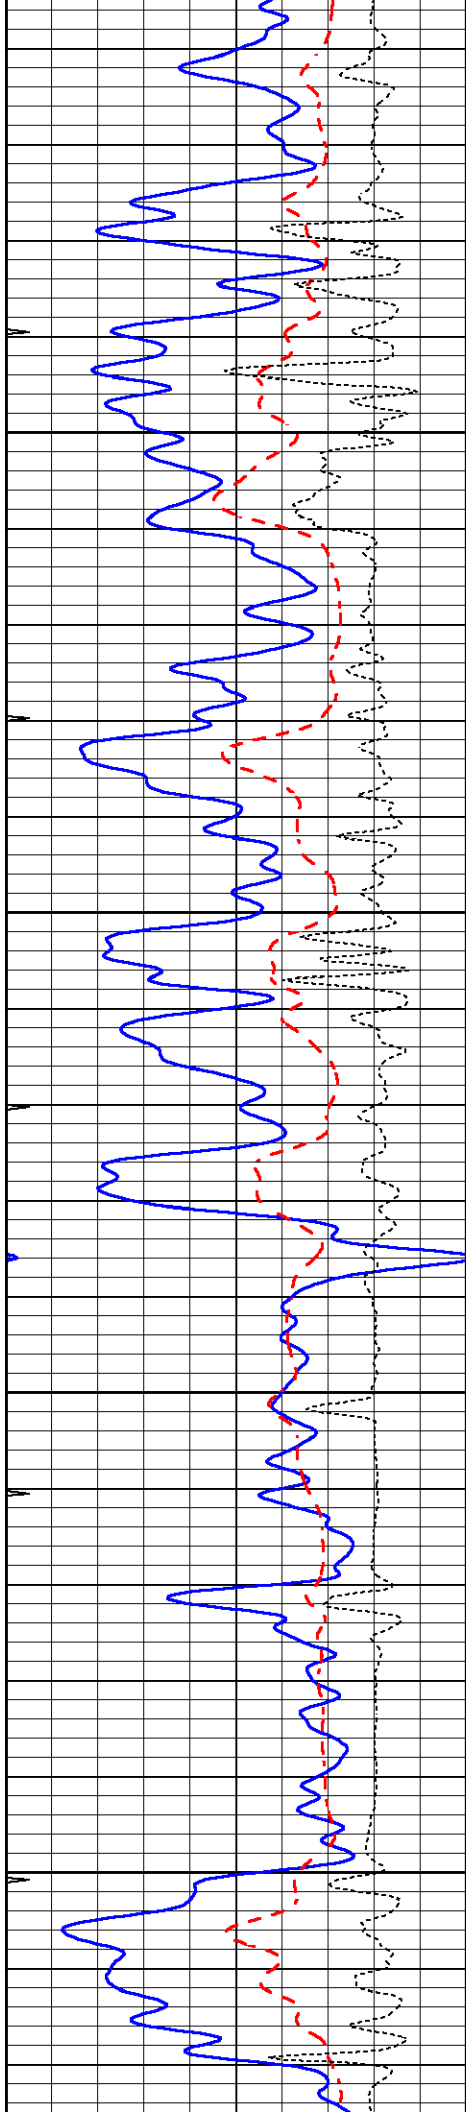



800

850

900

950

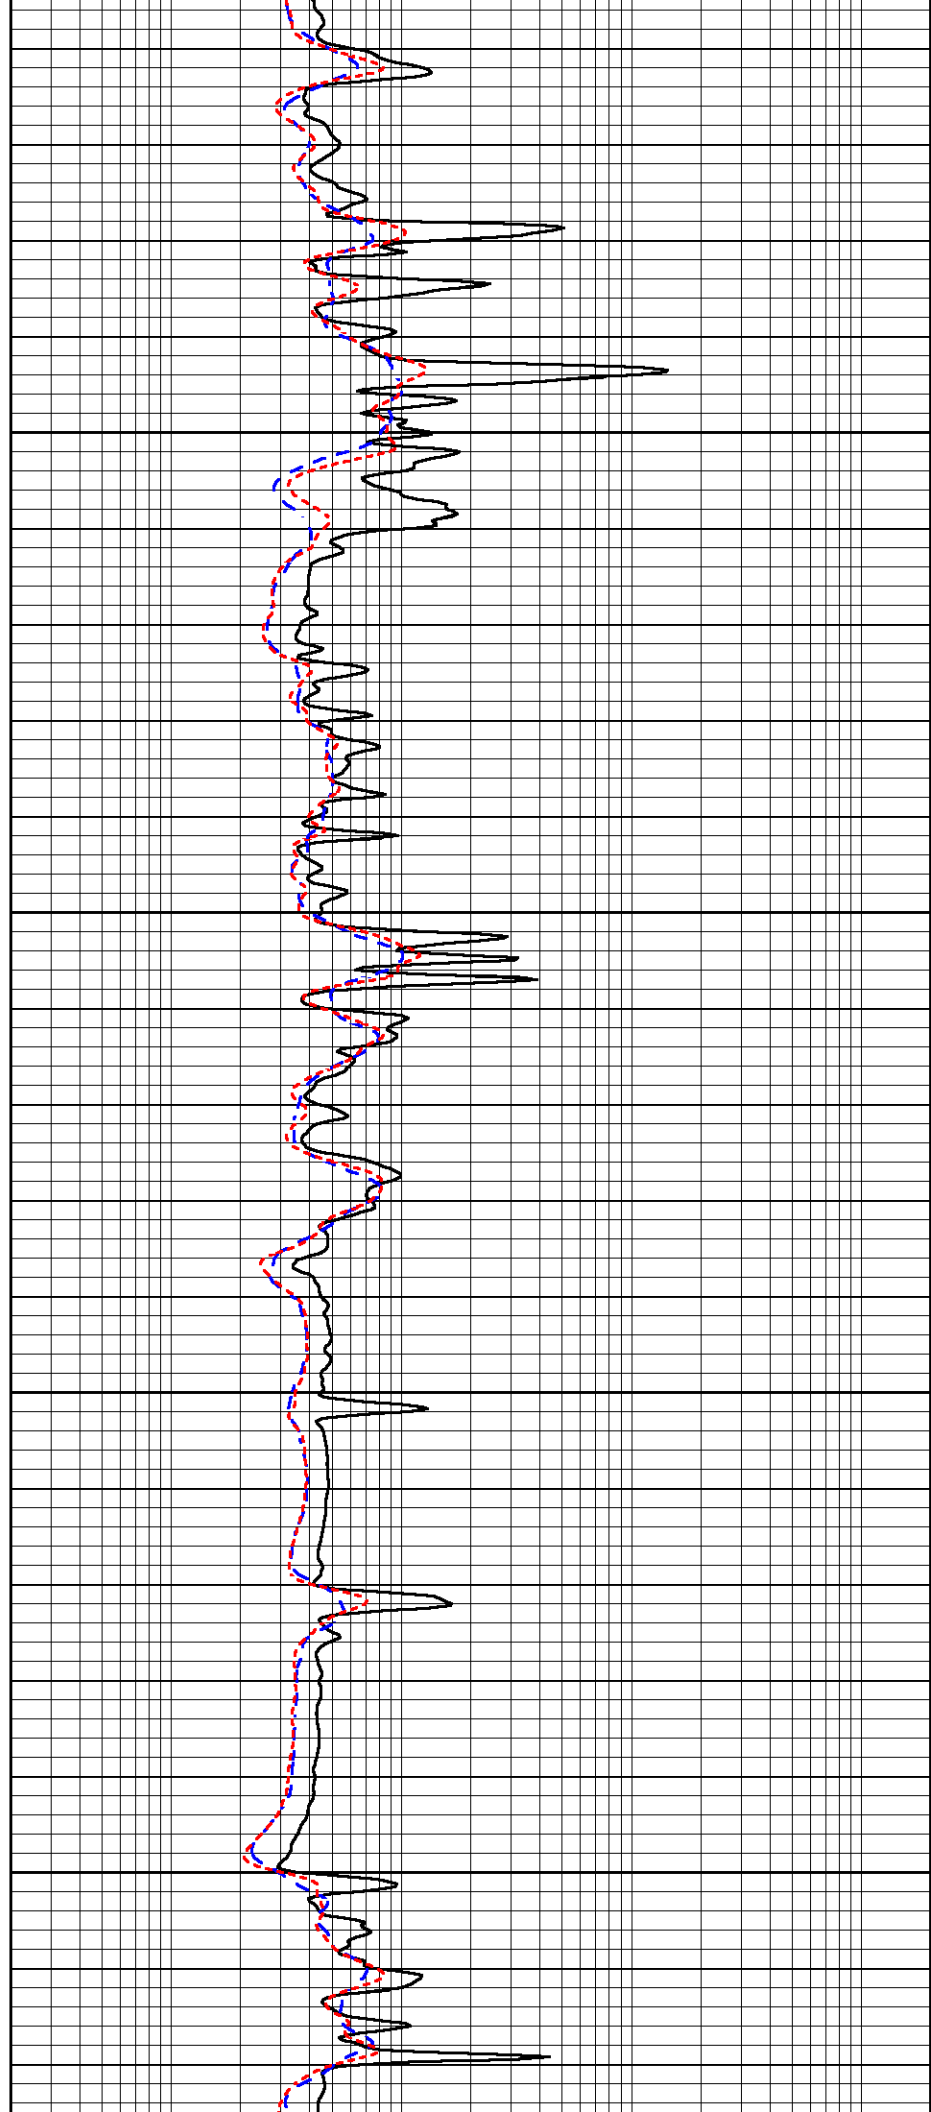

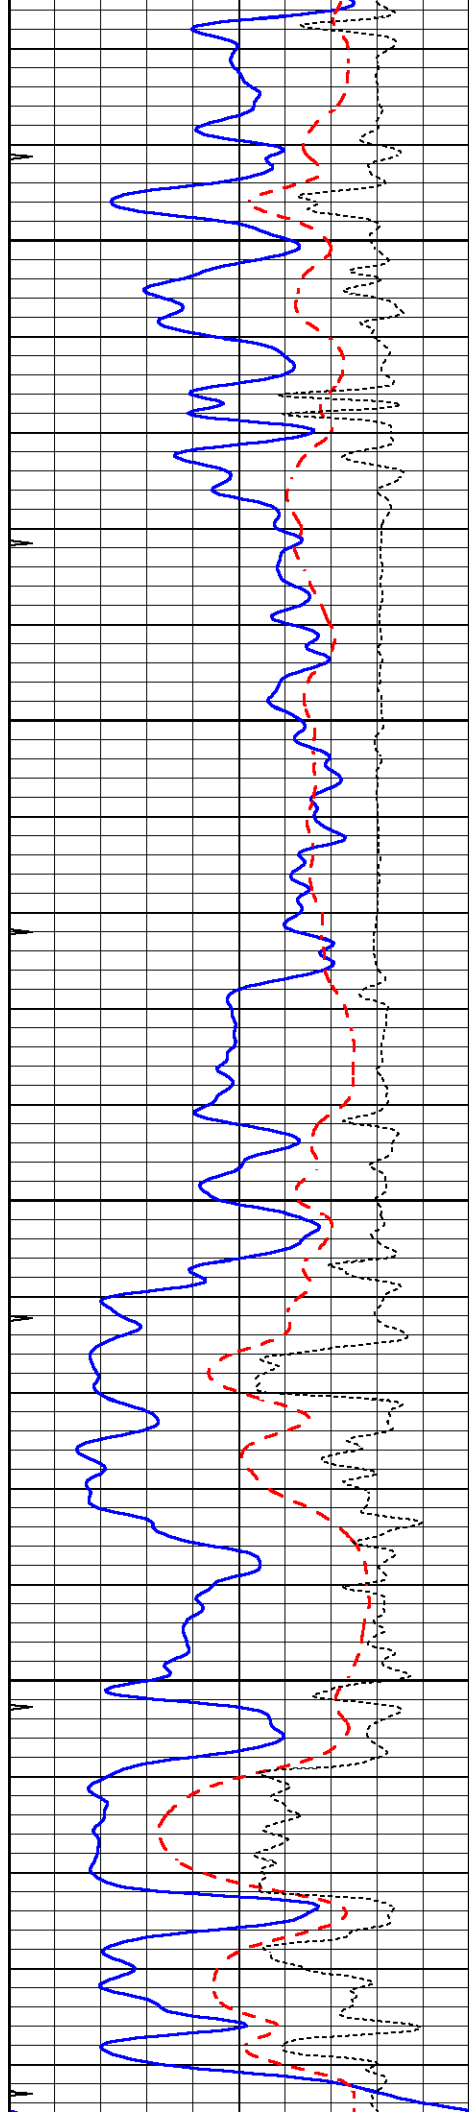



1000

1050

1100

1150

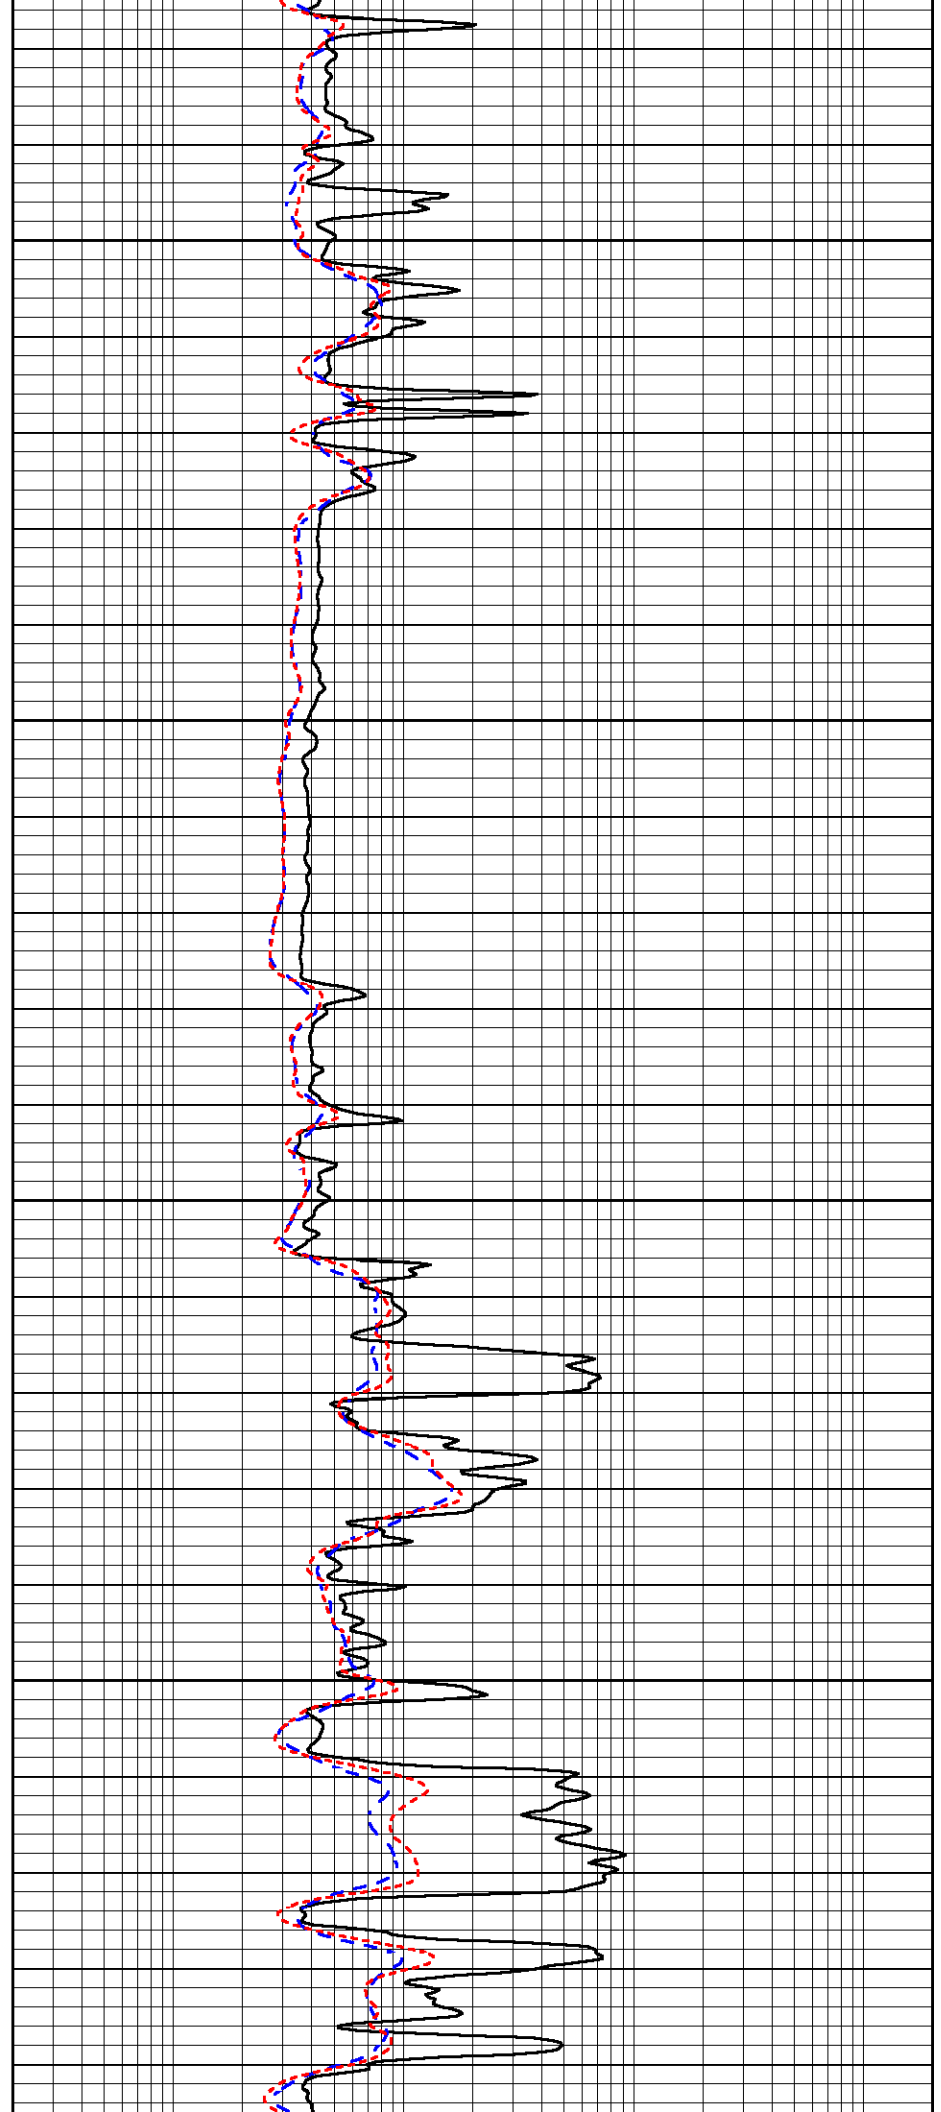

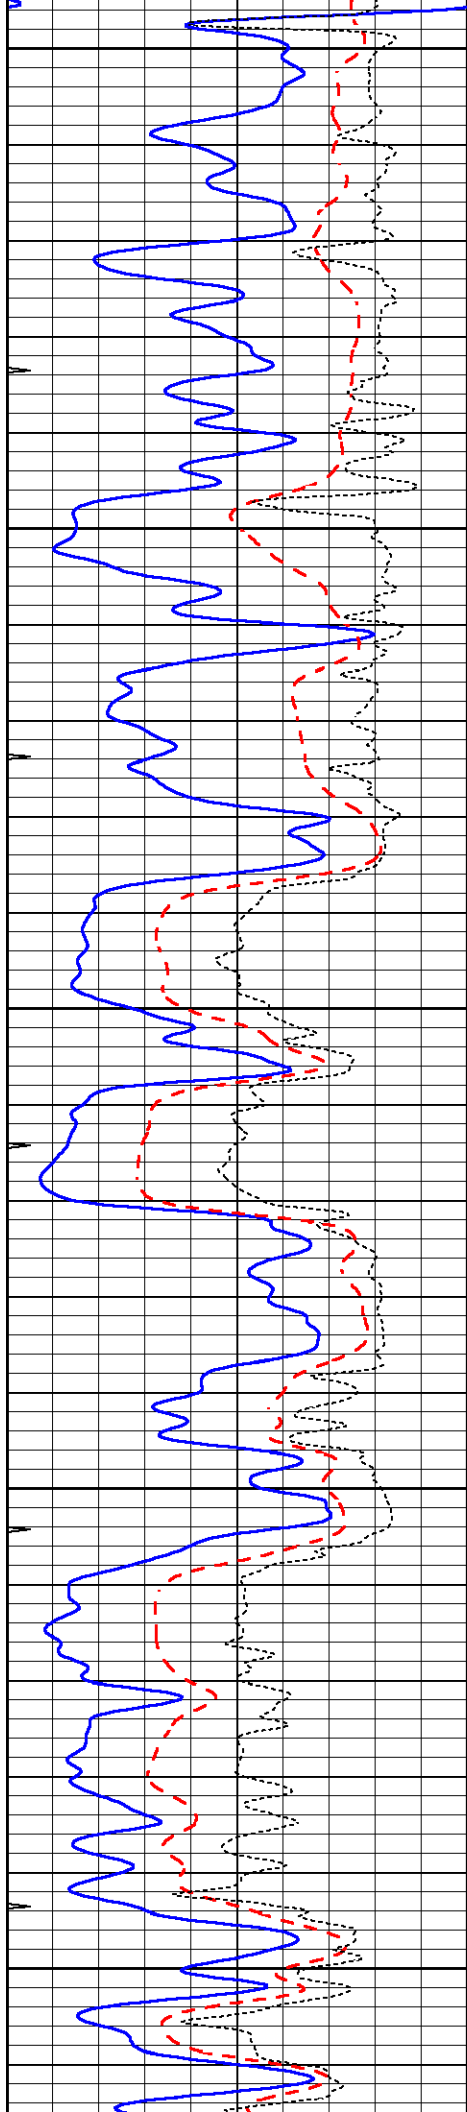


1200


1250

1300

1350

1400

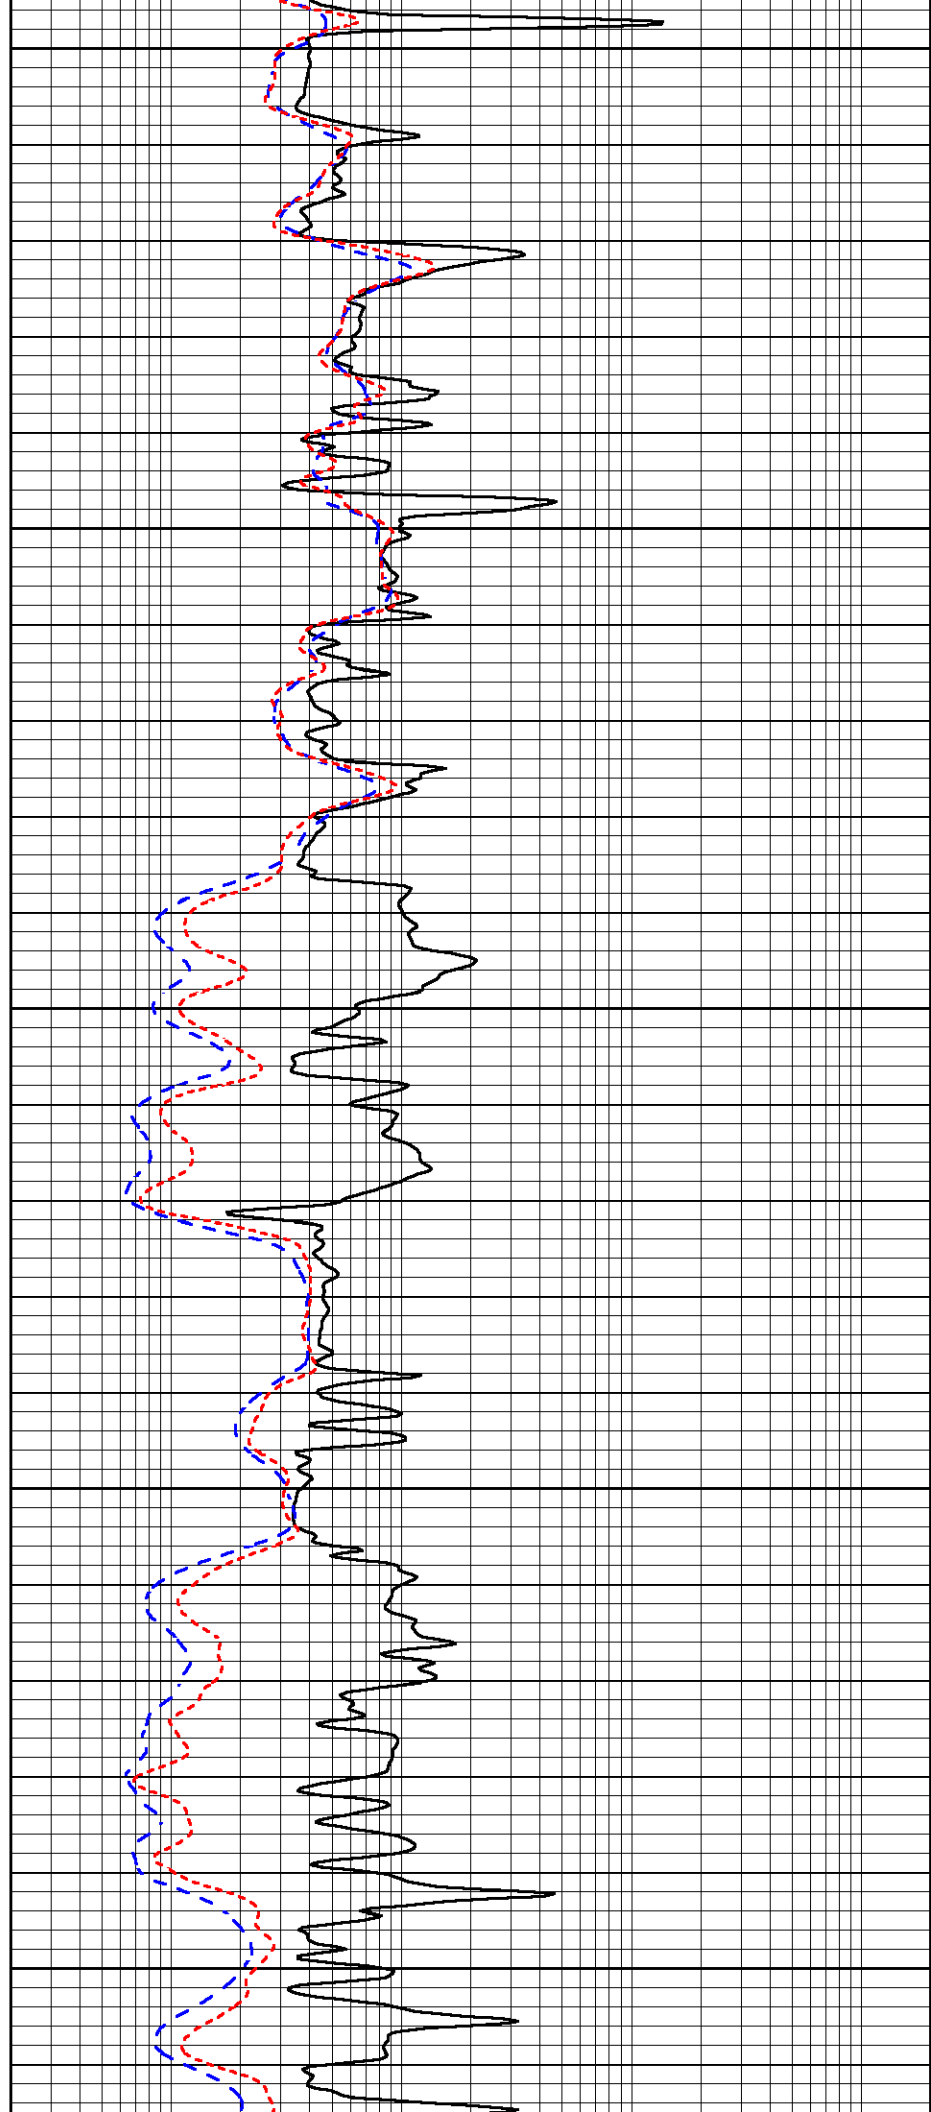

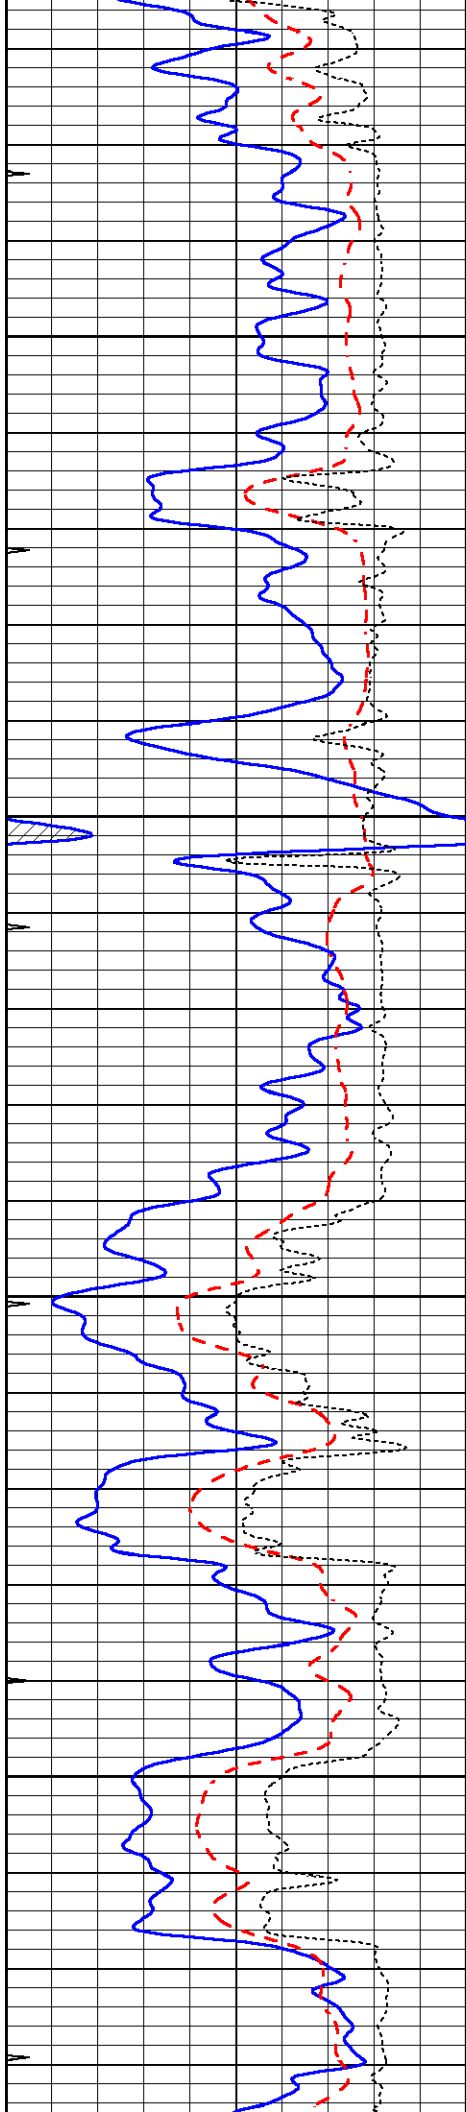



1450

1500

1550

1600

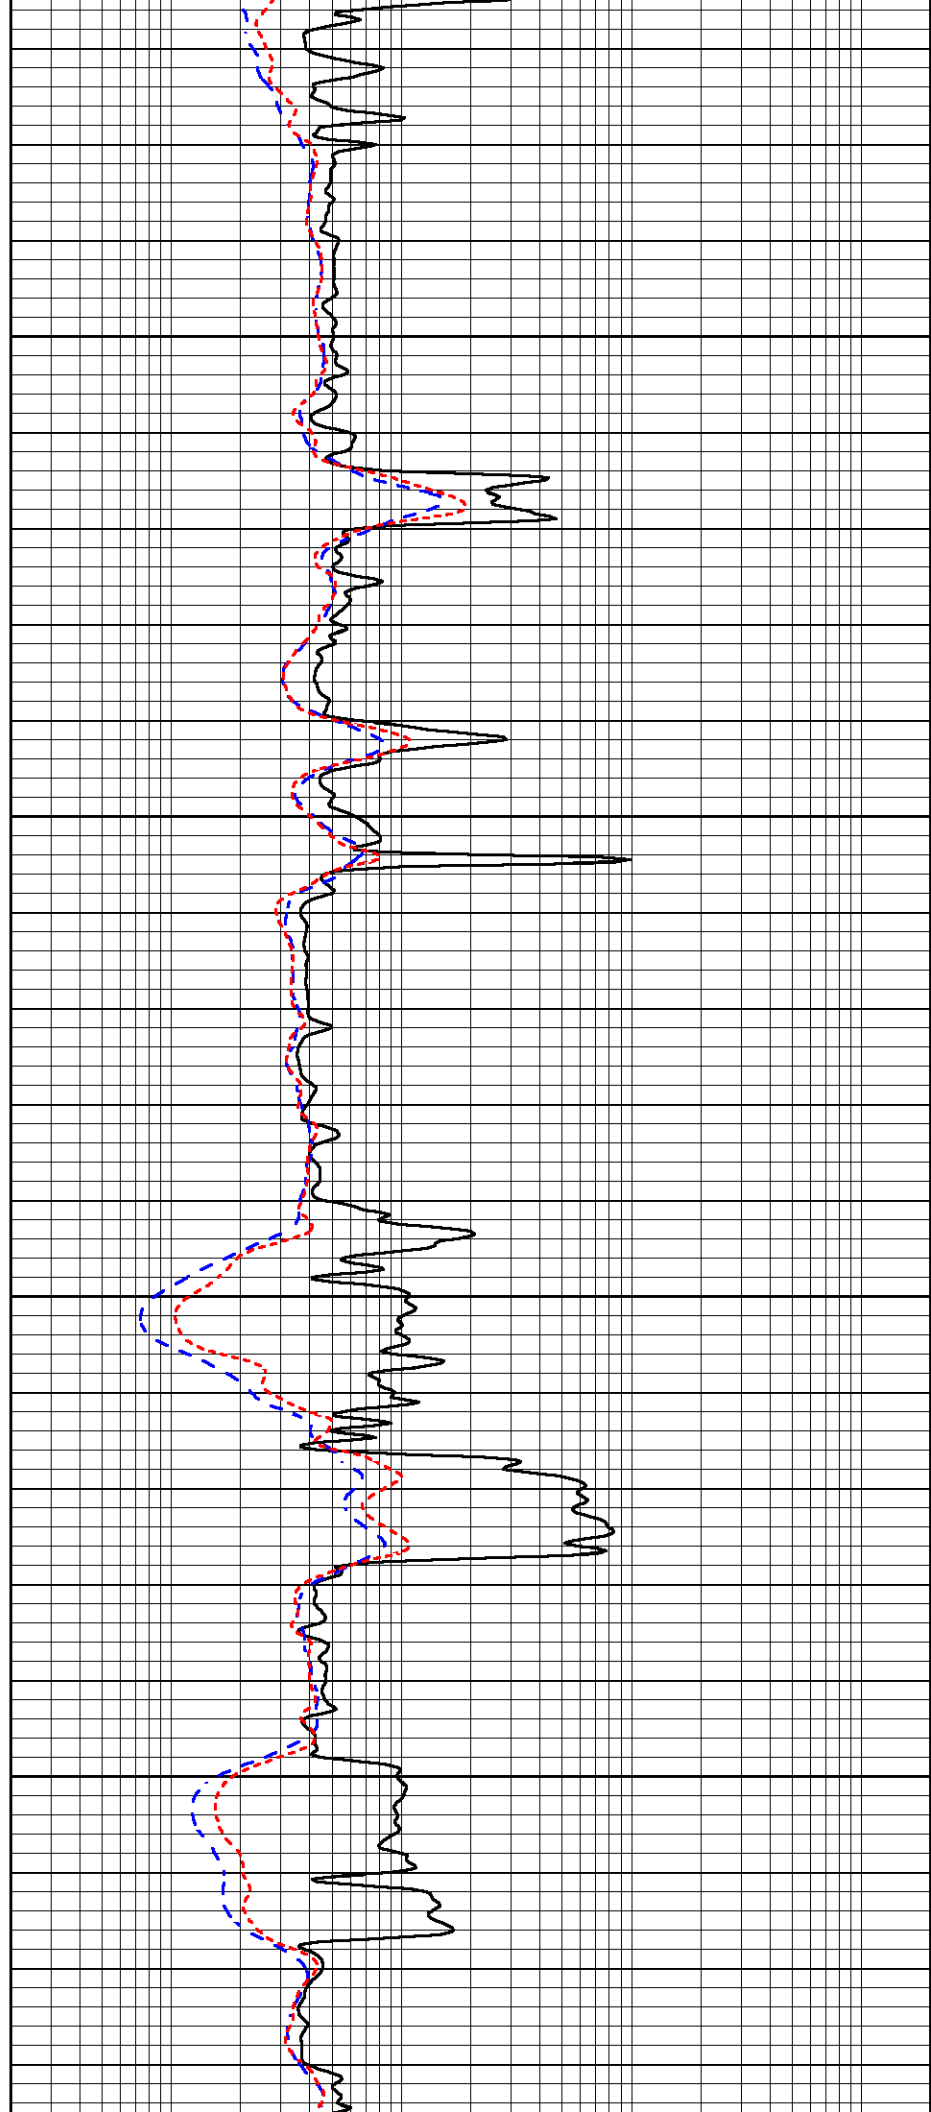

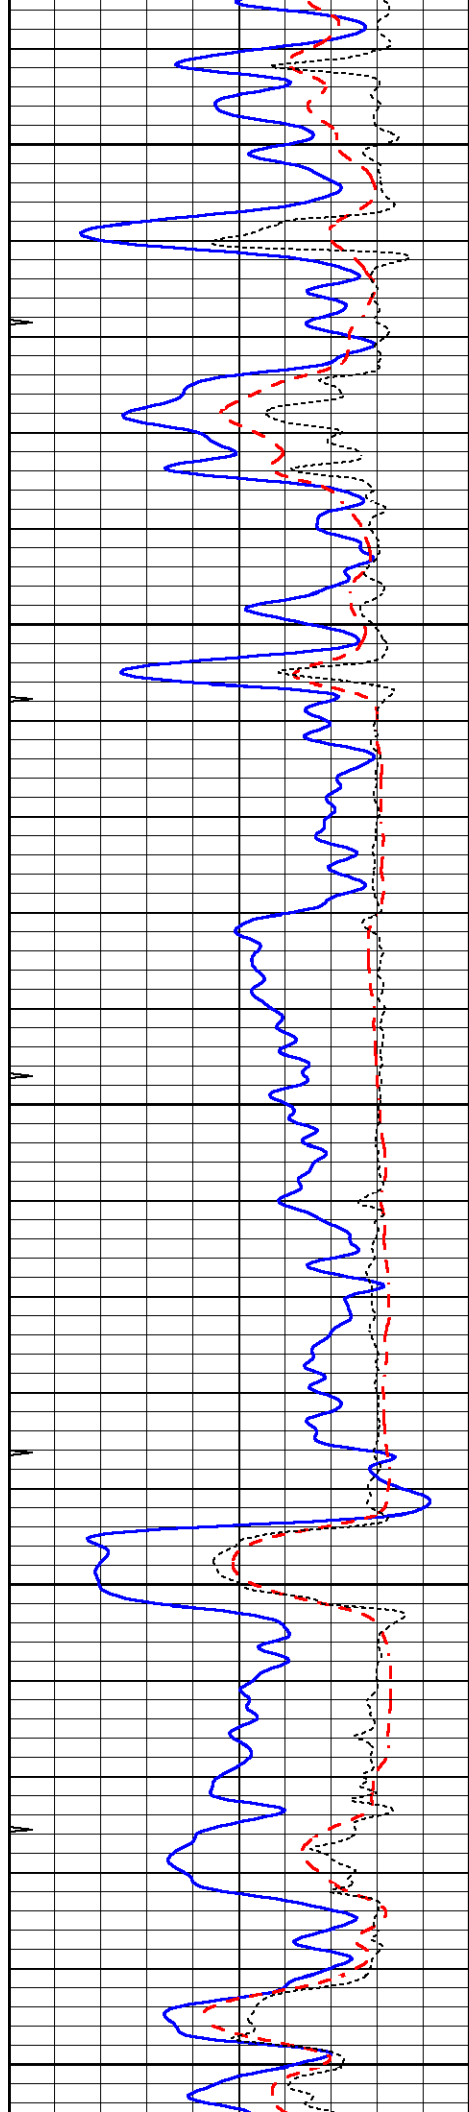


1650


1700

1750

1800

1850

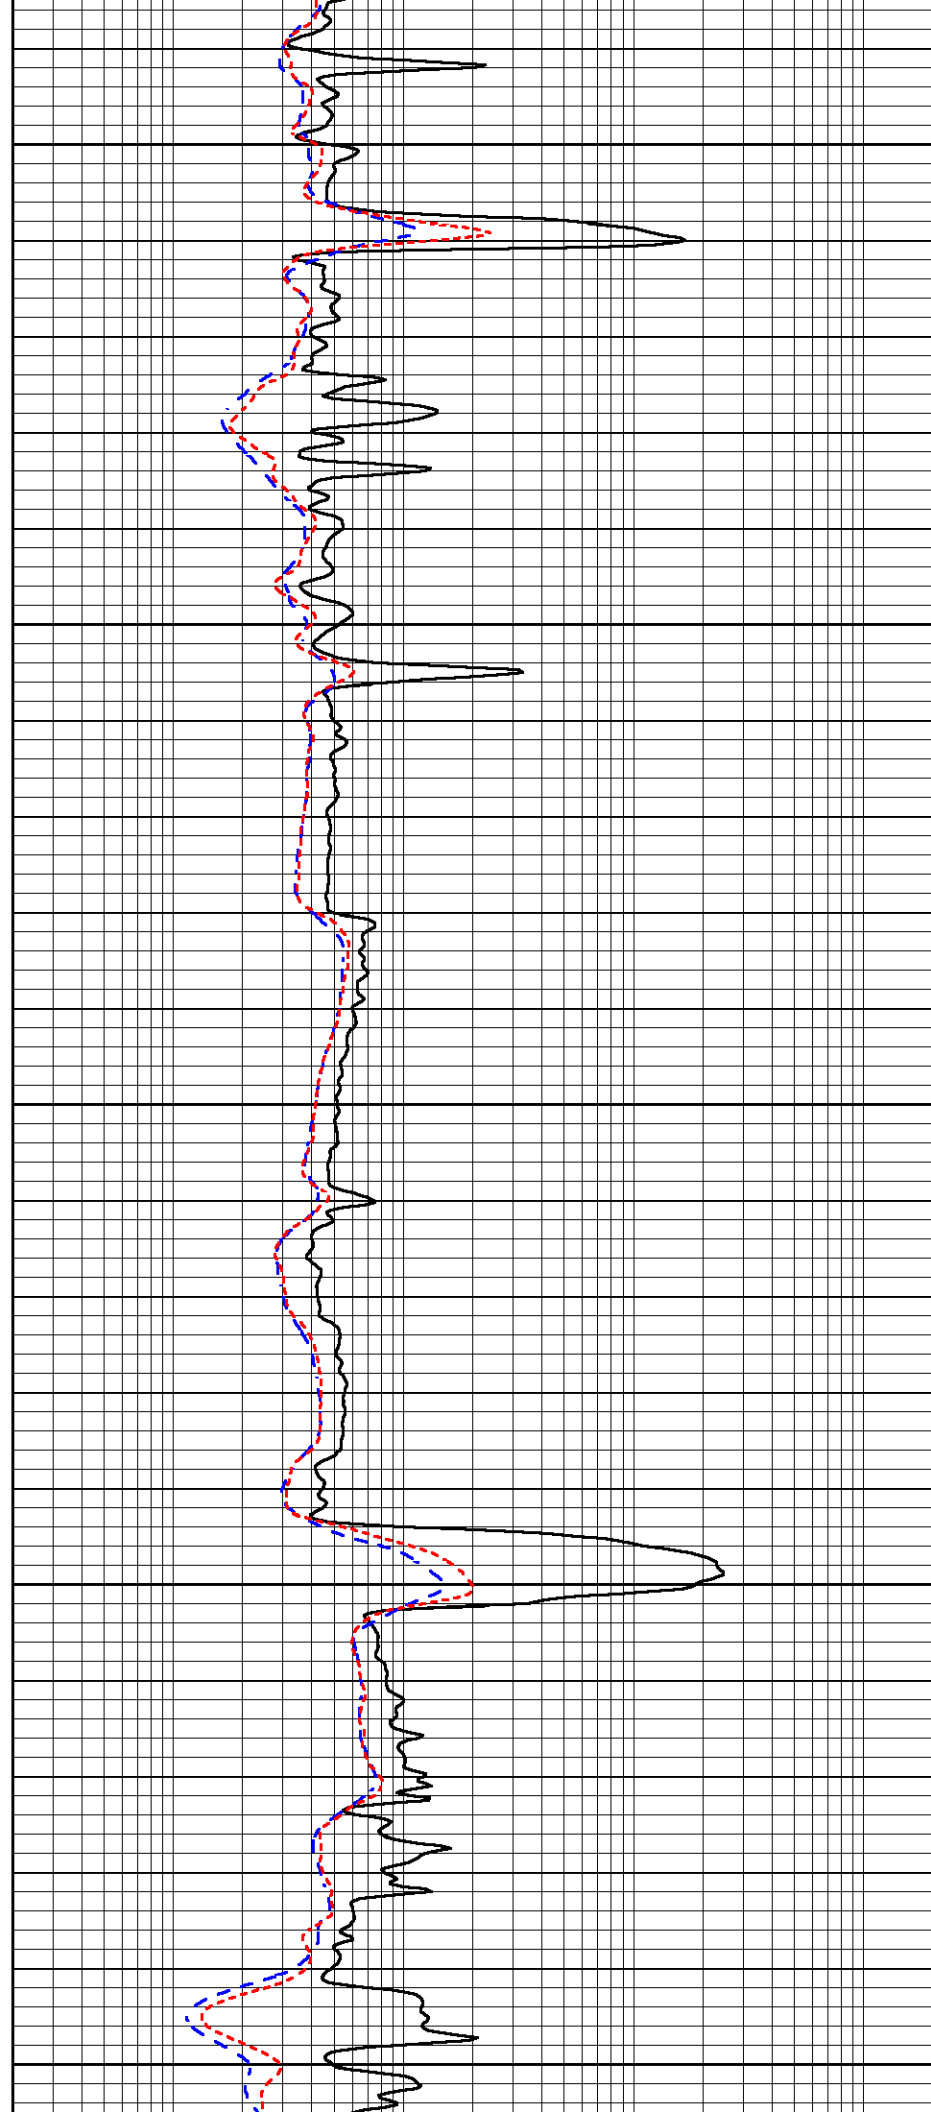

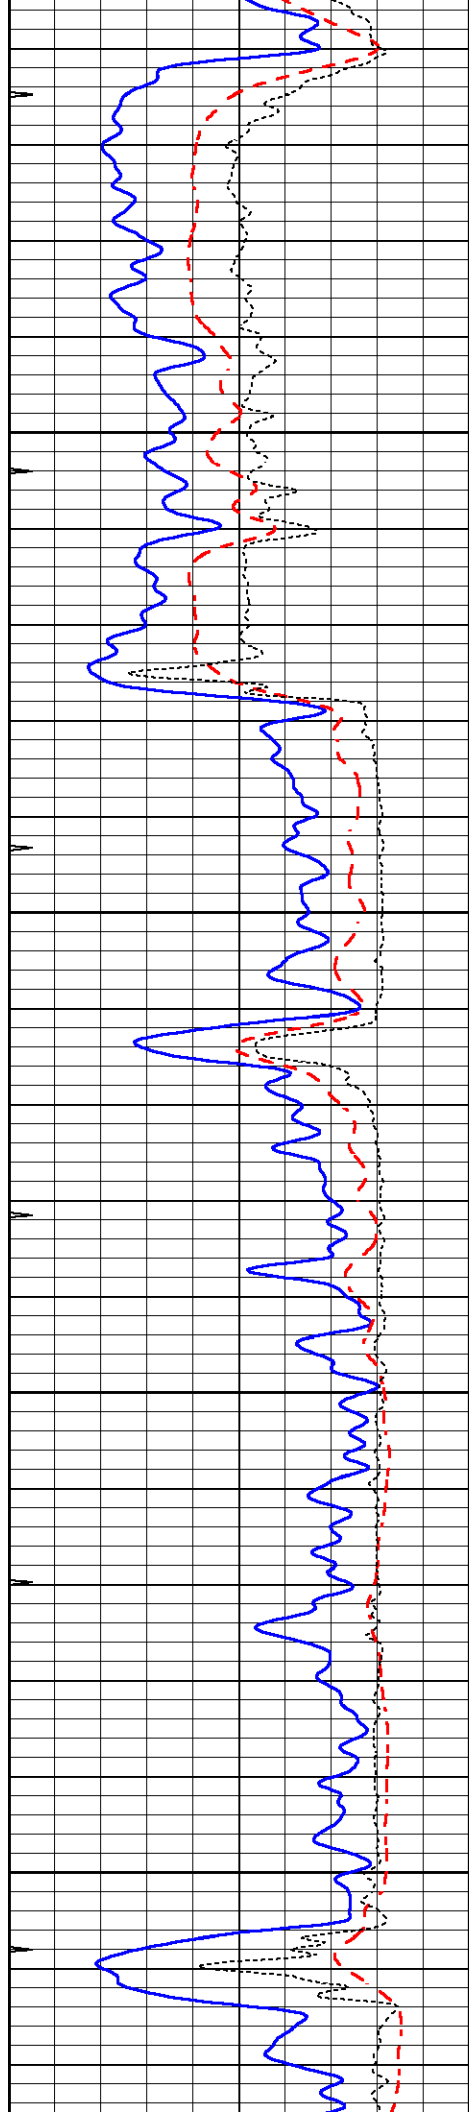



1900

1950

2000

2050

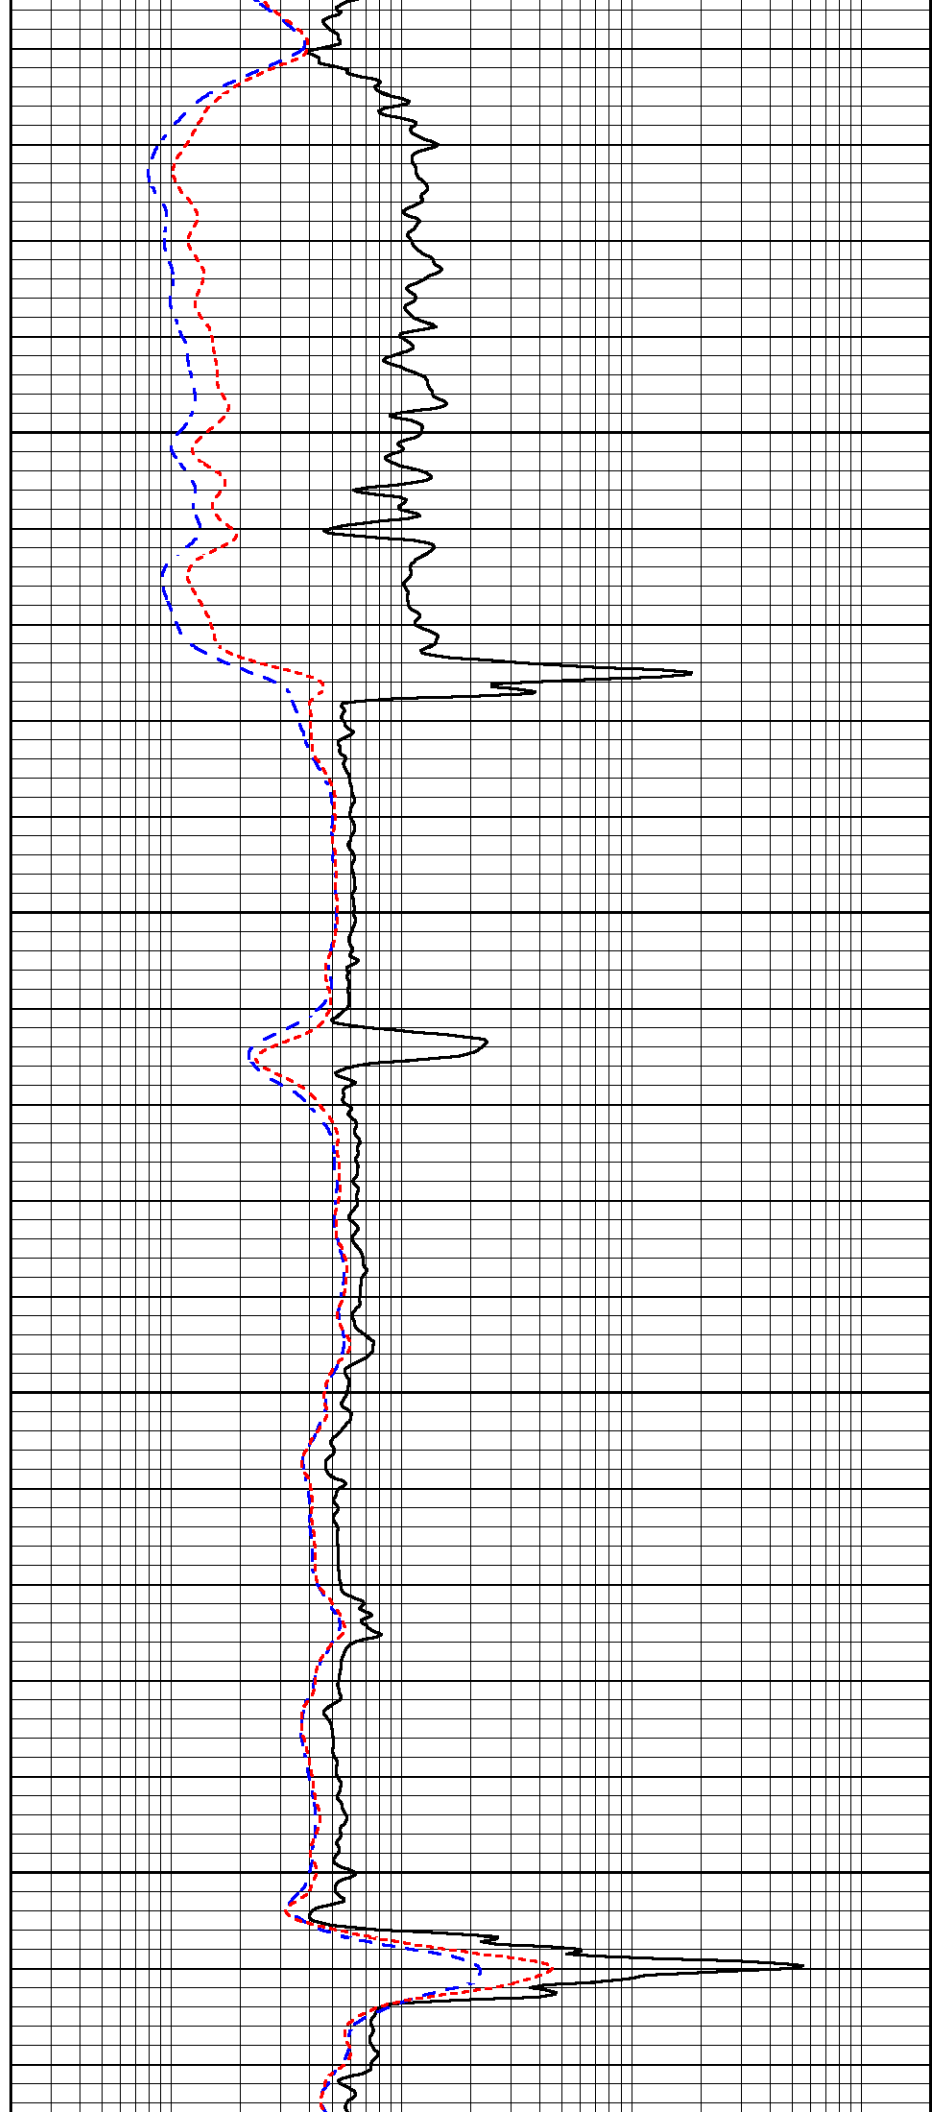

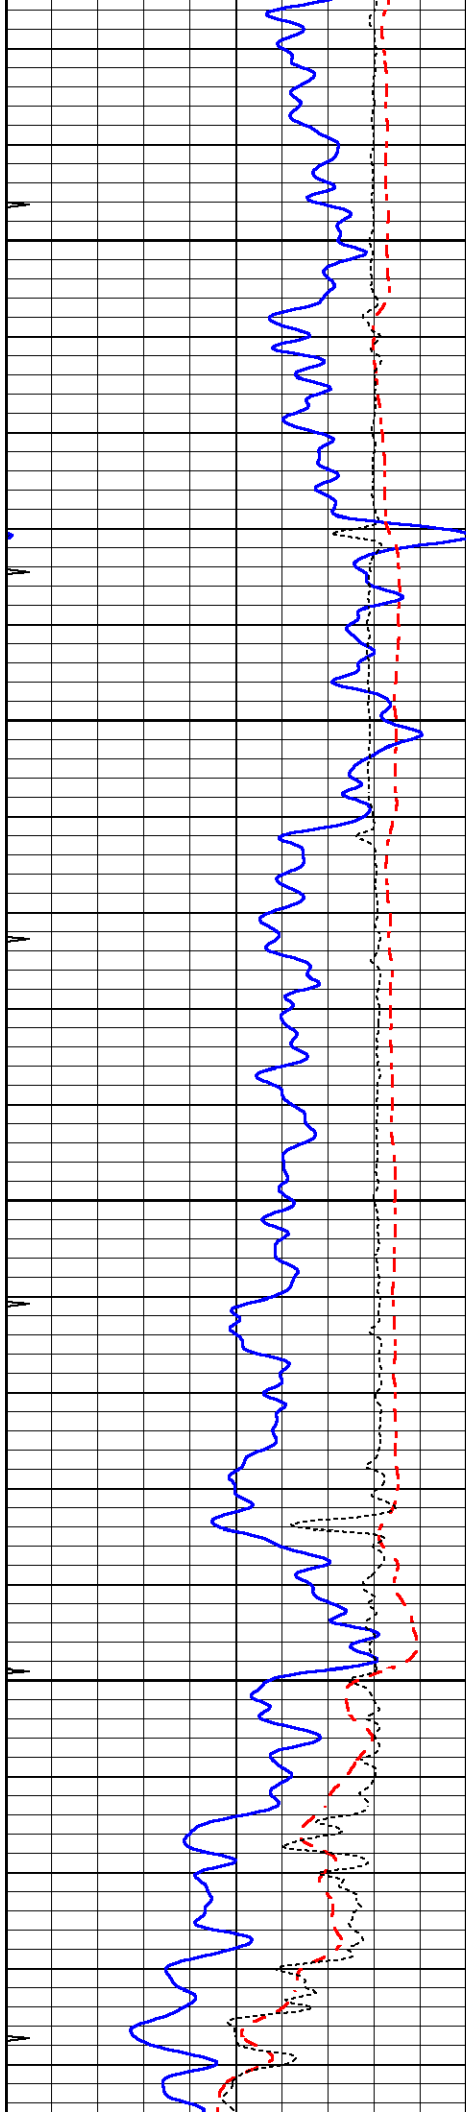



2100

2150

2200

2250

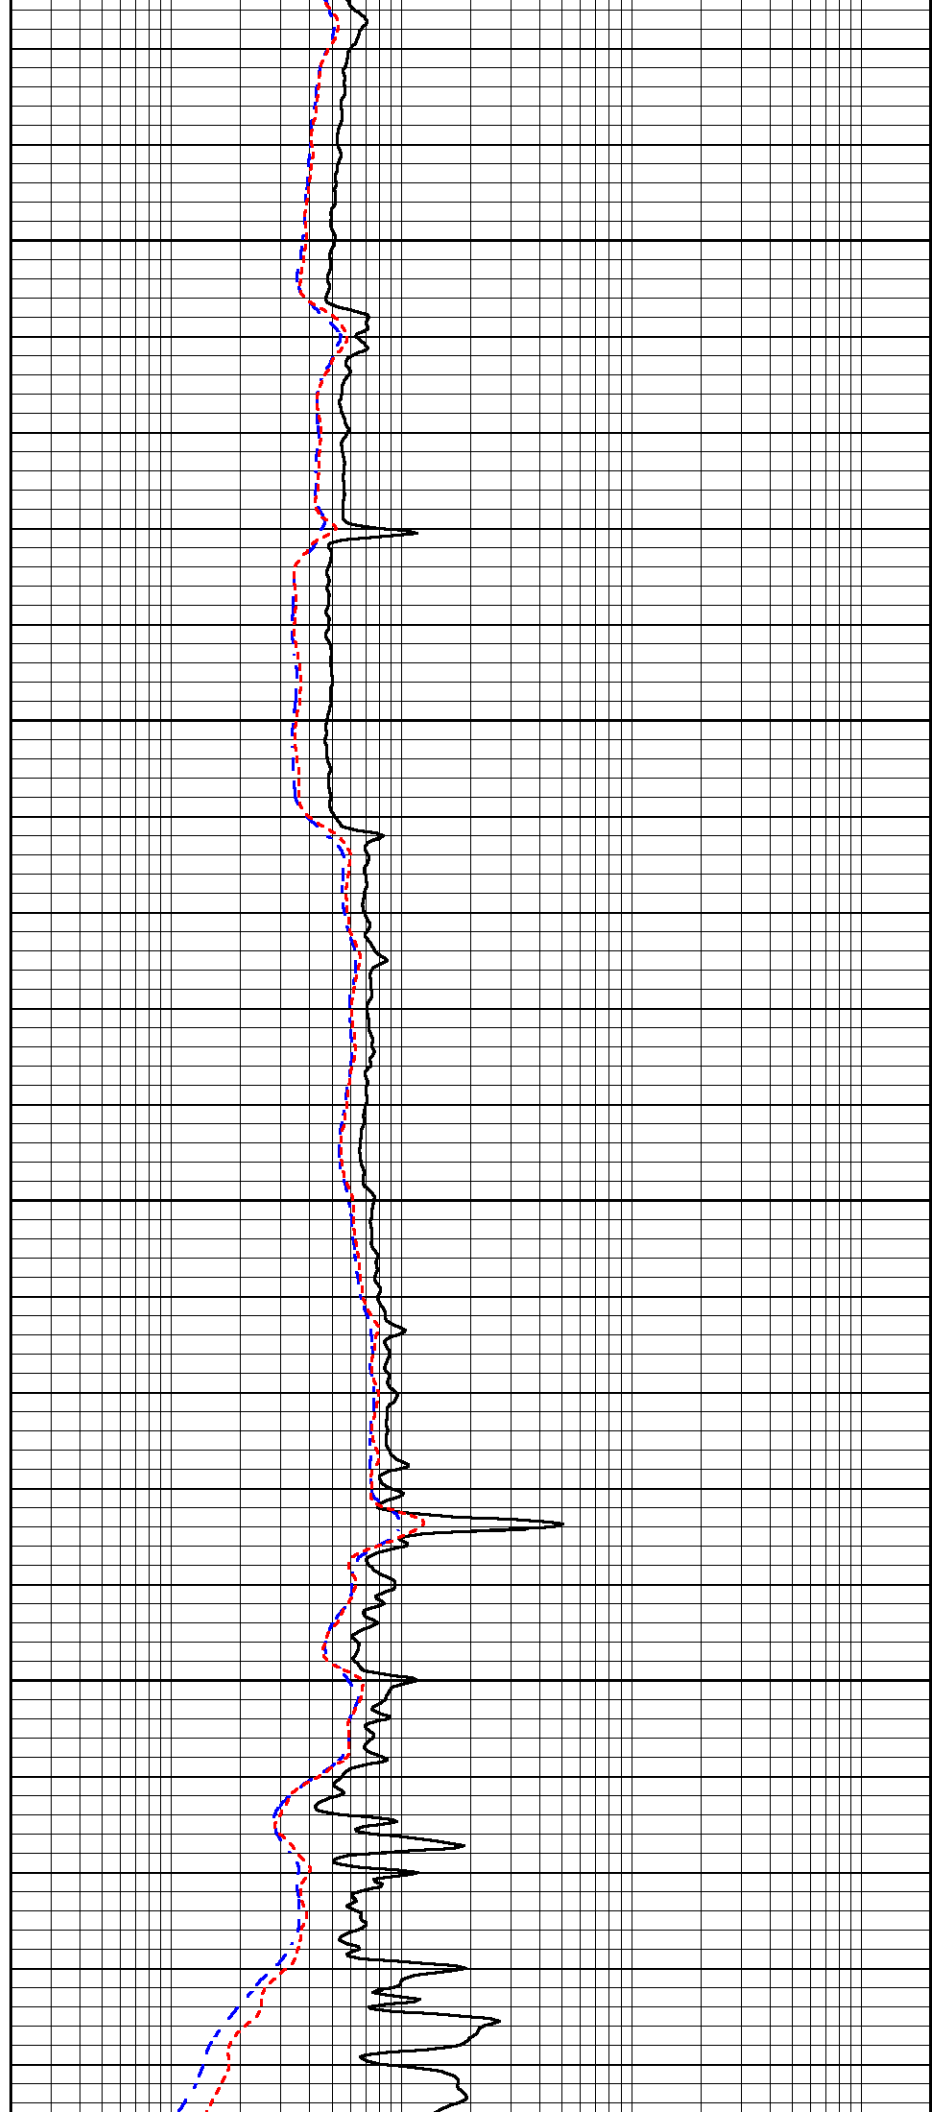

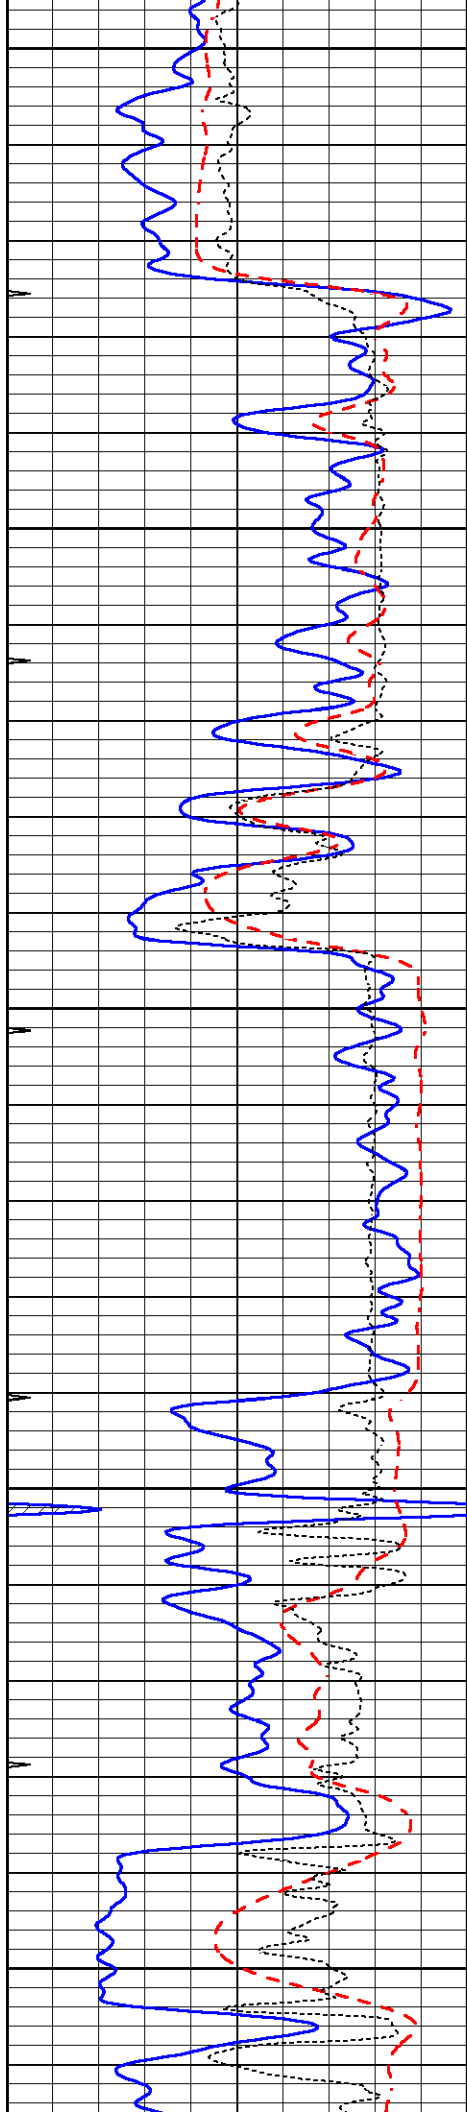


2300


2350

2400

2450

2500

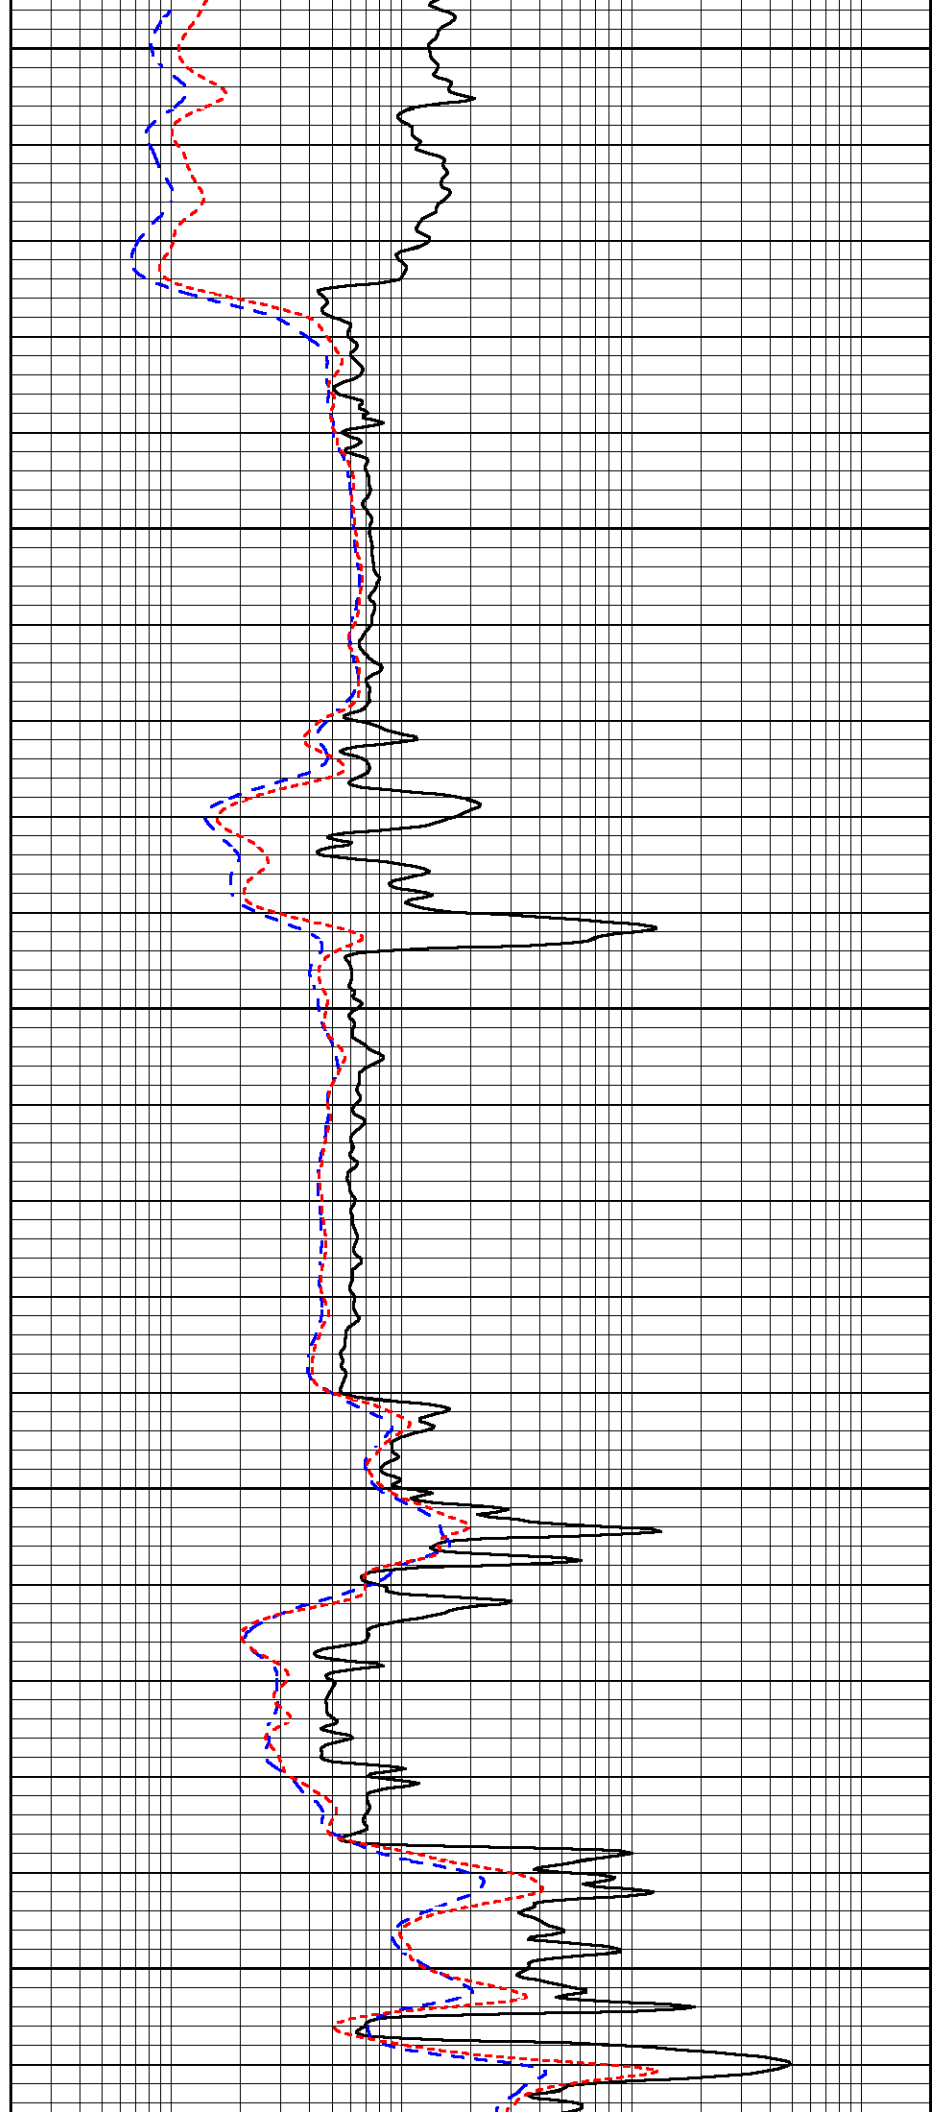

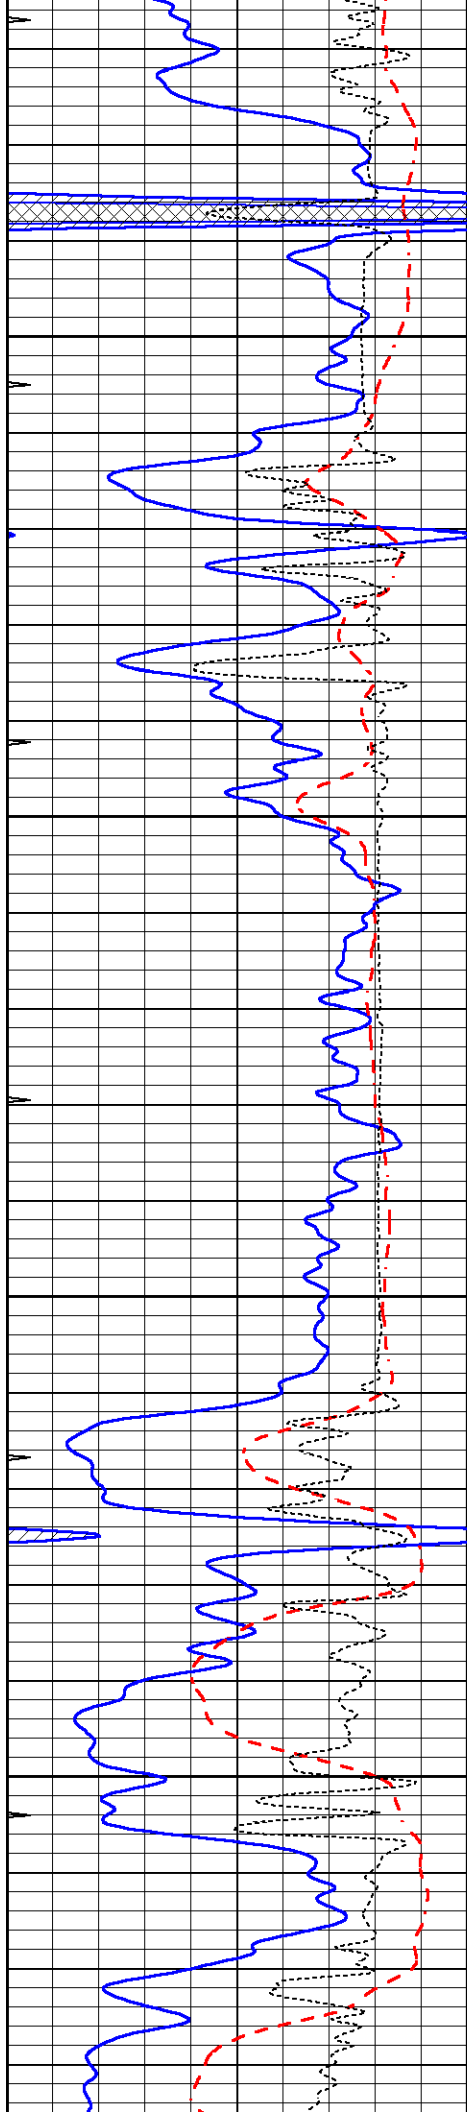



2550

2600

2650

2700

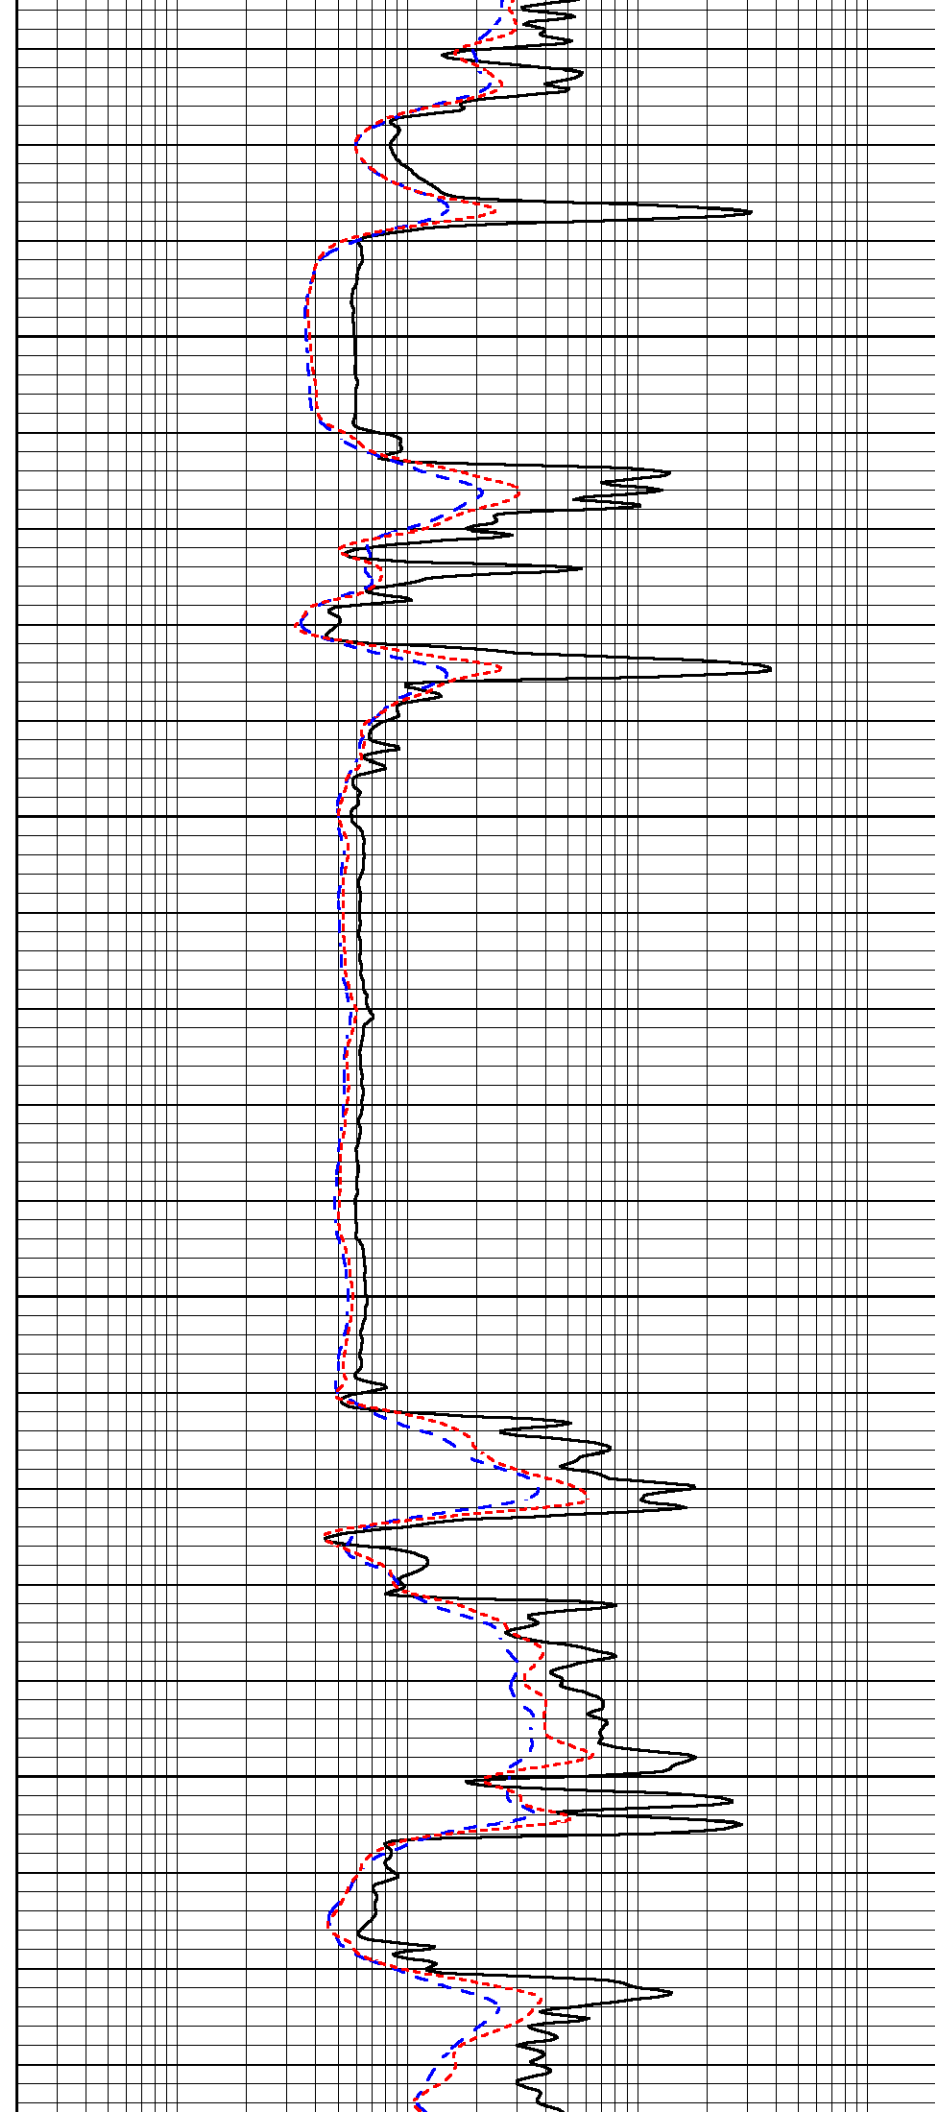

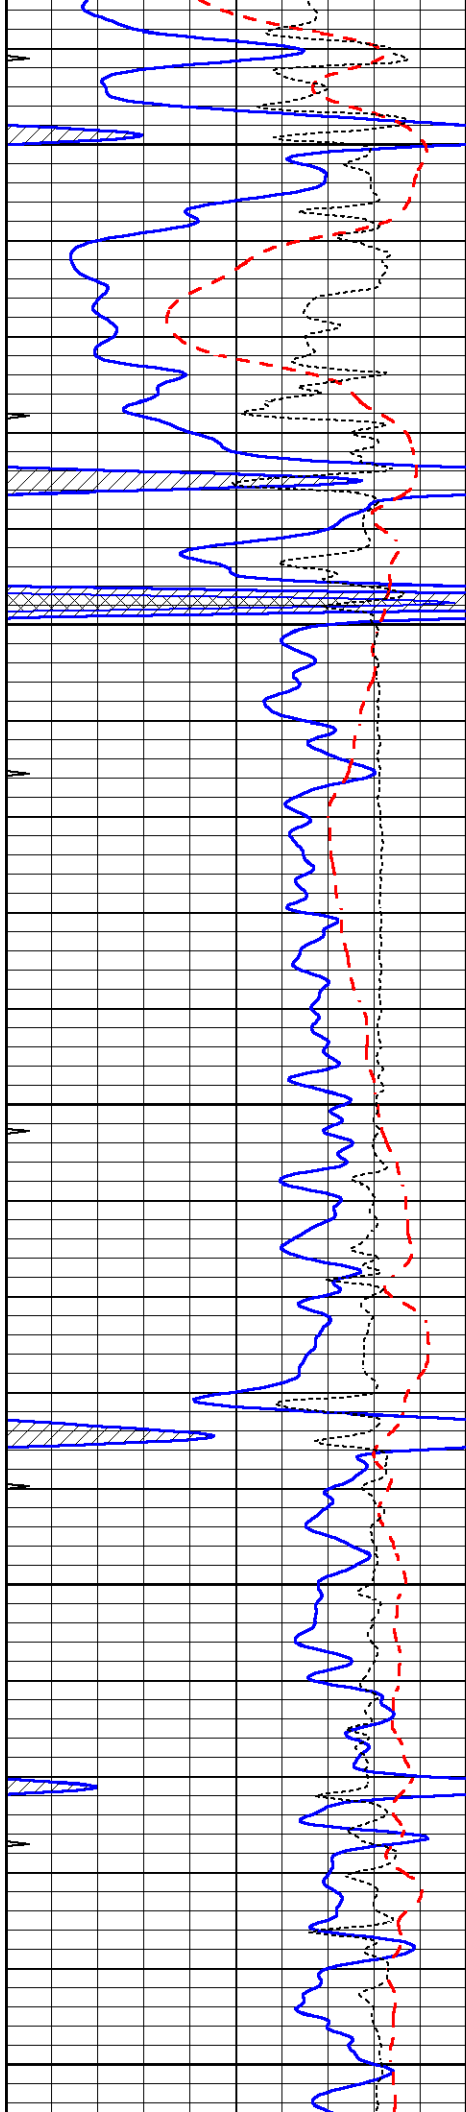


2750


2800

2850

2900

2950

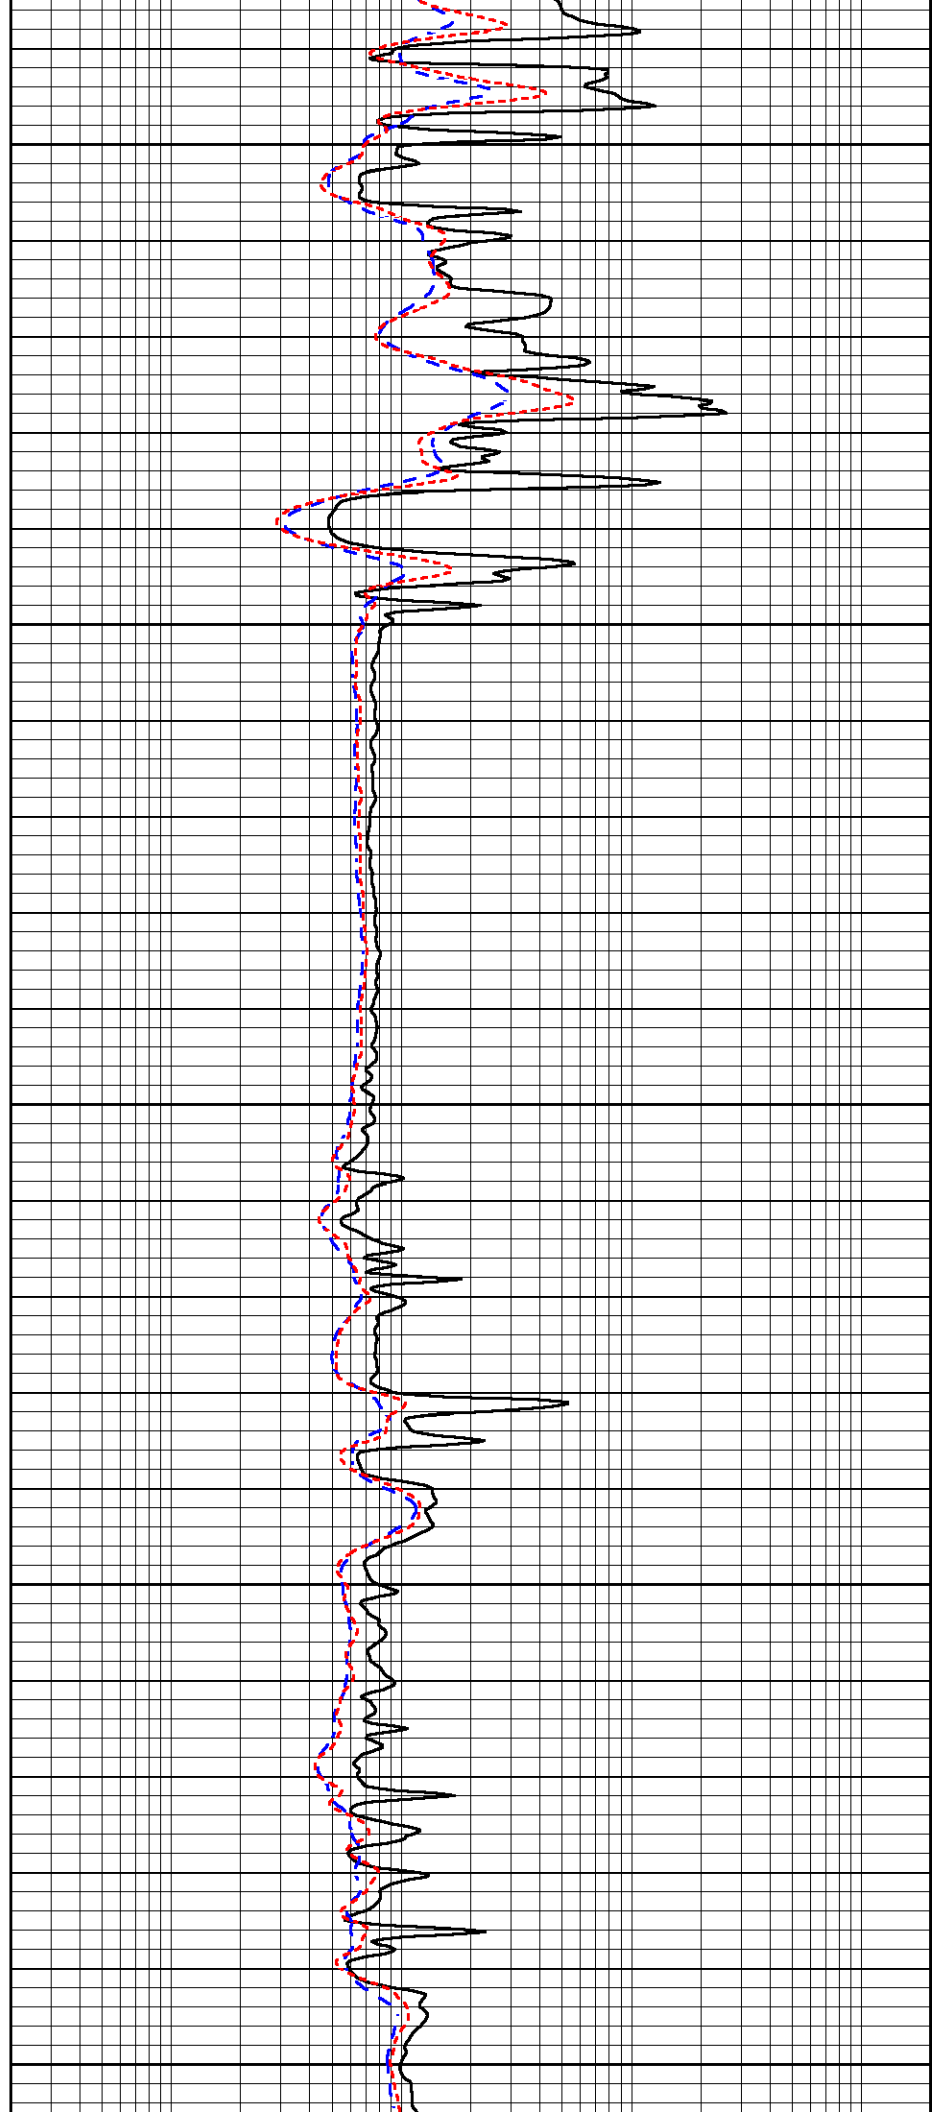

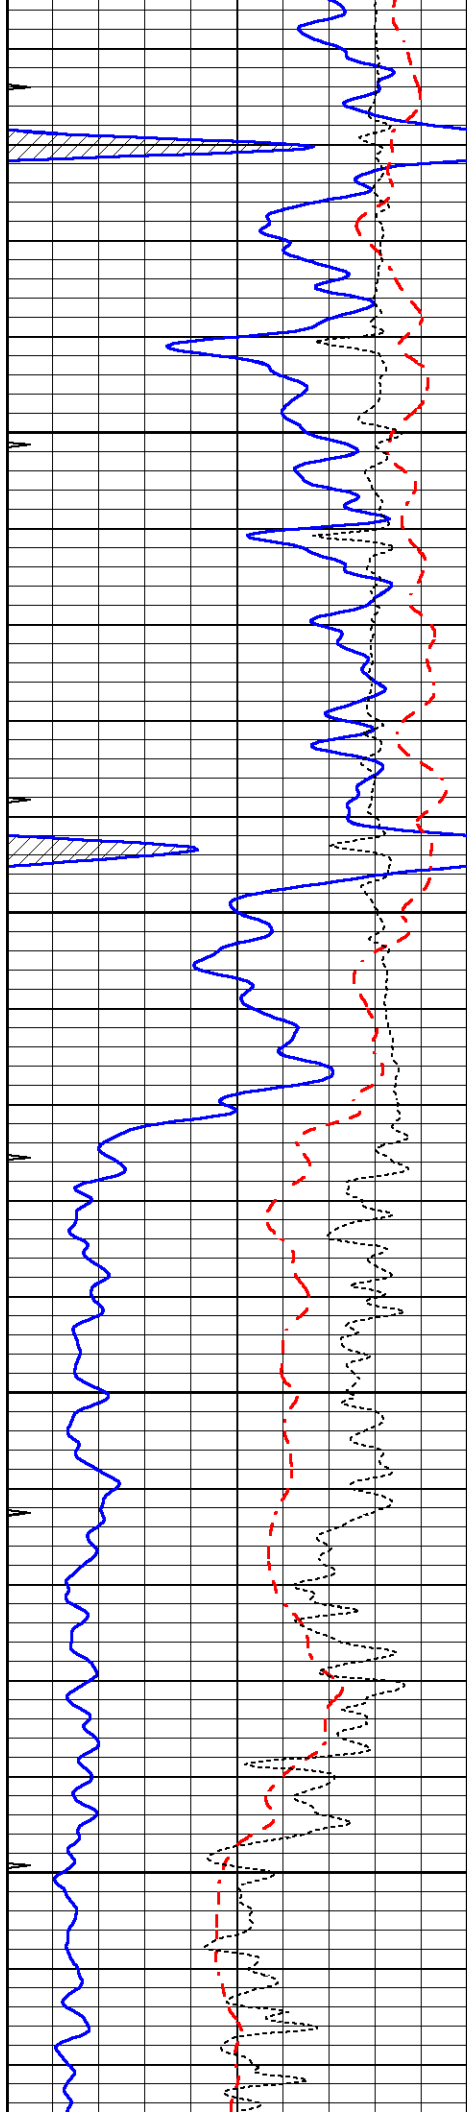




3000


3050

3100

3150

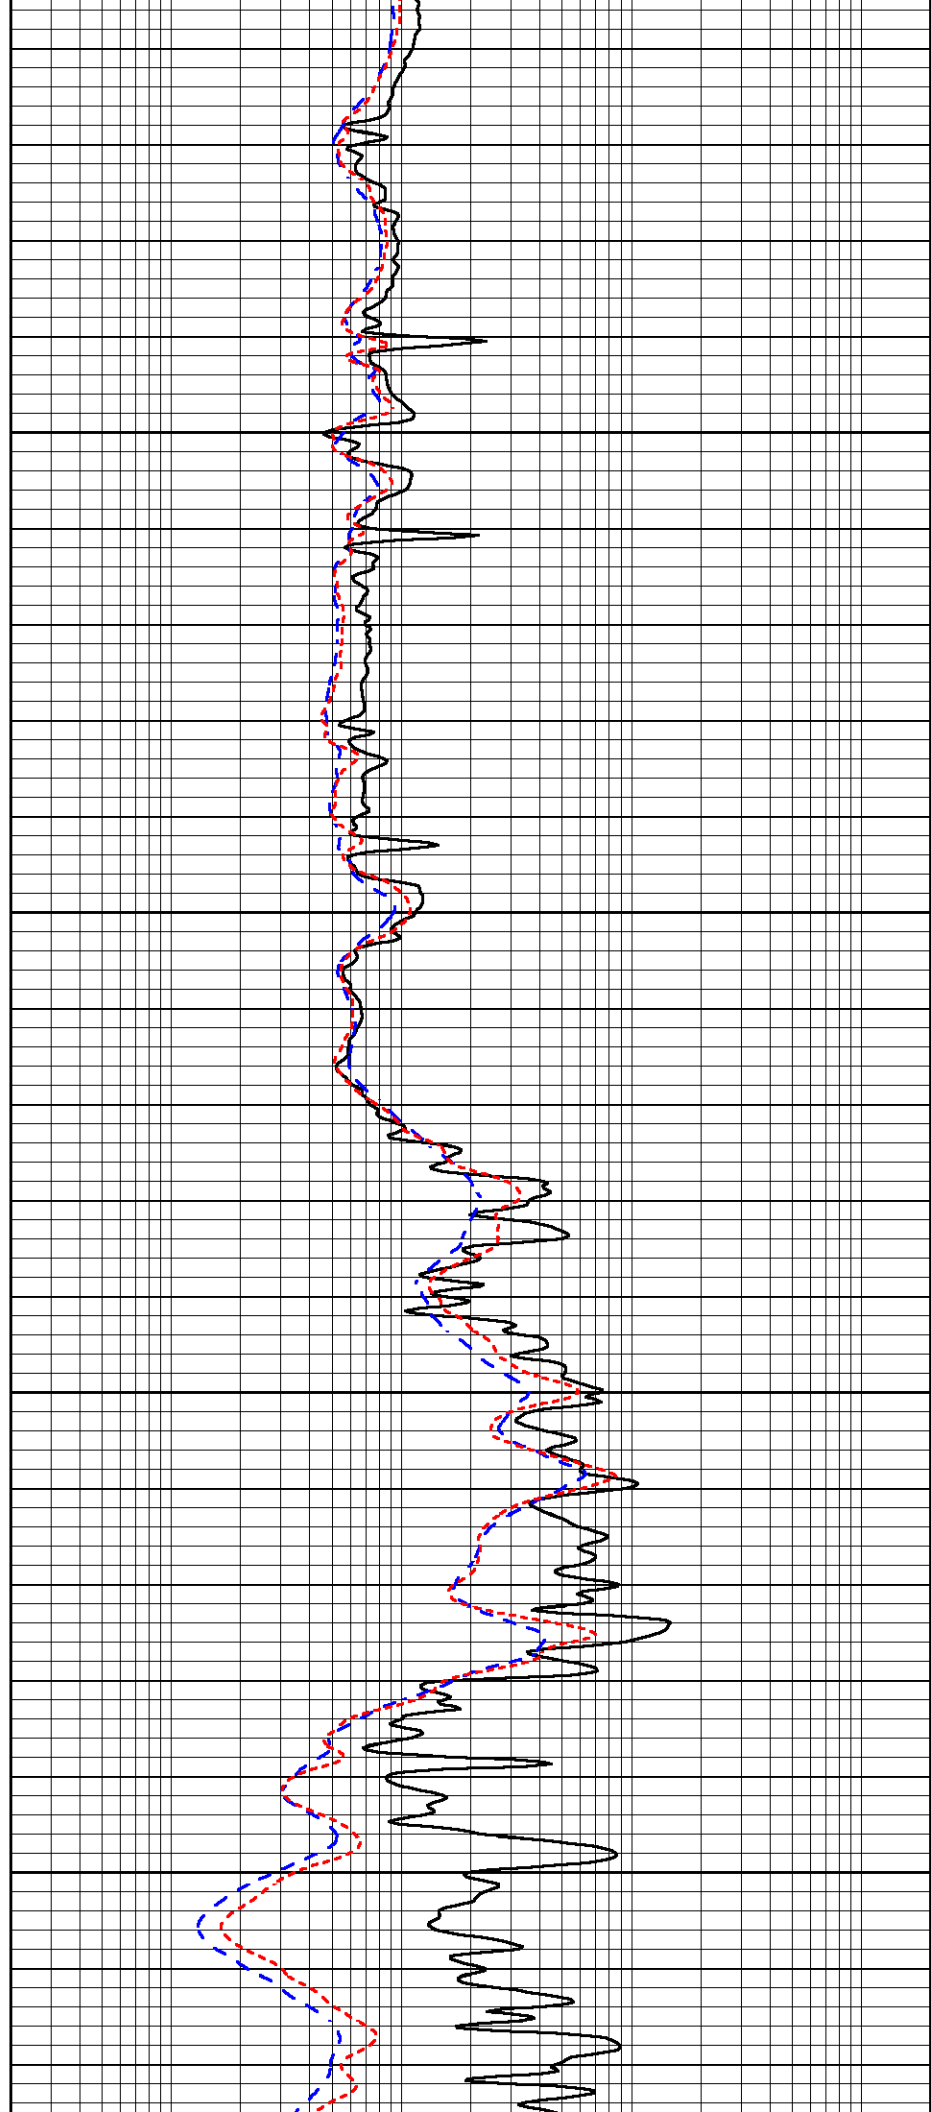

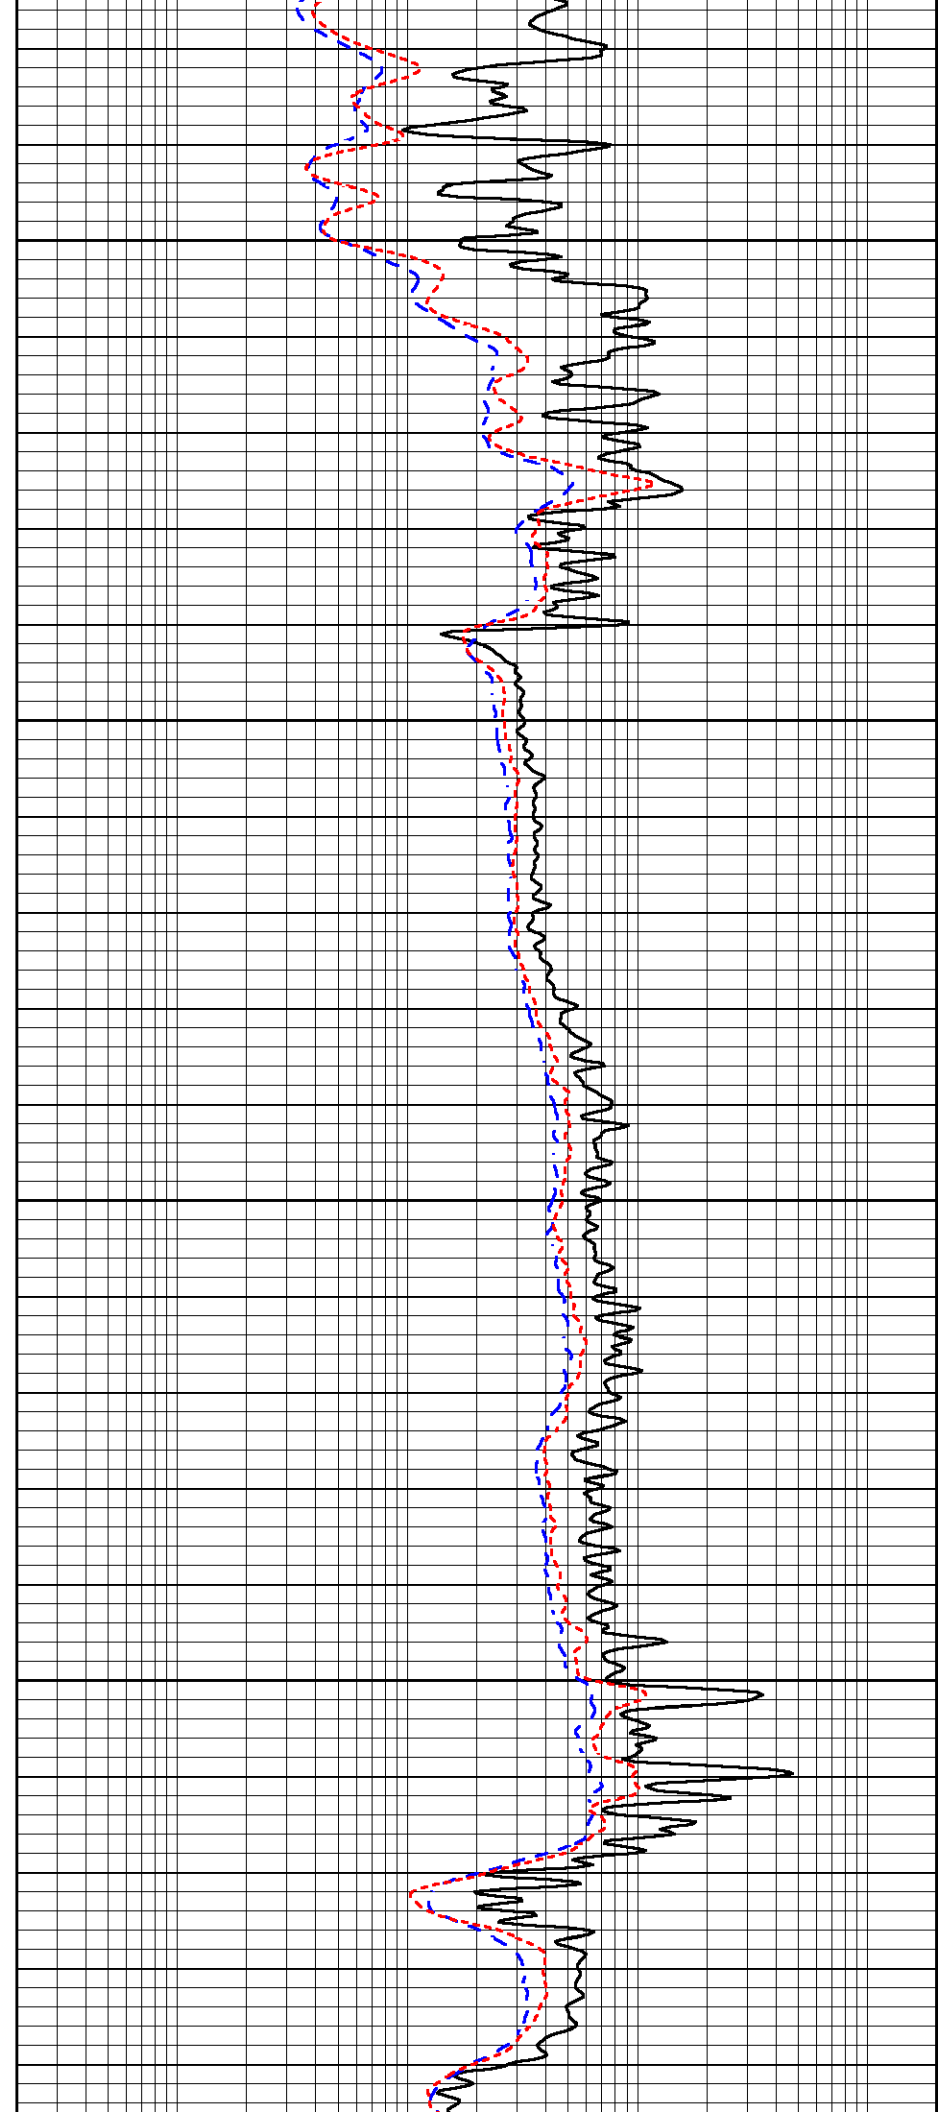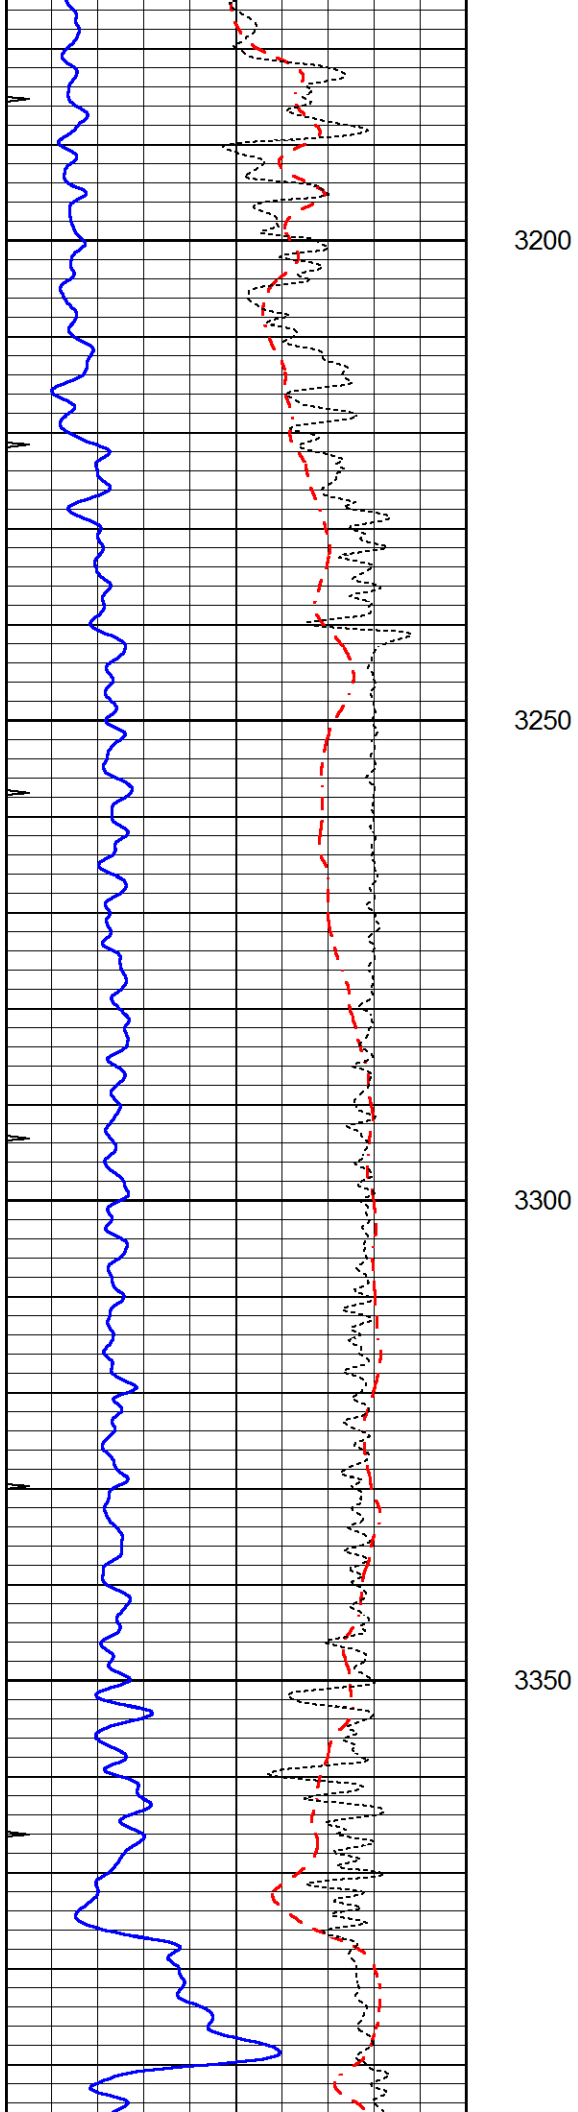


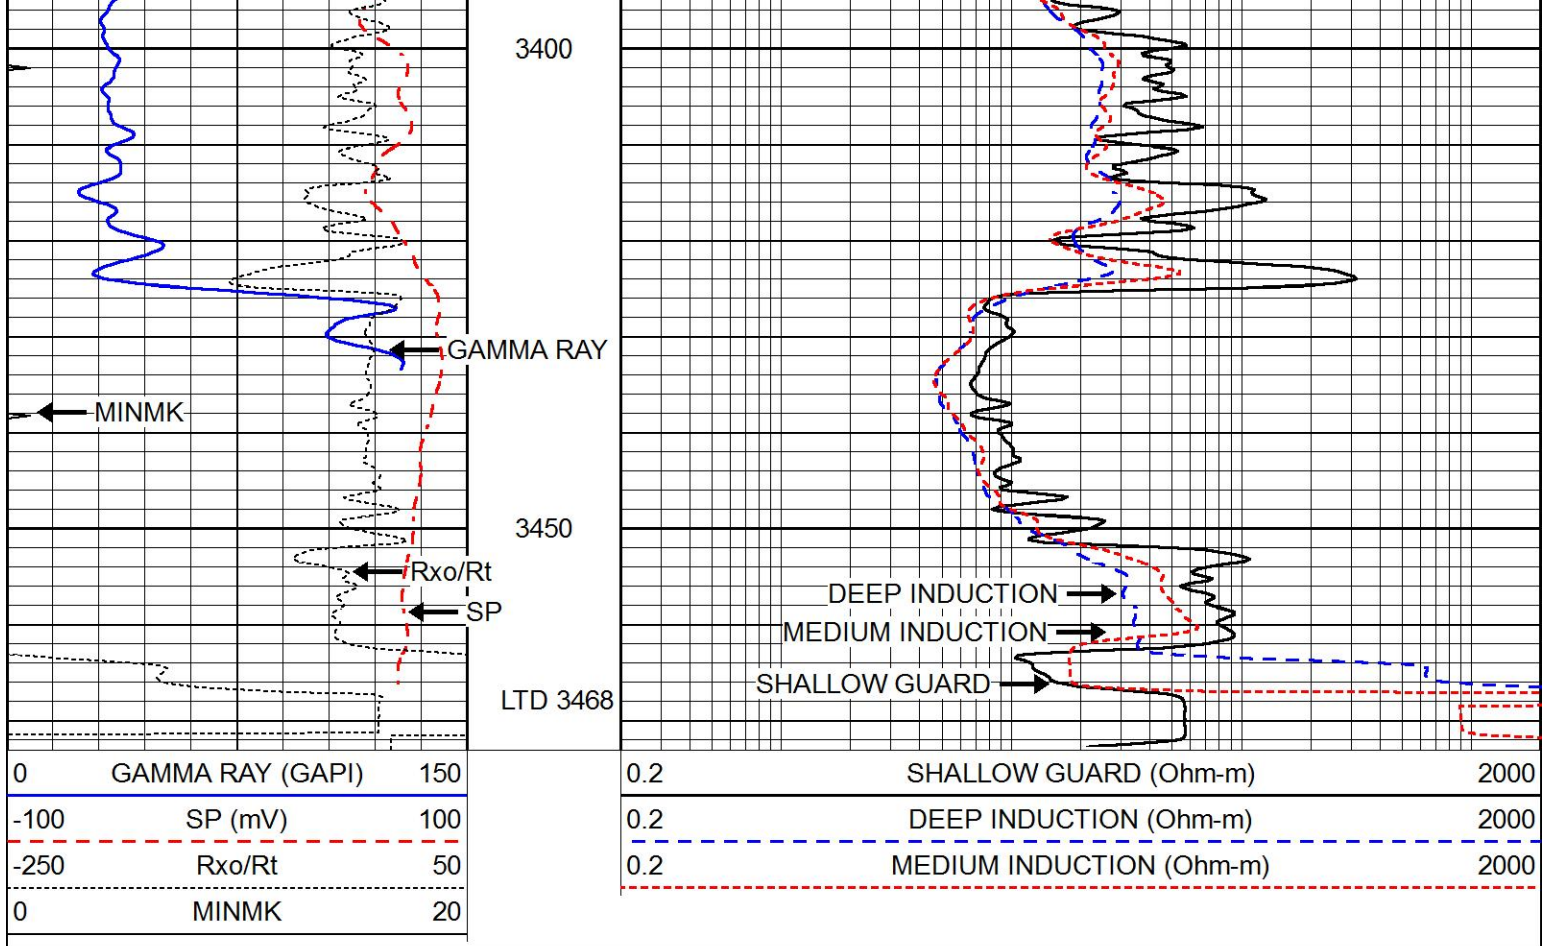



REPEAT SECTION

Database File 5034pe.db
 Dataset Pathname pass2RP
 Presentation Format _dil
 Dataset Creation Fri Oct 23 08:39:17 2020
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

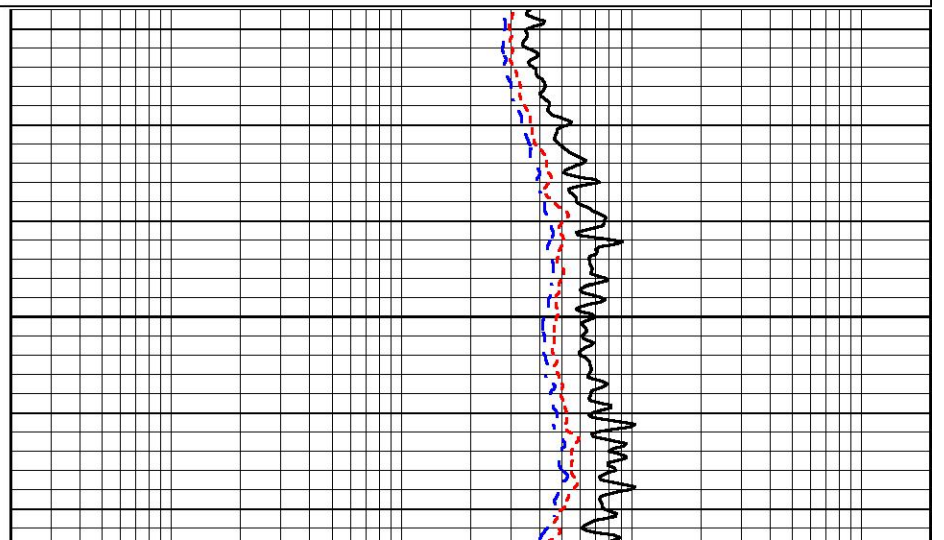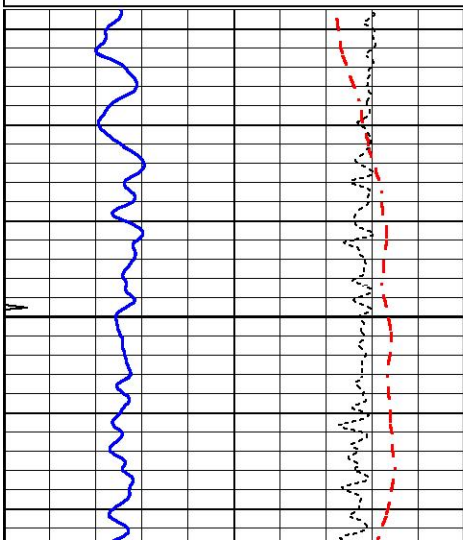

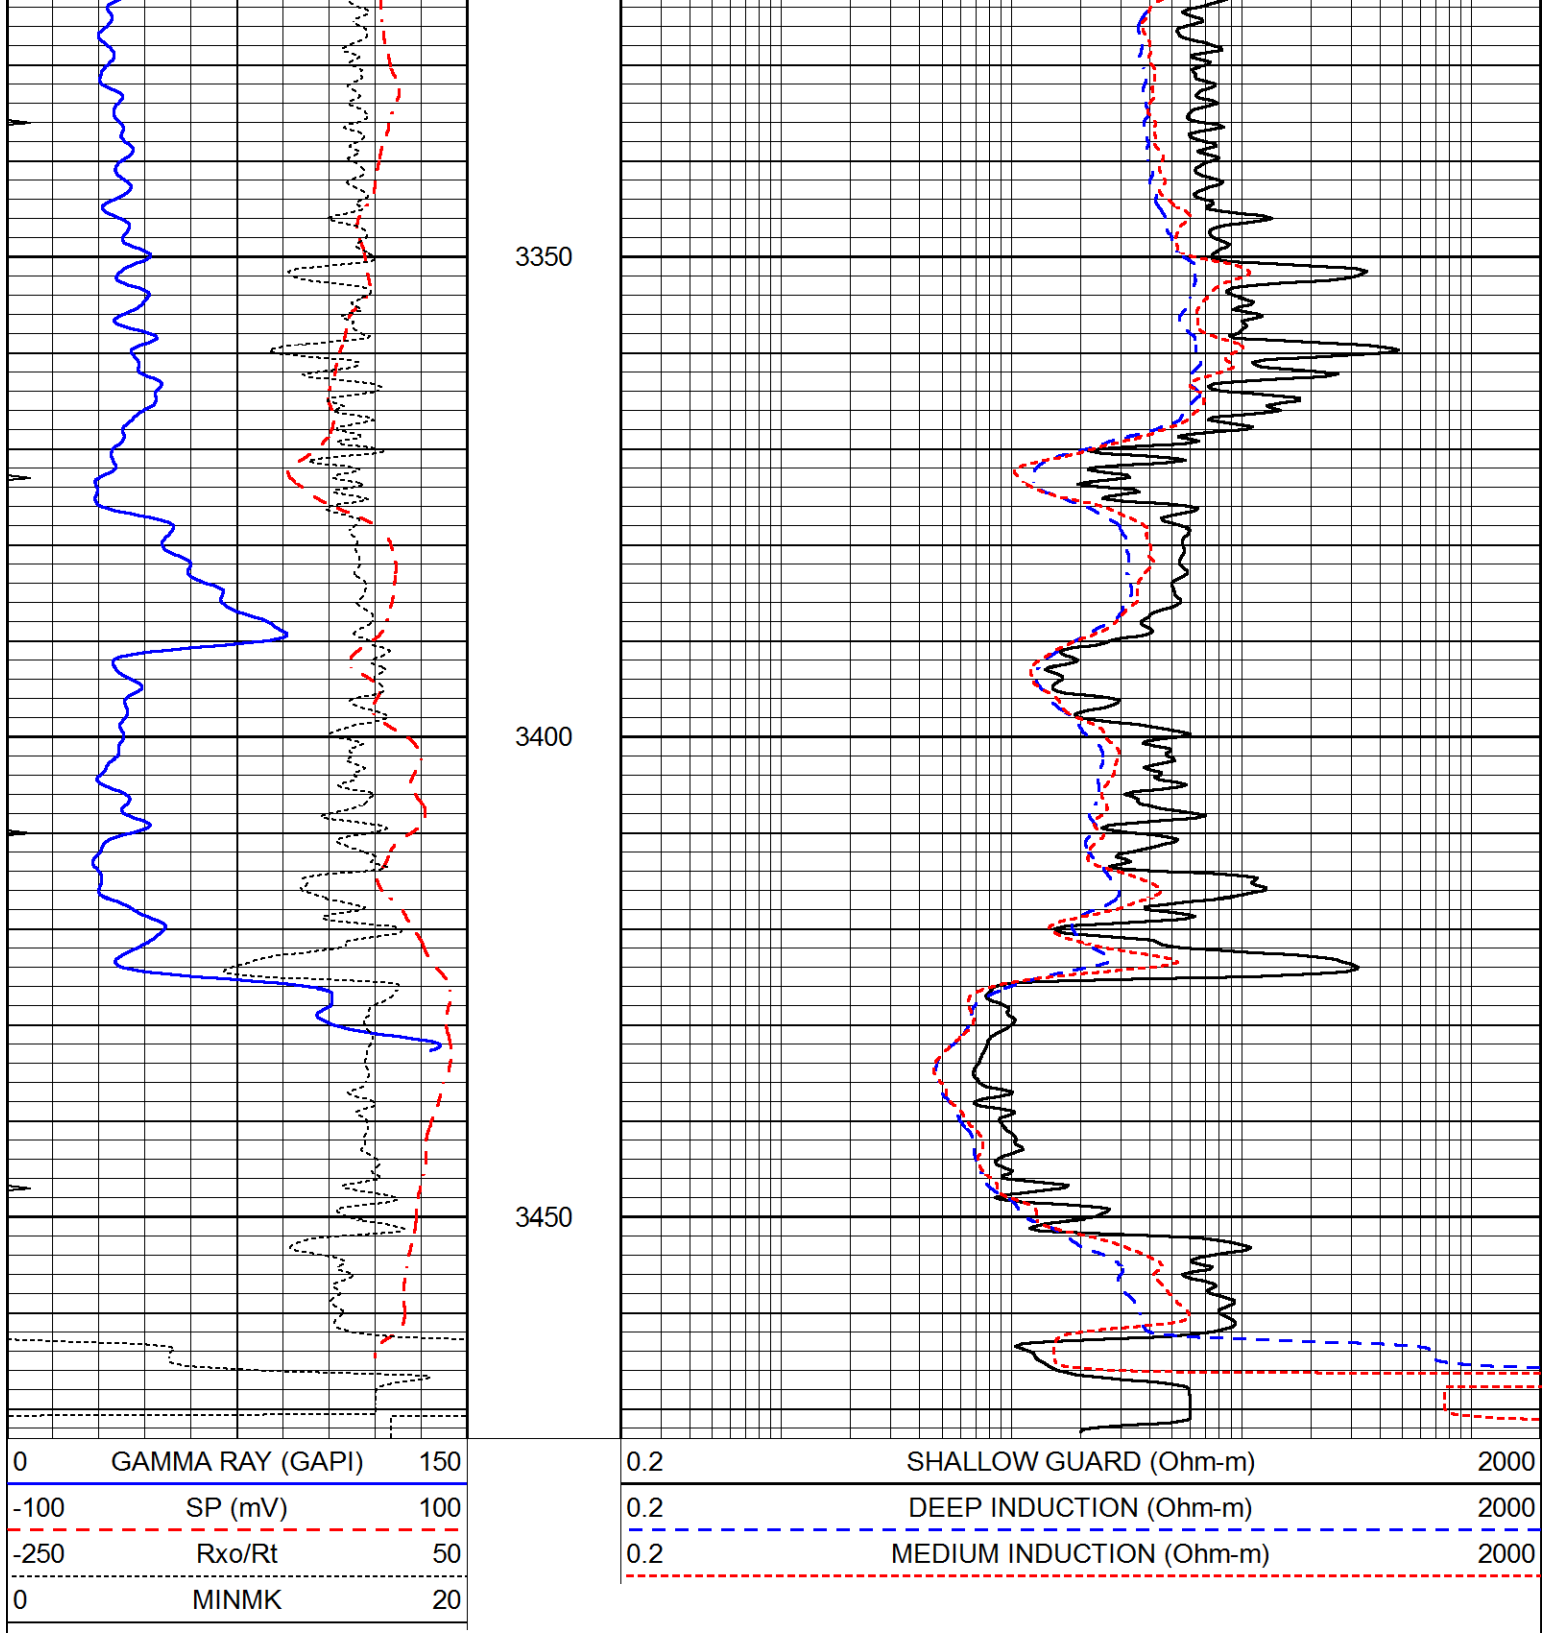

Calibration Report

Database File 5034pe.db
 Dataset Pathname pass2RP
 Dataset Creation Fri Oct 23 08:39:17 2020

Dual Induction Calibration Report

Serial-Model:	PROBE8-DILG
Surface Cal Performed:	Mon Sep 10 14:28:35 2018
Downhole Cal Performed:	Mon Sep 10 14:28:38 2018
After Survey Verification Performed:	Mon Sep 10 14:28:40 2018

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	0.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	590.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report
Serial: 002N Model: PRB

Master Calibration		Performed Tue Mar 10 15:08:00 2020					
	Background	Magnesium	Aluminum	Aluminum+Fe			
Window 1	780.1	6981.9	2088.6	1871.2	cps		
Window 2	718.6	5898.2	1813.8	1664.1	cps		
Window 3	580.0	2989.5	1088.0	1039.1	cps		
Window 4	172.8	175.7	175.3	173.5	cps		
Long Space	0.0	5179.6	1095.2	945.5	cps		
Short Space	1.1	1228.6	821.2	690.4	cps		
Rho		1.7100	2.5900	0.0000	g/cc		
Pe		2.0000	2.7500	5.7900			
Rib Angle	: 45.5	Rib Slope	: 1.016	Density/Spine Ratio	: 0.548		
Spine Angle	: 75.5	Spine Slope	: 3.857	Spine Intercept	: -18.9		

Before Survey Verification		Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0	0.0	0.0	cps		
Window 2	0.0	0.0	0.0	0.0	cps		
Window 3	0.0	0.0	0.0	0.0	cps		
Window 4	0.0	0.0	0.0	0.0	cps		
Long Space	0.0	0.0	0.0	0.0	cps		
Short Space	0.0	0.0	0.0	0.0	cps		
Measured Rho		0.0000	0.0000	0.0000	g/cc		
Measured Correction		0.0000	0.0000	0.0000	g/cc		
Measured Pe			0.0000	0.0000			

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings	Target	Normalization
Short Space	1.00 cps	1.00 cps	1.0000
Long Space	1.00 cps	1.00 cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	
3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: GR6
Tool Model: OPEN
Performed: Thu Jul 30 20:04:35 2020

Calibrator Value: 150.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 276.0 cps

Sensitivity: 0.7500 GAPI/cps