


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Osborne County. Sec. 2 Twp. 10 Rge. (E) 15 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C NW NW
Lease Owner Cities Service Oil Company
Lease Name Finnesy Well No. 1
Office Address Box 553 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed _____ 19____
Application for plugging filed 11-30 19 67
Application for plugging approved 11-28 19 67
Plugging commenced 11-20 19 67
Plugging completed 11-20 19 67
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Kansas City Depth to top 3249 Bottom 3435 Total Depth of Well 3485 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	264'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy rotary mud 3485'-500' Spotted 50 Sx. cement thru drill pipe at 500' Heavy rotary mud to 250' Spotted 25 sx. cement thru drill pipe at 250'. Pushed 1/2 sx. hulls to 40' and pumped in cement thru drill pipe at 40' and filled to surface.

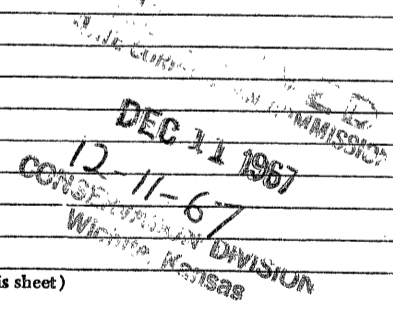

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Bros. Inc.
Address Hoisington, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
M. M. Hardin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Hardin M. M. Hardin
Box 553 Russell, Kansas Dist. Supt. 67665
(Address)

SUBSCRIBED AND SWORN to before me this 5th day of December, 19 67

James F. Kyger
James F. Kyger Notary Public.

My commission expires 10-5-68

WELL RECORD

15-141-20002-00-00

Company Cities Service Oil Company Well No. 1 Farm Finnery
 Location 660' FWL 630' FWL Sec. 2 T. 10E R. 15W
 Elevation 1949' KB County Osborne State Kansas
 Initial Prod. Dry and Abandoned 11-30-67 Contractor Peel Bros. Inc.
 Acid _____ Drlg. Comm. 11-3-67
 T. D. 3403' Drlg. Comp. 11-20-67

Casing Record:

8 5/8" @ 264' w/225 Sk. Cement

Formation Record:

	<u>Depth</u>
Post Rock	0-35
Shale	35-150
Shale & Shells	150-265
Shale	265-955
Red Bed and Shells	955-1170
Anhydrite	1170-1211
Red Bed	1211-1565
Shale & Shells	1565-1845
Shale & Lime	1845-2260
Lime & Shale	2260-2951
Lime	2951-3108
Lime & Shale	3108-3123
Lime	3123-3485

Electric Log Tops:

Hebbar	3118'
Toronto	3140'
Lansing-K.C.	3168'
Base KC	3458'

Stone Tests

	<u>Strength</u>
1213'	1
1893'	1/2 ^o
2566'	3/4 ^o

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 18 1968
 CONSERVATION DIVISION
 Wichita, Kansas