



MICRO LOG

Company BEREXCO LLC  
 Well ELLEN #1-15  
 Field BEAUCHAMP NORTH  
 County STANTON  
 State KS

Company BEREXCO LLC  
 Well ELLEN #1-15  
 Field BEAUCHAMP NORTH  
 County STANTON State KS

Location: 2305' FSL & 2287' FEL  
 API #: 15 187 21358  
 Permanent Datum Ground Level Elevation 3394  
 Log Measured From KB 13' AGL  
 Drilling Measured From KB  
 Other Services  
 DIL  
 CDNL/SON  
 Elevation  
 K.B. 3407  
 D.F. 3405  
 G.L. 3394

Date	2/13/2023
Run Number	One
Depth Driller	5600
Depth Logger	5599
Bottom Logged Interval	5579
Top Log Interval	3500'
Casing Driller	8 5/8" @ 1632'
Casing Logger	1632'
Bit Size	7 7/8"
Type Fluid in Hole	Chemical
Density / Viscosity	9.3/54
pH / Fluid Loss	10.0/6.4
Source of Sample	Pit
Rm @ Meas. Temp	1.8 @ 60degf
Rmf @ Meas. Temp	1.35 @ 60degf
Rmc @ Meas. Temp	2.16 @ 60degf
Source of Rmf / Rmc	Calculated
Rm @ BHT	0.89 @ 122degf
Time Circulation Stopped	7:00 PM
Time Logger on Bottom	9:00 PM
Maximum Recorded Temperature	122degf
Equipment Number	T-605
Location	HAYS, KS.
Recorded By	COLBY DREILING
Witnessed By	KEATON JONES

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

JOHNSON CITY SOUTH ON HWY 27 TO RD 21,  
 1 WEST, 0.5 SOUTH, WEST INTO.  
 Thanks for using Gemini Wireline LLC  
 785-625-1182






MAIN PASS

Database File berexcoellen#1-15oh.db  
 Dataset Pathname pass5MIC  
 Presentation Format kml  
 Dataset Creation Tue Feb 14 00:34:58 2023  
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

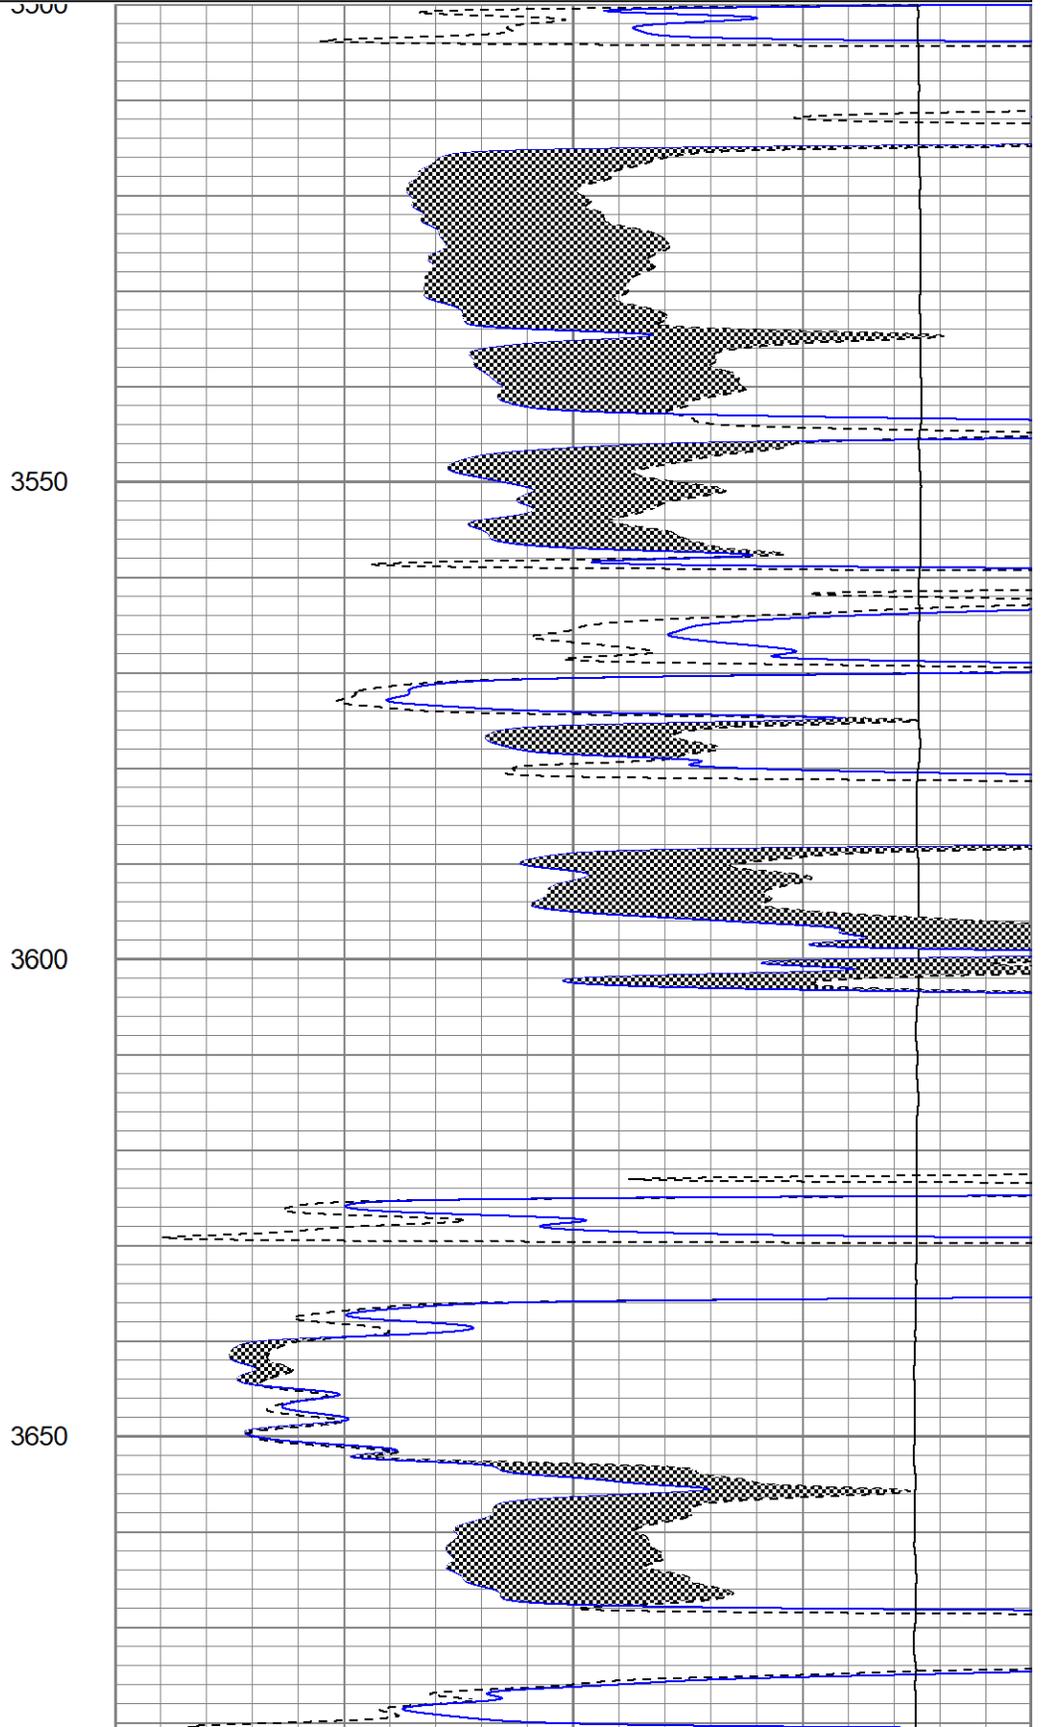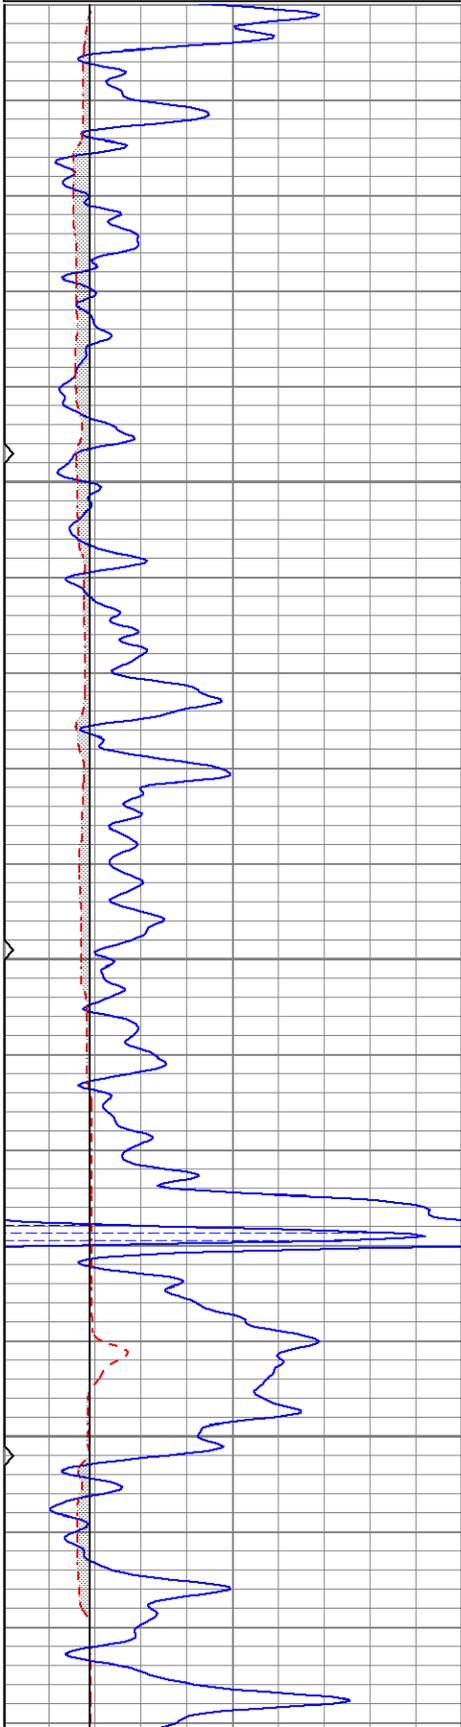

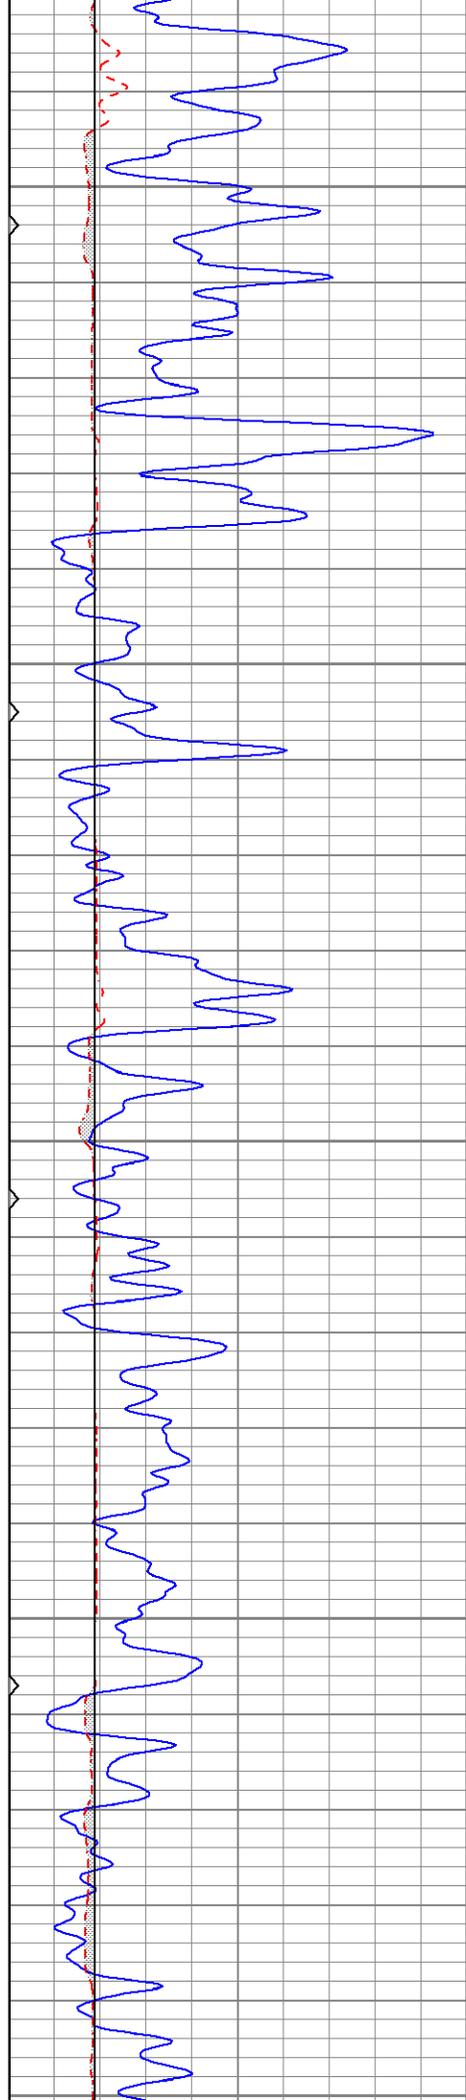


3700

3750

3800

3850

3900

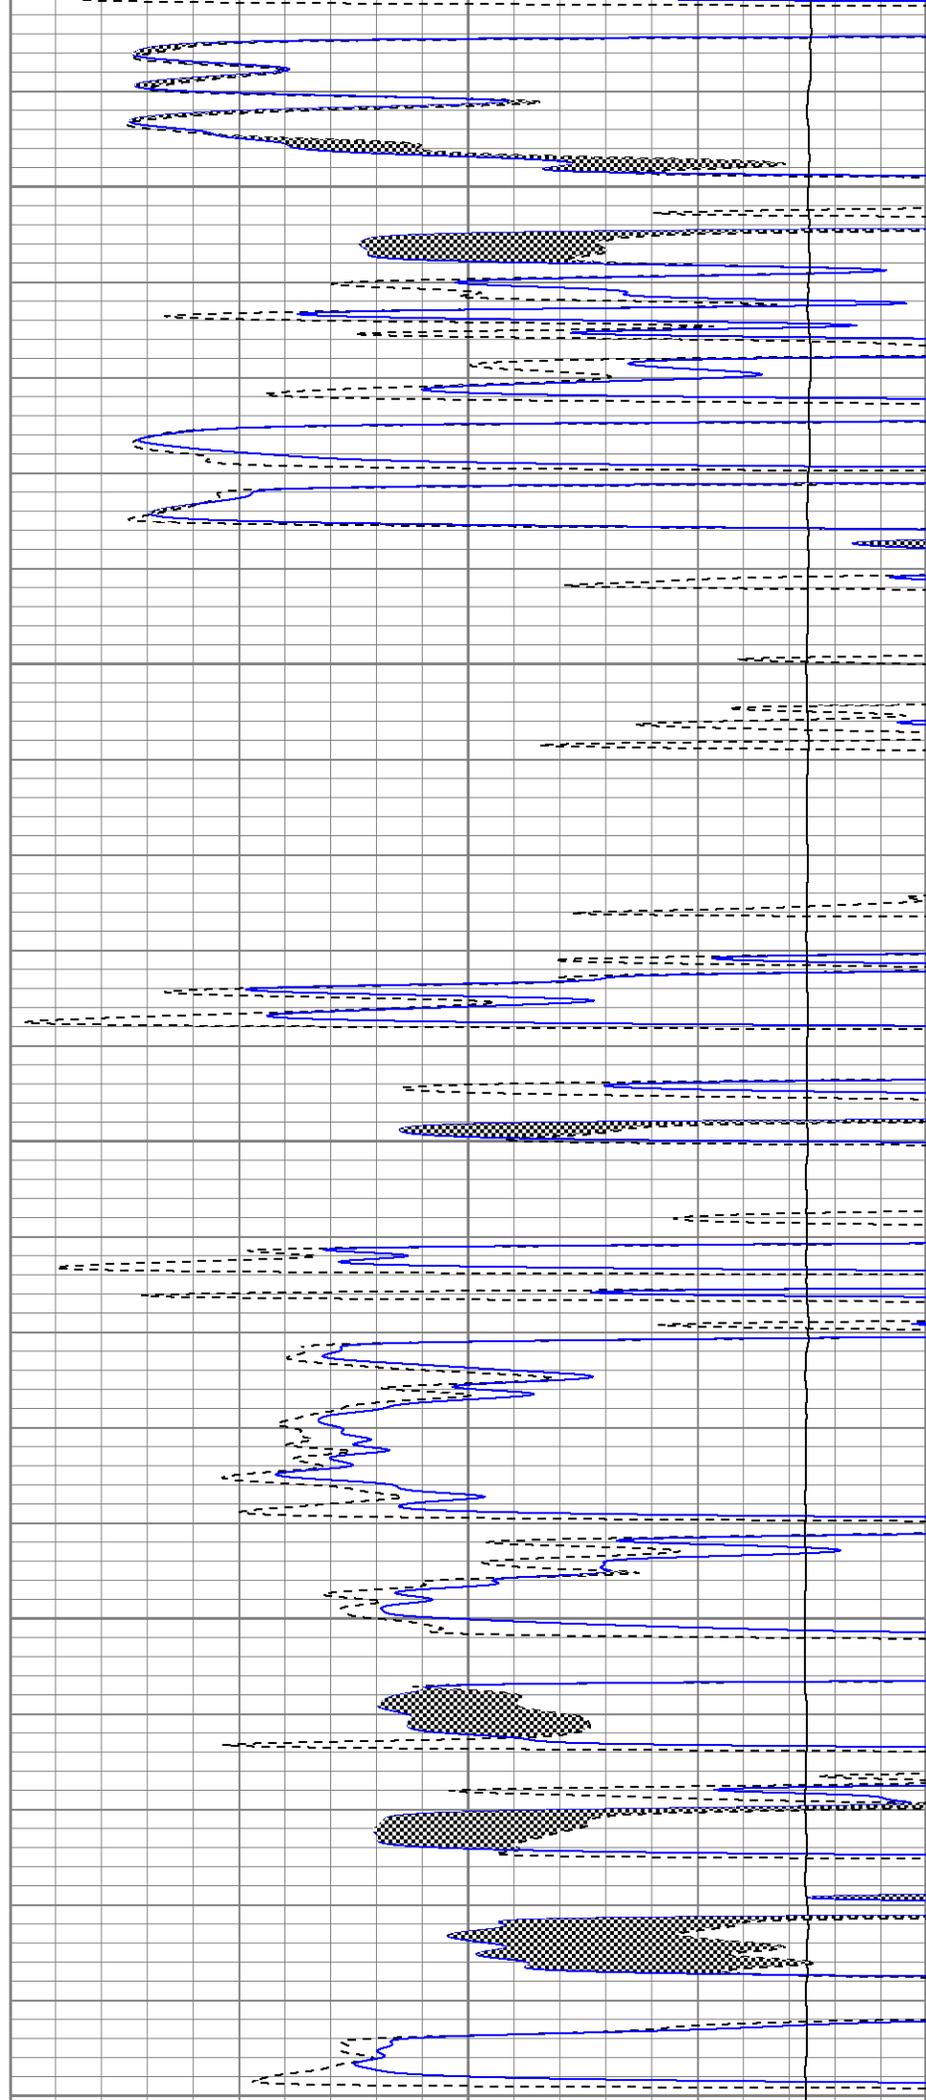



3900


3950

4000

4050

4100

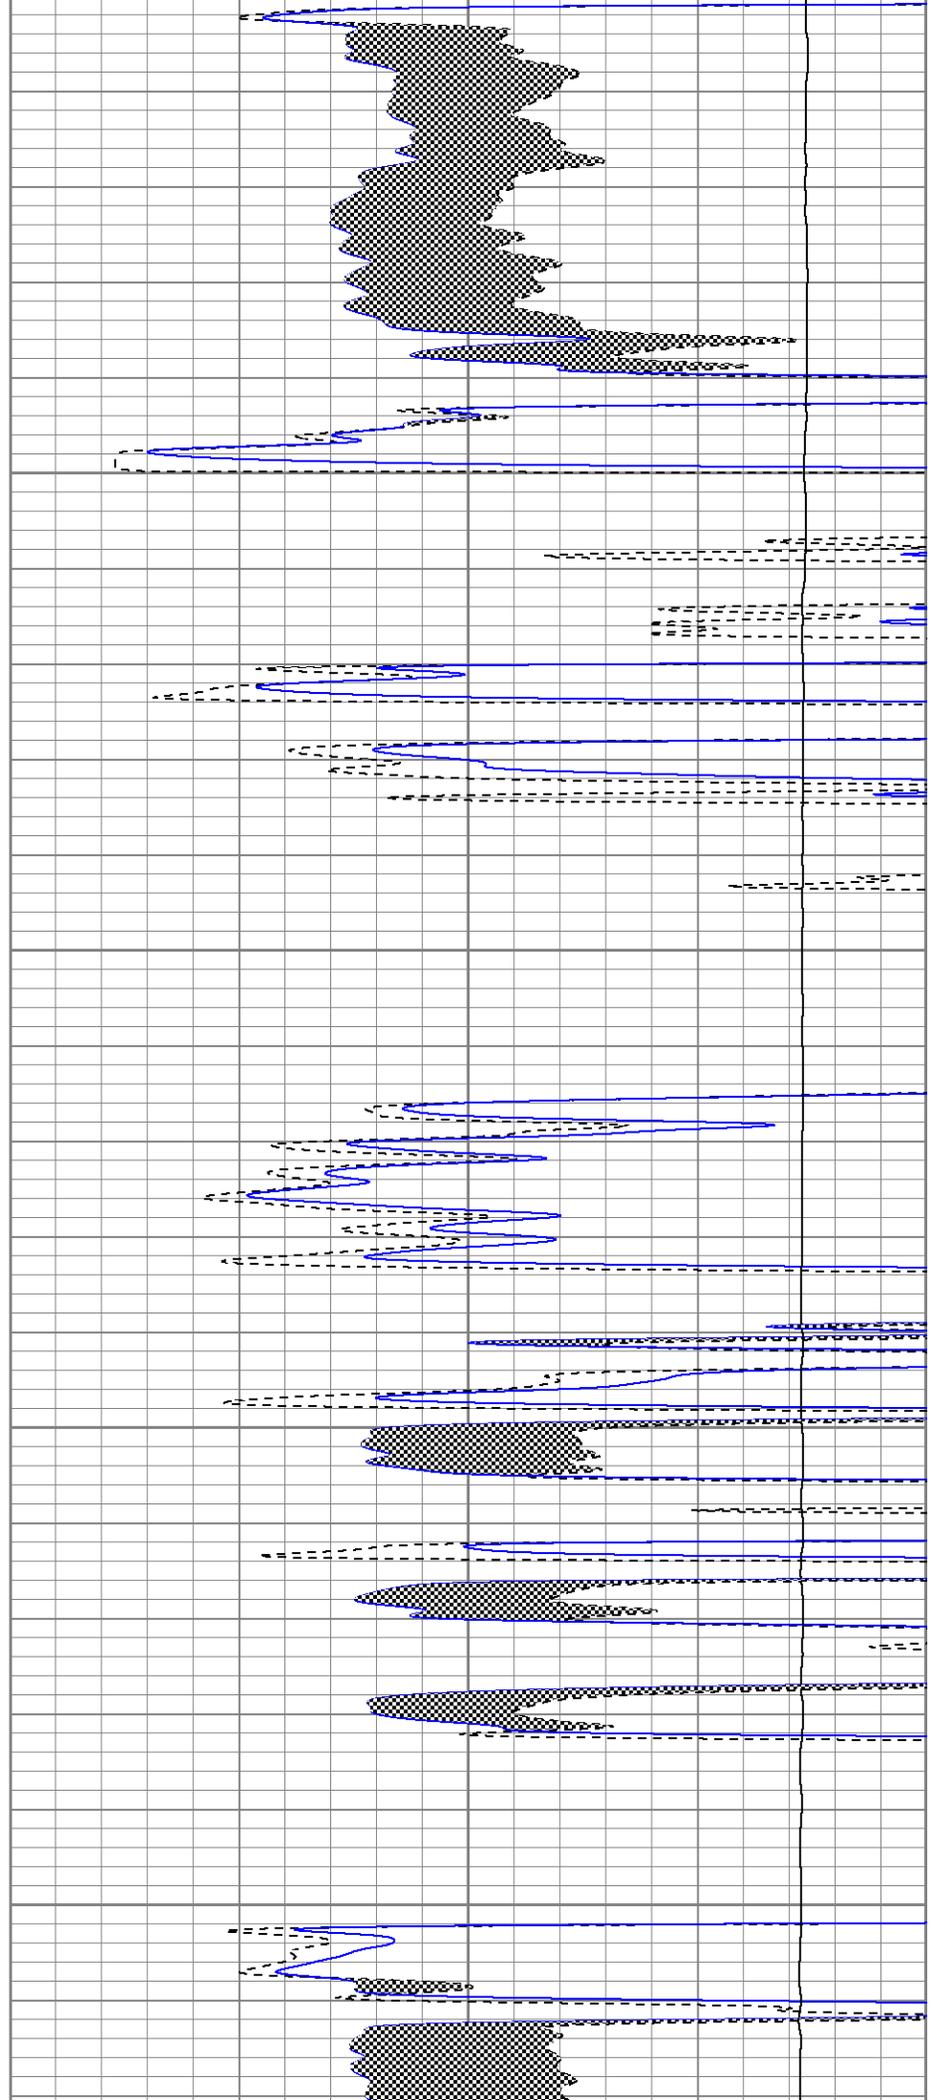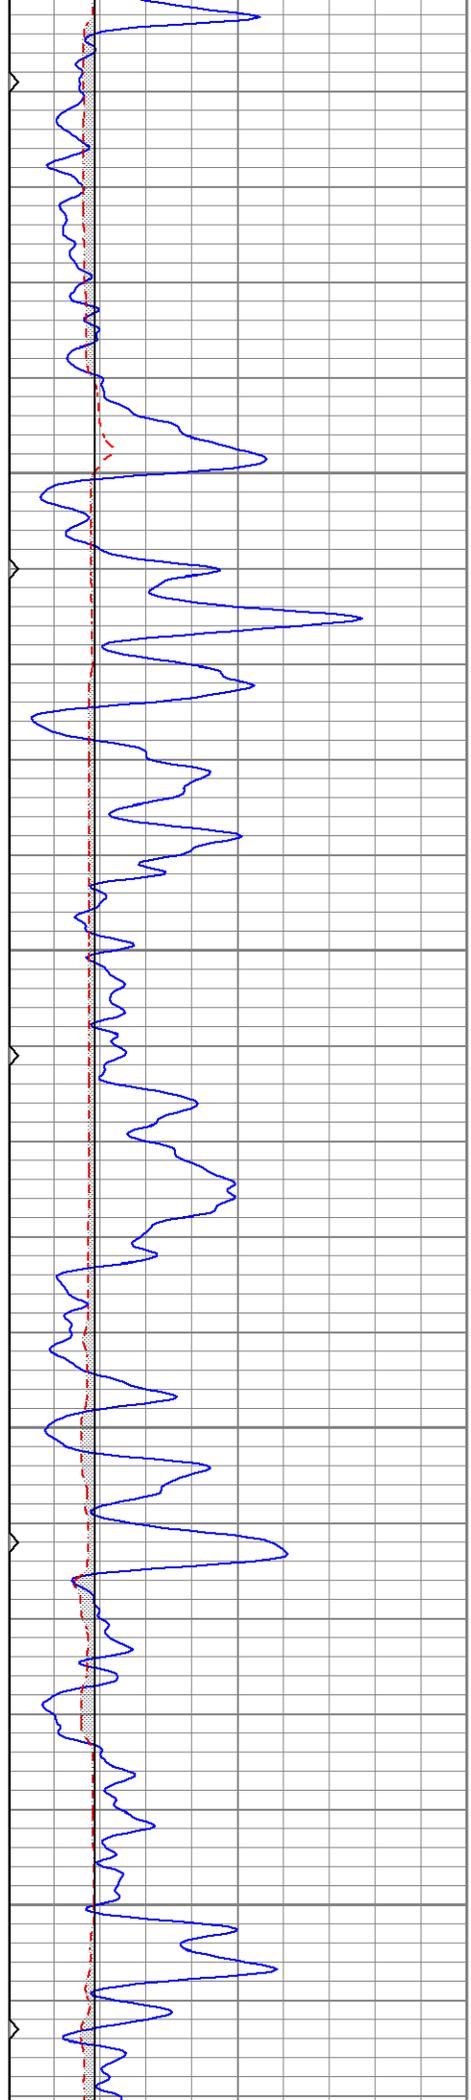

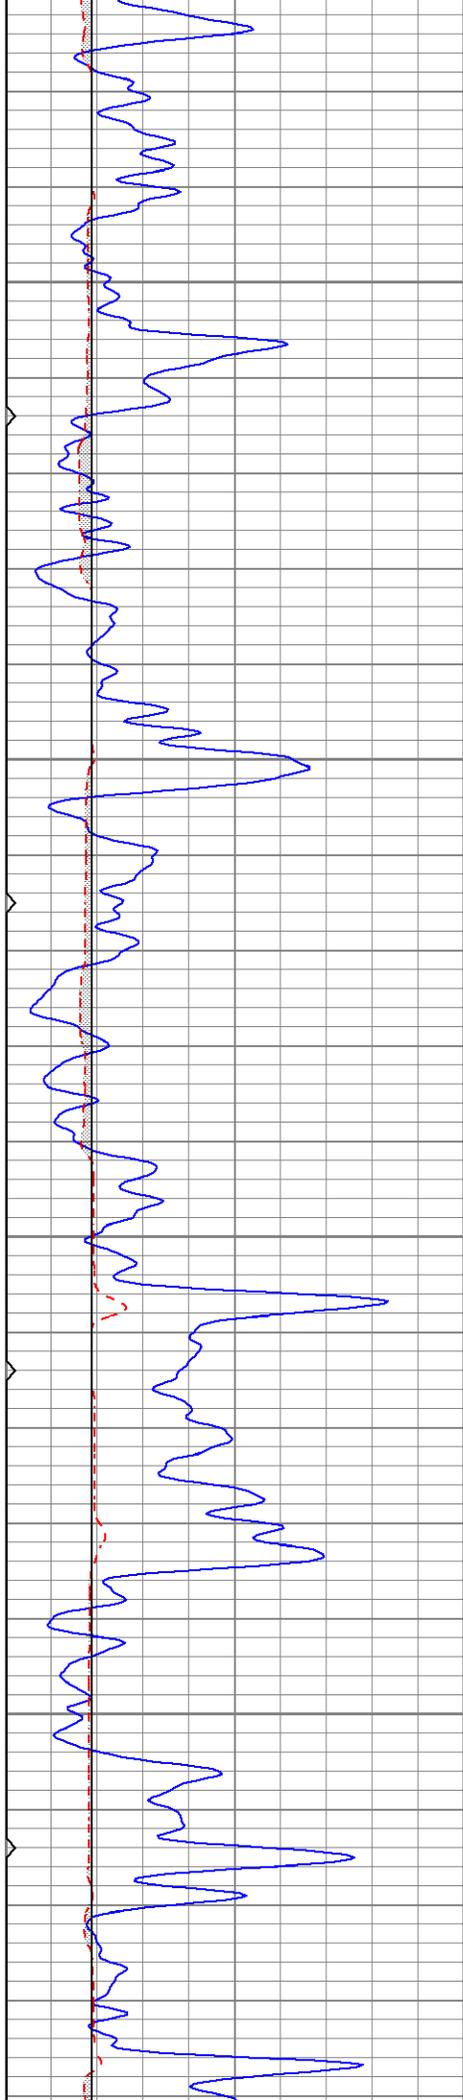



4150

4200

4250

4300

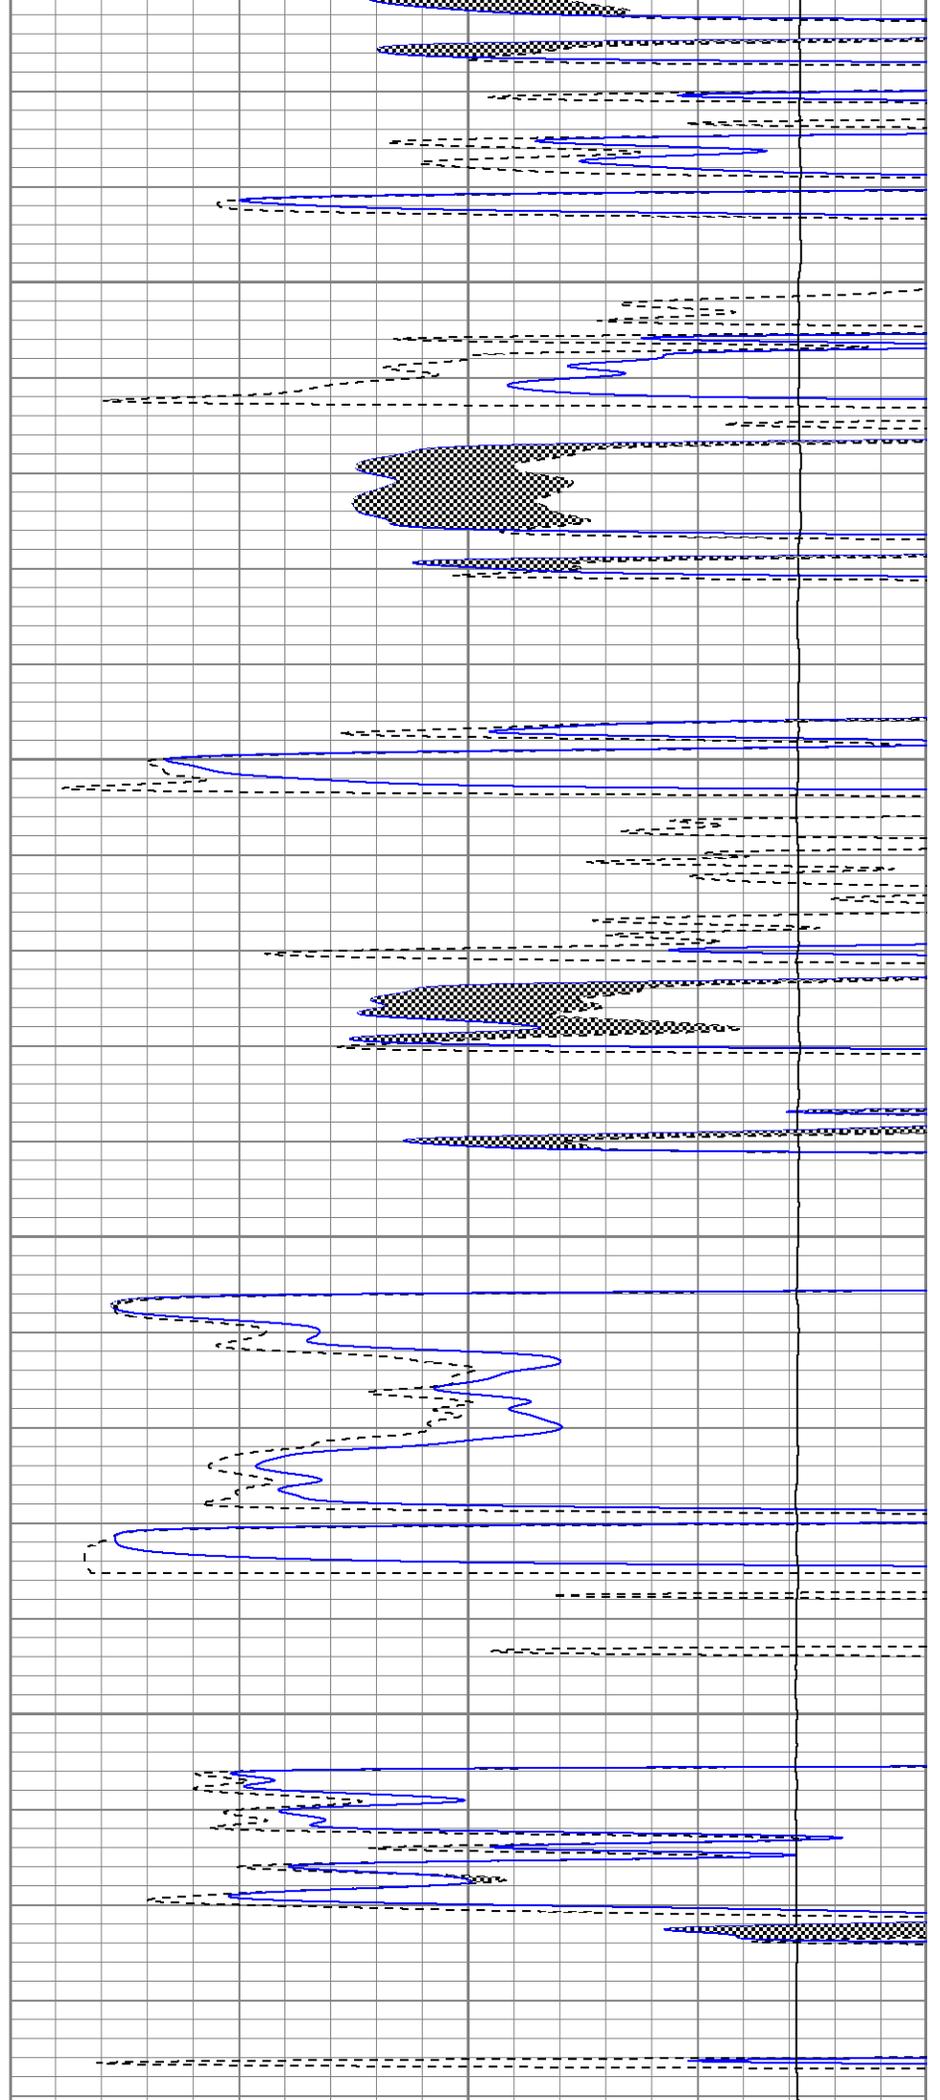

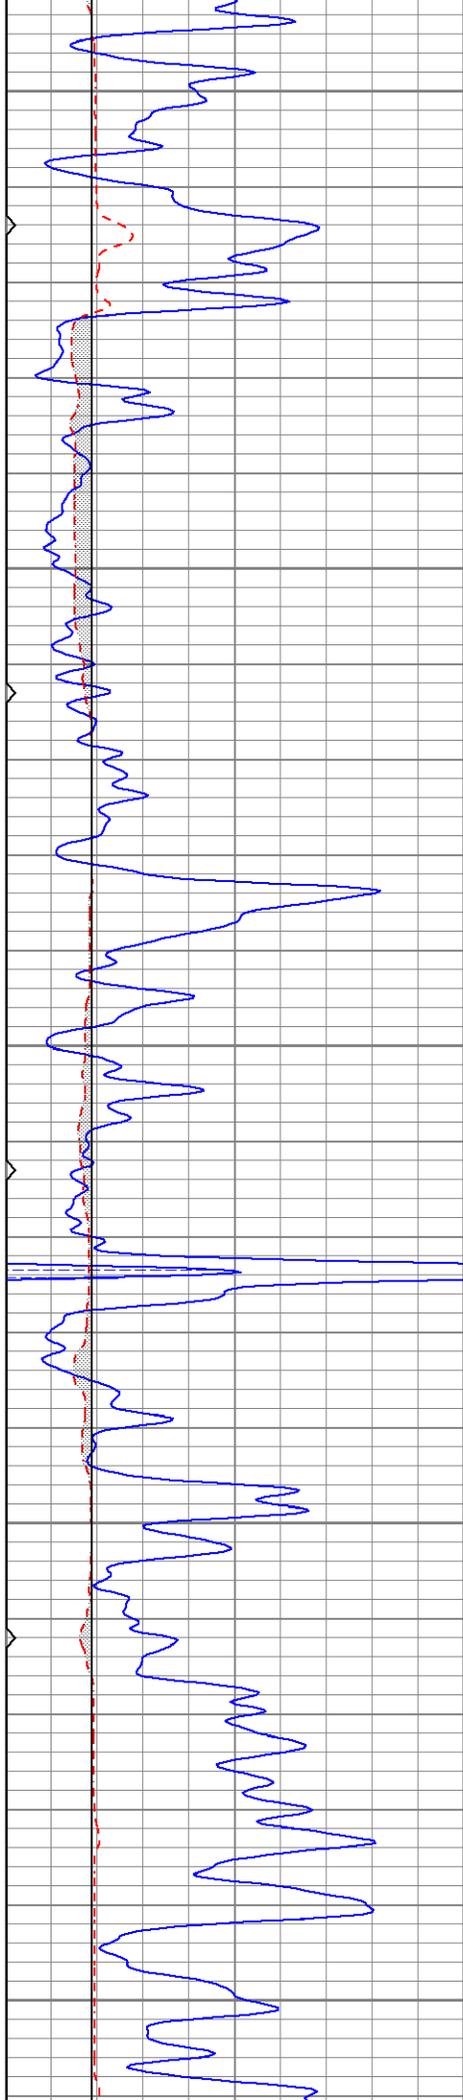


4350


4400

4450

4500

4550

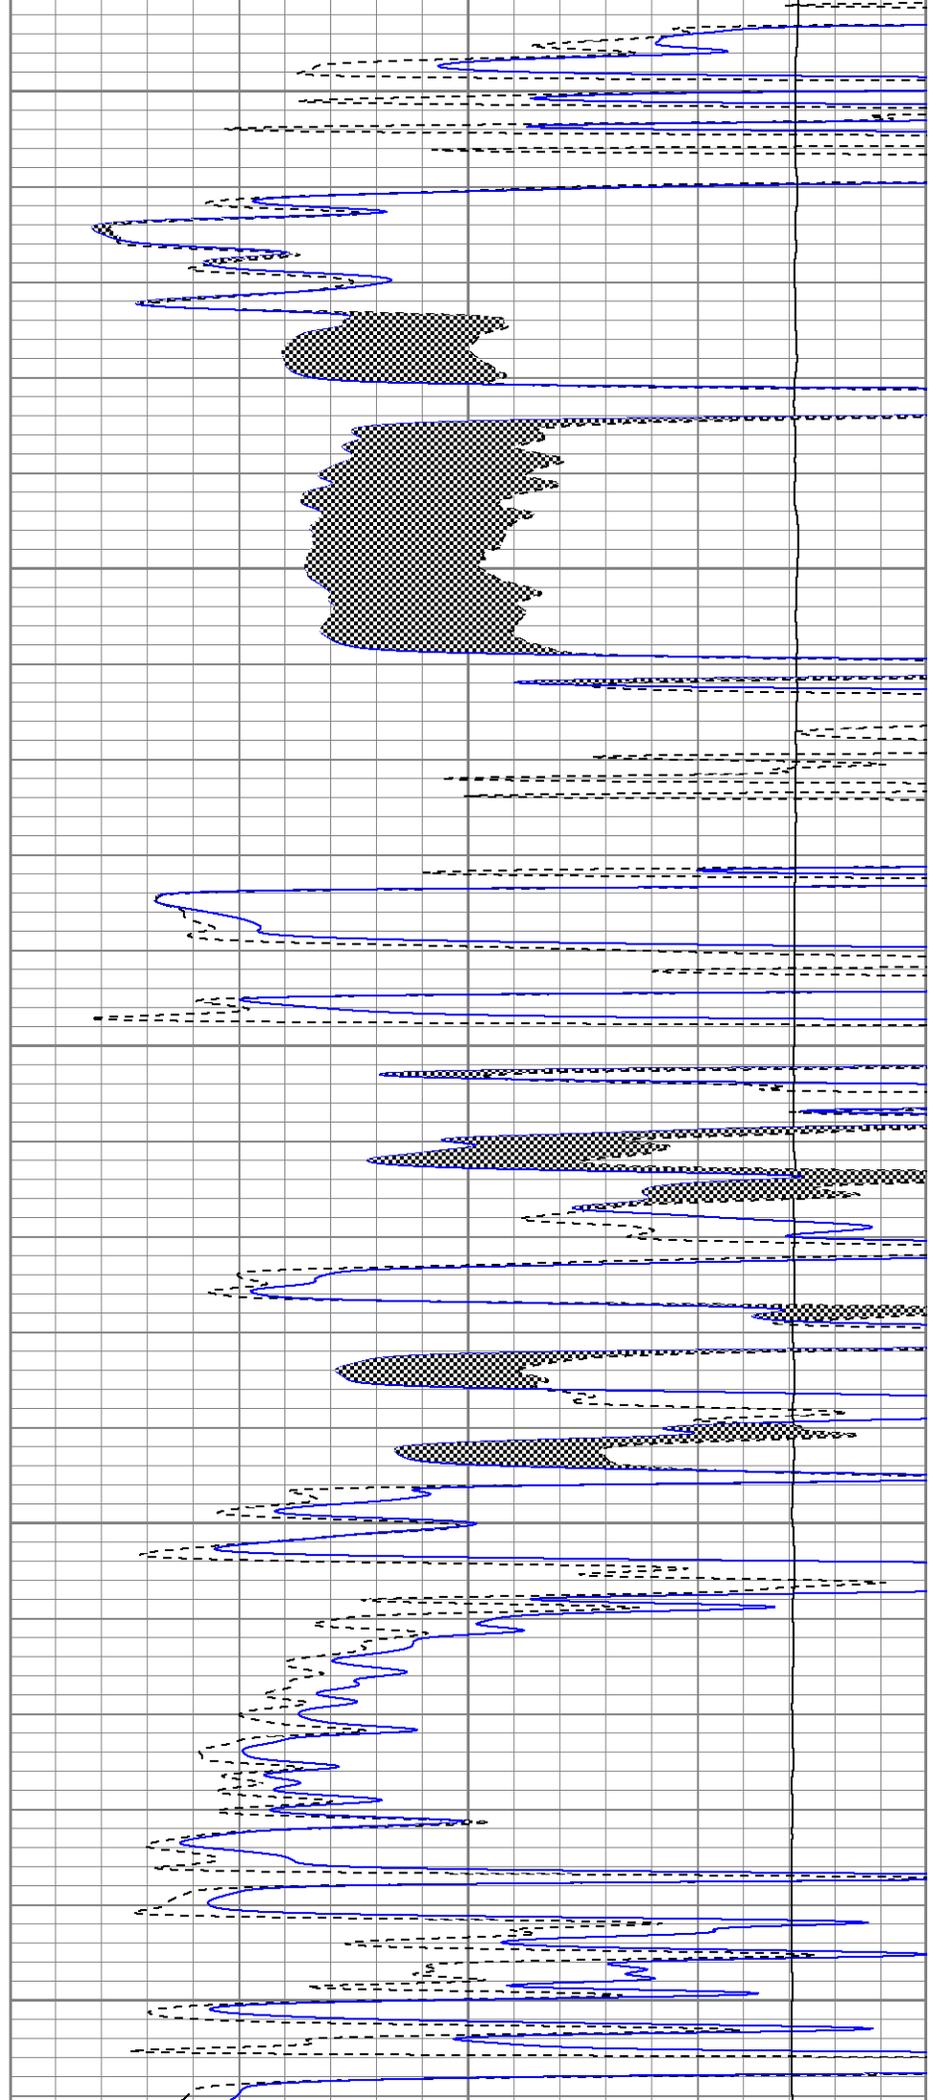

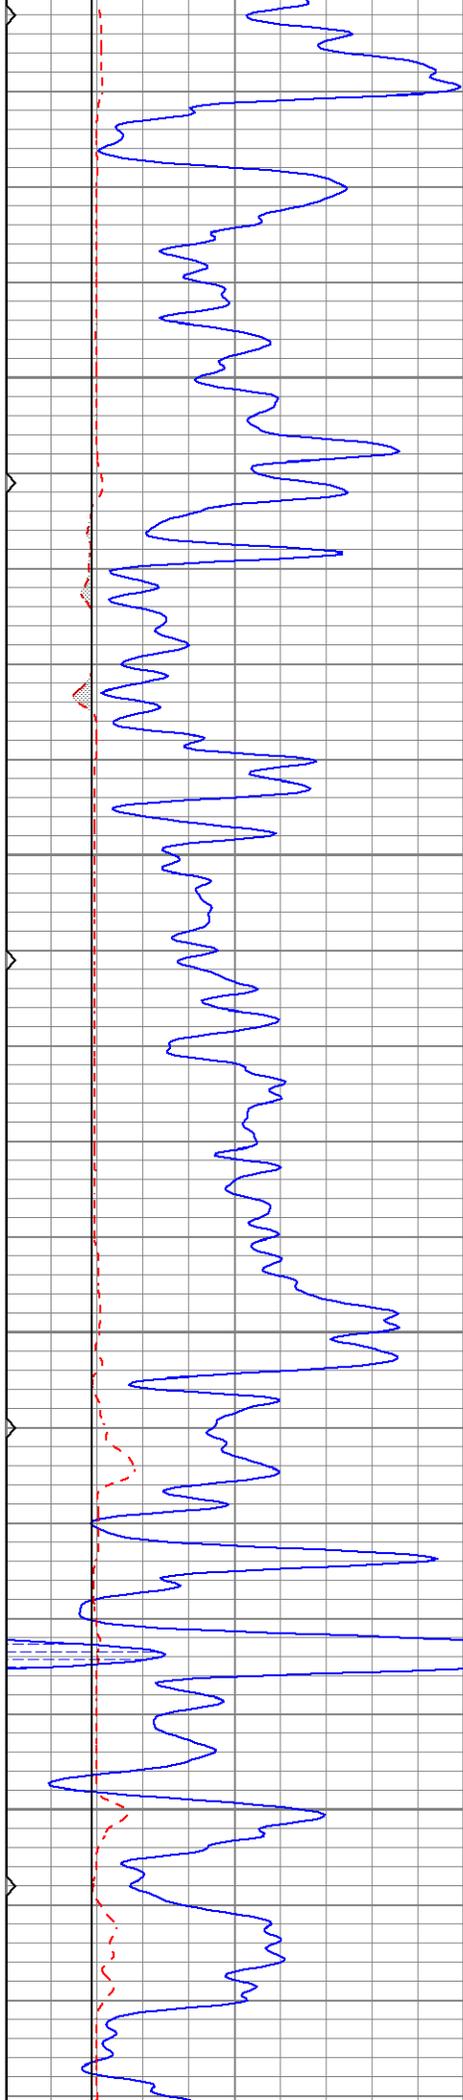



4600

4650

4700

4750

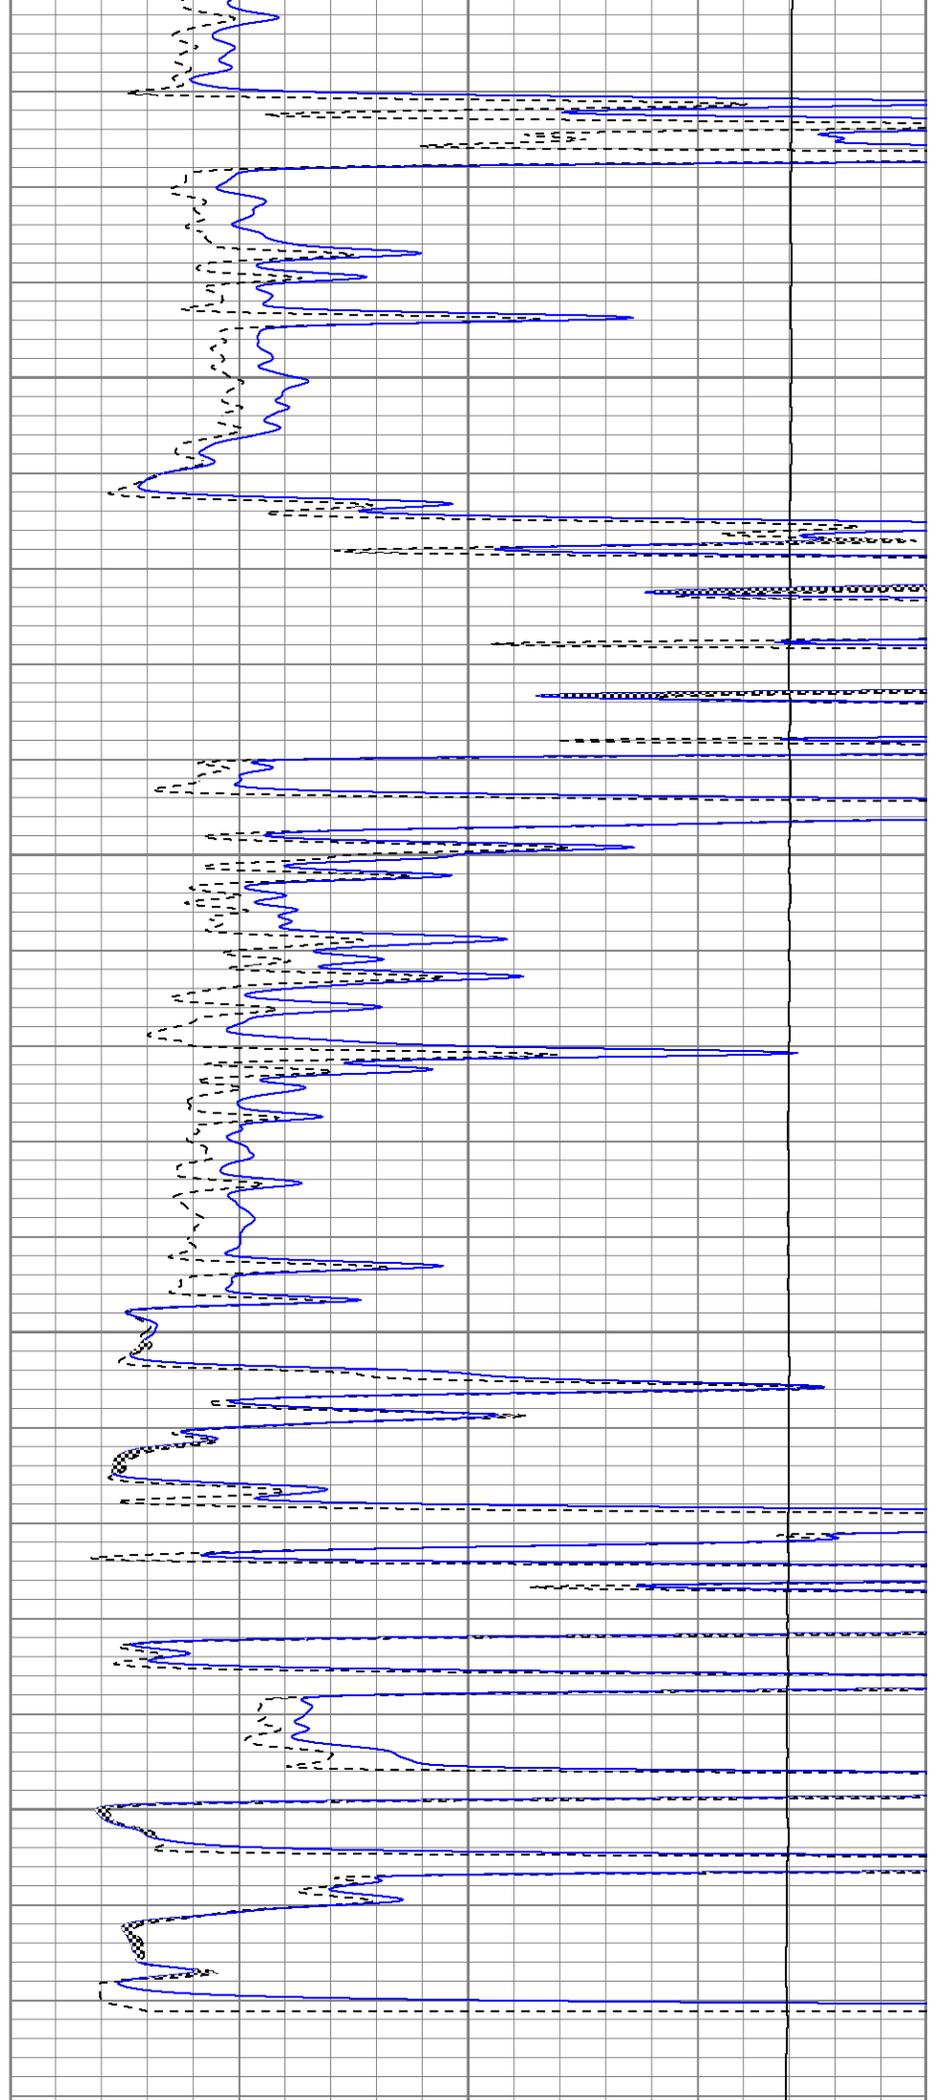

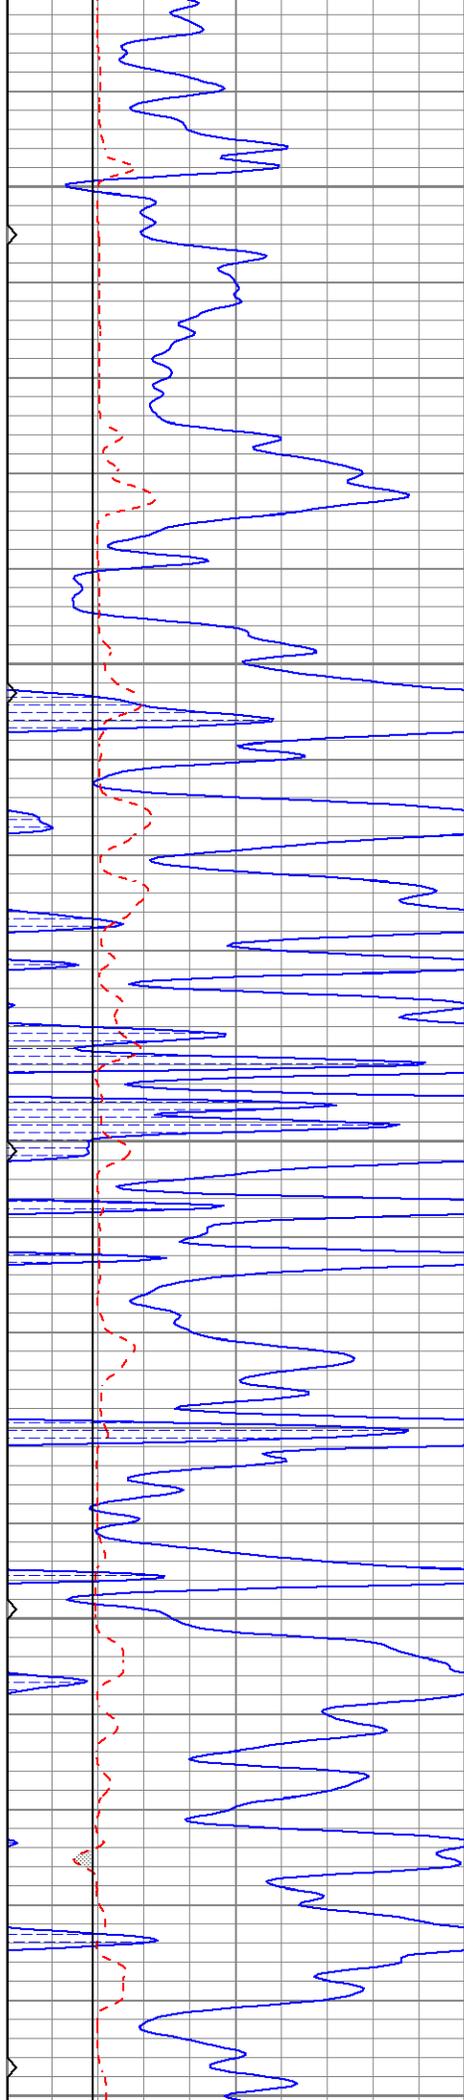


4800



4850


4900

4950

5000

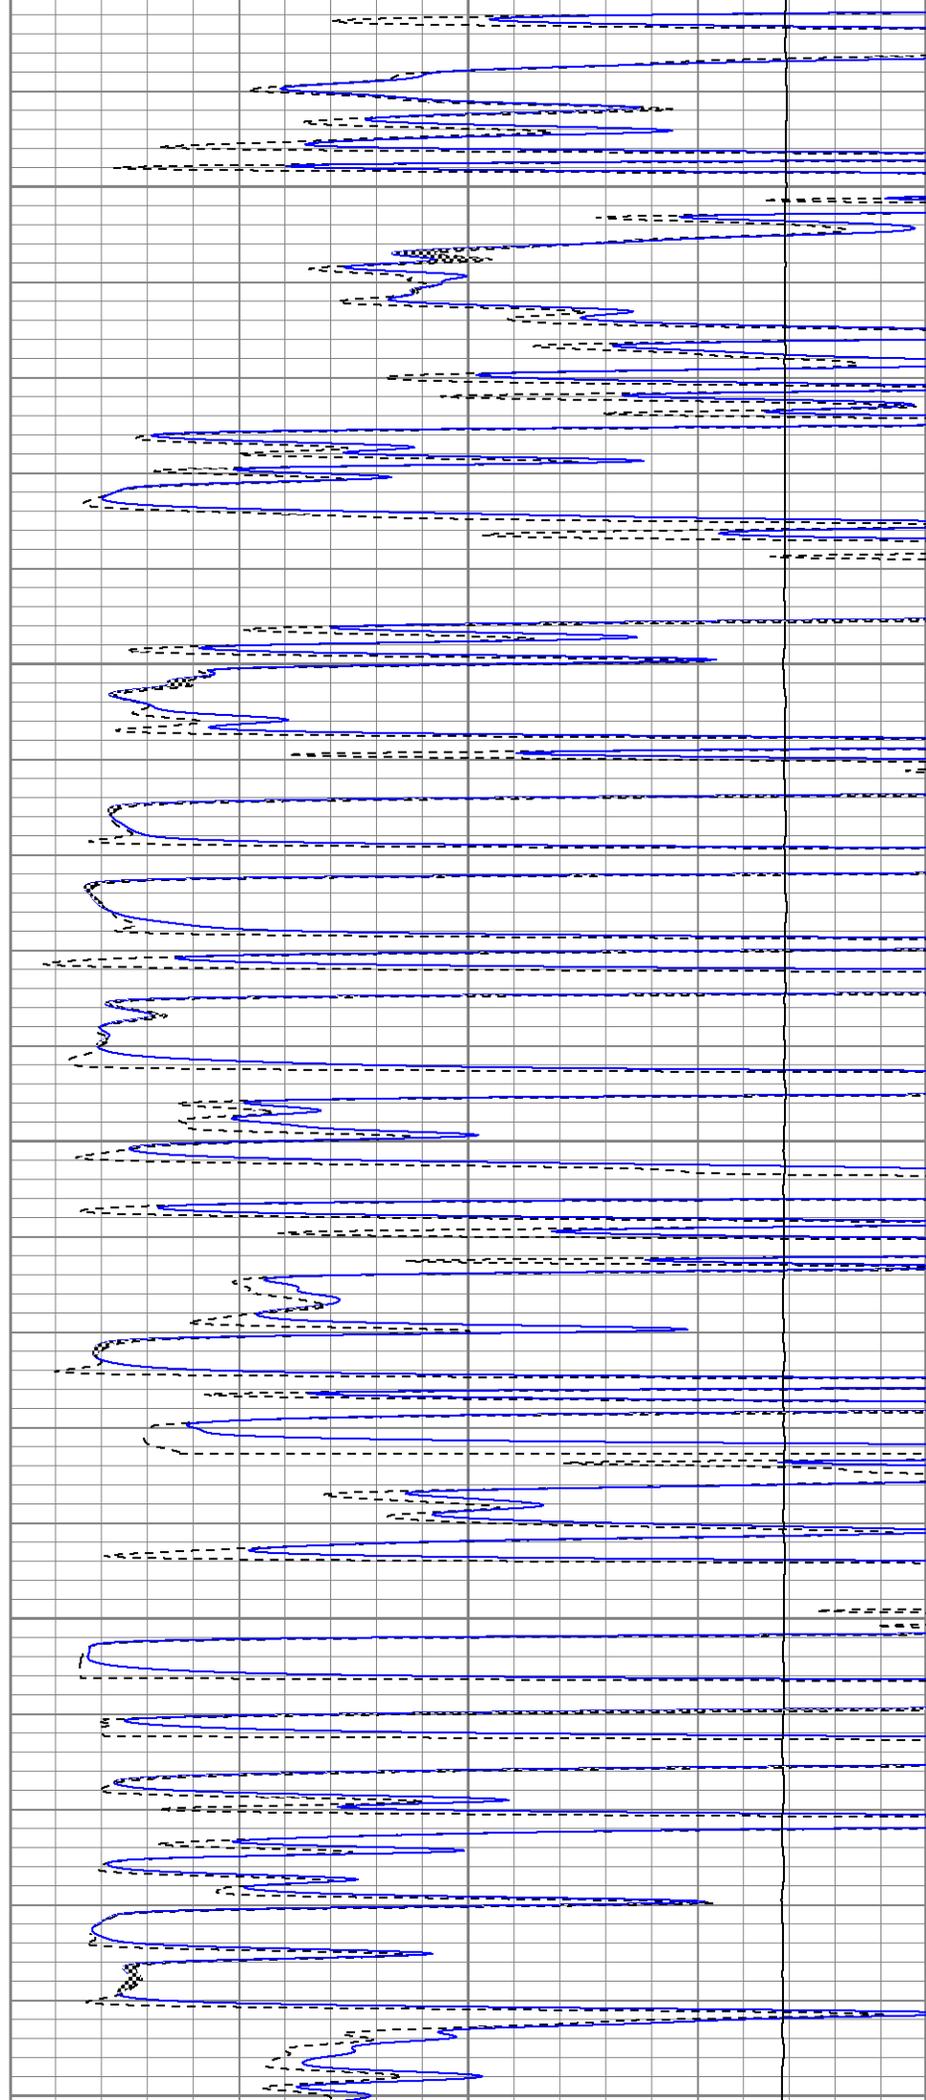

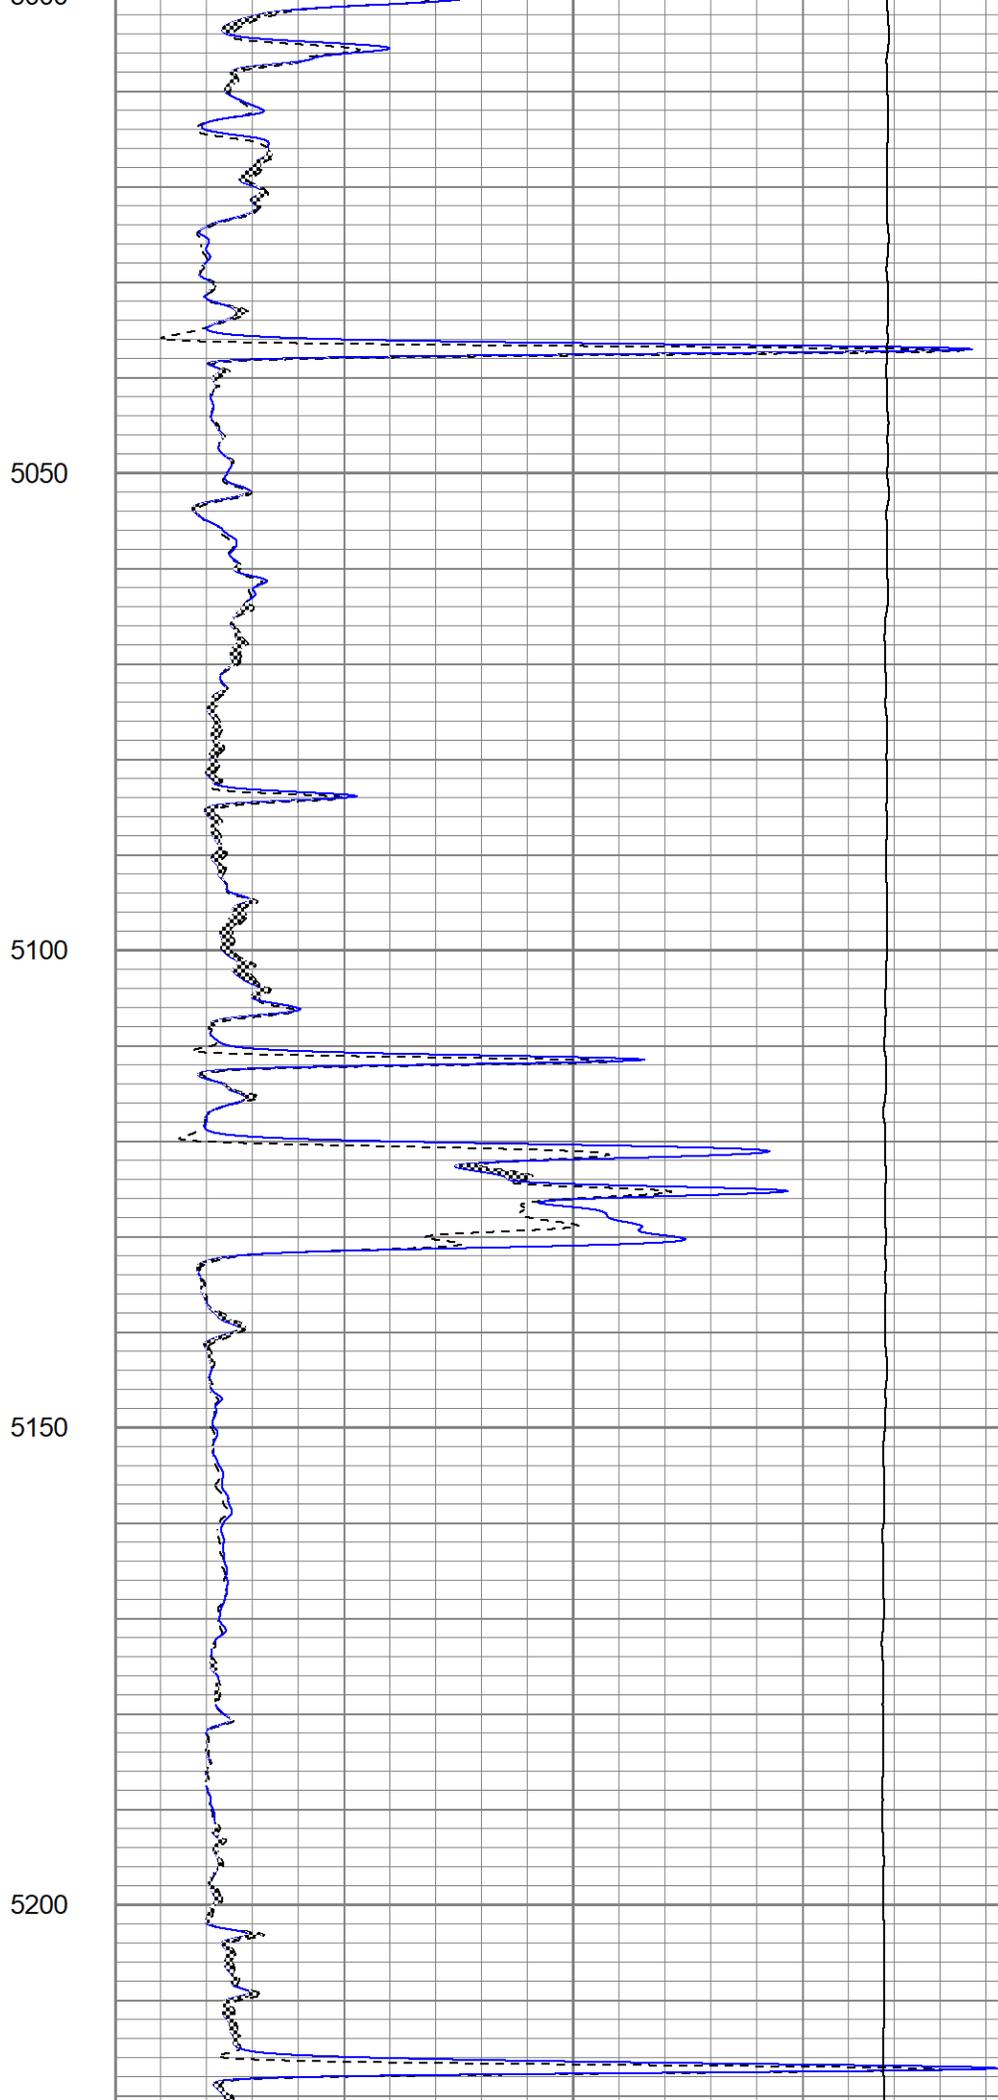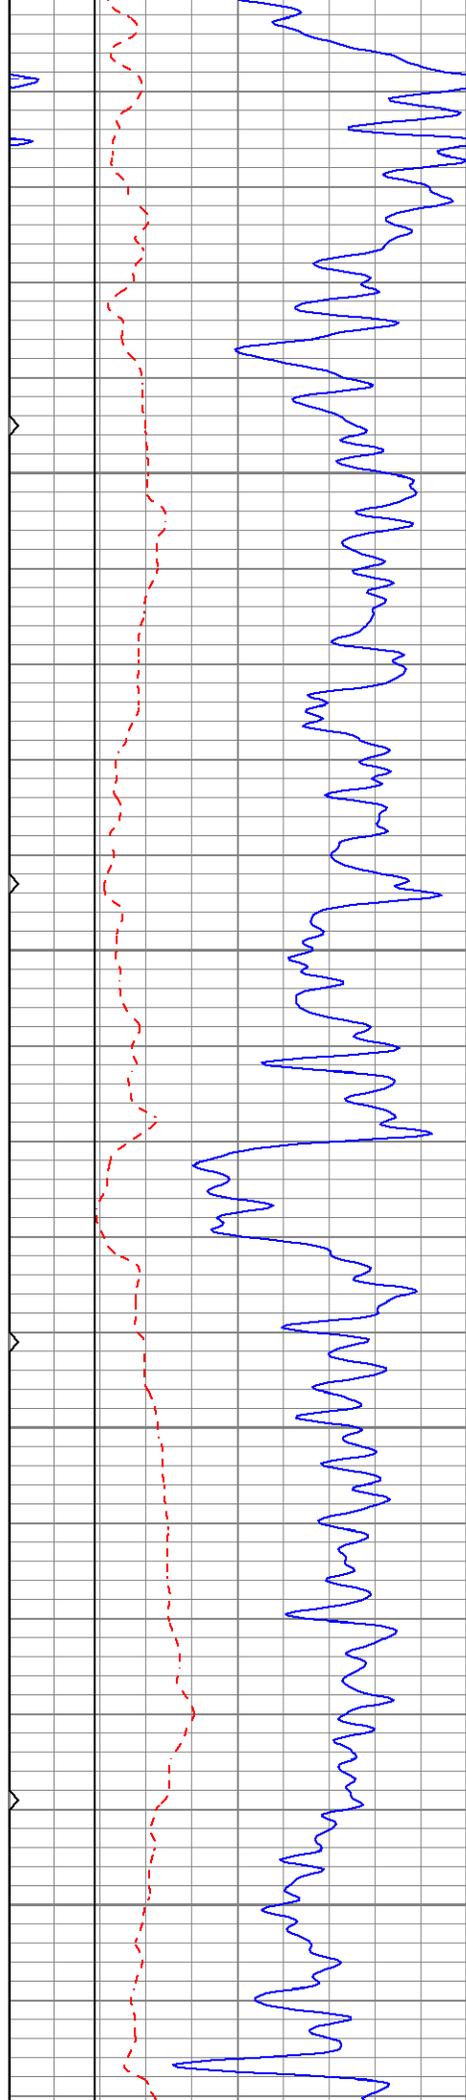

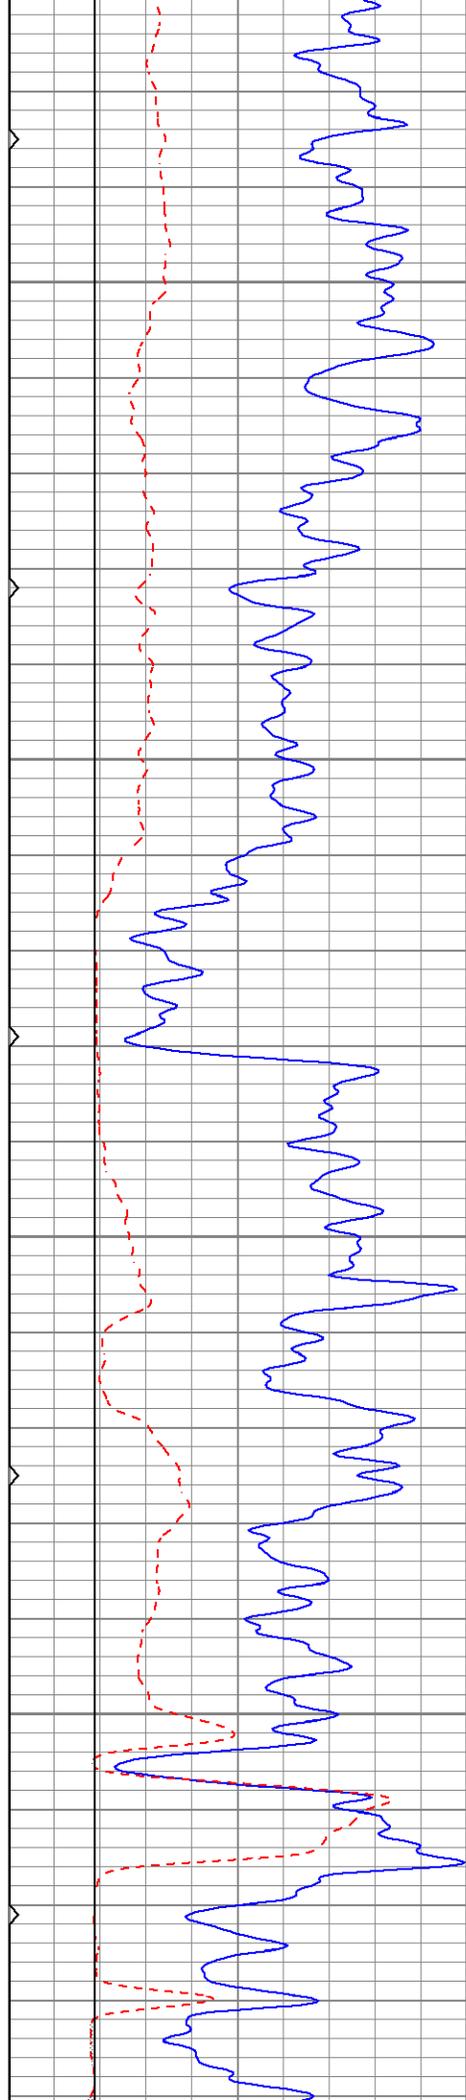




5250

5300

5350

5400

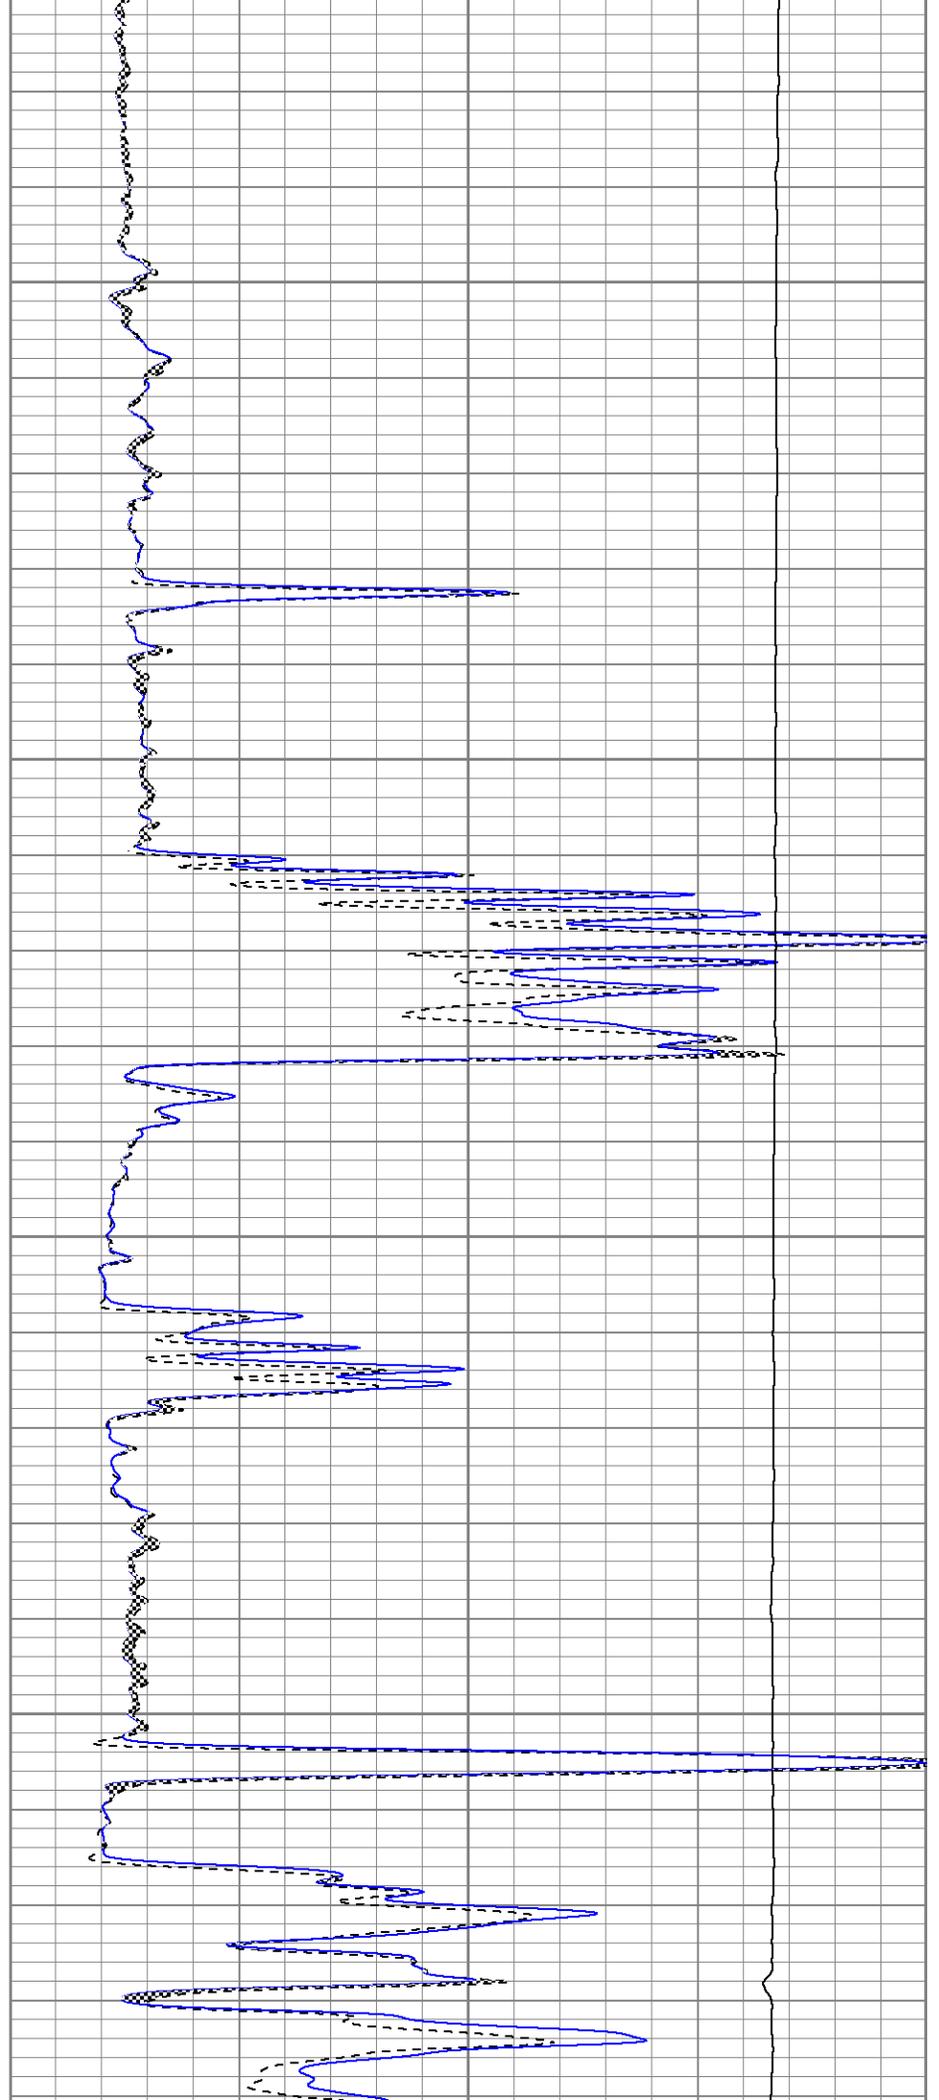


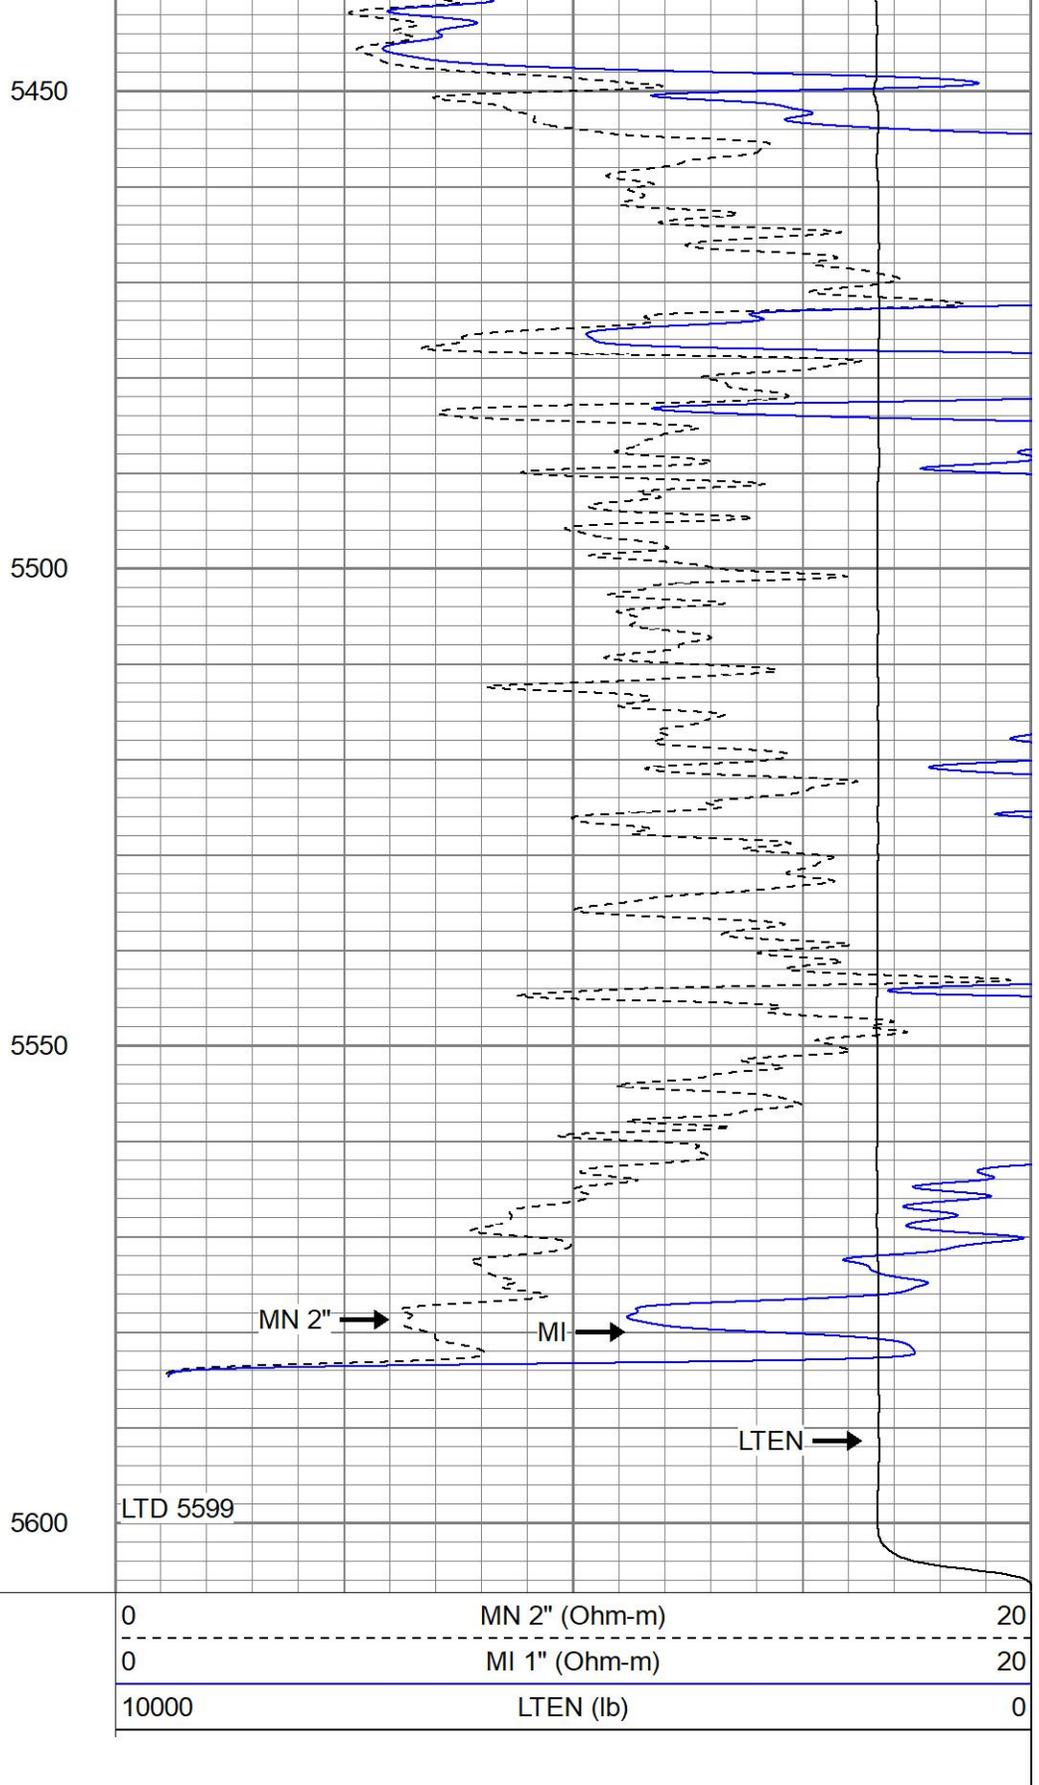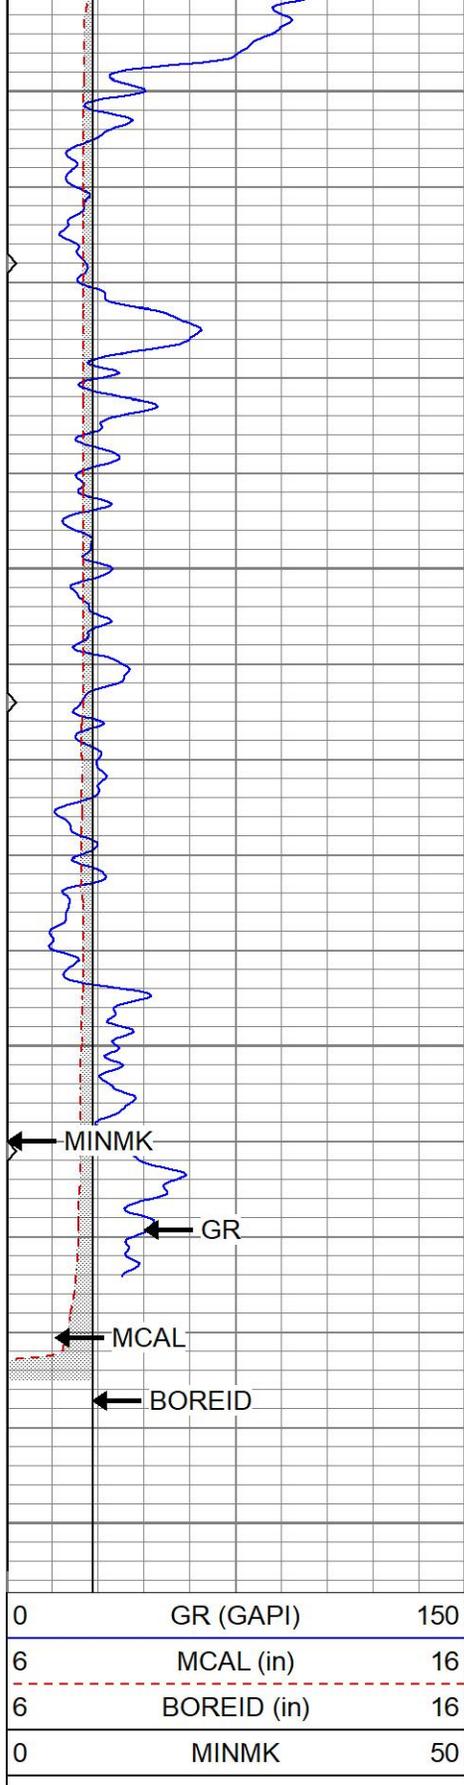


# REPEAT SECTION

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

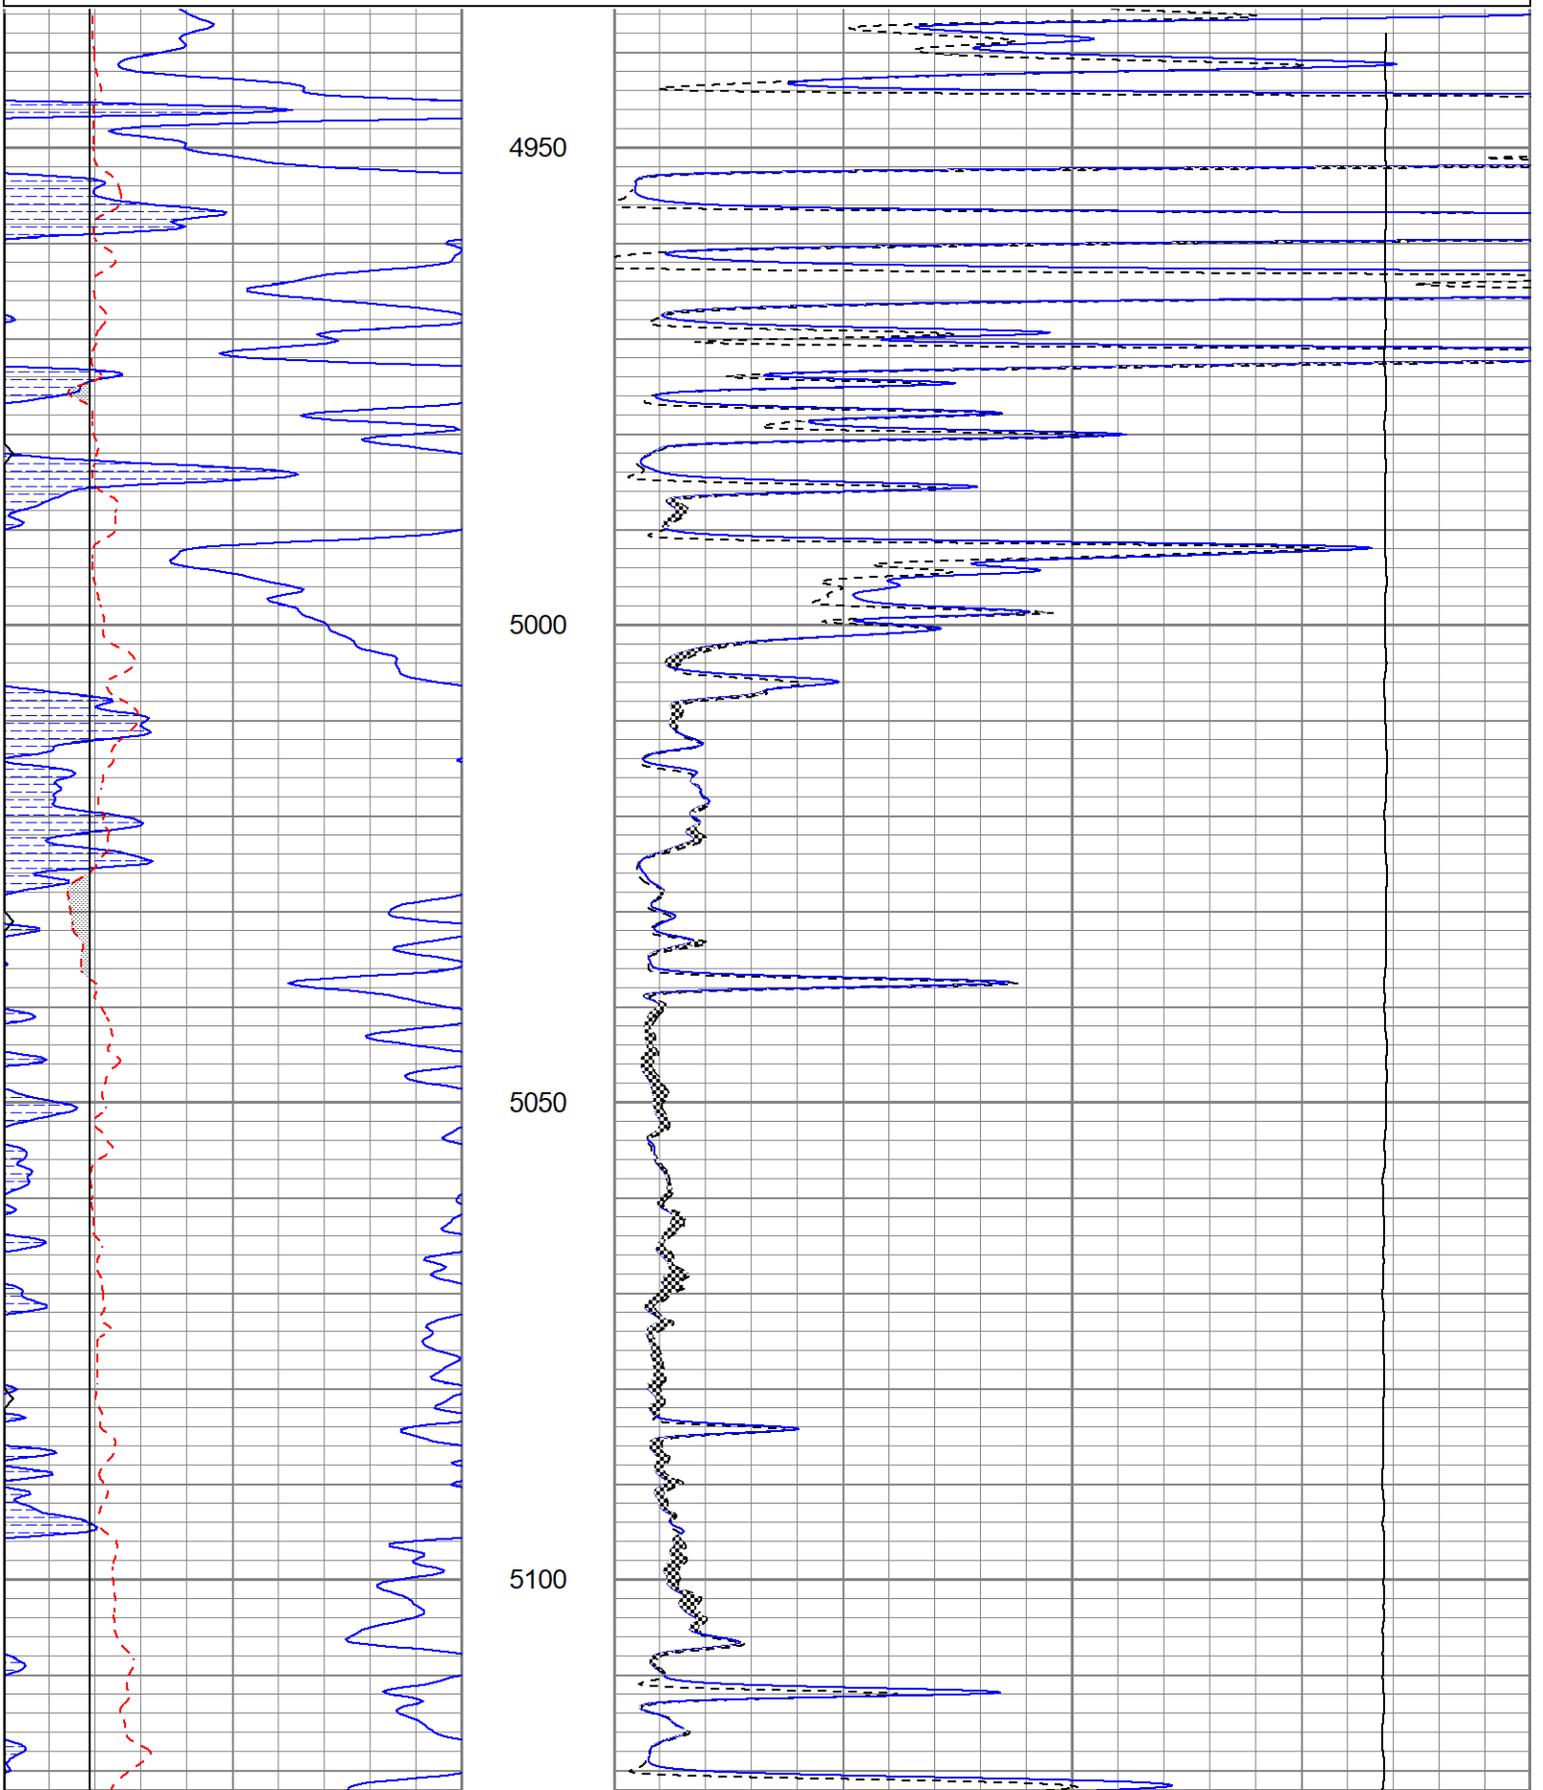

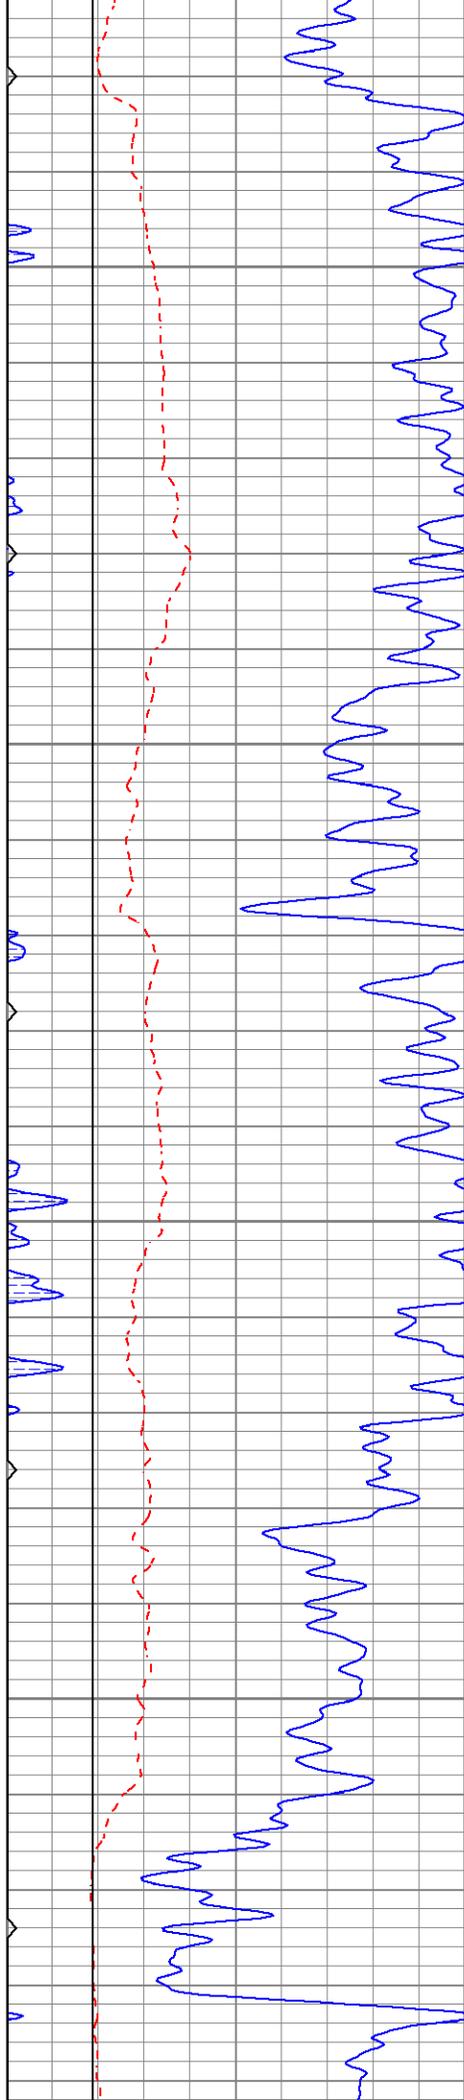



5150

5200

5250

5300

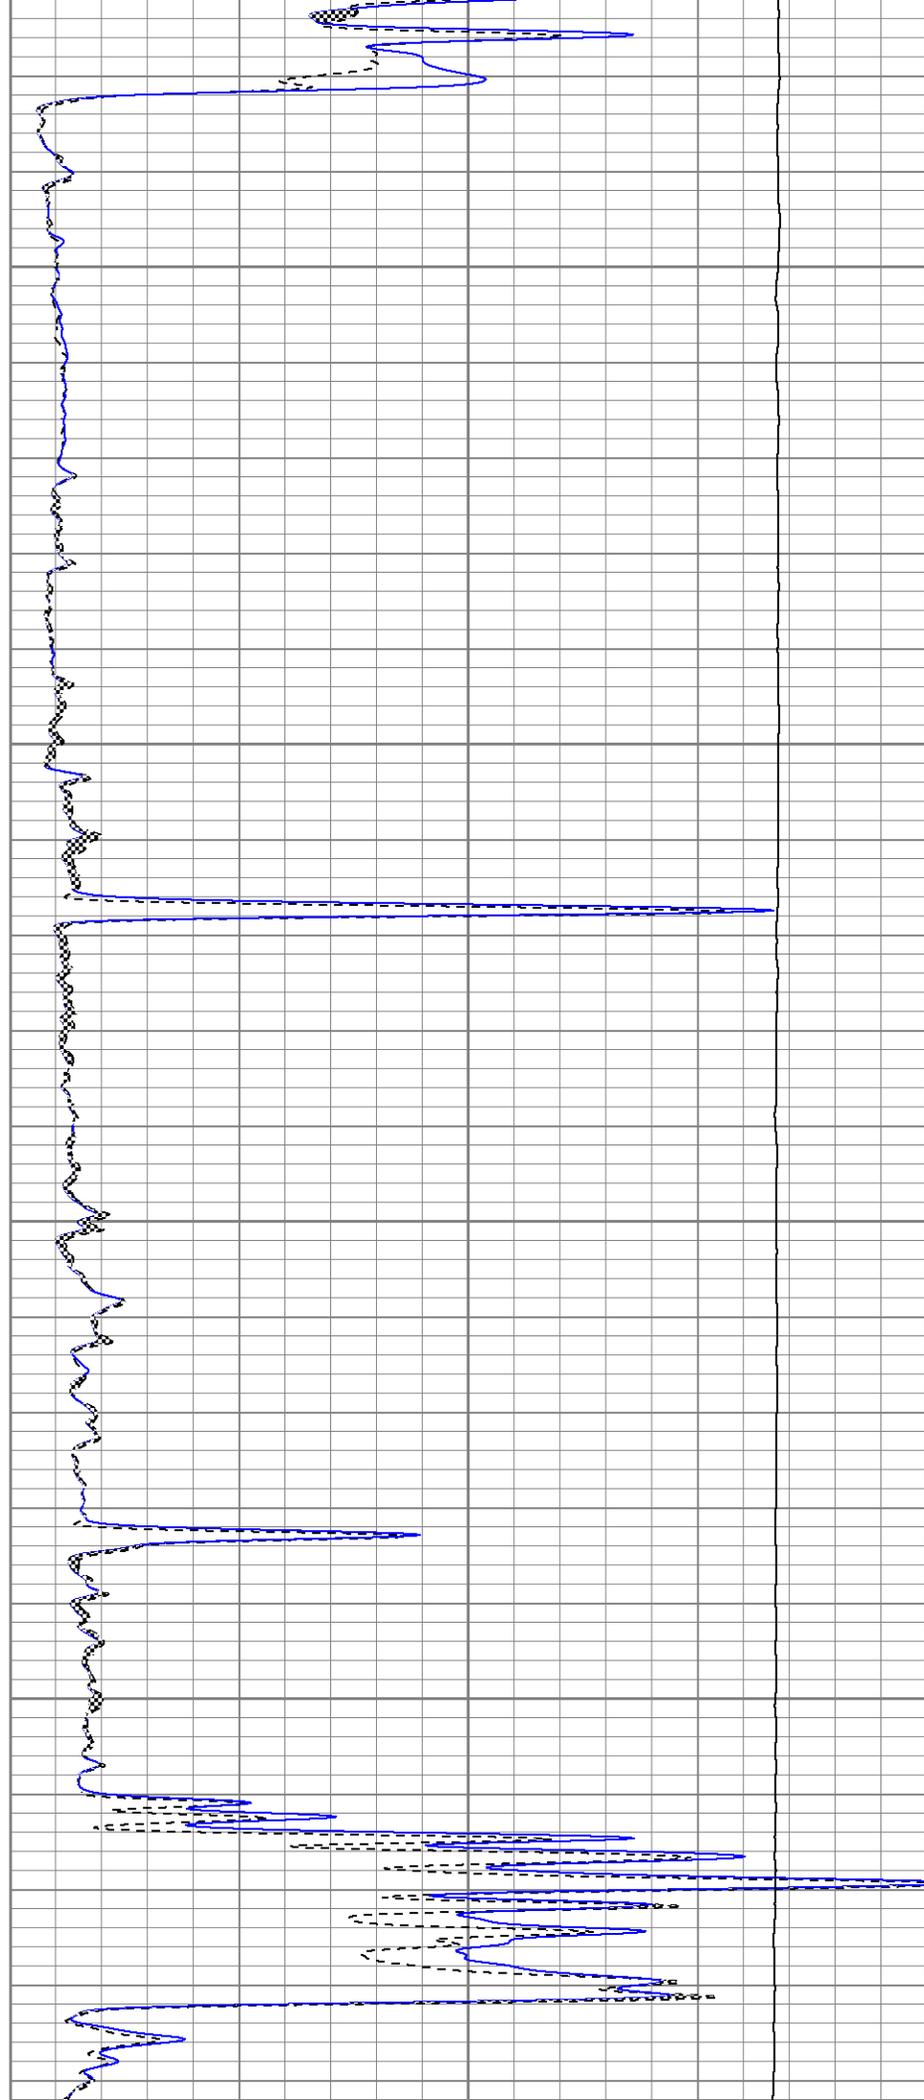

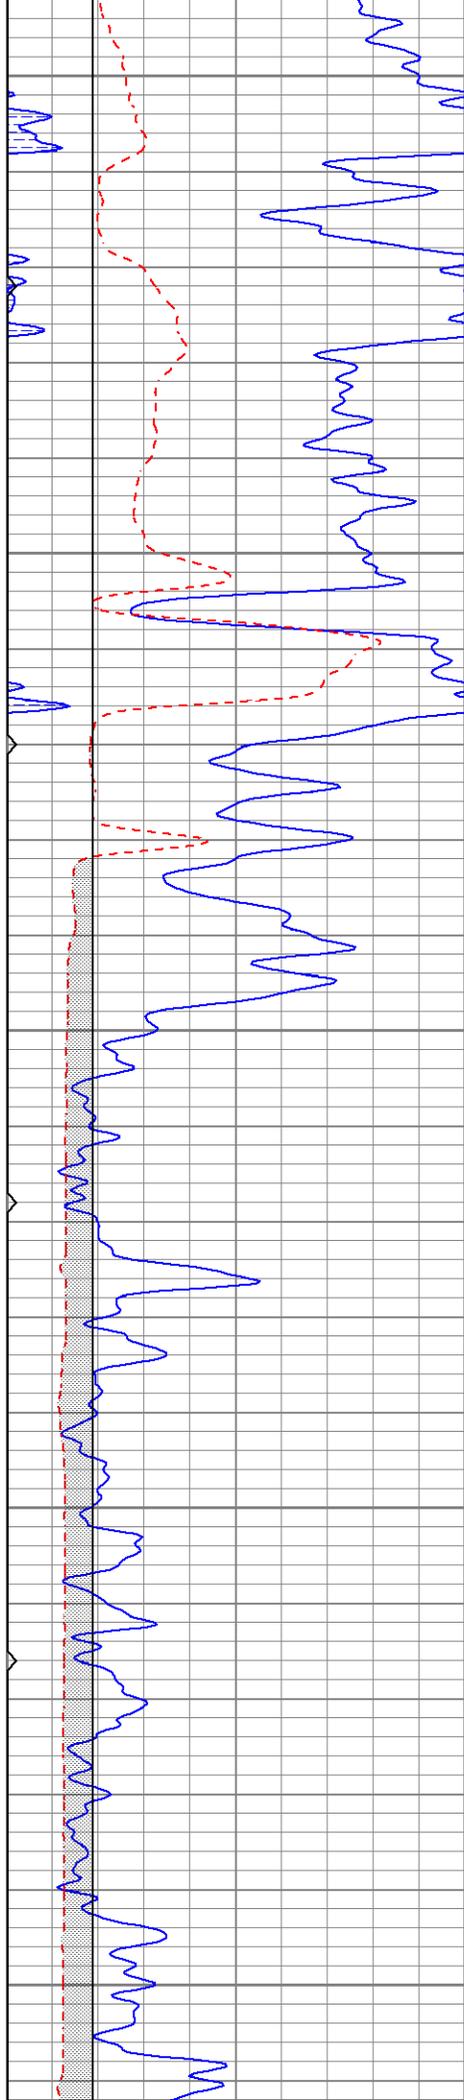

5350

5400

5450

5500

5550

