


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-141-20009-00-00 Form CP-4
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Osborne County. Sec. 15 Twp. 10S Rge. 14 (E) (W)

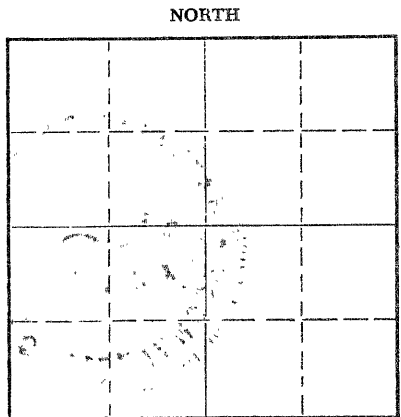

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Neven H. Veail
Lease Name Meyer Well No. 1
Office Address 1401 McKinley, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) XXX Dry Hole
Date well completed 8-3 19 68
Application for plugging filed 8-3 19 68
Application for plugging approved 8-3 19 68
Plugging commenced 8-3 19 68
Plugging completed 8-3 19 68
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3945 ~~3425~~ - 600 - Heavy rotary mud
600 - 600 - Plug, 50 sacks cement
600 - 200 - Heavy rotary mud
200 - 200 - Plug, 1/2 sack hulls, 25 sacks cement
200 - 40 - Heavy rotary mud
40 - GL - Plug, 10 sacks cement

All work done by Allied Cementing Company equipment.

RECEIVED
STATE CORPORATION COMMISSION
AUG 8 - 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Peel Brothers, Inc.
Address Box 359, Hoisington, Kansas



STATE OF Kansas, COUNTY OF Osborne, ss.
Peel Brothers, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Wendell C. Peel
Wendell C. Peel
President
(Address) _____

SUBSCRIBED AND SWORN to before me this 5th day of August, 19 68

My commission expires 6-21-70
Ethel S. Williamson
Ethel S. Williamson Notary Public.

DRILLER'S LOG

15-141-20009-0000

Well Owner: Neven H. Veail
Farm Name: Meyer No. 1
Date Started: 7-22-68
Date Completed: 8-3-68
Total Depth: 3935

Section 15-10S-14W
Osborne County, Kansas

Casing: 8-5/8" set at 224' cemented

Contractor: Peel Brothers, Inc.

Figures below are the bottoms of the formations:

Post Rock	0 -	48
Red Bed		725
Sand		937
Anhydrite		1188
Shell and Shells		1210
Shale		1960
Lime & Shale		3115
Shale & Lime		3215
Lime		3945
Total Depth		3945

RECEIVED
STATE CORPORATION COMMISSION
AUG 8 - 8 - 1968
CONSERVATION DIVISION
Wichita, Kansas

This is to certify that the above information is true and correct to the best of our knowledge.

PEEL BROTHERS, INC.

Wendell G. Peel
Wendell G. Peel
President



SUBSCRIBED AND SWORN to before me this 5th day of August, 1968.

Ethel S. Williamson
Ethel S. Williamson
Notary Public

My Commission expires 6-21-70