



MICRO LOG

Company STEWART PRODUCERS, INC.

Well MORRISON #1-26

Field UNNAMED

County NESS State KANSAS

Location: API #: 15-135-26194-0000

428' FNL & 505' FWL
SE - NW - NW - NW

Other Services
CDL/CNL/PE
DIL/SONIC

SEC 26 TWP 19S RGE 26W

Elevation

Permanent Datum GROUND LEVEL Elevation 2609
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

K.B. 2616
D.F. 2614
G.L. 2609

Date 11/20/22

Run Number TWO

Depth Driller 4660

Depth Logger 4660

Bottom Logged Interval 4644

Top Log Interval 3800

Casing Driller 8 5/8" @ 221'

Casing Logger 223

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD CHLORIDES: 2.800 PPM

Density / Viscosity 9.3/56

pH / Fluid Loss 11.0/7.2

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.50 @ 58F

Rmf @ Meas. Temp 1.13 @ 58F

Rmc @ Meas. Temp 1.80 @ 58F

Source of Rmf / Rmc MEASURED

Rm @ BHT .713 @ 122F

Time Circulation Stopped 4 HOURS

Time Logger on Bottom 9.30 A.M.

Maximum Recorded Temperature 122F

Equipment Number 8916

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By AARON YOUNG ROBERT STEWART

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395

DIRECTIONS:


NESS CITY, KS., 15W. ON HWY 96 TO "BEELER RD.", 5S. TO "W 80RD.", 1 1/8 E., S. INTO





MAIN SECTION

Database File	6801pe.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Sun Nov 20 10:21:49 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

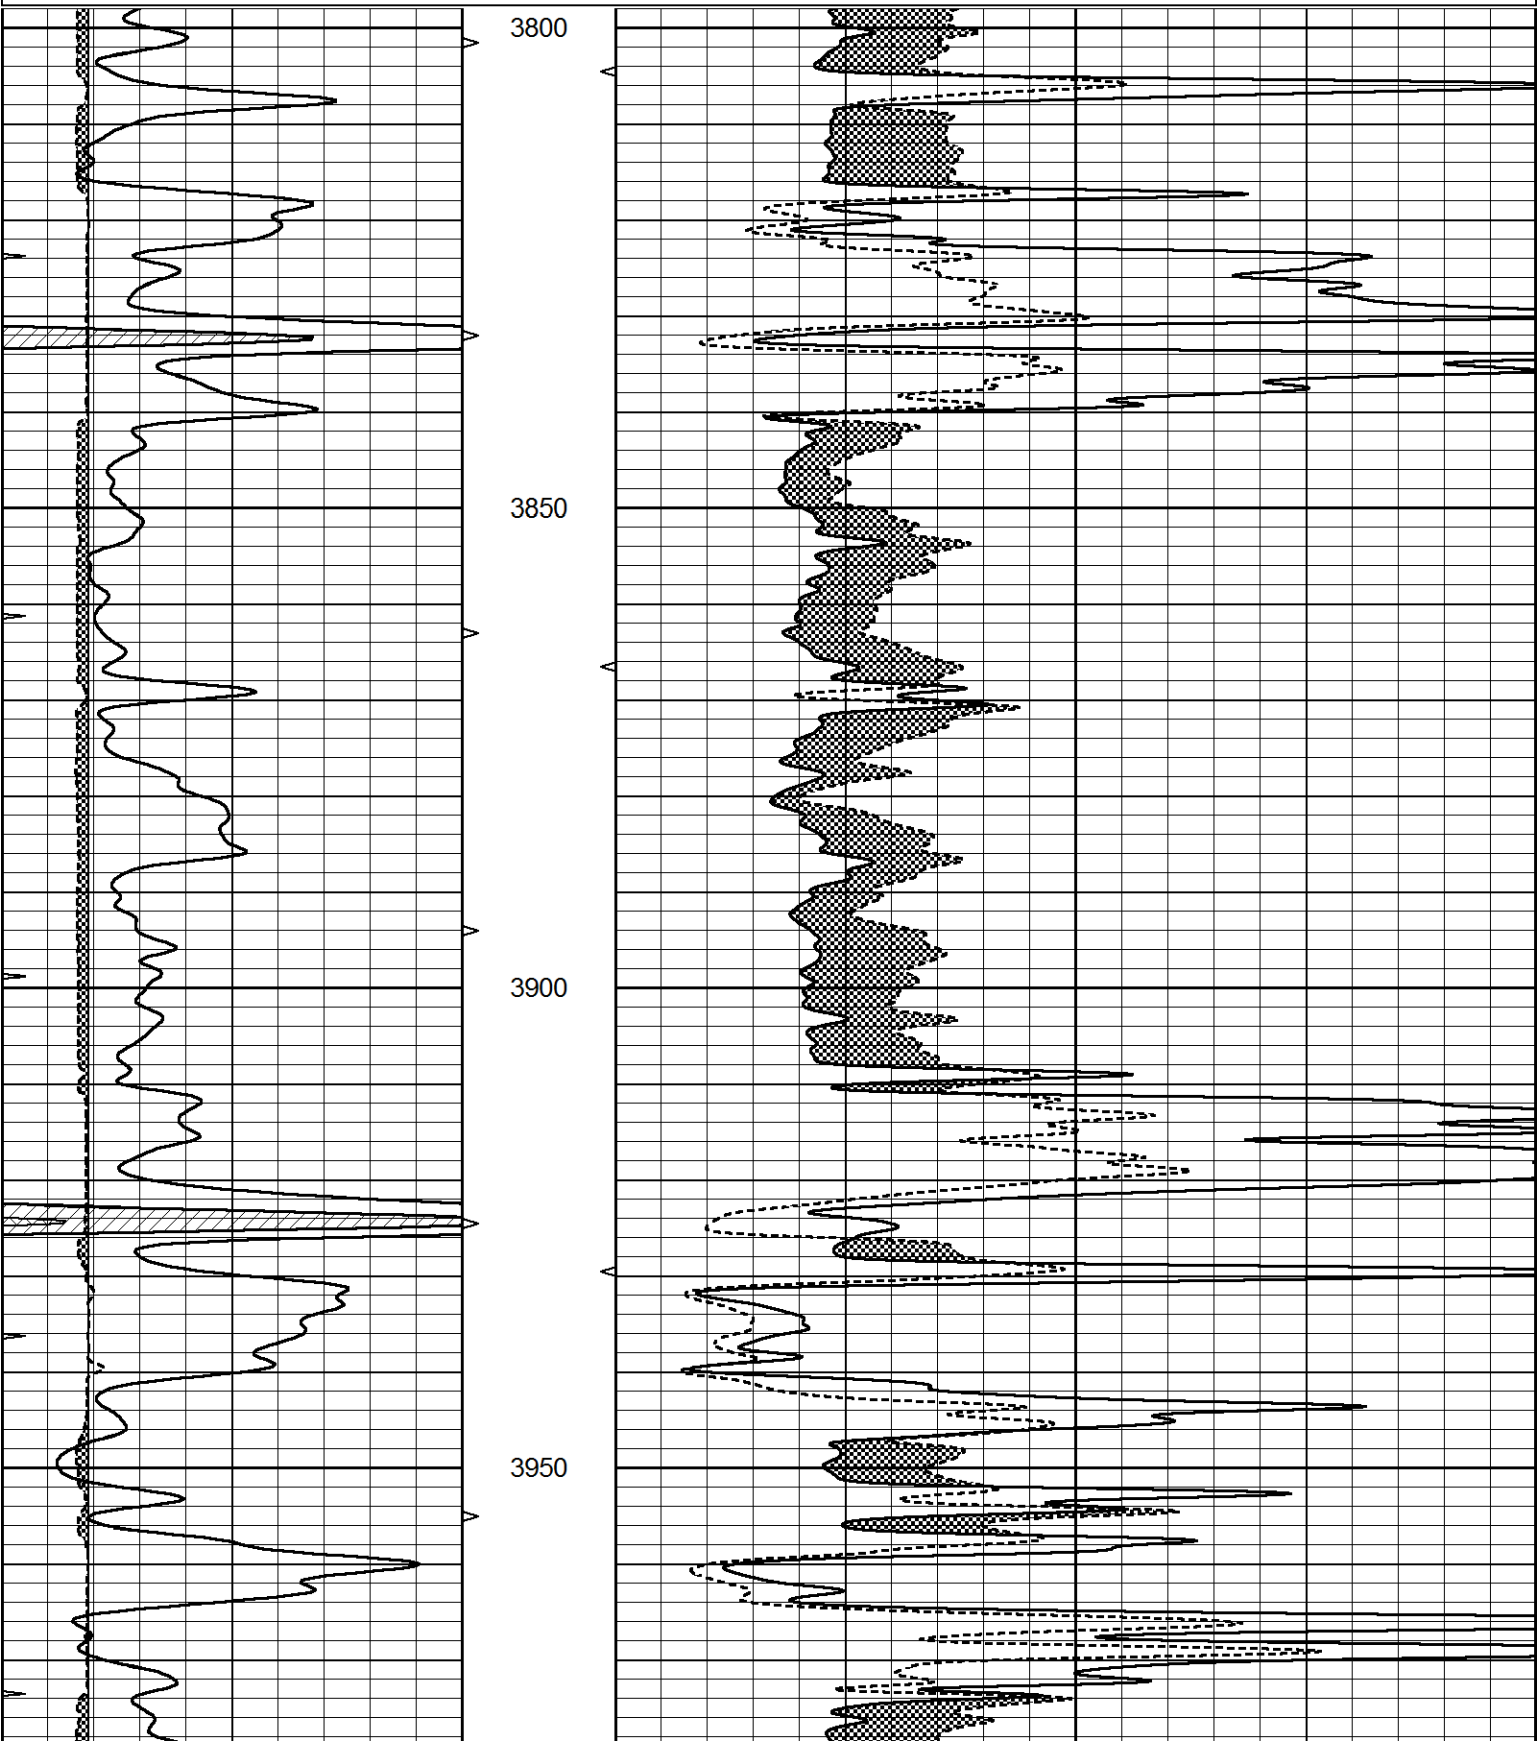

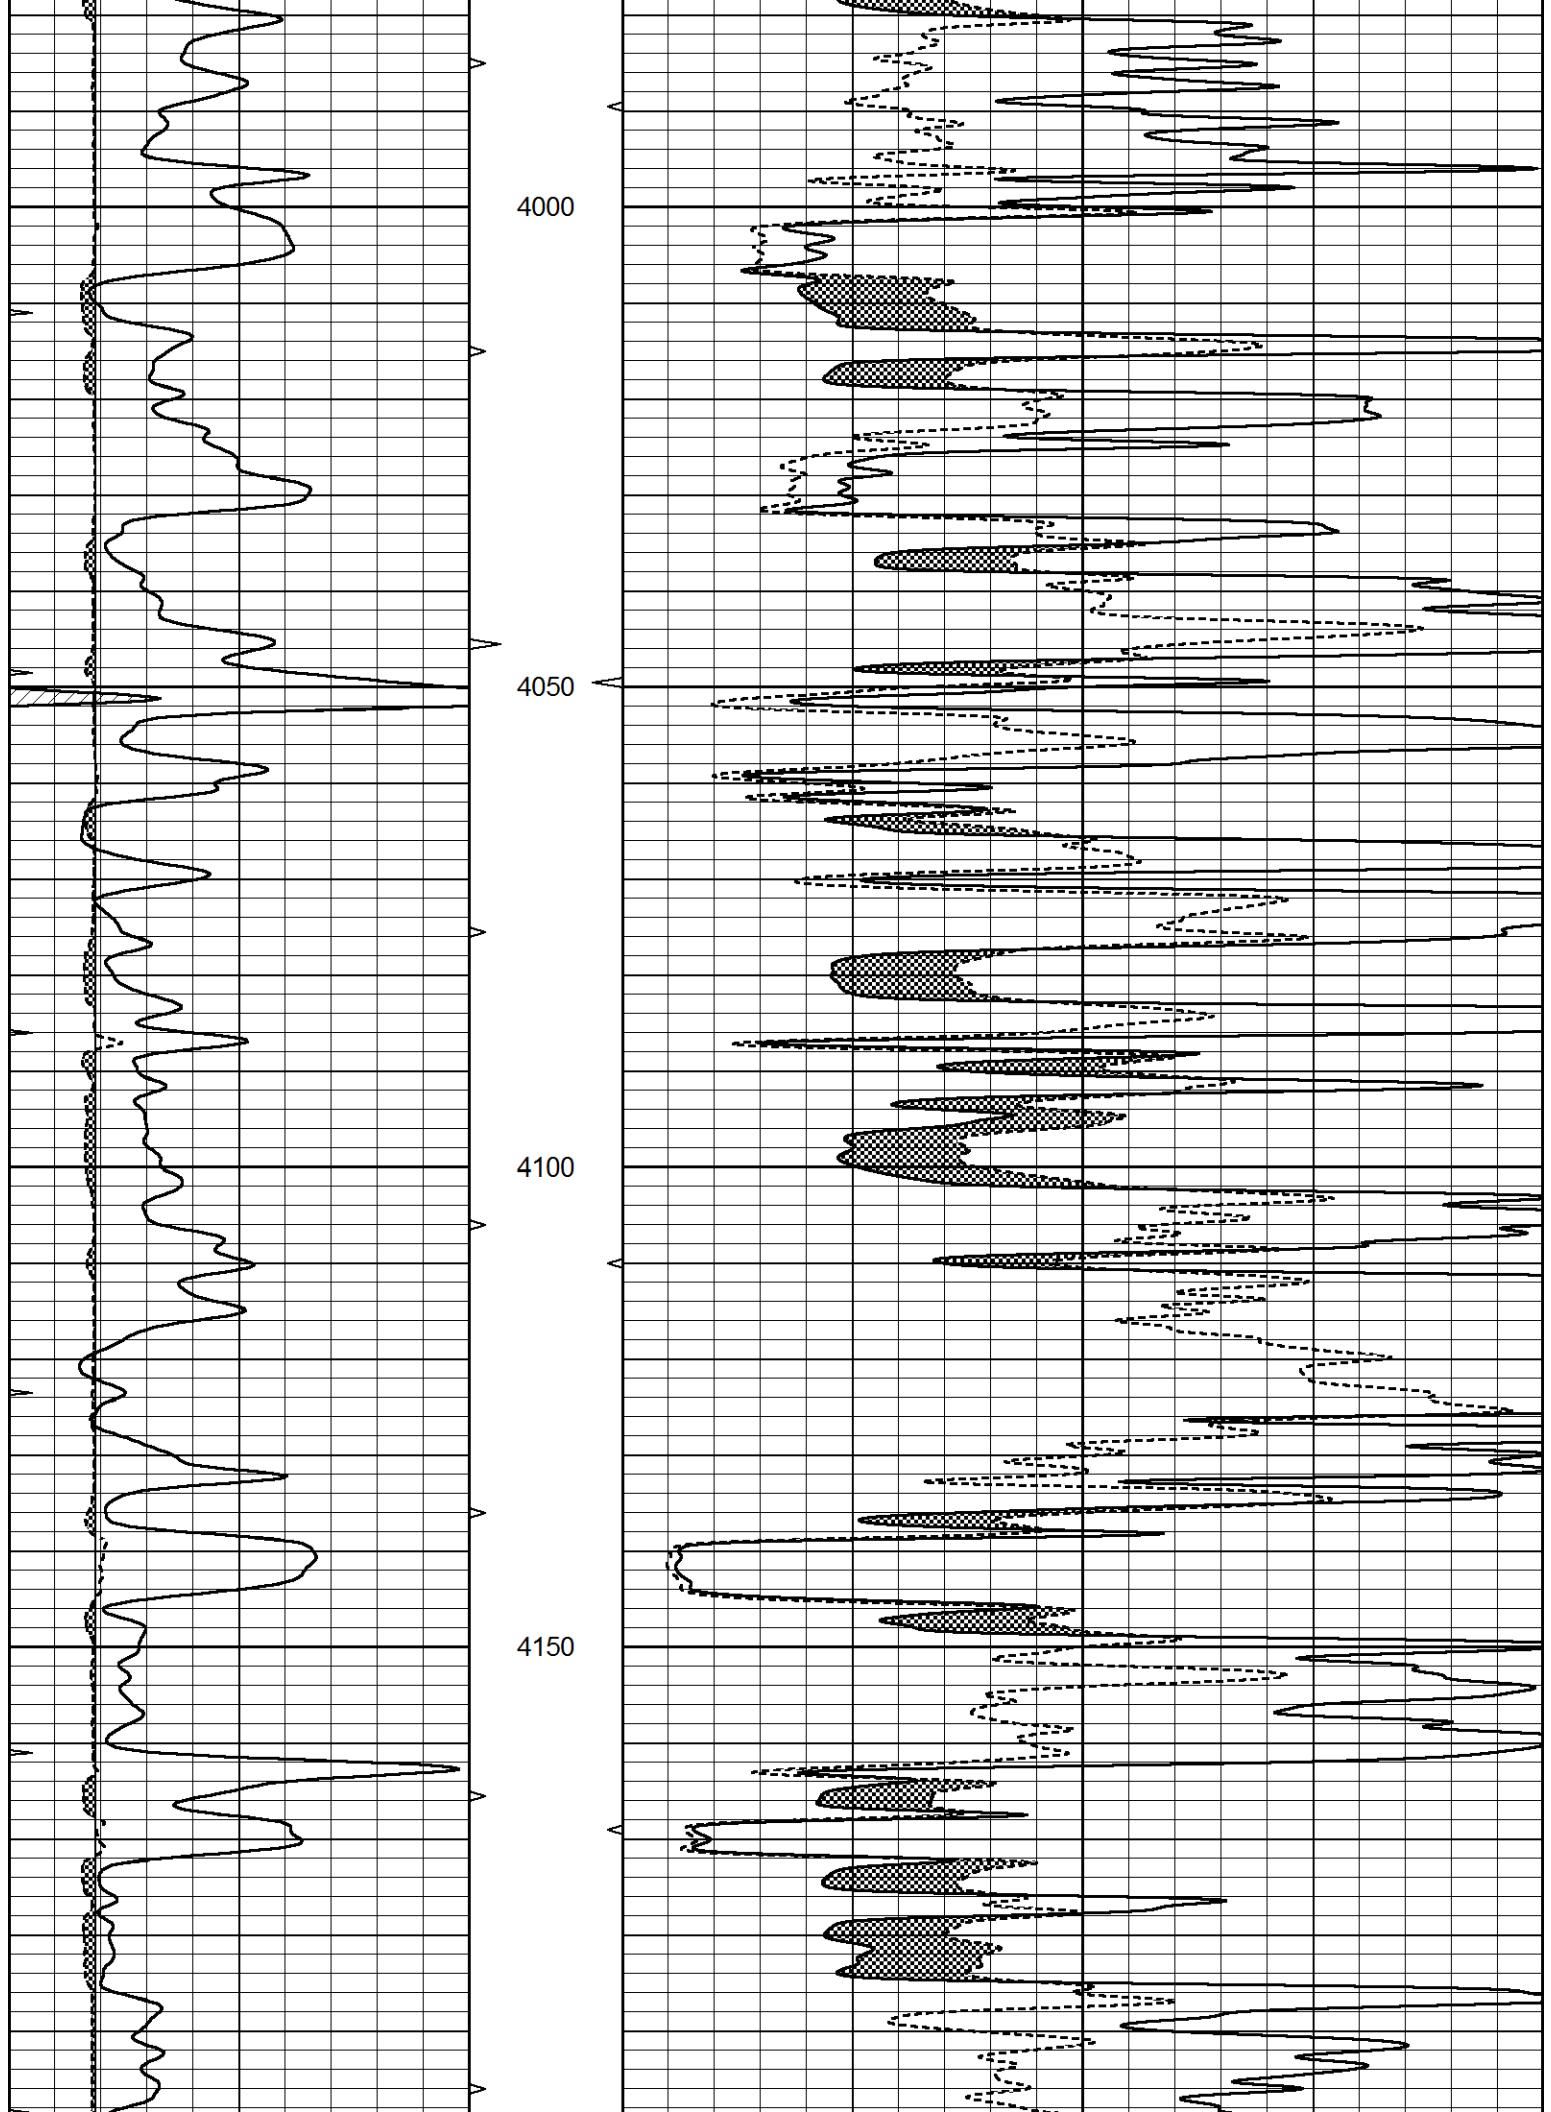

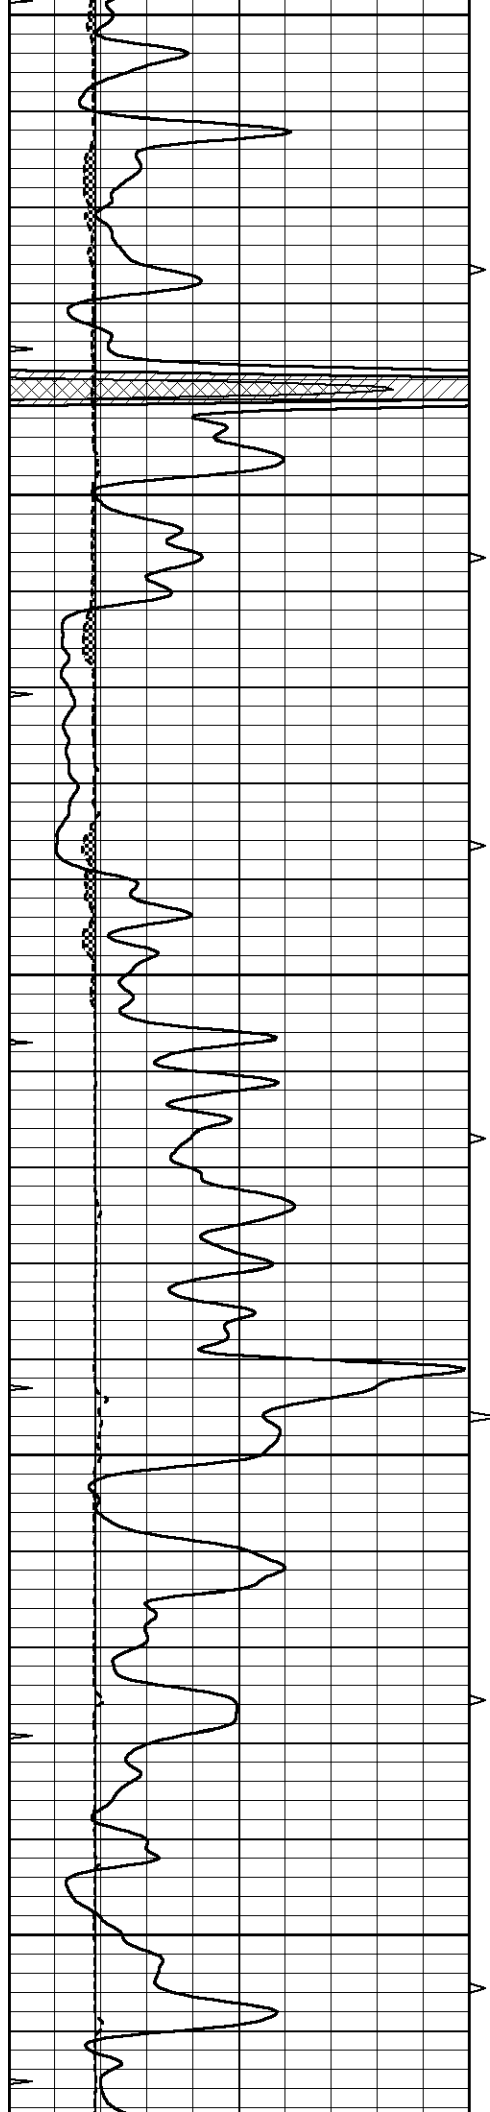


4200


4250

4300

4350

4400

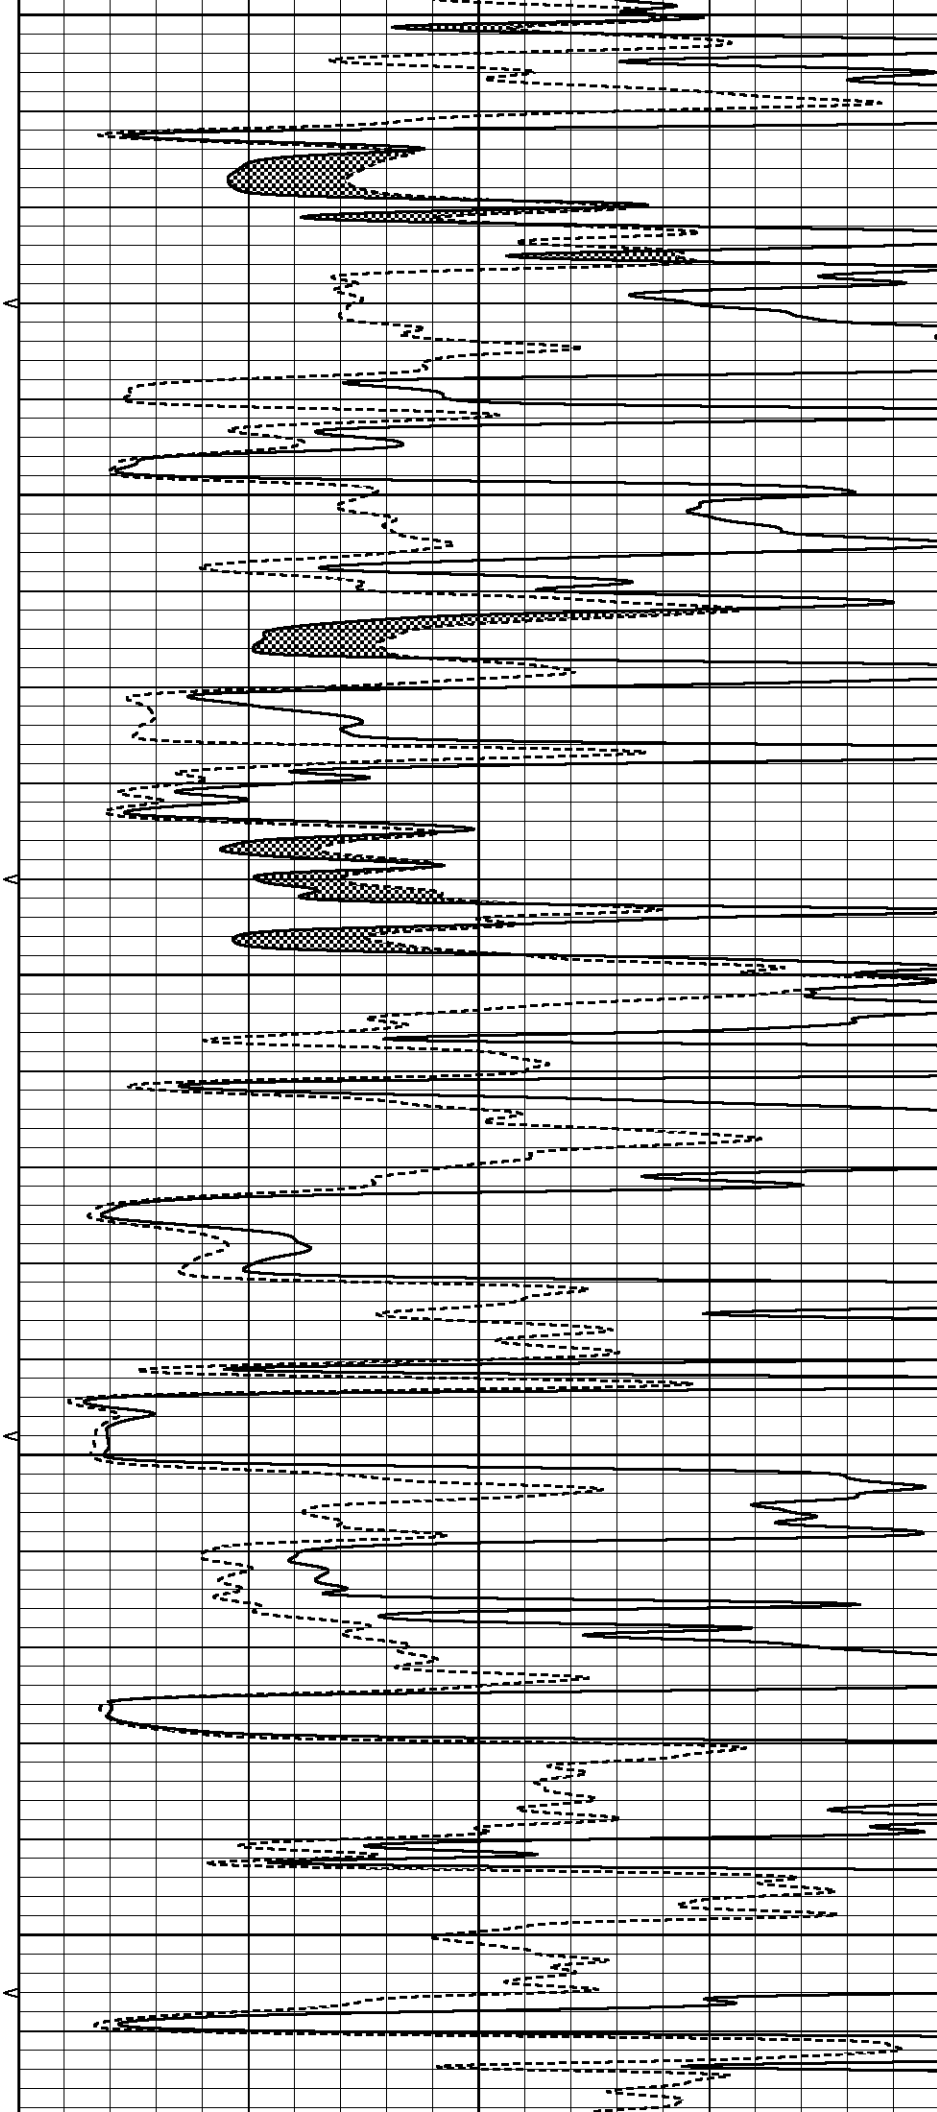

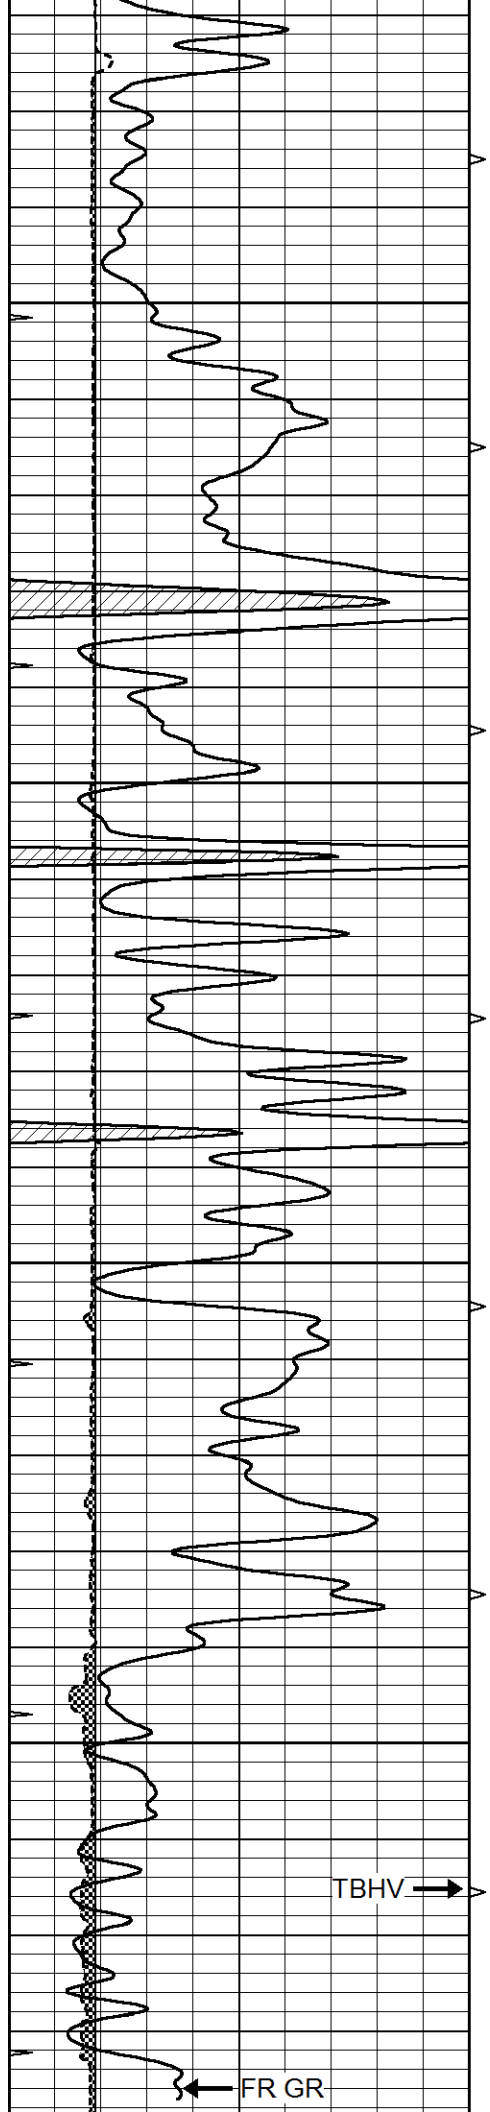

4450

4500


4550


4600

TBHV →

← FR GR



5.5" ABHV

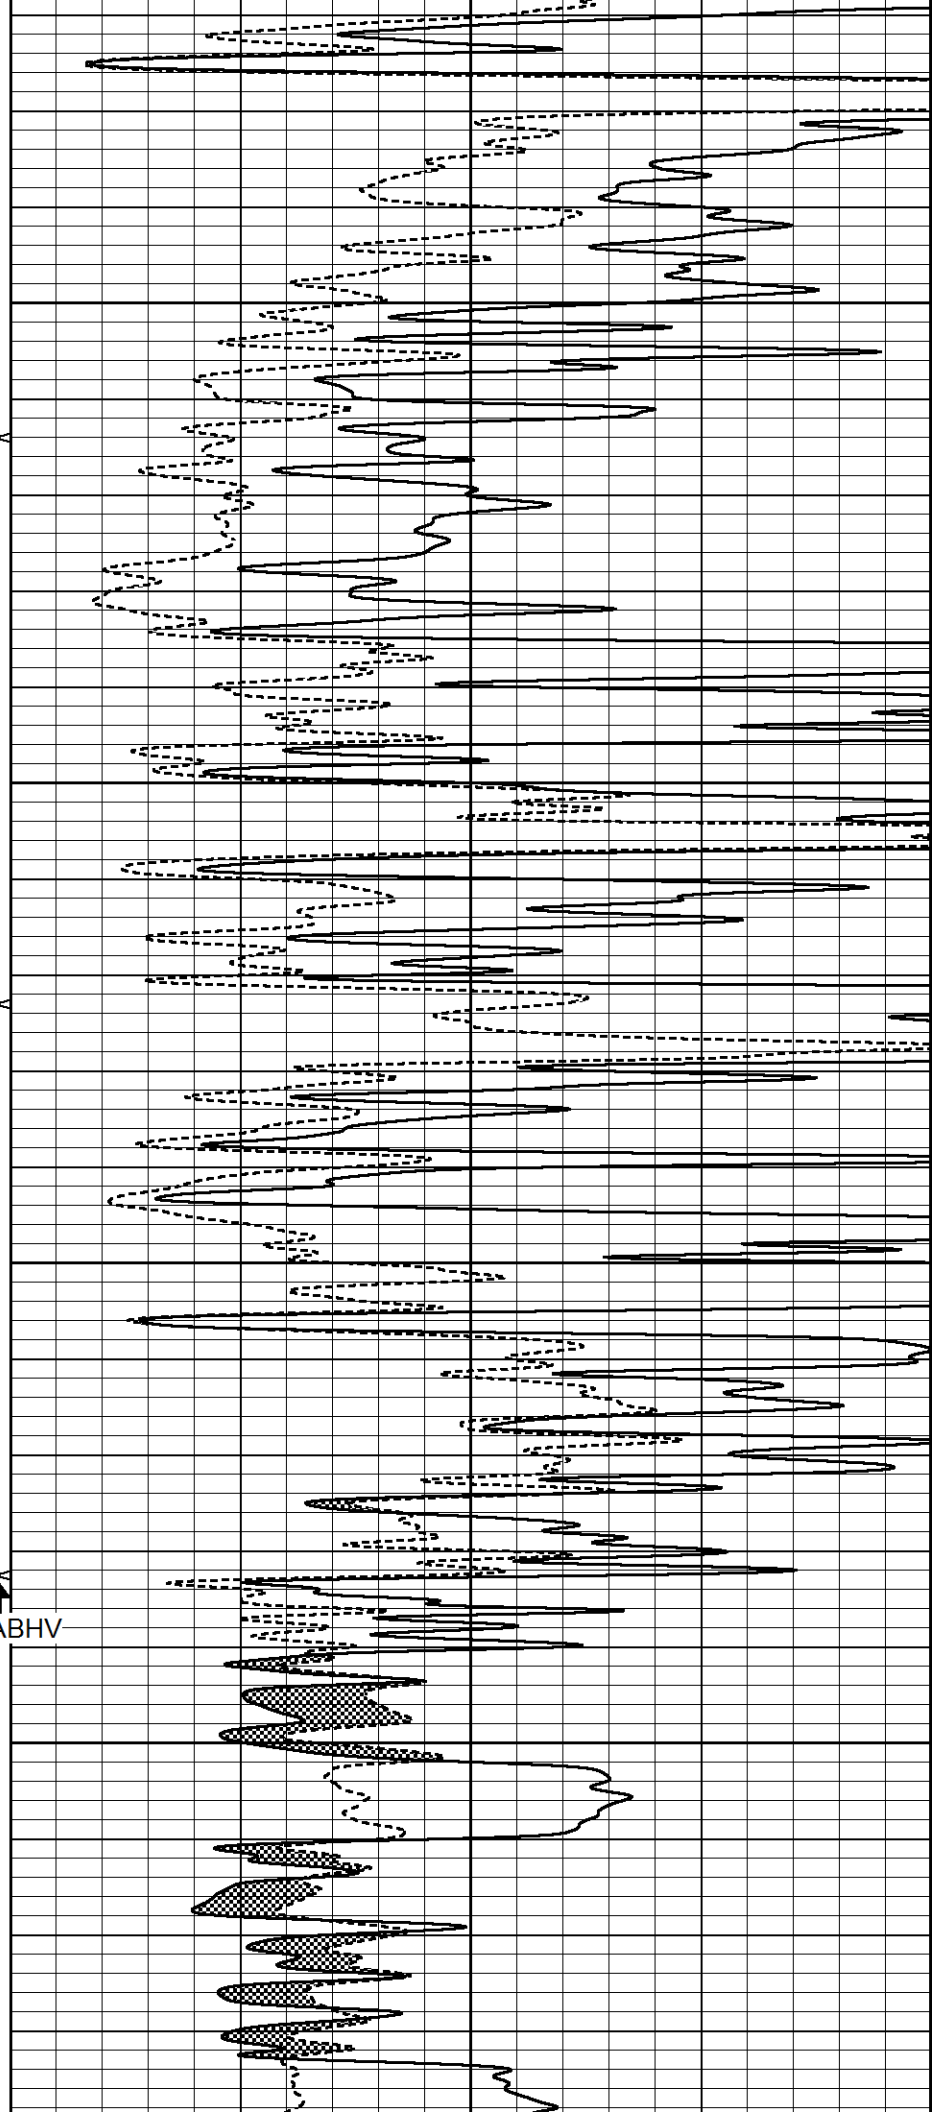


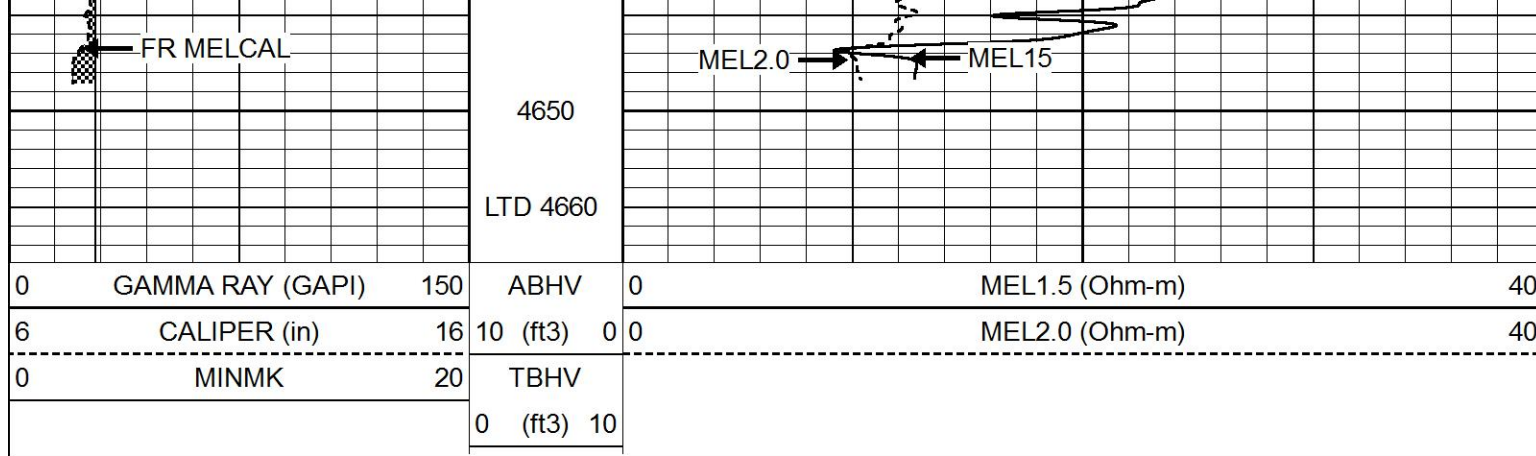

REPEAT SECTION

Database File 6801pe.db
 Dataset Pathname pass6.3
 Presentation Format _micro
 Dataset Creation Sun Nov 20 10:27:30 2022
 Charted by Depth in Feet scaled 1:240

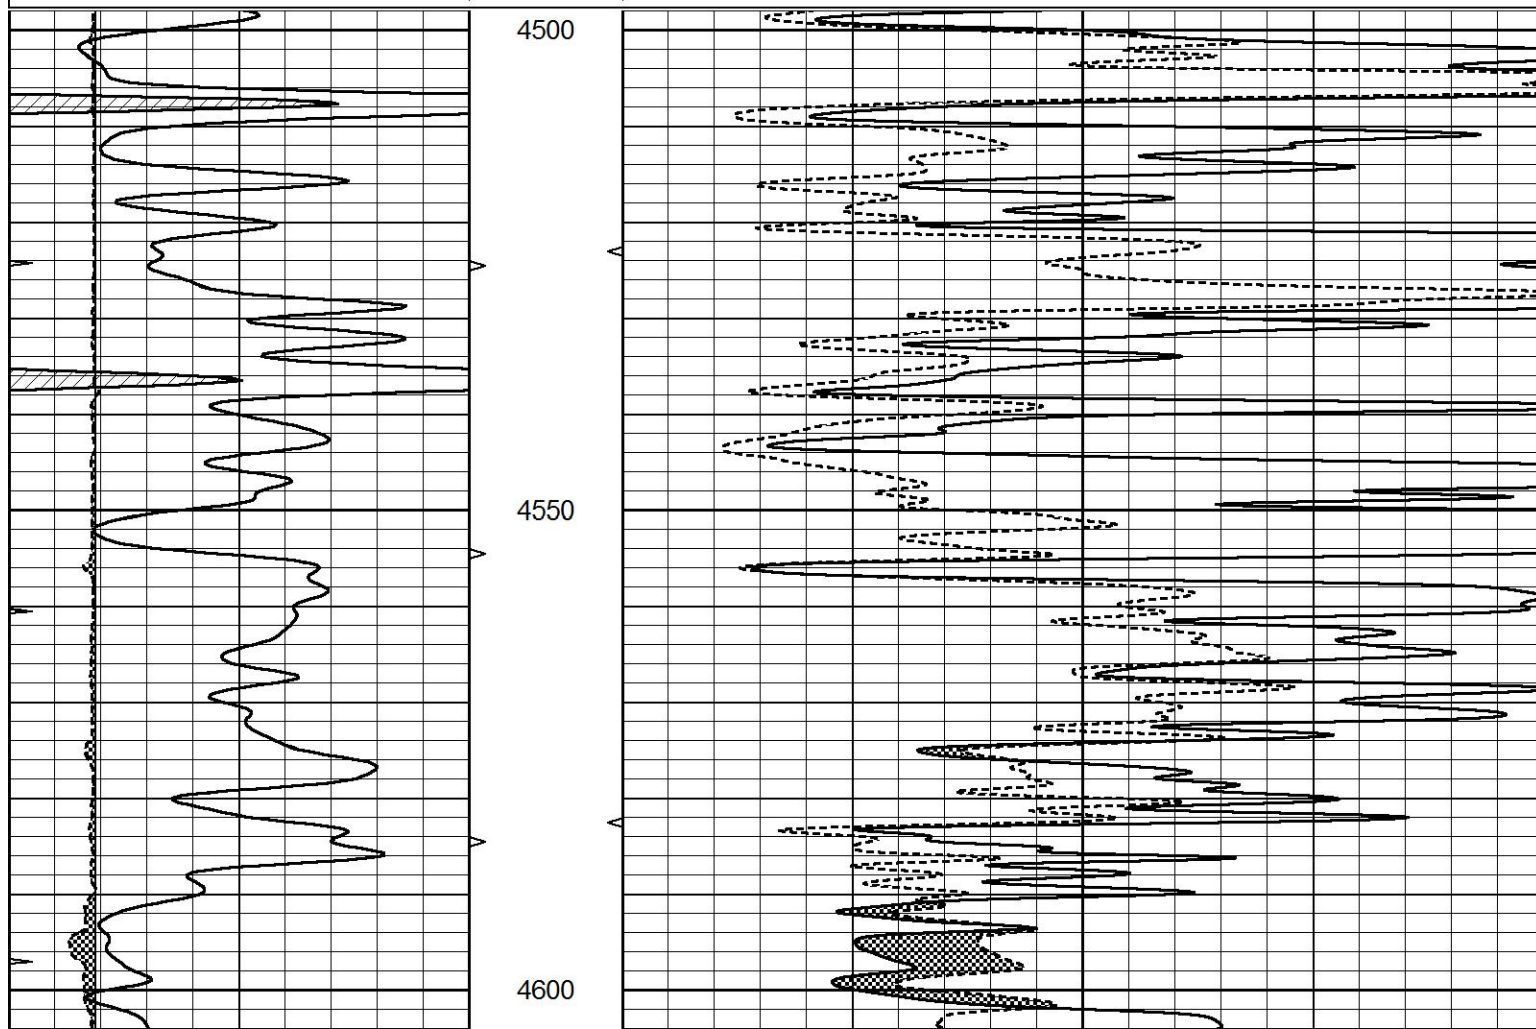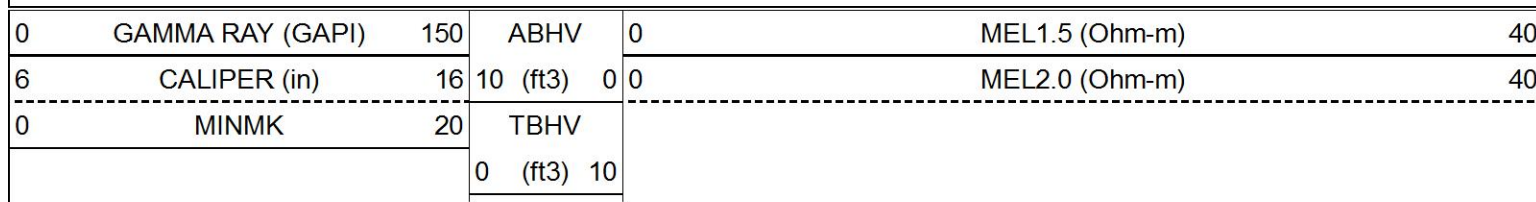

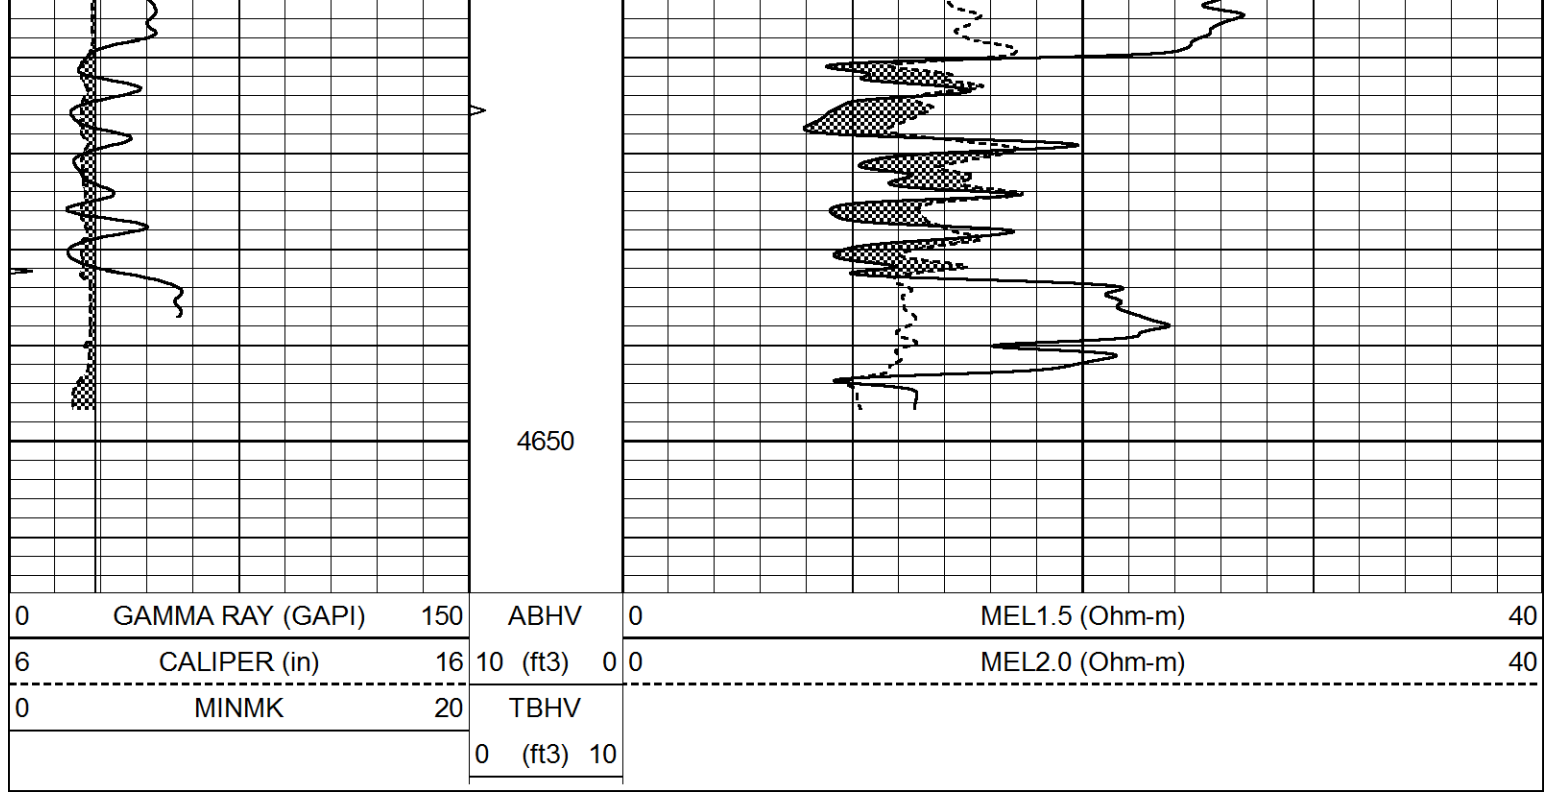

Calibration Report			
Database File	6801pe.db		
Dataset Pathname	pass7.1		
Dataset Creation	Sun Nov 20 10:21:49 2022		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Sun Nov 20 09:34:47 2022		
Caliper Calibration:	Gain=-2.735	Offset=18.612	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	3.880	0.955	
1.5" Calibration:	Gain=40.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	0.624	
2" Calibration:	Gain=65.000	Offset=-1.200	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.006	0.468	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Thu Nov 17 19:32:29 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5800	GAPI/cps	

