

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-039-20977-00-00
Spot: S2S2S2S2 Sec/Twnshp/Rge: 9-4S-26W
100 feet from S Section Line, 2640 feet from W Section Line
Lease Name: LILA UNIT Well #: 9-1
County: DECATUR Total Vertical Depth: 3800 feet

Operator License No.: 33335
Op Name: IA OPERATING, INC.
Address: 900 N TYLER ROAD #14
WICHITA, KS 67212

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	208		

\$123.50

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 10/25/2006 4:15 PM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: KEITH VANPELT Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: Order 200 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES WitnessType: NONE
Date/Time Plugging Completed: 10/25/2006 6:15 PM KCC Agent: HERB DEINES

Actual Plugging Report:

Perfs:

1st. Plug at 2100' w/25 sxs.
2nd. Plug at 1275' w/100 sxs.
3rd. Plug at 275' w/40 sxs.
4th. Plug at 40' w /10 sxs.
Rathole with 15 sxs.
Mousehole with 10 sxs.


INVOICED
DATE 10/31/06
NO. 200 7060751

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

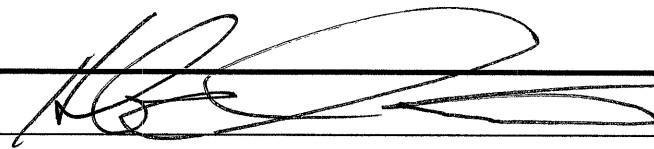

(TECHNICIAN)

OCT 30 2006

RECEIVED
OCT 31 2006
KCC WICHITA
PCT